




# THC0900A03

Hybrid Coupler 3dB, 90°

Rev A1.0

The THC0900A03 is a low profile, high performance 3dB hybrid coupler in a new easy to use, manufacturing friendly surface mount package. It is designed for AMPS Band applications. The THC0900A03 is particularly for balanced power and low noise amplifiers, plus signal designed distribution and other applications where low insertion loss and tight amplitude and phase balance is required. It can be used in power applications up to 200 Watts.

Parts have been subjected to rigorous qualification testing and they are manufactured using materials with coefficients of thermal expansion (CTE) compatible with common substrates such as FR4, G-10, RF-35, R04350 and polyimide

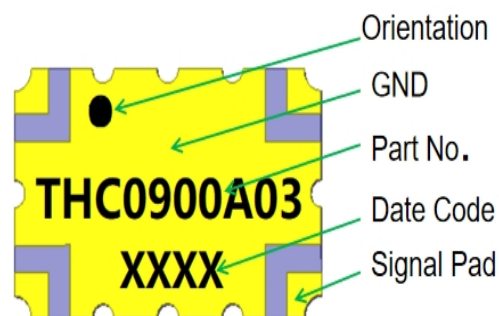


## Features:

- . 800-1000 MHz
- . AMPS
- . High Power
- . Very Low Loss
- . Tight Amplitude Balance
- . High Isolation
- . Low VSWR
- . Good Repeatability
- . CTE compatible with FR4, G-10, RF-35, R04350B and polyimide
- . Immersion gold, prevent surface oxidation & scratch
- . RoHS Compliant
- . Tape & Reel Package available


## Electrical Specifications

Frequency	Isolation	Insertion Loss	VSWR	Amplitude Balance
MHz	dB Min	dB Max	Max:1	dB Max
800-1000	33.5	0.20	1.20	$\pm 0.25$
Phase Balance	Power	Size	Thickness	
Degrees	Avg.CW.Watts	mm	mm	
$90 \pm 2.0$	200	8.89*14.22	1.3	


## TOP VIEW

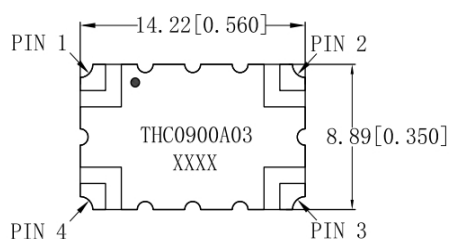

## SIDE IEW



## BOTTOM VIEW

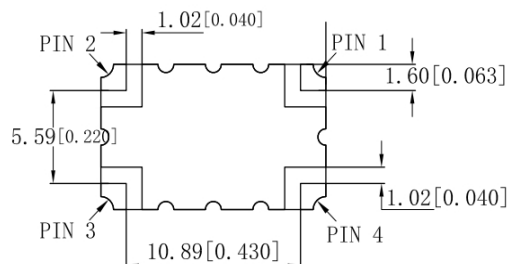




# THC0900A03

Hybrid Coupler 3dB, 90°

Rev A1.0

## Hybrid Coupler Pin Configuration

The THC0900A03 has an orientation marker to denote Pin 1. Once port one has been identified the other ports are known automatically. Please see the chart below for clarification:

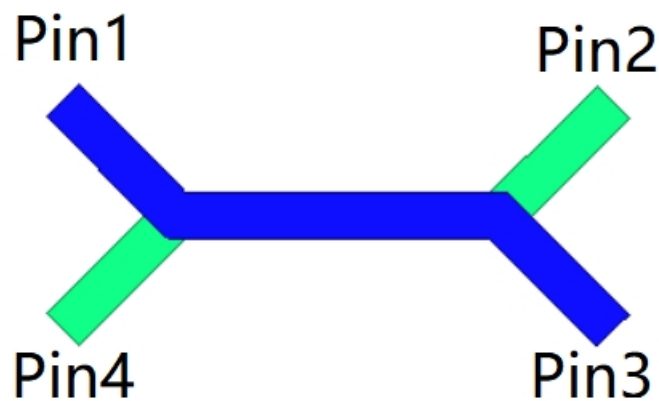

Configurati on	Pin 1	Pin 2	Pin 3	Pin 4
<b>Splitter</b>	Input	Isolated	$-3\text{dB} \angle \theta - 90^\circ$	$-3\text{dB} \angle \theta$
<b>Splitter</b>	Isolated	Input	$-3\text{dB} \angle \theta$	$-3\text{dB} \angle \theta - 90^\circ$
<b>Splitter</b>	$-3\text{dB} \angle \theta - 90^\circ$	$-3\text{dB} \angle \theta$	Input	Isolated
<b>Splitter</b>	$-3\text{dB} \angle \theta$	$-3\text{dB} \angle \theta - 90^\circ$	Isolated	Input
<b>Combiner</b>	$A \angle \theta - 90^\circ$	$A \angle \theta$	Isolated	Output
<b>Combiner</b>	$A \angle \theta$	$A \angle \theta - 90^\circ$	Output	Isolated
<b>Combiner</b>	Isolated	Output	$A \angle \theta - 90^\circ$	$A \angle \theta$
<b>Combiner</b>	Output	Isolated	$A \angle \theta$	$A \angle \theta - 90^\circ$

Note:

“A” is the amplitude of the applied signals. When two quadrature signals with equal amplitudes are applied to the coupler as described in the table, they will combine at the output port. If the amplitudes are not equal, some of the applied energy will be directed to the isolated port.



# THC0900A03

Hybrid Coupler 3dB, 90°


Rev A1.0

## Typical Performance Data

Frequency		MHz	800	825	850	875	900	925	950	975	1000
Coupling		dB	3.23	3.13	3.06	3.08	3.14	3.15	3.10	3.10	3.12
Transmission		dB	2.91	3.02	3.12	3.00	2.80	2.78	2.88	2.94	2.95
Insertion Loss		dB	-0.07	-0.08	-0.09	-0.04	-0.03	-0.03	-0.02	-0.03	-0.04
Isolation		dB	-40.9	-43.0	-44.3	-44.3	-42.0	-39.6	-37.3	-35.3	-33.6
Phase		degree	90.79	90.90	90.98	91.02	91.00	91.02	91.11	91.25	91.37
VSWR	Input	/	1.08	1.07	1.07	1.06	1.04	1.03	1.02	1.03	1.05
	coupler	/	1.02	1.00	1.02	1.04	1.05	1.07	1.08	1.08	1.07
	Transmission	/	1.03	1.04	1.04	1.05	1.06	1.07	1.08	1.10	1.11
	Isolated	/	1.09	1.10	1.11	1.11	1.12	1.12	1.12	1.13	1.14

## Typical Performance

### Coupling(dB):

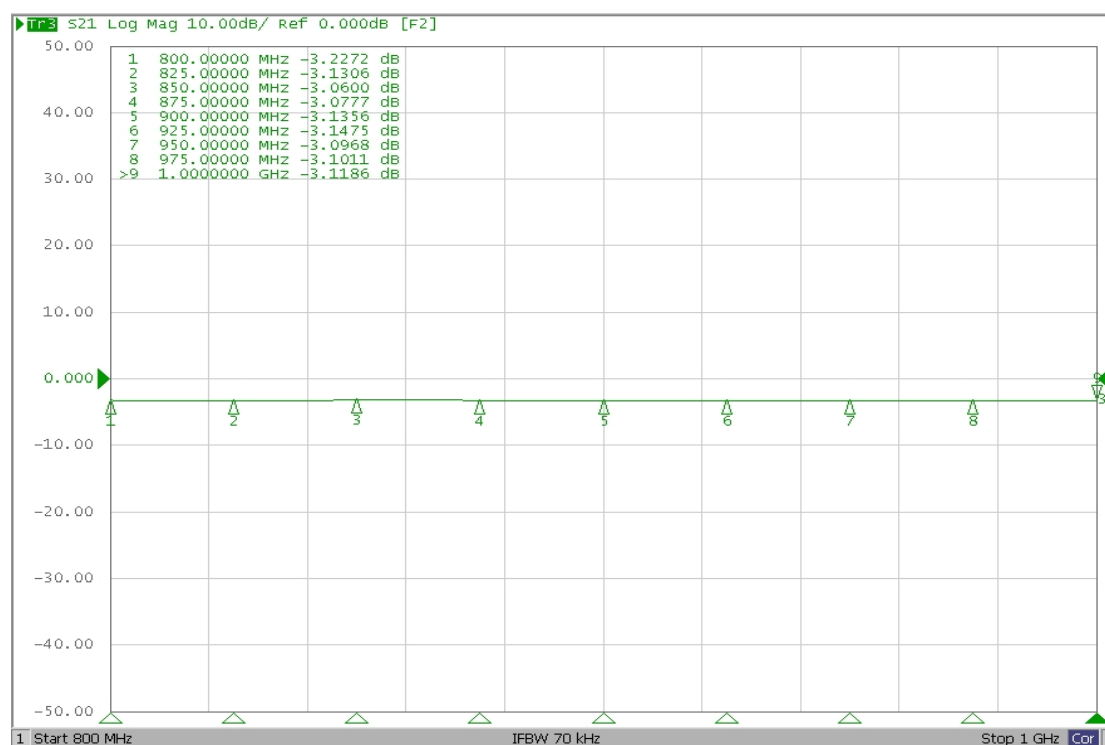




# THC0900A03


Hybrid Coupler 3dB, 90°

Rev A1.0

## Transmission(dB):

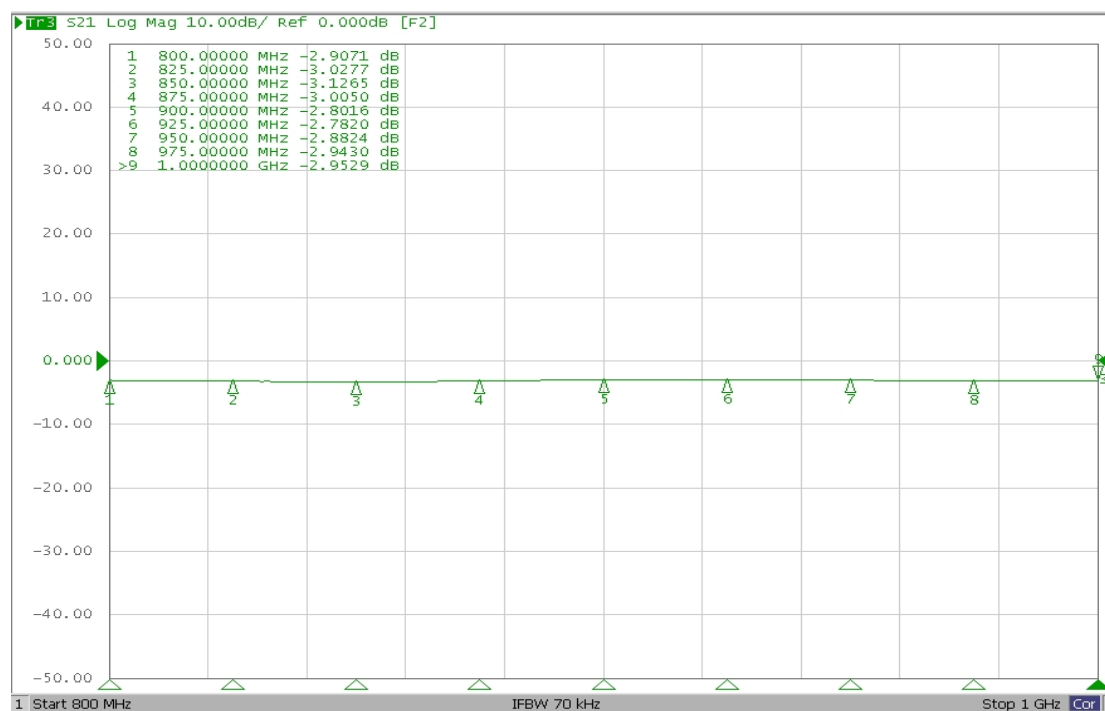

## Isolation(dB):

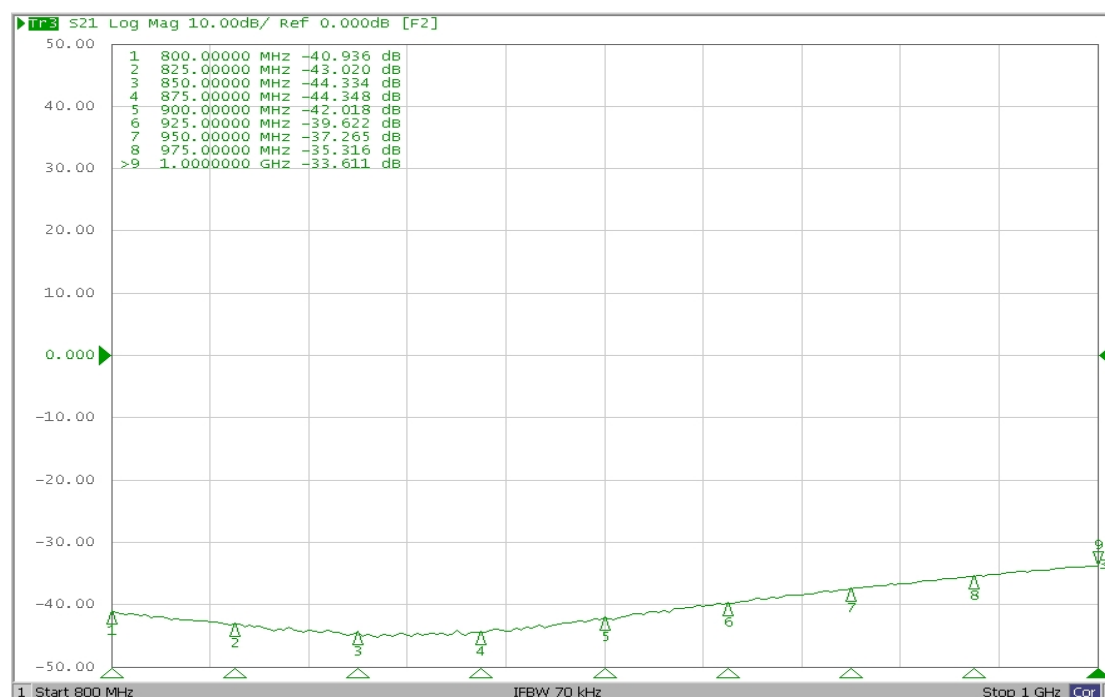




# THC0900A03

Hybrid Coupler 3dB, 90°


Rev A1.0

Phase(degree):

Coupling Phase(degree):

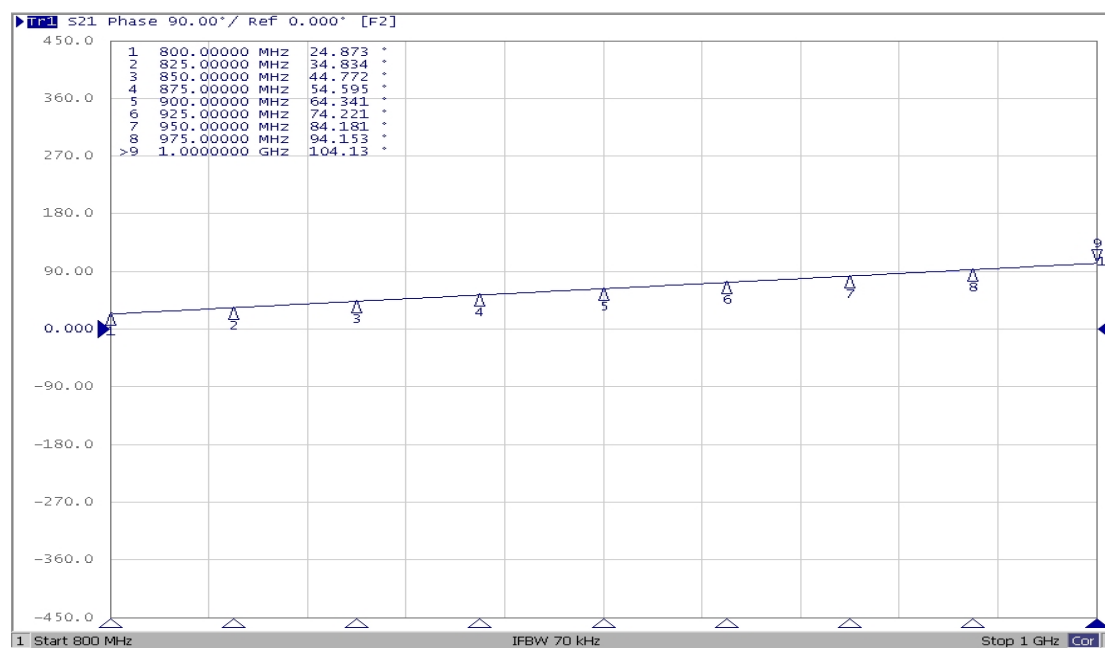

Transmission Phase(degree):

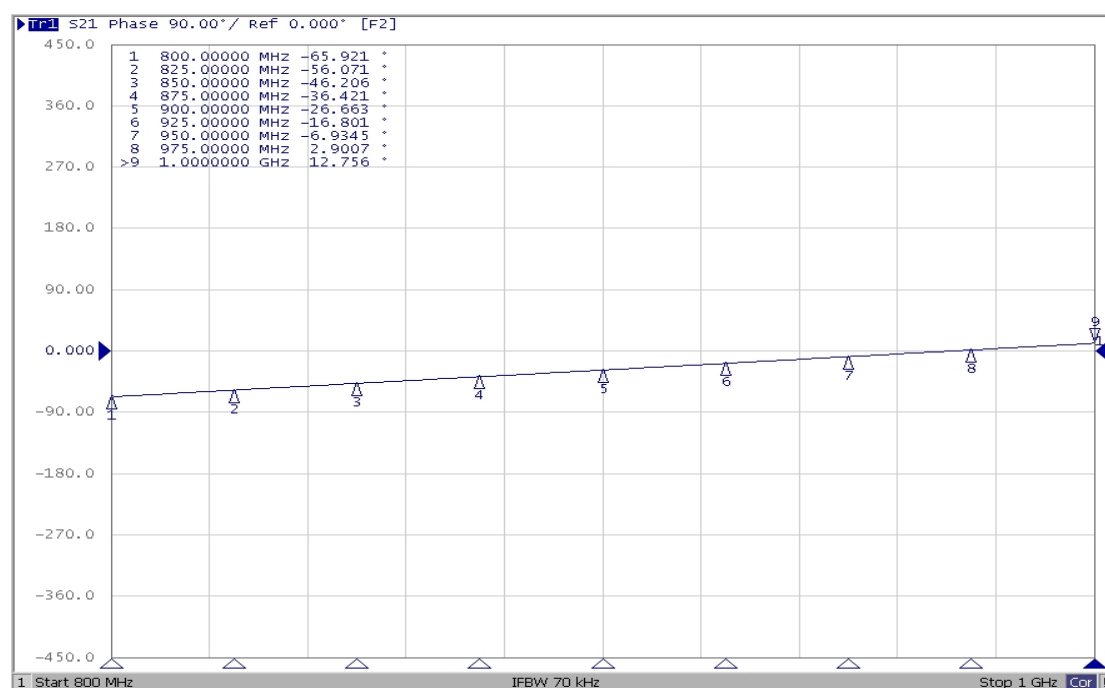




# THC0900A03

Hybrid Coupler 3dB, 90°


Rev A1.0

VSWR :

Input Port/Coupling Port:

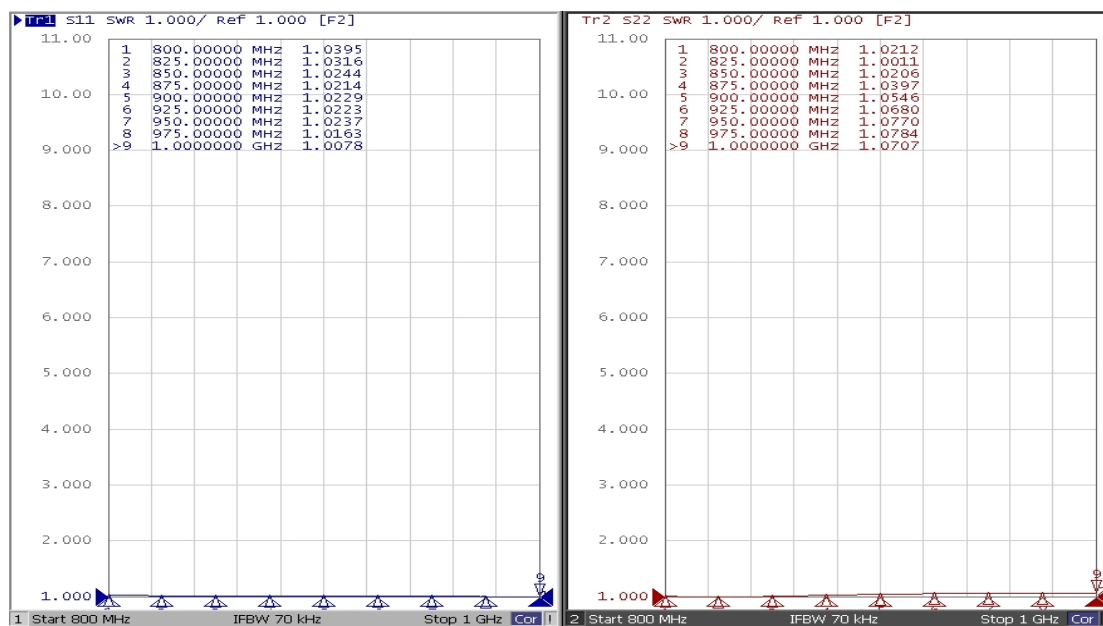

Input Port/Transmission Port:

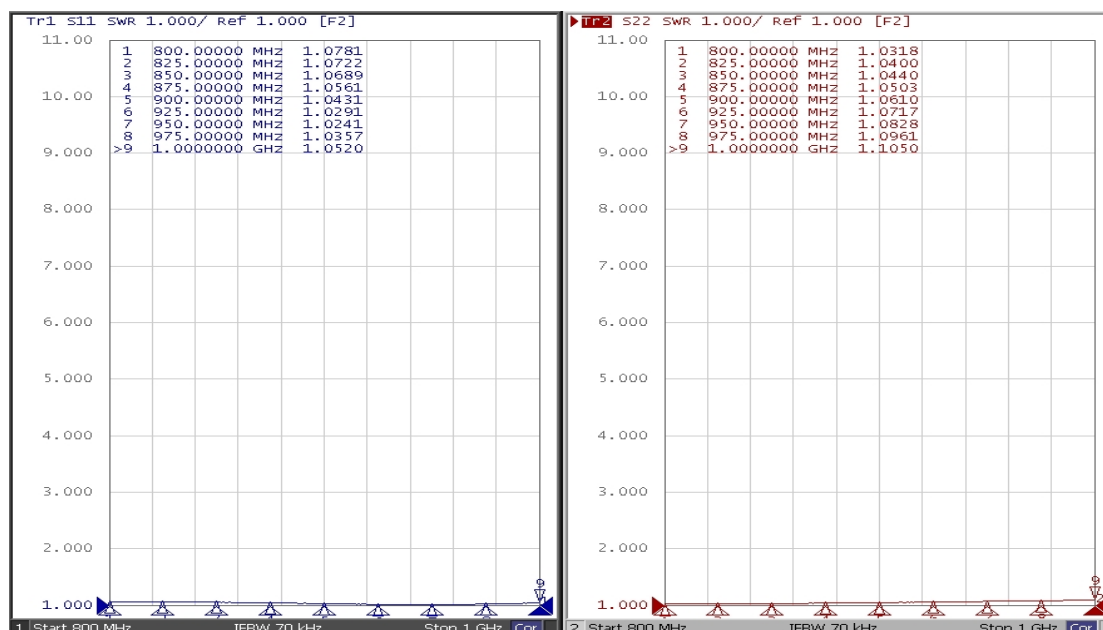




# THC0900A03


Hybrid Coupler 3dB, 90°

Rev A1.0

Input Port/Isolation Port:

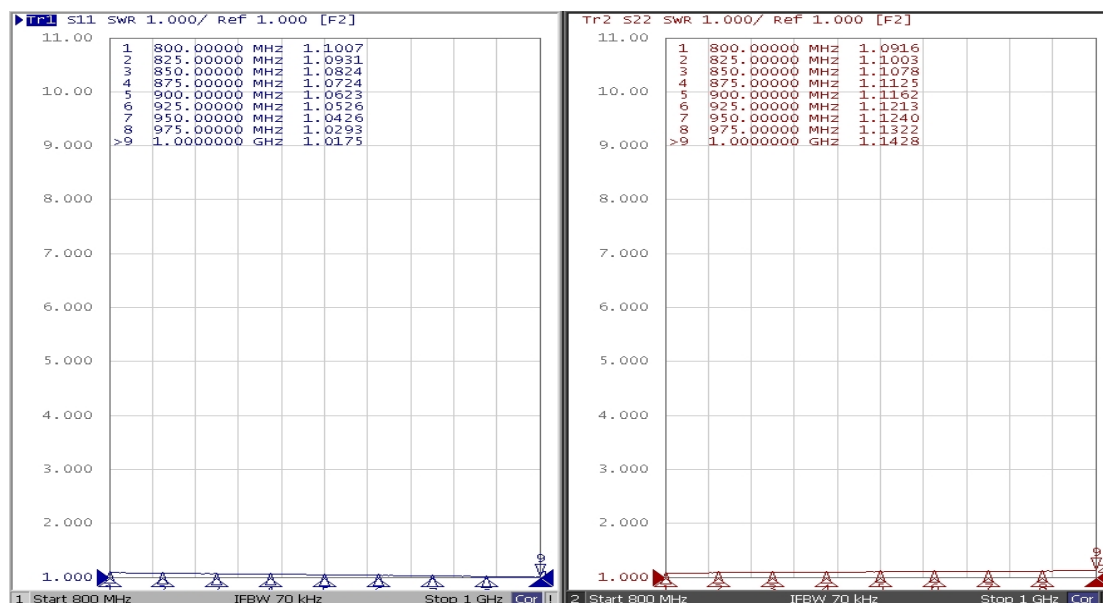

## Recommended PCB Layout

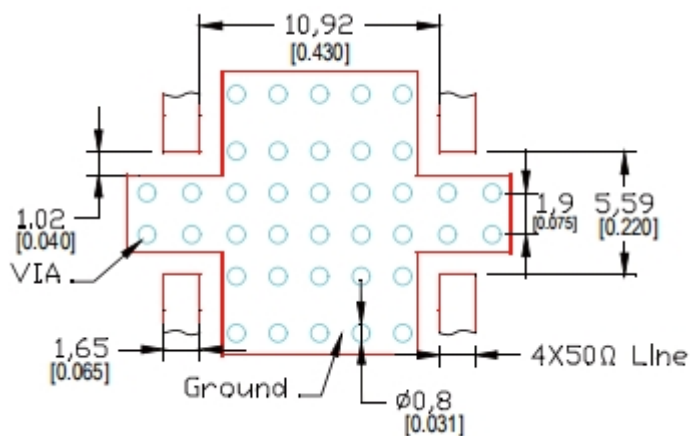

NOTE:

1. copper 1 OZ
2. Bottom side of the PCB is continuous ground plane
3. All dimensions shown in mm