



# THC1600W03S

Hybrid Coupler 3dB, 90°

Rev A1.0

The THC1600W03S is a low profile, high performance 3dB hybrid coupler in a new easy to use, manufacturing friendly surface mount package. It is designed for AMPS Band applications. The THC1600W03S is particularly for balanced power and low noise amplifiers, plus signal designed distribution and other applications where low insertion loss and tight amplitude and phase balance is required. It can be used in power applications up to 300 Watts.

Parts have been subjected to rigorous qualification testing and they are manufactured using materials with coefficients of thermal expansion (CTE) compatible with common substrates such as FR4, G-10, RF-35, R04350 and polyimide.


## Features:

- . 800-2400 MHz
- . AMPS
- . High Power
- . Very Low Loss
- . Tight Amplitude Balance
- . High Isolation
- . Low VSWR
- . Good Repeatability
- . CTE compatible with FR4, G-10, RF-35, R04350B and polyimide
- . Immersion gold, prevent surface oxidation & scratch
- . RoHS Compliant
- . Tape & Reel Package available


## Electrical Specifications

Frequency	Isolation	Insertion Loss	VSWR	Amplitude Balance
MHz	dB Min	dB Max	Max:1	dB Max
800-2400	-21.0	0.25	1.2	±0.95
Phase Balance	Power	Size	Thickness	Operating Temp.
Degrees	Avg.CW.Watts	mm	mm	°C
90±2.0	300	14.22*8.89	2.5	-55 to+105


## TOP VIEW

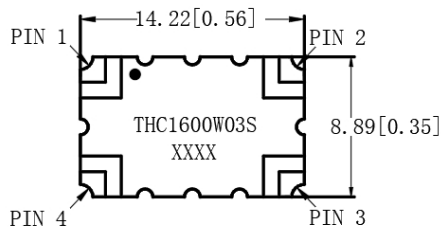

## SIDE IEW




## BOTTOM VIEW

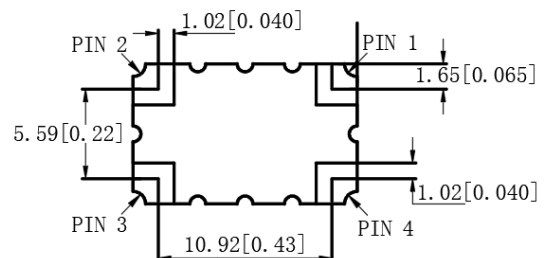

## Hybrid Coupler Pin Configuration

The THC1600W03S has an orientation marker to denote Pin 1. Once port one has been identified the other ports are known automatically. Please see the chart below for clarification:

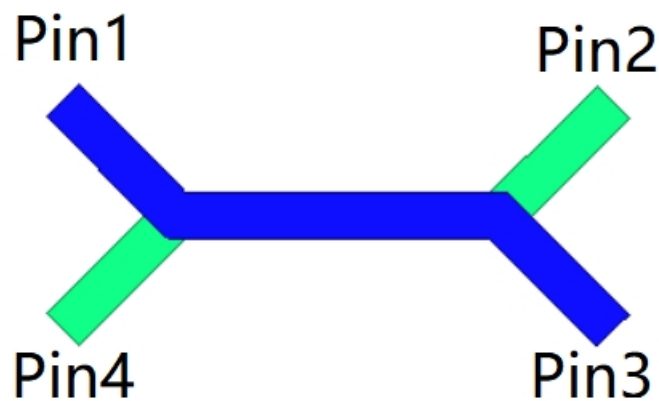

Configuration	Pin 1	Pin 2	Pin 3	Pin 4
<b>Splitter</b>	Input	Isolated	$-3\text{dB} \angle \theta - 90^\circ$	$-3\text{dB} \angle \theta$
<b>Splitter</b>	Isolated	Input	$-3\text{dB} \angle \theta$	$-3\text{dB} \angle \theta - 90^\circ$
<b>Splitter</b>	$-3\text{dB} \angle \theta - 90^\circ$	$-3\text{dB} \angle \theta$	Input	Isolated
<b>Splitter</b>	$-3\text{dB} \angle \theta$	$-3\text{dB} \angle \theta - 90^\circ$	Isolated	Input
<b>Combiner</b>	$A \angle \theta - 90^\circ$	$A \angle \theta$	Isolated	Output
<b>Combiner</b>	$A \angle \theta$	$A \angle \theta - 90^\circ$	Output	Isolated
<b>Combiner</b>	Isolated	Output	$A \angle \theta - 90^\circ$	$A \angle \theta$
<b>Combiner</b>	Output	Isolated	$A \angle \theta$	$A \angle \theta - 90^\circ$

Note:


“A” is the amplitude of the applied signals. When two quadrature signals with equal amplitudes are applied to the coupler as described in the table, they will combine at the output port. If the amplitudes are not equal, some of the applied energy will be directed to the isolated port.

## Typical Performance Data


Frequency	MHz	800	1000	1200	1400	1600	1800	2000	2200	2400
Coupling	dB	-4.03	-3.17	-2.67	-2.39	-2.26	-2.26	-2.39	-2.71	-3.24
Transmission	dB	-2.32	-2.96	-3.48	-3.86	-4.07	-4.11	-3.96	-3.65	-3.19
Insertion Loss	dB	-0.17	-0.06	-0.07	-0.12	-0.16	-0.18	-0.17	-0.18	-0.21
Isolation	dB	-27.18	-28.18	-29.83	-31.85	-33.12	-31.49	-28.00	-24.52	-21.42
Phase	degree	90.13	90.36	90.50	90.63	90.69	90.70	90.67	91.00	91.69
VSWR	Input	/	1.15	1.13	1.12	1.12	1.12	1.11	1.12	1.19
	coupler	/	1.15	1.13	1.12	1.12	1.12	1.11	1.12	1.19
	Transmission	/	1.14	1.11	1.08	1.05	1.05	1.06	1.08	1.18
	Isolated	/	1.15	1.13	1.11	1.10	1.10	1.10	1.12	1.19

## Typical Performance


### Coupling(dB):

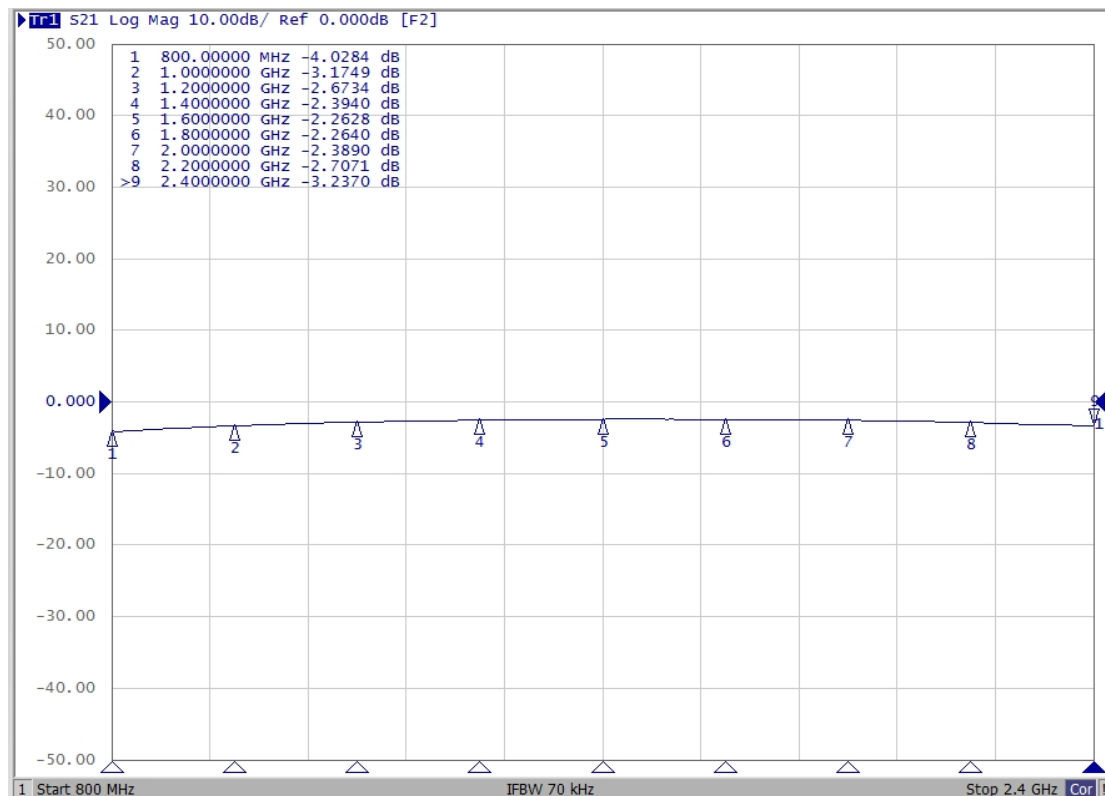

## Transmission(dB):

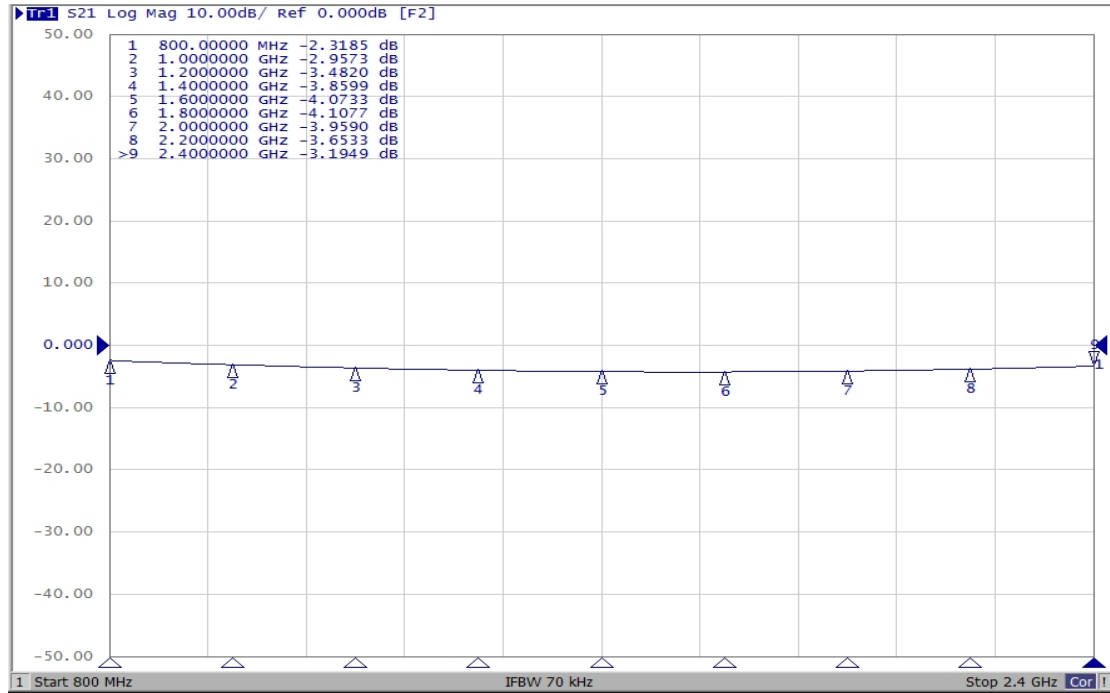


## Isolation(dB):

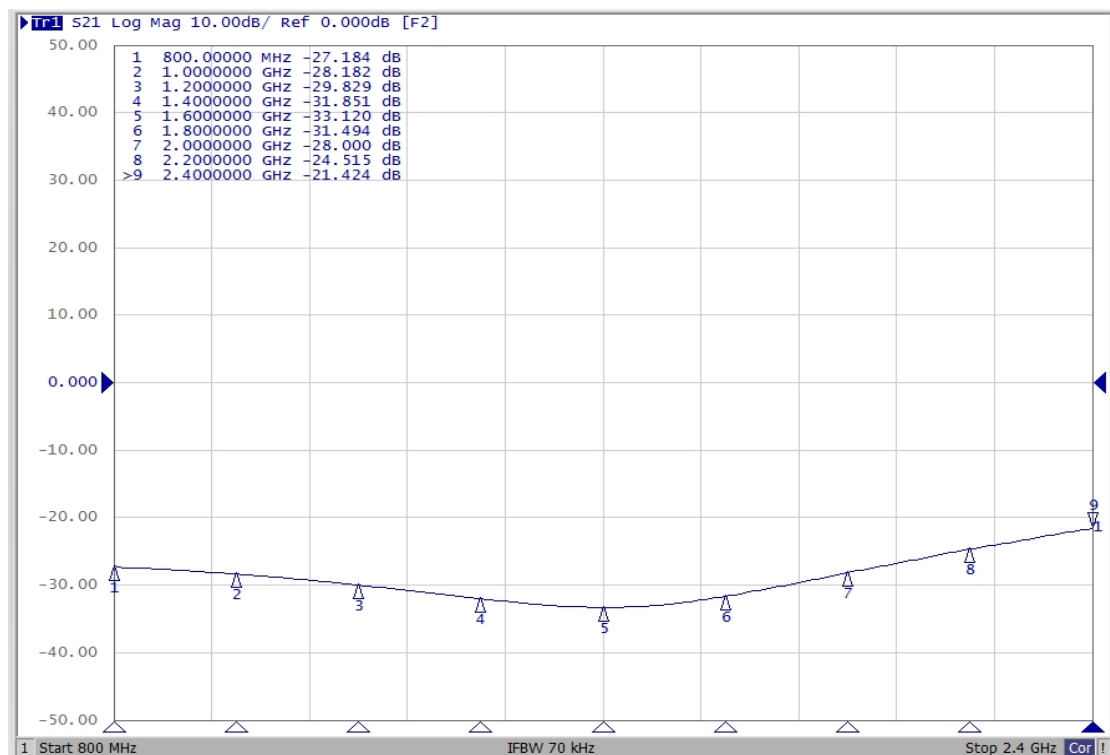


Phase(degree):

Coupling Phase(degree):

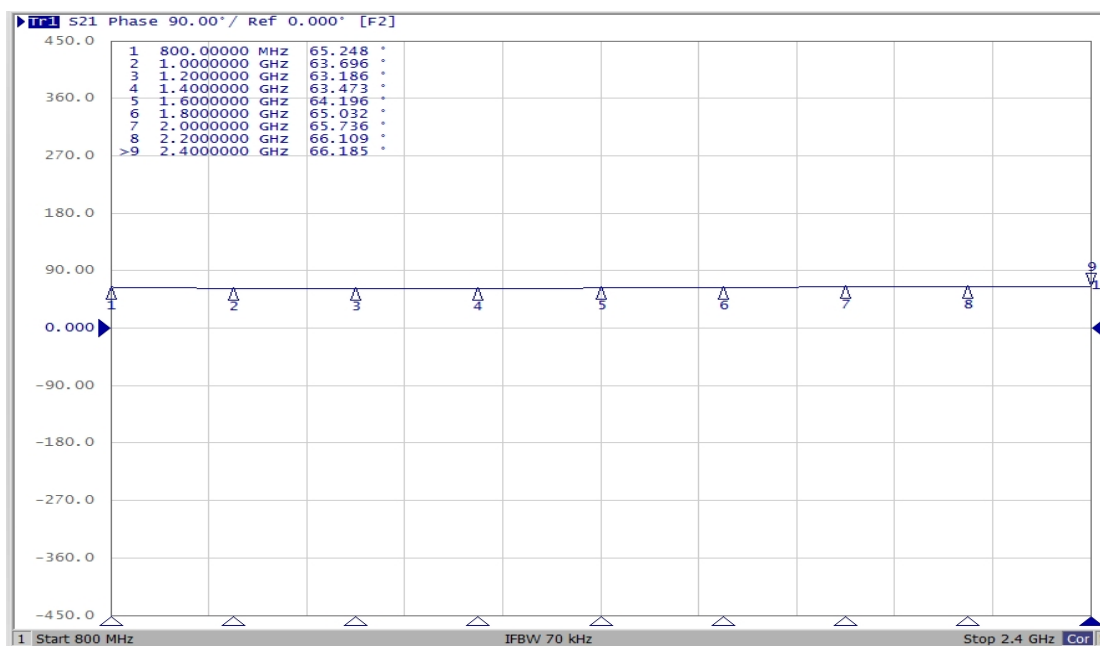

Transmission Phase(degree):

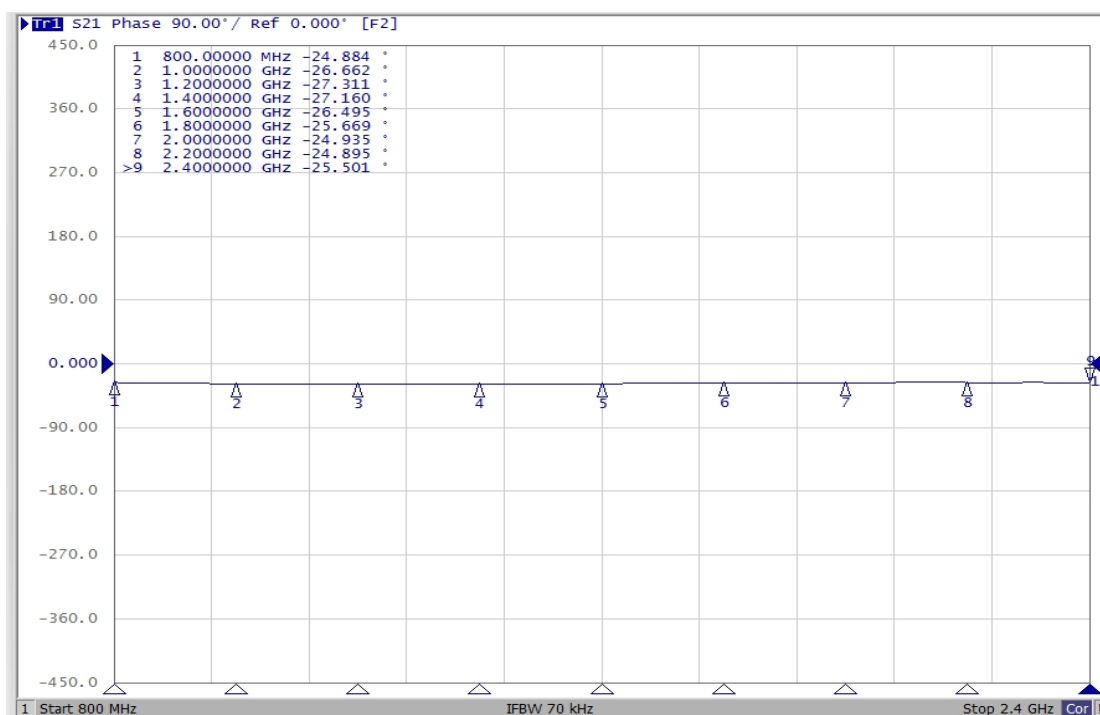




# THC1600W03S

Hybrid Coupler 3dB, 90°


Rev A1.0

**VSWR :**

**Input Port:**

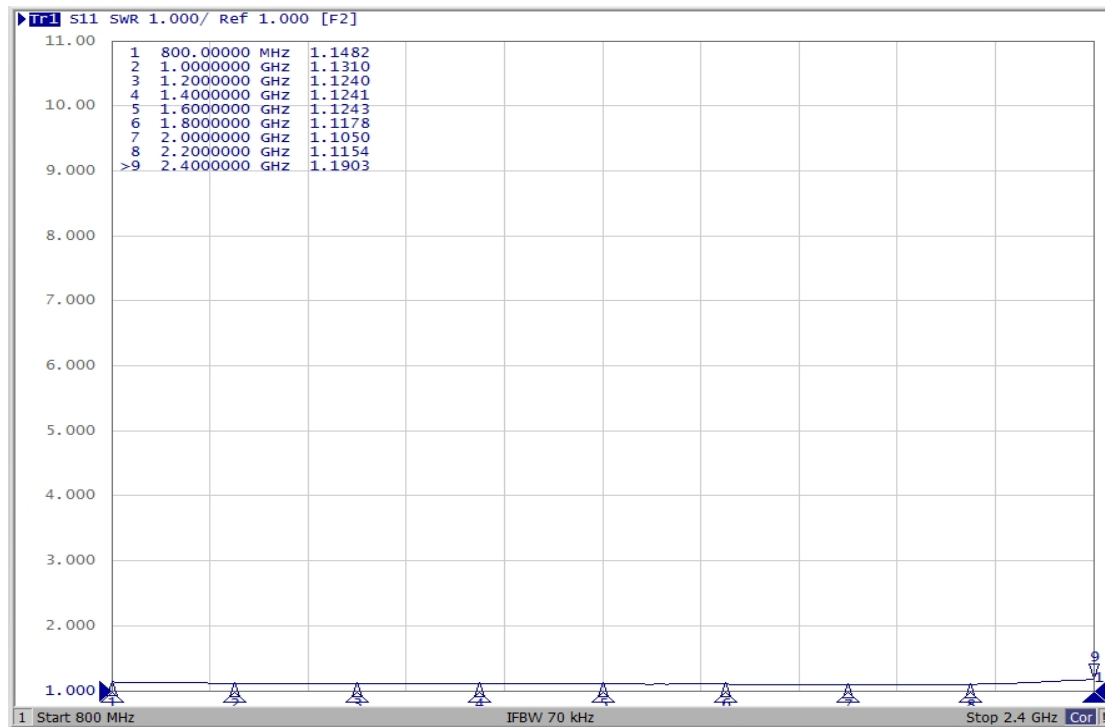

**Coupling Port:**

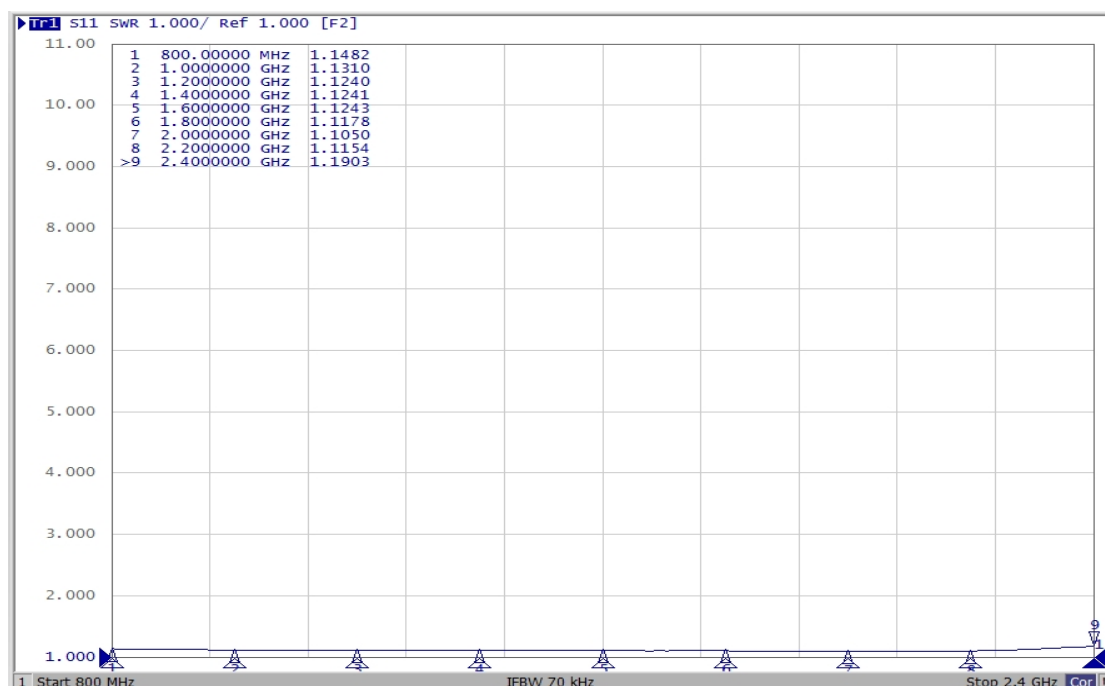

For detailed performance specs & shopping online see CBWB web site: [www.shcbwb.com](http://www.shcbwb.com)




# THC1600W03S

Hybrid Coupler 3dB, 90°

Rev A1.0

## Transmission Port:

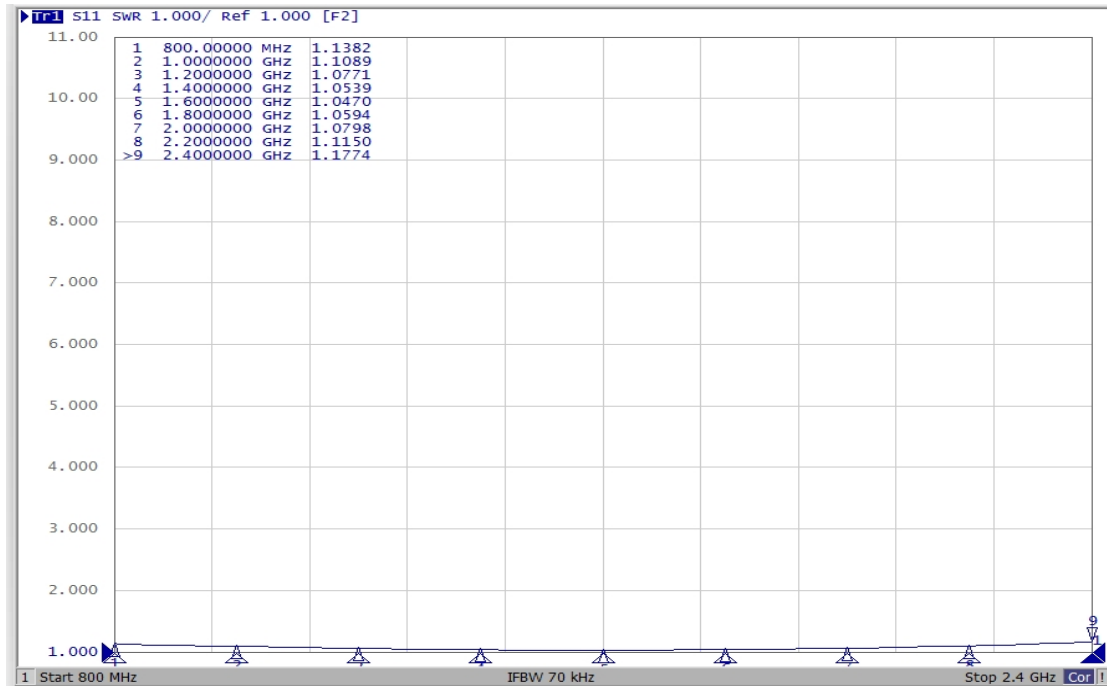

## Isolation Port:

