
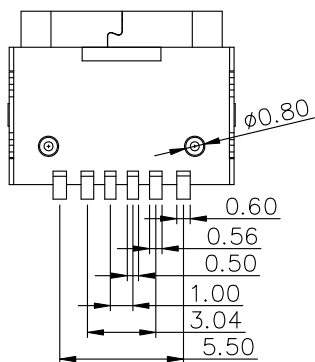
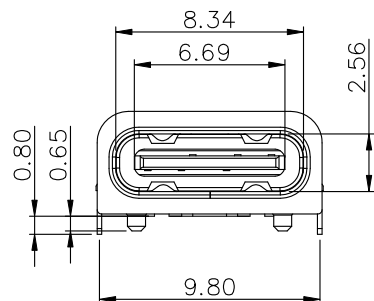
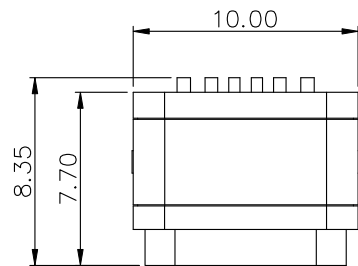


A5	CC1	B12	GND
A9	VBUS	B9	VBUS
A12	GND	B5	CC2
PIN	SIGNAL NAME	PIN	SIGNAL NAME

NOTES:

SPECIFICATION:

1. CURRENT RATING: 3.0A MAX
2. VOLTAGE: 100 VAC
3. TEMPERATURE RANGE: -30 °C ~ 85 °C
4. CONTACT RESISTANCE: 40 MILLIONHM MAX
5. INSULATION RESISTANCE: 100 MEGOHMS MIN.
6. LNSERTION FORCE : 5N~20N
7. UNMATING FORCE: 8N~20N
8. DURABILITY: 10,000 CYCLES
5. WATER PROOFNESS:THISPRODUCTIS BASED ON IPX7.

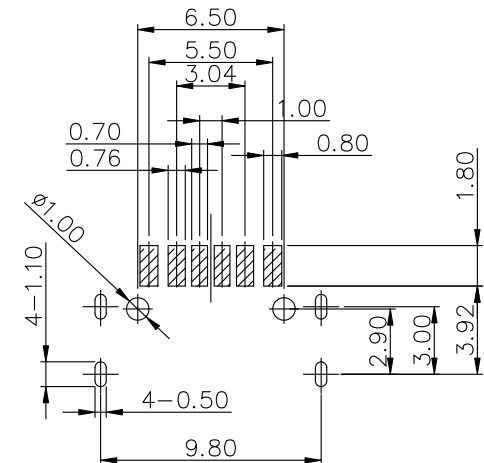

PCB LAYOUT/TOP VIEW

-TOLERANCES- UNLESS OTHERWISE SPECIFIED			
.XXX	±0.15	.X°	±3°
.XX	±0.20	.XX°	±1°
.X	±0.30	.XXX°	±0.5°

NSRTCONN 深圳市南苏尔特科技有限公司
NSURT TECHNOLOGY (Shenzhen) CO., LTD.

REV:	DESCRIPTION	BY	DATE	MATL:	SEE SPECIFICATION			APPROVED	
				PROJECTION:	THIRD ANGLE PROJECTION			CHECKED	
				UNIT:	SCALE	REV (NO)	SHEET	DRAWN	CHEN
				mm	1:1	A0	1 OF 1	DATE	2016. 6. 22

产品名称 PART NAME	TYPE C母座6PIN防水型-S		
料号 PART No	US****-*****R		C