
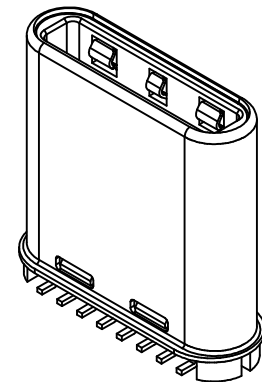
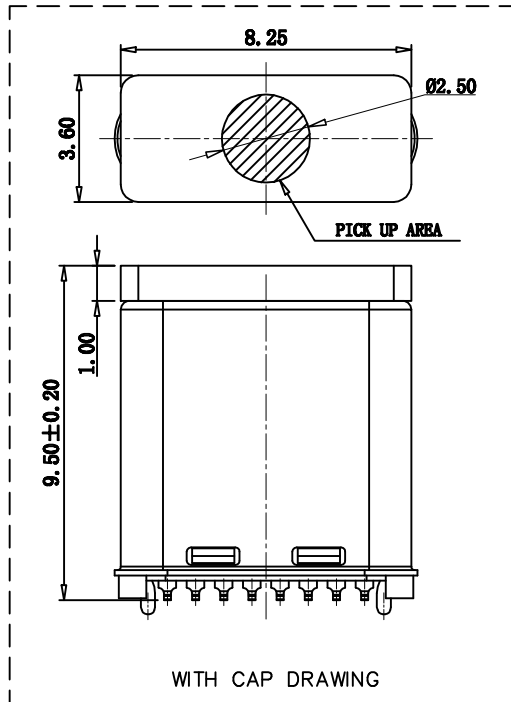
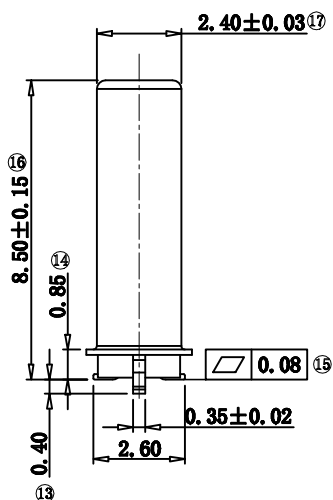
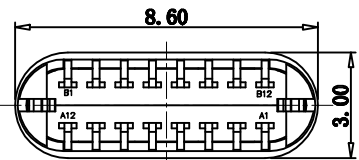
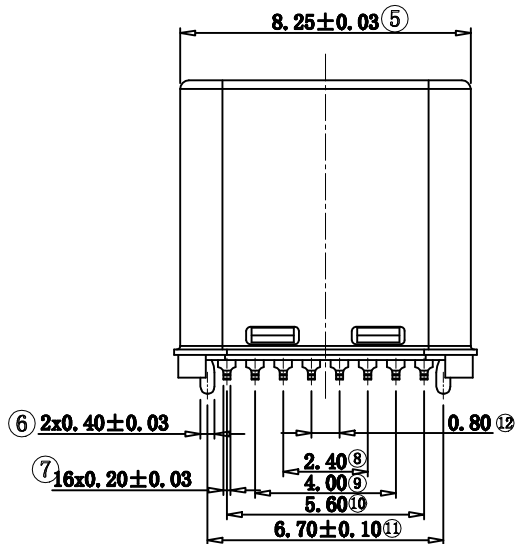


ITEM 項目	PARTS NAME 零件名稱	PART NO. 零件編號	Q'TY 數量	MATERIAL 材質	FINISH/REMARK 處理/備註
1	SHELL	M22-0873-50001	1	SUS316-L	Ni: 50u"
2	HOUSING	M21-0873-00001	1	PA-10T	R6130NH(Black)
3	CONTACT	M22-0873-00001	16	C7025	Contact area: Au: 30u", Solder tails: Matte Tin120u", Ni: 80u"
4	LATCH	M22-0873-40001	1	SUS301-EH	Solder tails: Matte Tin: 80u", Ni: 50u"
5	EMC SPRING	M22-0866-10003	2	SUS304-H	NON Plating
6	CAP	M21-0873-90001	1	LCP	(Black)

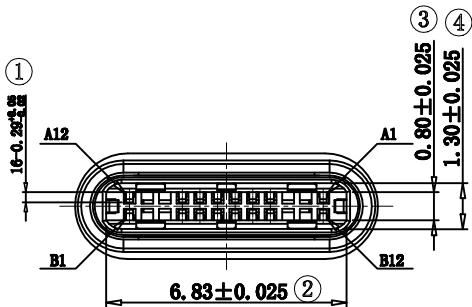

SPECIFICATION
MATERIAL
See drawing
STANDARD DATA
Rating current: 3.0A
Operating temperature: -10°C ~ +60°C
Storage temperature: -20°C ~ +85°C
ELECTRICAL
Insulator resistance: 100Mohms Min.
Withstanding voltage: 100 VAC / minute
Contact resistance: initial 60mohms Max;
after 70mohms Max.
MECHANICAL
Mating force: 5~20N
Unmating force : Initial 8~20N
After 10000cycles 6~20N
Durability: 10000 cycles Min.

US5J1D-0013 5 8 1 R

颜色:
1:黑色
塑胶材质:
8:PA10T
电镀:
5:30U"

RECOMMENDED P.C.B LAYOUT
ALL TOLERANCE ±0.05mm

-TOLERANCES- UNLESS OTHERWISE SPECIFIED			
.XXX ±0.10	.X" ±3"	.XX ±0.15	.XX" ±1"
.X ±0.25	.XXX" ±0.5"		

NSURTCNN 深圳市南苏尔特科技有限公司
NSURT TECHNOLOGY (Shenzhen) CO., LTD.

REV:	DESCRIPTION	BY	DATE	MATL:	SEE SPECIFICATION	APPROVED
A0	NEW DRAWING	胡红元	2023. 8. 3	PROJECTION:	THIRD ANGLE PROJECTION	CHECKED
A1	端子平面度调整为0.08	胡红元	2023. 11. 6	UNIT:	SCALE	REV (NO)
				mm	1:1	A1
						1 OF 2
						DATE
						2023. 07. 28

产品名称 PART NAME	TYPE C 16PIN 立贴公头8.5mm
料号 PART No	US5J1D-0013581R
	P