



THC0700W03H

Hybrid Coupler 3B, 90°

Rev A1.0

The THC0700W03H is a low profile, high performance 3dB hybrid coupler in a new easy to use, manufacturing friendly surface mount package. It is designed for AMPS Band applications. The THC0700W03H is particularly for balanced power and low noise amplifiers, plus signal designed distribution and other applications where low insertion loss and tight amplitude and phase balance is required. It can be used in power applications up to 200 Watts.

Parts have been subjected to rigorous qualification testing and they are manufactured using materials with coefficients of thermal expansion (CTE) compatible with common substrates such as FR4, G-10, RF-35, R04350 and polyimide.

Features:

- . 200-1200 MHz
- . AMPS
- . High Power
- . Very Low Loss
- . Tight Amplitude Balance
- . High Isolation
- . Low VSWR
- . Good Repeatability
- . CTE compatible with FR4, G-10, RF-35, R04350B and polyimide
- . Immersion gold, prevent surface oxidation & scratch
- . RoHS Compliant
- . Tape & Reel Package available

Electrical Specifications


Frequency	Isolation	Insertion Loss	VSWR	Amplitude Balance
MHz	dB Min	dB Max	Max:1	dB Max
200-1200	20.0	0.45	1.20	±1.0
Phase Balance	Power	Size	Thickness	Operating Temp.
Degrees	Avg.CW.Watts	mm	mm	°C
90±2.0	200	50.8*23	5.1	-55 to+105

Mechanical Outline

TOP VIEW


SIDE VIEW

BOTTOM VIEW

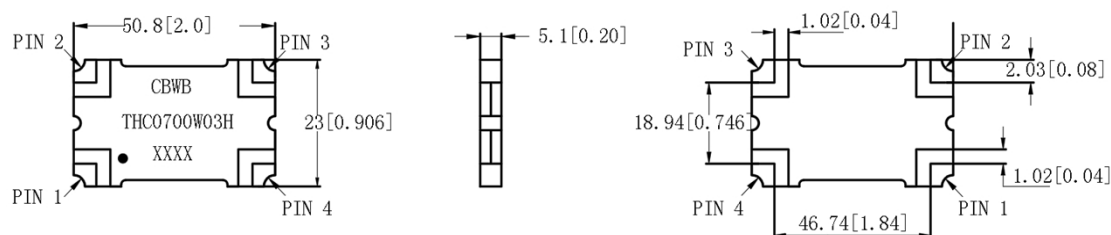

Hybrid Coupler Pin Configuration

The THC0700W03H has an orientation marker to denote Pin 1. Once port one has been identified the other ports are known automatically. Please see the chart below for clarification:

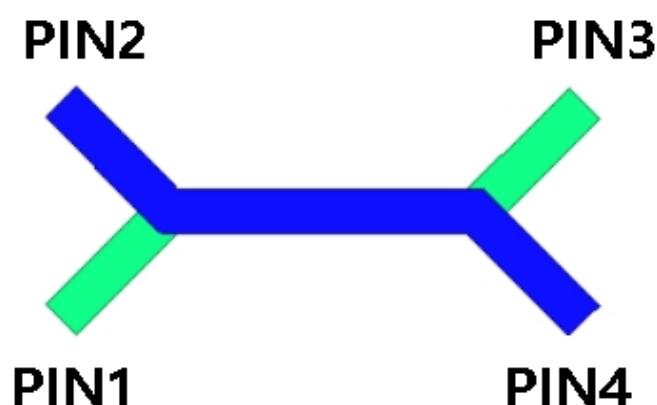

Configuration	Pin 1	Pin 2	Pin 3	Pin 4
Splitter	Input	-3dB $\angle \theta$	-3dB $\angle \theta - 90^\circ$	Isolated
Splitter	-3dB $\angle \theta$	Input	Isolated	-3dB $\angle \theta - 90^\circ$
Splitter	-3dB $\angle \theta - 90^\circ$	Isolated	Input	-3dB $\angle \theta$
Splitter	Isolated	-3dB $\angle \theta - 90^\circ$	-3dB $\angle \theta$	Input
Combiner	-3dB $\angle \theta - 90^\circ$	Output	Isolated	-3dB $\angle \theta$
Combiner	Output	-3dB $\angle \theta - 90^\circ$	-3dB $\angle \theta$	Isolated
Combiner	Isolated	-3dB $\angle \theta$	-3dB $\angle \theta - 90^\circ$	Output
Combiner	-3dB $\angle \theta$	Isolated	Output	-3dB $\angle \theta - 90^\circ$

Note:


“A” is the amplitude of the applied signals. When two quadrature signals with equal amplitudes are applied to the coupler as described in the table, they will combine at the output port. If the amplitudes are not equal, some of the applied energy will be directed to the isolated port.

Typical Performance Data


Frequency	MHz	200	290	380	550	700	830	950	1070	1200
Coupling	dB	-4.27	-3.27	-3.04	-3.67	-4.28	-3.92	-3.25	-2.90	-3.33
Transmission	dB	-2.27	-3.11	-3.40	-2.94	-2.57	-2.89	-3.53	-3.94	-3.54
Insertion Loss	dB	-0.17	-0.18	-0.20	-0.29	-0.32	-0.35	-0.38	-0.40	-0.41
Isolation	dB	-26.72	-27.34	-28.61	-32.06	-31.23	-28.14	-26.41	-25.12	-22.95
Phase	degree	89.83	90.09	90.13	89.95	89.79	89.20	88.76	89.18	90.50
VSWR	Input	/	1.14	1.11	1.12	1.11	1.11	1.09	1.09	1.12
	coupler	/	1.15	1.12	1.11	1.12	1.12	1.10	1.10	1.12
	Transmission	/	1.15	1.11	1.10	1.12	1.12	1.09	1.09	1.12
	Isolated	/	1.15	1.11	1.11	1.11	1.12	1.09	1.10	1.13

Typical Performance


Coupling(dB):

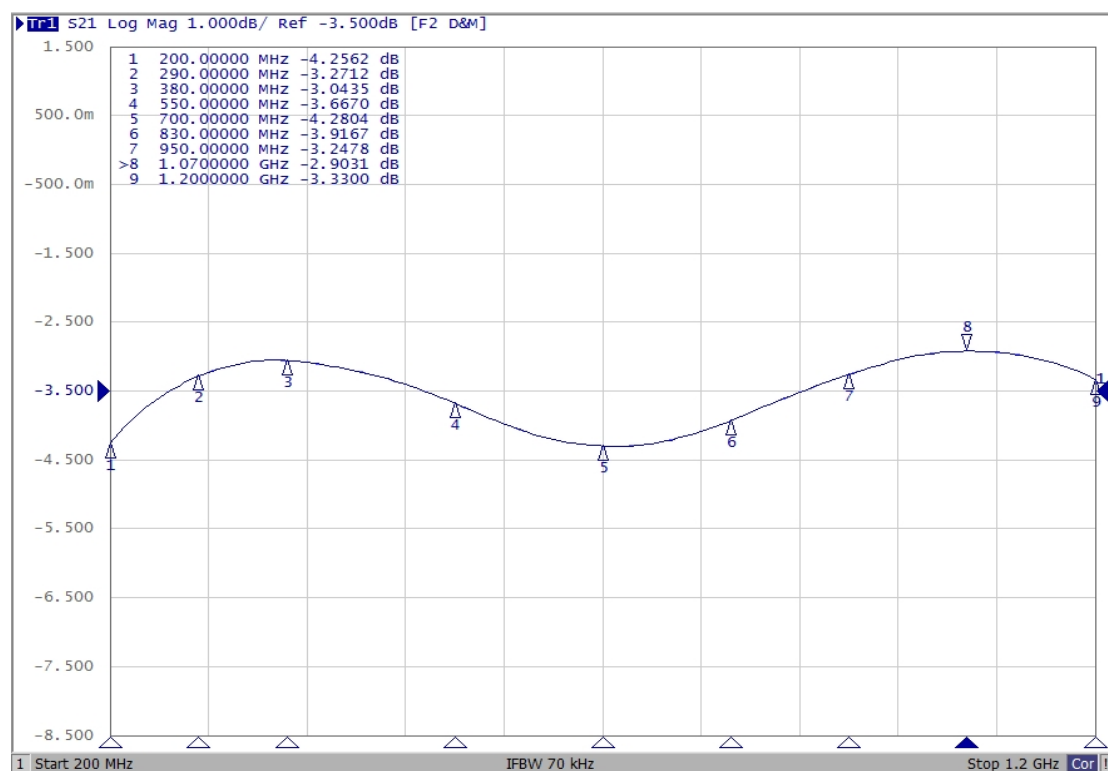


Transmission(dB):

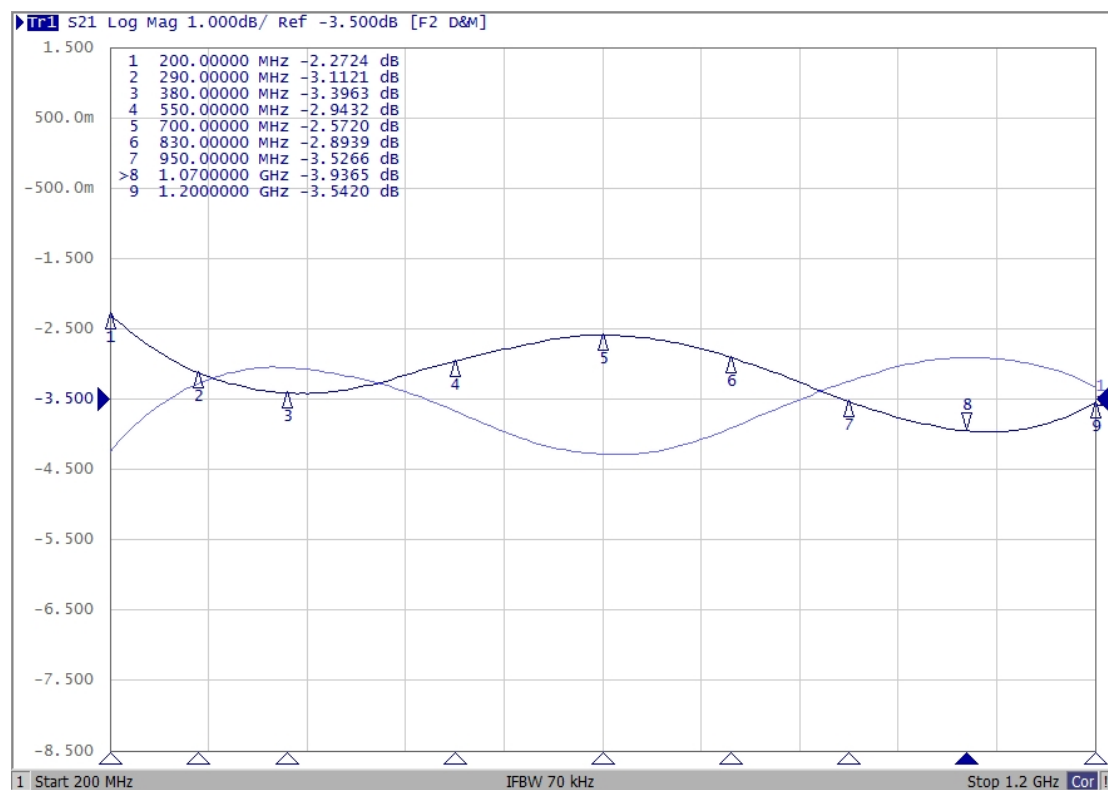


Isolation(dB):

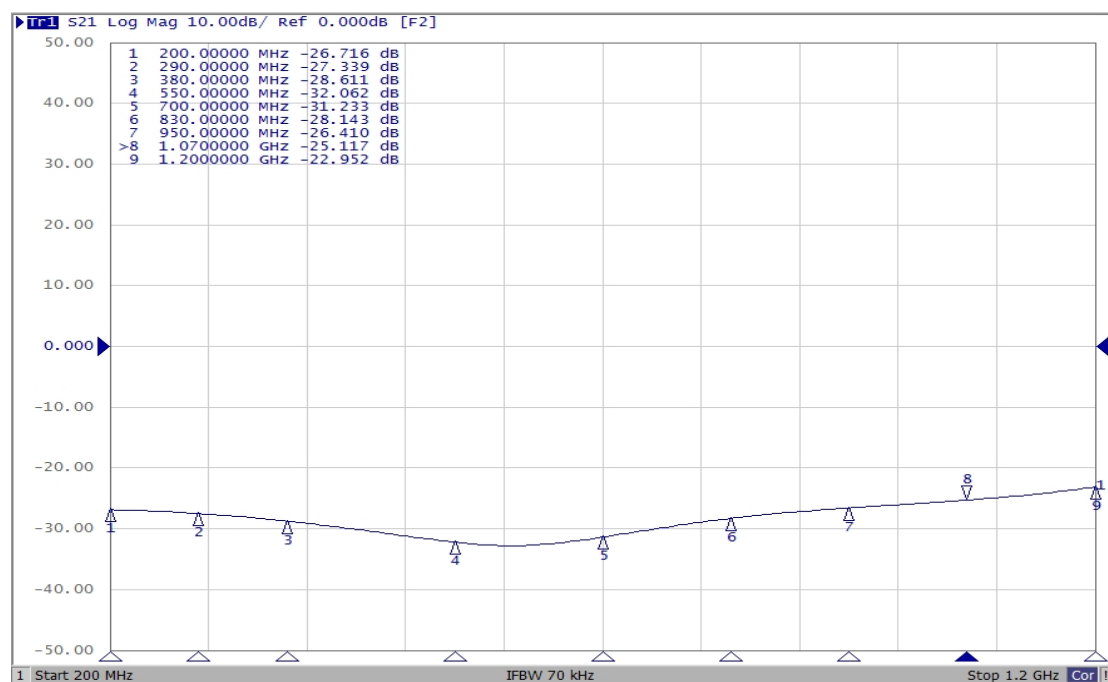

Phase(degree):

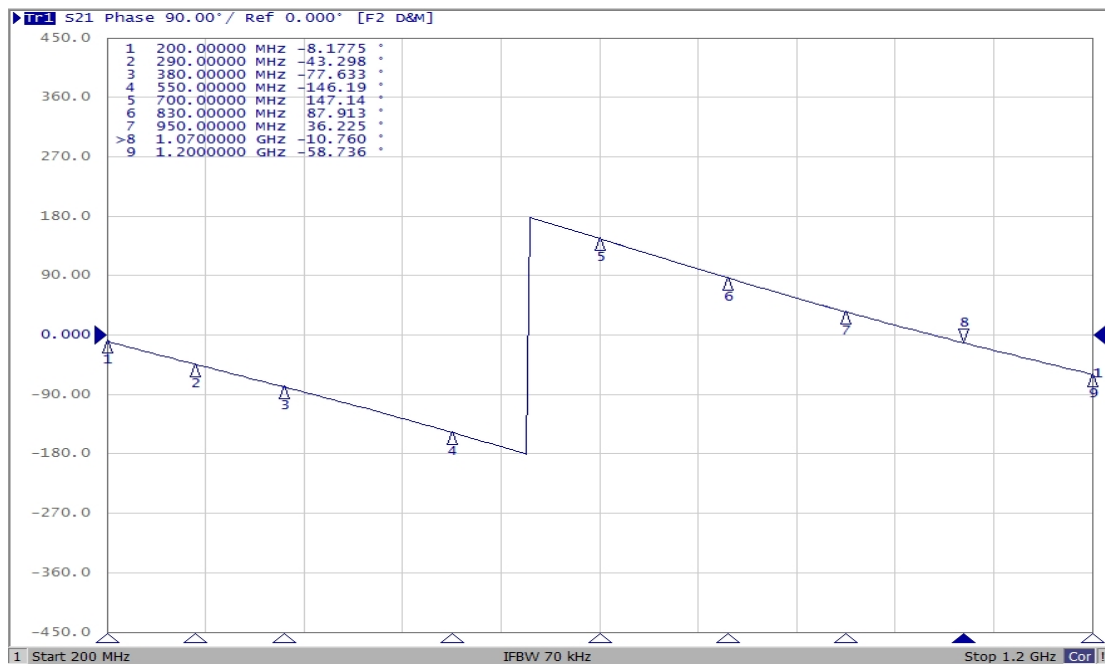

Transmission Phase(degree):

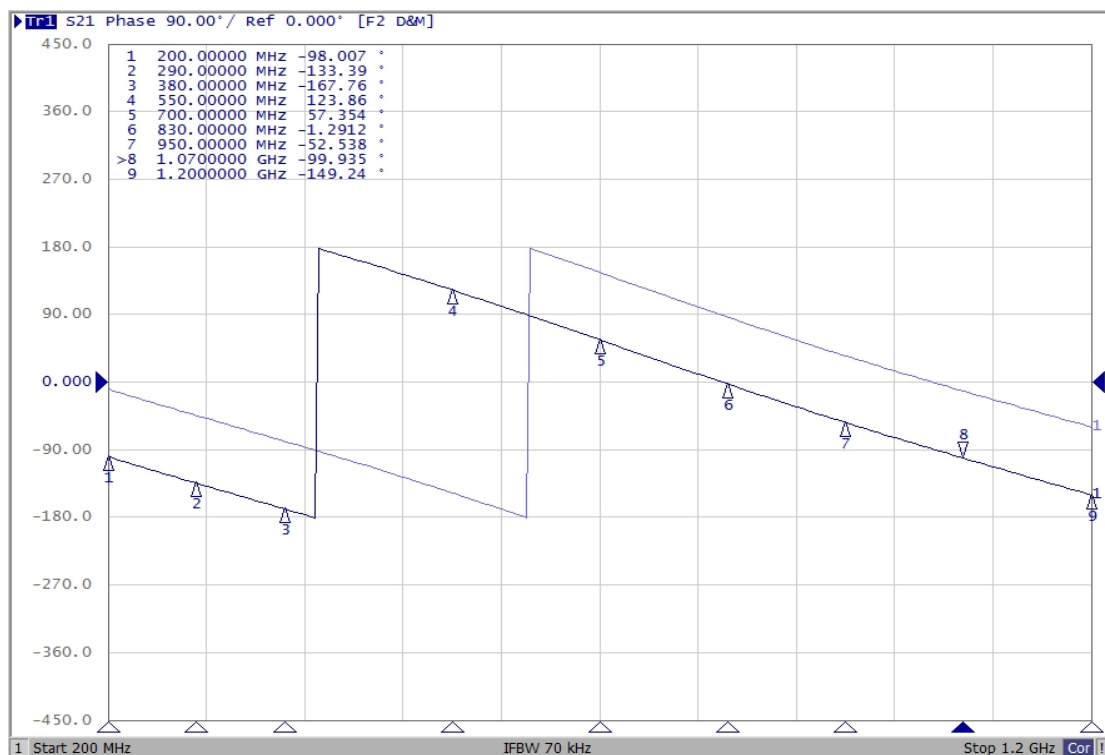




THC0700W03H

Hybrid Coupler 3B, 90°


Rev A1.0

VSWR :

Input Port:

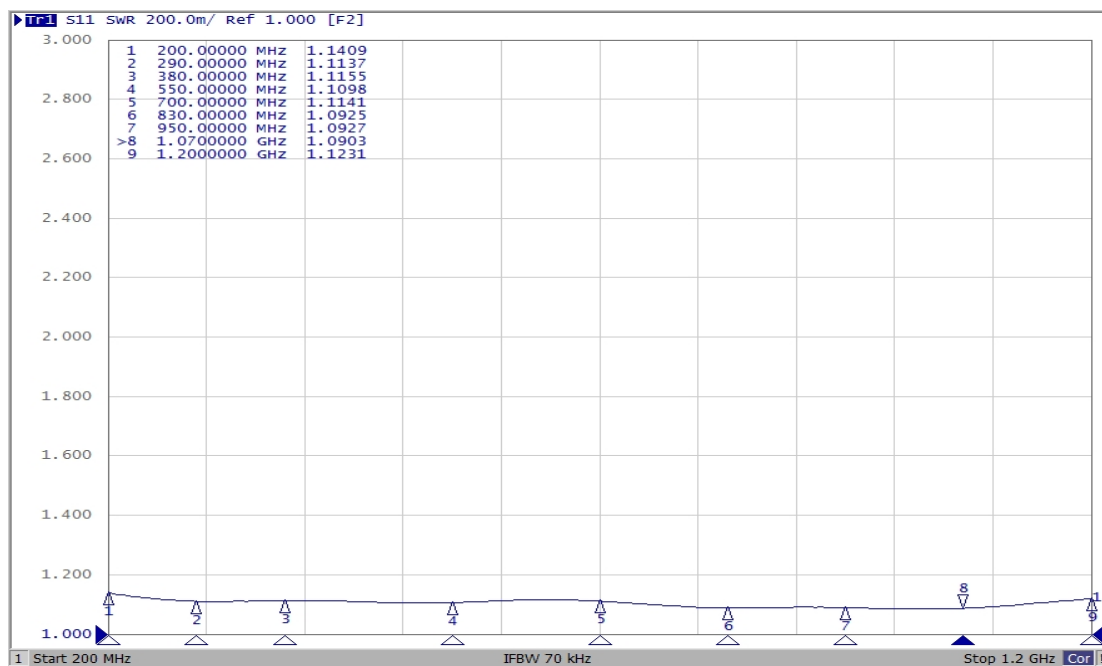

Coupling Port:

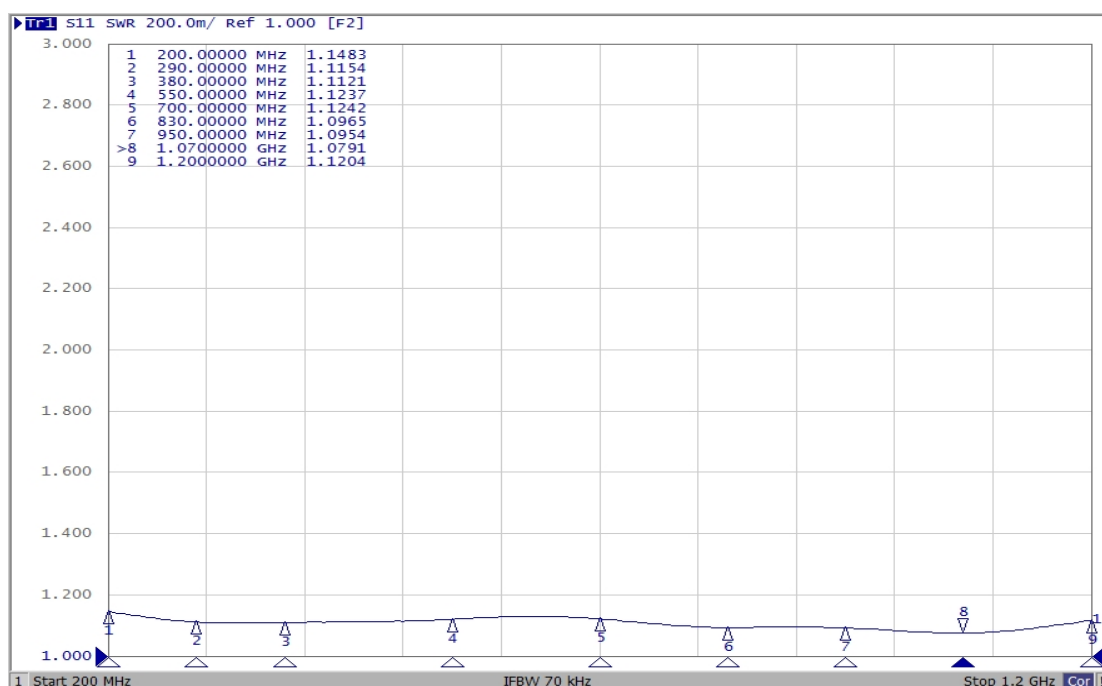




THC0700W03H

Hybrid Coupler 3B, 90°

Rev A1.0

Transmission Port:

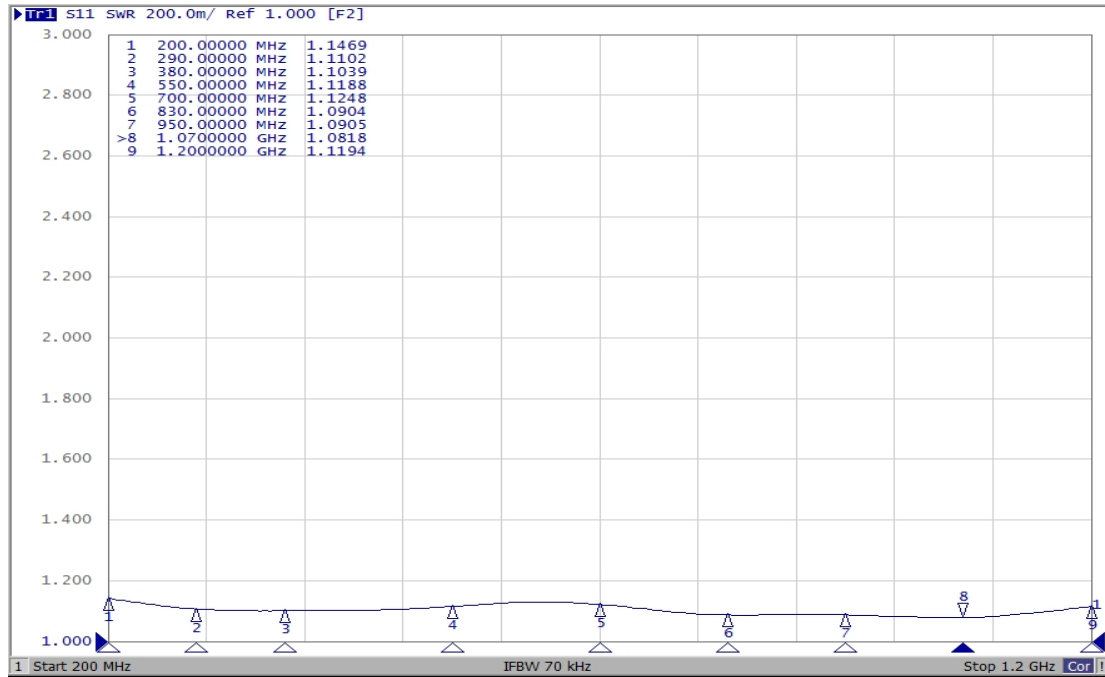

Isolation Port:

