TFT LCD Approval Specification

MODEL NO.: N116B6-L07

Customer : KJS / Inventec

Approved by :

Note :

核准時間	部門	審核	角色	投票
2009-07-29 09:30:12	NB 產品管理處	徐 2009.07.29 凡 琇	Director	Accept

CONTENTS

REVISION HISTORY ----------3

1. GENERAL DESCRIPTION ----------4
   1.1 OVERVIEW
   1.2 FEATURES
   1.3 APPLICATION
   1.4 GENERAL SPECIFICATIONS
   1.5 MECHANICAL SPECIFICATIONS
2. ABSOLUTE MAXIMUM RATINGS ----------5
   2.1 ABSOLUTE RATINGS OF ENVIRONMENT
   2.2 ELECTRICAL ABSOLUTE RATINGS
      2.2.1 TFT LCD MODULE
      2.2.2 BACKLIGHT UNIT
3. ELECTRICAL CHARACTERISTICS ----------7
   3.1 TFT LCD MODULE
   3.2 BACKLIGHT UNIT
4. BLOCK DIAGRAM ----------10
   4.1 TFT LCD MODULE
5. INPUT TERMINAL PIN ASSIGNMENT ----------11
   5.1 TFT LCD MODULE
   5.2 TIMING DIAGRAM OF LVDS INPUT SIGNAL
   5.3 COLOR DATA INPUT ASSIGNMENT
   5.4 EDID DATA STRUCTURE
6. CONVERTER SPECIFICATION ----------17
   6.1 INPUT CONNECTOR PIN ASSIGNMENT
   6.2 INPUT ELECTRICAL CHARACTERISTICS OF CONVERTER
7. INTERFACE TIMING ----------18
   7.1 INPUT SIGNAL TIMING SPECIFICATIONS
   7.2 POWER ON/OFF SEQUENCE
8. TOUCH PANEL SPECIFICATION ----------20
   8.1 ELECTRICAL CHARASTRISTICS
   8.2 MECHINCAL& RELIBILITY CHARASTRISTICS
   8.3 DESIGN GUIDE
9. OPTICAL CHARACTERISTICS ----------22
   9.1 TEST CONDITIONS
   9.2 OPTICAL SPECIFICATIONS
10. PRECAUTIONS ----------26
   10.1 SYSTEM MATCHING PRECAUTIONS
   10.2 HANDLING PRECAUTIONS
   10.3 STORAGE PRECAUTIONS
   10.4 OPERATION PRECAUTIONS
   10.5 OTHER PRECAUTIONS
11. PACKING ----------27
   11.1 CARTON
   11.2 PALLET
12. DEFINITION OF LABELS ----------29
   12.1 CMO MODULE LABEL
   12.2 CMO CARTON LABEL

REVISION HISTORY

Version	Date	Page (New)	Section	Description
Ver 3.0	Jul. 27, 2009	All	All	Approval specification first issued.

1. GENERAL DESCRIPTION

1.1 OVERVIEW

N116B6-L07 is a 11.6" TFT Liquid Crystal Display module with LED Backlight unit / 40 pins LVDS interface and touch panel. This module supports 1366 x 768 Wide-XGA mode and can display 262,144 colors. The optimum viewing angle is at 6 o'clock direction. The converter module for Backlight is built in.

1.2 FEATURES

- Aspect ratio 16:9
- WXGA (1366 x 768 pixels) resolution
- 3.3V LVDS (Low Voltage Differential Signaling) interface with 1 pixel/clock
- Build in LED Converter
- Touch panel Attached

1.3 APPLICATION

- TFT LCD Notebook

1.4 GENERAL SPECIFICATI0NS

Item	Specification	Unit	Note
Active Area	256.125 (H) x 144.00 (V) (11.6" diagonal)	mm	(1)
Bezel Opening Area	259.125 (H) x 147 (V)	mm	
Driver Element	a-si TFT active matrix	-	-
Pixel Number	1366 x R.G.B. x 768	pixel	-
Pixel Pitch	0.1875 (H) x 0.1875 (V)	mm	-
Pixel Arrangement	RGB vertical stripe	-	-
Display Colors	262,144	color	-
Transmissive Mode	Normally white	-	-
Surface Treatment	Hard coating (3H), Anti-glare	-	-

1.5 MECHANICAL SPECIFICATIONS

Item		Min.	Typ.	Max.	Unit	Note
Module Size	Horizontal(H)	267.5	268	268.5	mm	(1)
	Vertical(V) w/o PCB	161	161.5	162	mm	
	Vertical(V) with PCB	171.3	172	172.7	mm	
	Thickness(T)	-	-	5.2	mm	
Weight		-	-	350	g	

Note (1) Please refer to the attached drawings for more information of front and back outline dimensions.

2. ABSOLUTE MAXIMUM RATINGS

2.1 ABSOLUTE RATINGS OF ENVIRONMENT

Item	Symbol	Value		Unit	Note
		Min.	Max.		
Storage Temperature	T_{ST}	-20	+60	ºC	(1)
Operating Ambient Temperature	T_{OP}	0	+50	ºC	(1), (2)
Shock (Non-Operating)	S_{NOP}	-	160/2	G/ms	(3), (5)
Vibration (Non-Operating)	V_{NOP}	-	1.5	G	(4), (5)


Note (1) Temperature and relative humidity range is shown in the figure below.

(a) 90 %RH Max. (Ta <= 40 ºC).

(b) Wet-bulb temperature should be 39 ºC Max. (Ta > 40 ºC).

(c) No condensation.

Note (2) The temperature of panel surface area should be 0 ºC min. and 60 ºC max.

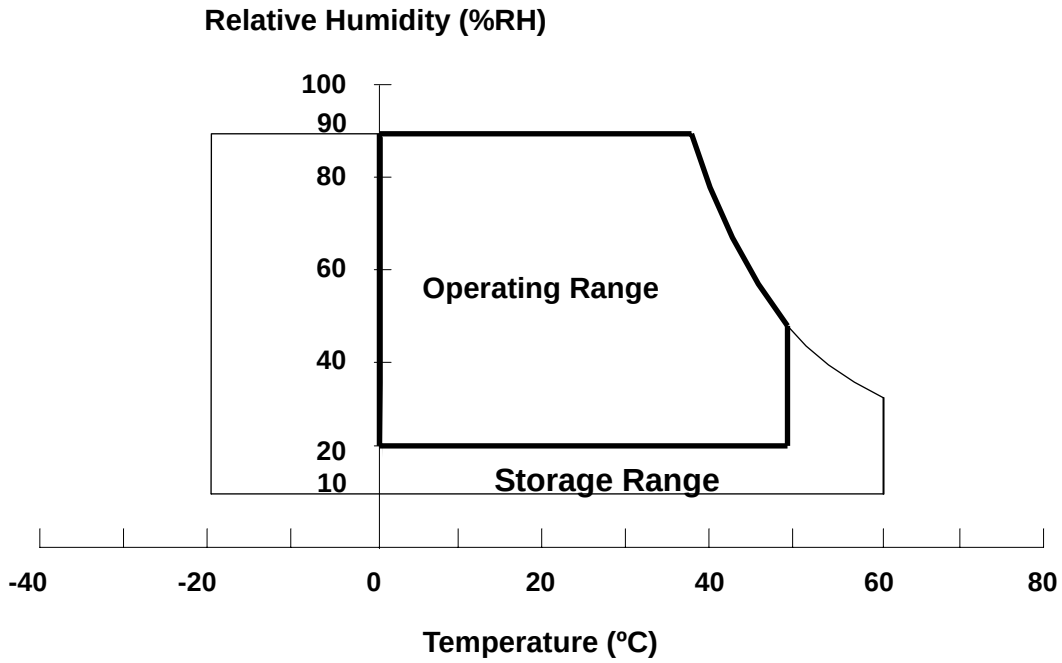


Note (3) 1 time for ± X, ± Y, ± Z. for Condition (160G / 2ms) is half Sine Wave,.

Note (4) 10~500 Hz, 30 min/cycle, 1cycle for X,Y,Z-axis.

Note (5) At testing Vibration and Shock, the fixture in holding the module has to be hard and rigid enough so that the module would not be twisted or bent by the fixture.

The fixing condition is shown as below:

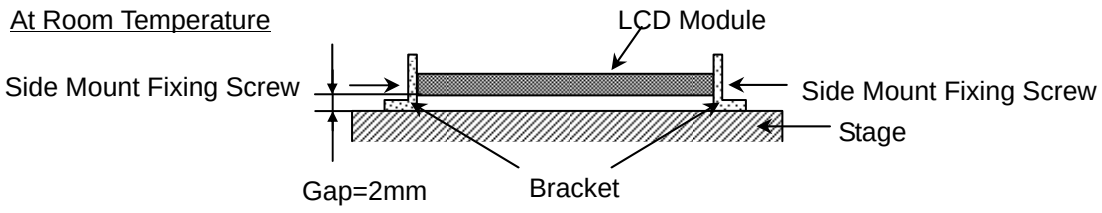

2.2 ELECTRICAL ABSOLUTE RATINGS

2.2.1 TFT LCD MODULE

Item	Symbol	Value		Unit	Note
		Min.	Max.		
Power Supply Voltage	VCCS	-0.3	+4.0	V	(1)
Logic Input Voltage	V_{IN}	-0.3	VCCS+0.3	V	

Note (1) Permanent damage to the device may occur if maximum values are exceeded. Function operation should be restricted to the conditions described under Normal Operating Conditions.

2.2.2 BACKLIGHT UNIT

Item	Value		Unit	Note
	Min	Max.		
LED Light Bar Power Supply Voltage	-20	13.6	V_{DC}	(1), (2)
LED Light Bar Power Supply Current	0	245	mA_{DC}	

Note (1) Permanent damage to the device may occur if maximum values are exceeded. Function operation should be restricted to the conditions described under Normal Operating Conditions.

Note (2) Specified values are for LED (Refer to Section 3.2 for further information).

3. ELECTRICAL CHARACTERISTICS

3.1 TFT LCD MODULE

Ta = 25 ± 2 ºC


Parameter		Symbol	Value			Unit	Note
			Min.	Typ.	Max.		
Power Supply Voltage		VCCS	3.0	3.3	3.6	V	-
Ripple Voltage		V_{RP}	-	50	-	mV	-
Rush Current		I_{RUSH}	-	-	1.5	A	(2)
Initial Stage Current		I_{IS}	-	-	1.0	A	(2)
Power Supply Current	White	Icc	-	240	260	mA	(3)a
	Black		-	320	350	mA	(3)b
LVDS Differential Input High Threshold		$V_{TH(LVDS)}$	-	-	+100	mV	(5), V_{CM}=1.2V
LVDS Differential Input Low Threshold		$V_{TL(LVDS)}$	-100	-	-	mV	(5) V_{CM}=1.2V
LVDS Common Mode Voltage		V_{CM}	1.125	-	1.375	V	(5)
LVDS Differential Input Voltage		$\|V_{ID}\|$	100	-	600	mV	(5)
Terminating Resistor		R_T	-	100	-	Ohm	-
Power per EBL WG		P_{EBL}	-	1.52	-	W	(4)

Note (1) The ambient temperature is Ta = 25 ± 2 ºC.


Note (2) I_{RUSH}: the maximum current when VCCS is rising

I_{IS}: the maximum current of the first 100ms after power-on

Measurement Conditions: Shown as the following figure. Test pattern: Black.

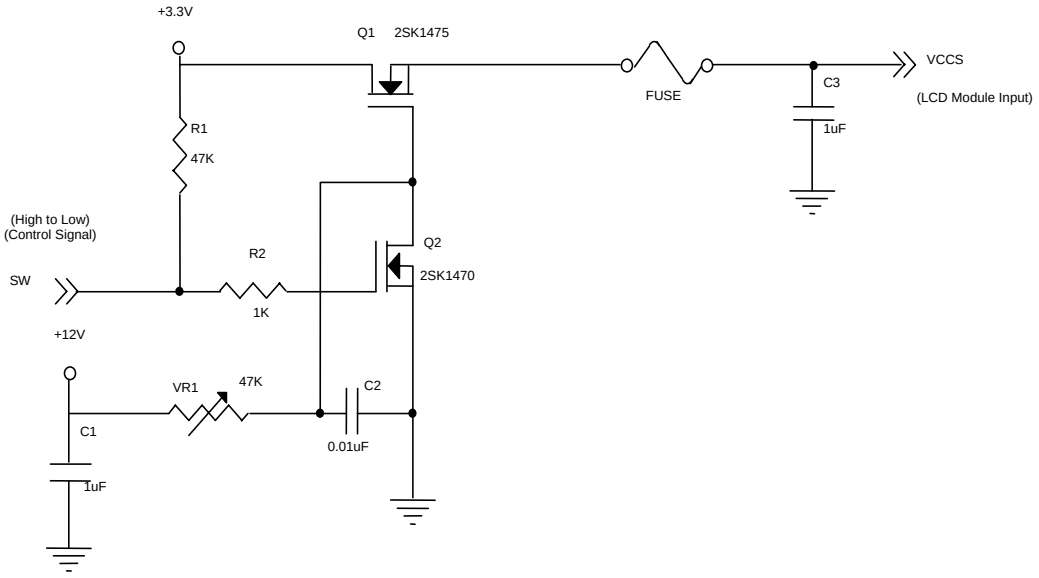

VCCS rising time is 470us

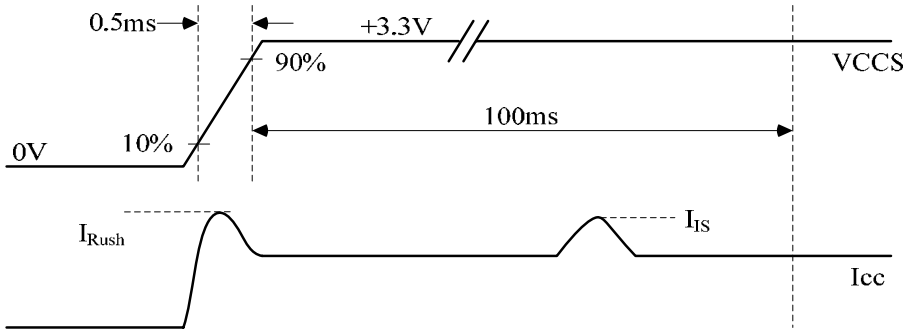

Note (3) The specified power supply current is under the conditions at VCCS = 3.3 V, Ta = 25 ± 2 ºC, DC Current and f_v = 60 Hz, whereas a power dissipation check pattern below is displayed.

a. White Pattern



Active Area

b. Black Pattern



Active Area


Note (4) The specified power are the sum of LCD panel electronics input power and the converter input power. Test conditions are as follows.

(a) VCCS = 3.3 V, Ta = 25 ± 2 ºC, f_v = 60 Hz,

(b) The pattern used is a black and white 32 x 36 checkerboard, slide #100 from the VESA file "Flat Panel Display Monitor Setup Patterns", FPDMSU.ppt.

(c) Luminance: 60 nits.

Note (5) The parameters of LVDS signals are defined as the following figures.

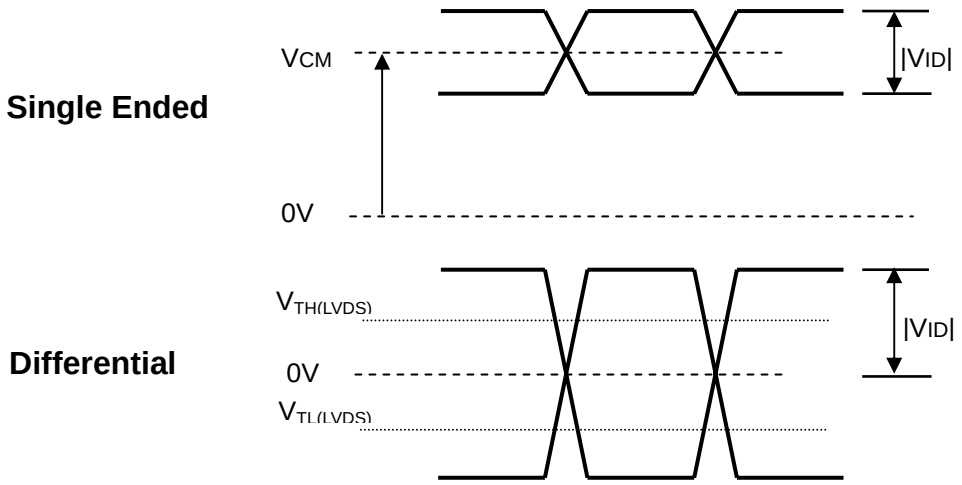


3.2 BACKLIGHT UNIT

Ta = 25 ± 2 ºC

Parameter	Symbol	Value			Unit	Note
		Min.	Typ.	Max.		
LED Light Bar Power Supply Voltage	V_L	12	12.8	13.6	V	(1) (Duty 100%)
LED Light Bar Power Supply Current	I_L	133	140	147	mA	
Power Consumption	P_L	1.59	1.79	1.99	W	(2)(@ I_L =140 mA)
LED Life Time	L_{BL}	12000	-	-	Hrs	(3)

Note (1) LED current is measured by utilizing a high frequency current meter as shown below:

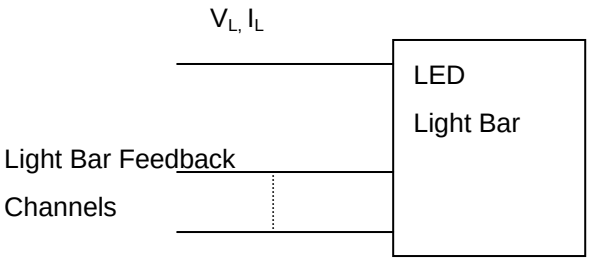


Note (2) $P_L = I_L \times V_L$

Note (3) The lifetime of LED is defined as the time when it continues to operate under the conditions at Ta = 25 ±2 °C and I = 20mA(Per EA) until the brightness becomes ≦ 50% of its original value.

4. BLOCK DIAGRAM

4.1 TFT LCD MODULE

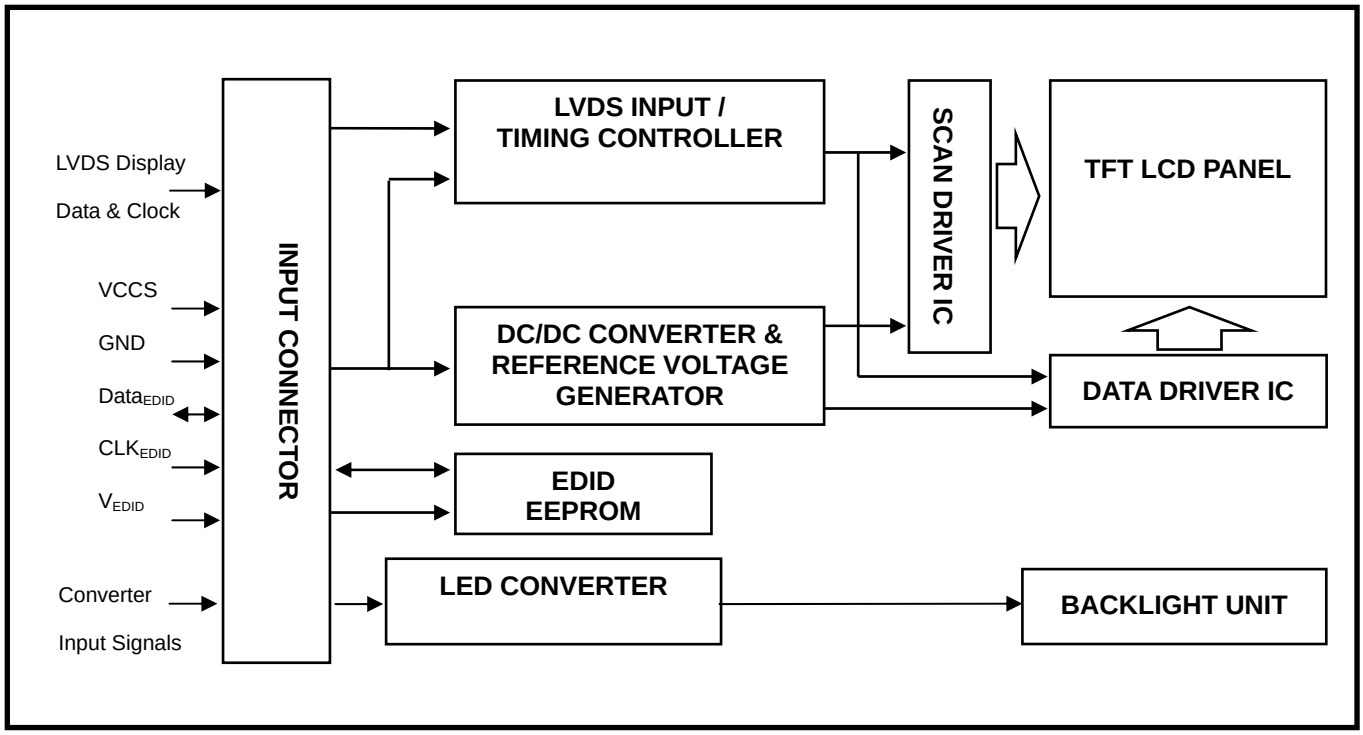

5. INPUT TERMINAL PIN ASSIGNMENT


5.1 TFT LCD MODULE

Pin	Symbol	Description	Polarity	Remark
1	NC	No Connection (Reserve)		
2	VCCS	Power Supply (3.3V typ.)		
3	VCCS	Power Supply (3.3V typ.)		
4	VEDID	DDC 3.3V power		
5	NC	No Connection (Reserved for CMO test)		
6	CLKEDID	DDC clock		
7	DATAEDID	DDC data		
8	Rxin0-	LVDS differential data input	Negative	R0-R5, G0
9	Rxin0+	LVDS differential data input	Positive	
10	VSS	Ground		
11	Rxin1-	LVDS differential data input	Negative	G1~G5, B0, B1
12	Rxin1+	LVDS differential data input	Positive	
13	VSS	Ground		
14	Rxin2-	LVDS Differential Data Input	Negative	B2-B5,HS,VS, DE
15	Rxin2+	LVDS Differential Data Input	Positive	
16	VSS	Ground		
17	RxCLK-	LVDS differential clock input		
18	RxCLK+	LVDS differential clock input		
19	VSS	Ground		
20	NC	No Connection (Reserve)		
21	NC	No Connection (Reserve)		
22	VSS	Ground		
23	NC	No Connection (Reserve)		
24	NC	No Connection (Reserve)		
25	XL	Horizontal terminal (Left side)		
26	YD	Vertical terminal (Down side)		
27	XR	Horizontal terminal (Right side)		
28	YU	Vertical terminal (Up side)		
29	NC	No Connection (Reserve)		
30	NC	No Connection (Reserve)		
31	LED_GND	LED Ground		
32	LED_GND	LED Ground		
33	LED_GND	LED Ground		
34	NC	No Connection (Reserve)		
35	LED_PWM	PWM Control Signal of LED Converter		(4)
36	LED_EN	Enable Control Signal of LED Converter		
37	NC	No Connection (Reserve)		
38	LED_VCCS	LED Power		
39	LED_VCCS	LED Power		
40	LED_VCCS	LED Power		


Note (1) Connector Part No.: IPEX-20455-040E-12 or equivalent

Note (2) User's connector Part No: IPEX-20453-040T-01 or equivalent

Note (3) The first pixel is odd as shown in the following figure.

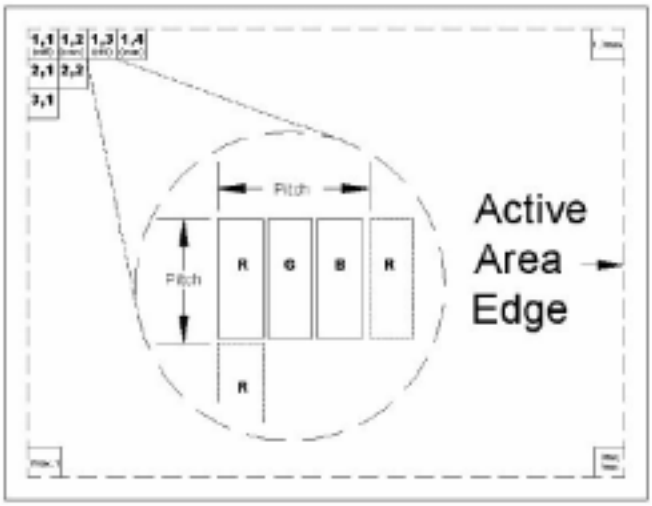

5.2 TIMING DIAGRAM OF LVDS INPUT SIGNAL

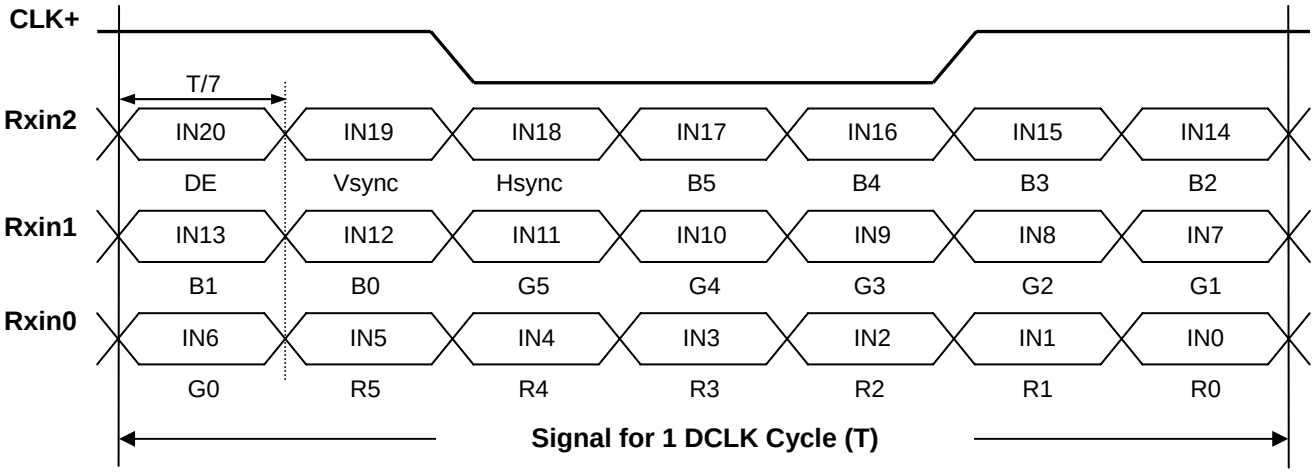

5.3 COLOR DATA INPUT ASSIGNMENT

The brightness of each primary color (red, green and blue) is based on the 6-bit gray scale data input for the color. The higher the binary input the brighter the color. The table below provides the assignment of color versus data input.

Color		Data Signal																	
		Red						Green						Blue					
		R5	R4	R3	R2	R1	R0	G5	G4	G3	G2	G1	G0	B5	B4	B3	B2	B1	B0
Basic Colors	Black	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0
	Red	1	1	1	1	1	1	0	0	0	0	0	0	0	0	0	0	0	0
	Green	0	0	0	0	0	0	1	1	1	1	1	1	0	0	0	0	0	0
	Blue	0	0	0	0	0	0	0	0	0	0	0	0	1	1	1	1	1	1
	Cyan	0	0	0	0	0	0	1	1	1	1	1	1	1	1	1	1	1	1
	Magenta	1	1	1	1	1	1	0	0	0	0	0	0	1	1	1	1	1	1
	Yellow	1	1	1	1	1	1	1	1	1	1	1	1	0	0	0	0	0	0
	White	1	1	1	1	1	1	1	1	1	1	1	1	1	1	1	1	1	1
Gray Scale Of Red	Red(0)/Dark	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0
	Red(1)	0	0	0	0	0	1	0	0	0	0	0	0	0	0	0	0	0	0
	Red(2)	0	0	0	0	1	0	0	0	0	0	0	0	0	0	0	0	0	0
	:	:	:	:	:	:	:	:	:	:	:	:	:	:	:	:	:	:	:
	:	:	:	:	:	:	:	:	:	:	:	:	:	:	:	:	:	:	:
	Red(61)	1	1	1	1	0	1	0	0	0	0	0	0	0	0	0	0	0	0
	Red(62)	1	1	1	1	1	0	0	0	0	0	0	0	0	0	0	0	0	0
	Red(63)	1	1	1	1	1	1	0	0	0	0	0	0	0	0	0	0	0	0
Gray Scale Of Green	Green(0)/Dark	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0
	Green(1)	0	0	0	0	0	0	0	0	0	0	0	1	0	0	0	0	0	0
	Green(2)	0	0	0	0	0	0	0	0	0	0	1	0	0	0	0	0	0	0
	:	:	:	:	:	:	:	:	:	:	:	:	:	:	:	:	:	:	:
	:	:	:	:	:	:	:	:	:	:	:	:	:	:	:	:	:	:	:
	Green(61)	0	0	0	0	0	0	1	1	1	1	0	1	0	0	0	0	0	0
	Green(62)	0	0	0	0	0	0	1	1	1	1	1	0	0	0	0	0	0	0
	Green(63)	0	0	0	0	0	0	1	1	1	1	1	1	0	0	0	0	0	0
Gray Scale Of Blue	Blue(0)/Dark	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0
	Blue(1)	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	1
	Blue(2)	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	1	0
	:	:	:	:	:	:	:	:	:	:	:	:	:	:	:	:	:	:	:
	:	:	:	:	:	:	:	:	:	:	:	:	:	:	:	:	:	:	:
	Blue(61)	0	0	0	0	0	0	0	0	0	0	0	0	1	1	1	1	0	1
	Blue(62)	0	0	0	0	0	0	0	0	0	0	0	0	1	1	1	1	1	0
	Blue(63)	0	0	0	0	0	0	0	0	0	0	0	0	1	1	1	1	1	1

Note (1) 0: Low Level Voltage, 1: High Level Voltage

5.4 EDID DATA STRUCTURE

The EDID (Extended Display Identification Data) data formats are to support displays as defined in the VESA Plug & Display and FPDI standards.

Byte # (decimal)	Byte # (hex)	Field Name and Comments	Value (hex)	Value (binary)
0	0	Header	00	00000000
1	1	Header	FF	11111111
2	2	Header	FF	11111111
3	3	Header	FF	11111111
4	4	Header	FF	11111111
5	5	Header	FF	11111111
6	6	Header	FF	11111111
7	7	Header	00	00000000
8	8	EISA ID manufacturer name (“CMO”)	0D	00001101
9	9	EISA ID manufacturer name (Compressed ASCII)	AF	10101111
10	0A	ID product code (N116B6-L07)	05	00000101
11	0B	ID product code (hex LSB first; N116B6-L07)	11	00010001
12	0C	ID S/N (fixed “0”)	00	00000000
13	0D	ID S/N (fixed “0”)	00	00000000
14	0E	ID S/N (fixed “0”)	00	00000000
15	0F	ID S/N (fixed “0”)	00	00000000
16	10	Week of manufacture (fixed week code)	11	00010001
17	11	Year of manufacture (fixed year code)	13	00010011
18	12	EDID structure version # (“1”)	01	00000001
19	13	EDID revision # (“3”)	03	00000011
20	14	Video I/P definition (“digital”)	80	10000000
21	15	Max H image size (“25.612cm”)	19	00011001
22	16	Max V image size (“14.4cm”)	0E	00001110
23	17	Display Gamma (Gamma = ”2.2”)	78	01111000
24	18	Feature support (“Active off, RGB Color”)	0A	00001010
25	19	Rx1, Rx0, Ry1, Ry0, Gx1, Gx0, Gy1, Gy0	CF	11001111
26	1A	Bx1, Bx0, By1, By0, Wx1, Wx0, Wy1, Wy0	45	01000101
27	1B	Rx=0.565	90	10010000
28	1C	Ry=0.348	59	01011001
29	1D	Gx=0.343	57	01010111
30	1E	Gy=0.585	95	10010101
31	1F	Bx=0.161	29	00101001
32	20	By=0.121	1F	00011111
33	21	Wx=0.313	50	01010000
34	22	Wy=0.329	54	01010100
35	23	Established timings 1	00	00000000
36	24	Established timings 2	00	00000000
37	25	Manufacturer’s reserved timings	00	00000000
38	26	Standard timing ID # 1	01	00000001
39	27	Standard timing ID # 1	01	00000001
40	28	Standard timing ID # 2	01	00000001

Byte # (decimal)	Byte # (hex)	Field Name and Comments	Value (hex)	Value (binary)
41	29	Standard timing ID # 2	01	00000001
42	2A	Standard timing ID # 3	01	00000001
43	2B	Standard timing ID # 3	01	00000001
44	2C	Standard timing ID # 4	01	00000001
45	2D	Standard timing ID # 4	01	00000001
46	2E	Standard timing ID # 5	01	00000001
47	2F	Standard timing ID # 5	01	00000001
48	30	Standard timing ID # 6	01	00000001
49	31	Standard timing ID # 6	01	00000001
50	32	Standard timing ID # 7	01	00000001
51	33	Standard timing ID # 7	01	00000001
52	34	Standard timing ID # 8	01	00000001
53	35	Standard timing ID # 8	01	00000001
54	36	Detailed timing description # 1 Pixel clock (“75.44MHz”, According to VESA CVT Rev1.1)	78	01111000
55	37	# 1 Pixel clock (hex LSB first)	1D	00011101
56	38	# 1 H active (“1366”)	56	01010110
57	39	# 1 H blank (“194”)	C2	11000010
58	3A	# 1 H active : H blank (“1366 : 194”)	50	01010000
59	3B	# 1 V active (”768”)	00	00000000
60	3C	# 1 V blank (”38”)	26	00100110
61	3D	# 1 V active : V blank (”768 :38”)	30	00110000
62	3E	# 1 H sync offset (”31”)	1F	00011111
63	3F	# 1 H sync pulse width ("65”)	41	01000001
64	40	# 1 V sync offset : V sync pulse width (”4 : 12”)	4C	01001100
65	41	# 1 H sync offset : H sync pulse width : V sync offset : V sync width (”31: 65 : 4 : 12”)	00	00000000
66	42	# 1 H image size (”256 mm”)	00	00000000
67	43	# 1 V image size (”144 mm”)	90	10010000
68	44	# 1 H image size : V image size (”256 : 144”)	10	00010000
69	45	# 1 H boarder (”0”)	00	00000000
70	46	# 1 V boarder (”0”)	00	00000000
71	47	# 1 Non-interlaced, Normal, no stereo, Separate sync, H/V pol Negatives	18	00011000
72	48	Detailed timing description # 2	00	00000000
73	49	# 2 Flag	00	00000000
74	4A	# 2 Reserved	00	00000000
75	4B	# 2 FE (hex) defines ASCII string (Model Name “N116B6-L07”, ASCII)	FE	11111110
76	4C	# 2 Flag	00	00000000
77	4D	# 2 1st character of name (“N”)	4E	01001110
78	4E	# 2 2nd character of name (“1”)	31	00110001
79	4F	# 2 3rd character of name (“1”)	31	00110001
80	50	# 2 4th character of name (“6”)	36	00110110
81	51	# 2 5th character of name (“B”)	42	01000010
82	52	# 2 6th character of name (“6”)	36	00110110
83	53	# 2 7th character of name (“-”)	2D	00101101

Byte # (decimal)	Byte # (hex)	Field Name and Comments	Value (hex)	Value (binary)
84	54	# 2 8th character of name (“L”)	4C	01001100
85	55	# 2 9th character of name (“0”)	30	00110000
86	56	# 2 9th character of name (“7”)	37	00110111
87	57	# 2 New line character indicates end of ASCII string	0A	00001010
88	58	# 2 Padding with “Blank” character	20	00100000
89	59	# 2 Padding with “Blank” character	20	00100000
90	5A	Detailed timing description # 3	00	00000000
91	5B	# 3 Flag	00	00000000
92	5C	# 3 Reserved	00	00000000
93	5D	# 3 FE (hex) defines ASCII string (Vendor “CMO”, ASCII)	FE	11111110
94	5E	# 3 Flag	00	00000000
95	5F	# 3 1st character of string (“C”)	43	01000011
96	60	# 3 2nd character of string (“M”)	4D	01001101
97	61	# 3 3rd character of string (“O”)	4F	01001111
98	62	# 3 New line character indicates end of ASCII string	0A	00001010
99	63	# 3 Padding with “Blank” character	20	00100000
100	64	# 3 Padding with “Blank” character	20	00100000
101	65	# 3 Padding with “Blank” character	20	00100000
102	66	# 3 Padding with “Blank” character	20	00100000
103	67	# 3 Padding with “Blank” character	20	00100000
104	68	# 3 Padding with “Blank” character	20	00100000
105	69	# 3 Padding with “Blank” character	20	00100000
106	6A	# 3 Padding with “Blank” character	20	00100000
107	6B	# 3 Padding with “Blank” character	20	00100000
108	6C	Detailed timing description # 4	00	00000000
109	6D	# 4 Flag	00	00000000
110	6E	# 4 Reserved	00	00000000
111	6F	# 4 FE (hex) defines ASCII string (Model Name“N116B6-L07”, ASCII)	FE	11111110
112	70	# 4 Flag	00	00000000
113	71	# 4 1st character of name (“N”)	4E	01001110
114	72	# 4 2nd character of name (“1”)	31	00110001
115	73	# 4 3rd character of name (“1”)	31	00110001
116	74	# 4 4th character of name (“6”)	36	00110110
117	75	# 4 5th character of name (“B”)	42	01000010
118	76	# 4 6th character of name (“6”)	36	00110110
119	77	# 4 7th character of name (“-”)	2D	00101101
120	78	# 4 8th character of name (“L”)	4C	01001100
121	79	# 4 9th character of name (“0”)	30	00110000
122	7A	# 4 9th character of name (“7”)	37	00110111
123	7B	# 4 New line character indicates end of ASCII string	0A	00001010
124	7C	# 4 Padding with “Blank” character	20	00100000
125	7D	# 4 Padding with “Blank” character	20	00100000
126	7E	Extension flag	00	00000000
127	7F	Checksum	34	00110100

6. CONVERTER SPECIFICATION

6.1 ABSOLUTE MAXIMUM RATINGS

Symbol	Ratings
LED_VCCS	-0.3V~6V
LED_PWM, LED_EN	-0.5V~6V

6.2 RECOMMENDED OPERATING RATINGS


Parameter		Symbol	Value			Unit	Note
			Min.	Typ.	Max.		
Converter Input power supply voltage		LED_VCCS	4.5	5.0	5.5	V	
Converter Rush Current		$ILED_{RUSH}$	-	-	1.5	A	(2)
Converter Initial Stage Current		$ILED_{IS}$	-	-	1.5	A	(2)
EN Control Level	Backlight on		2	-	5.0	V	
	Backlight off		0	-	0.5	V	
PWM Control Level	PWM High Level		2	-	5.0	V	
	PWM Low Level		0	-	0.5	V	
PWM Control Duty Ratio			20	-	100	%	
PWM Control Permissive Ripple Voltage		V_{PWM_pp}	-	-	100	mV	
PWM Control Frequency		f_{PWM}	190	210	230	Hz	
LED Power Current	LED_VCCS =Min.	I_{BL}	398	468	550	mA	(1)
	LED_VCCS =Typ.		358	422	495	mA	(1)
	LED_VCCS =Max.		326	383	450	mA	(1)

Note (1) The specified LED power supply current is under the conditions at “LED_VCCS = Min., Typ., Max, Ta = 25 ± 2 ºC, f_{PWM} = 200 Hz, Duty=100%.


Note (2) $ILED_{RUSH}$: the maximum current when LED_VCCS is rising,

$ILED_{IS}$: the maximum current of the first 100ms after power-on,

Measurement Conditions: Shown as the following figure. LED_VCCS = Typ, Ta = 25 ± 2 ºC, f_{PWM} = 200 Hz, Duty=100%.

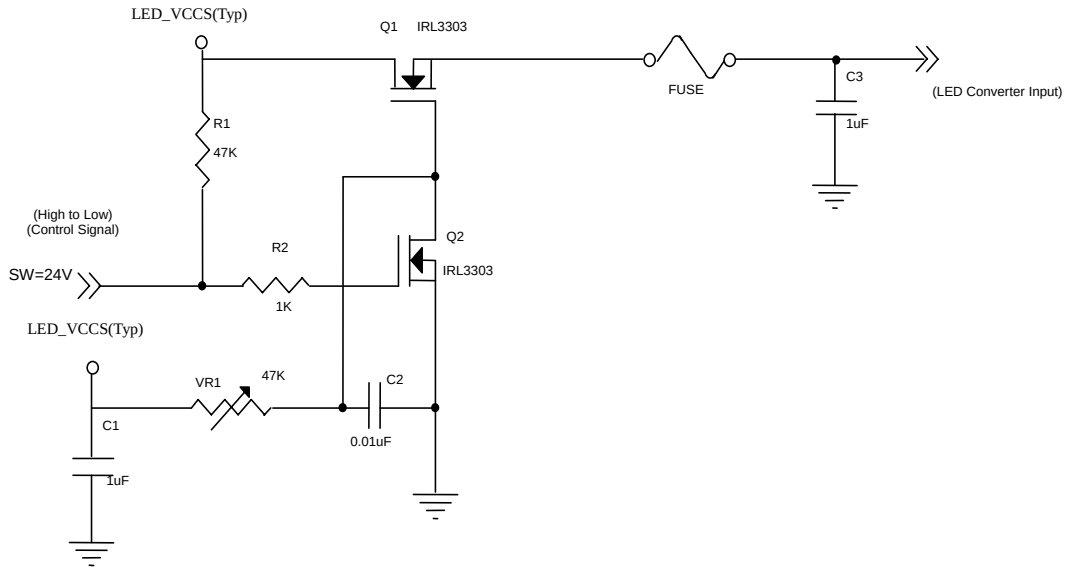

VLED rising time is 0.5ms

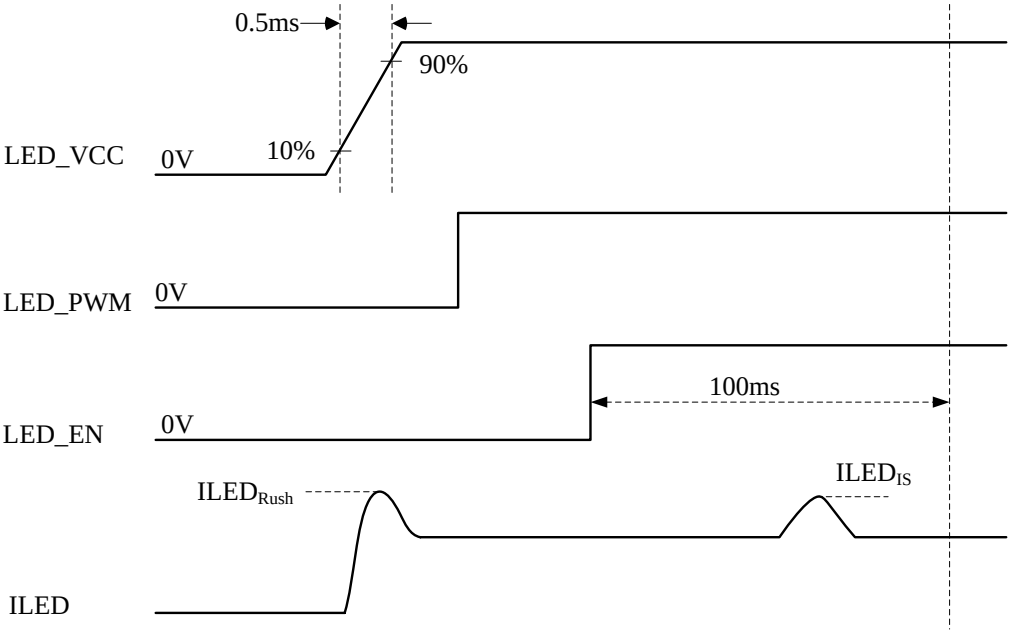

7. INTERFACE TIMING


7.1 INPUT SIGNAL TIMING SPECIFICATIONS

The input signal timing specifications are shown as the following table and timing diagram.


Signal	Item	Symbol	Min.	Typ.	Max.	Unit	Note
DCLK	Frequency	1/Tc	71	75.44	79	MHz	-
DE	Vertical Total Time	TV	772	784	788	TH	-
	Vertical Active Display Period	TVD	768	768	768	TH	-
	Vertical Active Blanking Period	TVB	TV-TVD	16	TV-TVD	TH	-
	Horizontal Total Time	TH	1408	1474	1501	Tc	-
	Horizontal Active Display Period	THD	1366	1366	1366	Tc	-
	Horizontal Active Blanking Period	THB	TH-THD	108	TH-THD	Tc	-

Note (1) Because this module is operated by DE only mode, Hsync and Vsync are ignored.

INPUT SIGNAL TIMING DIAGRAM

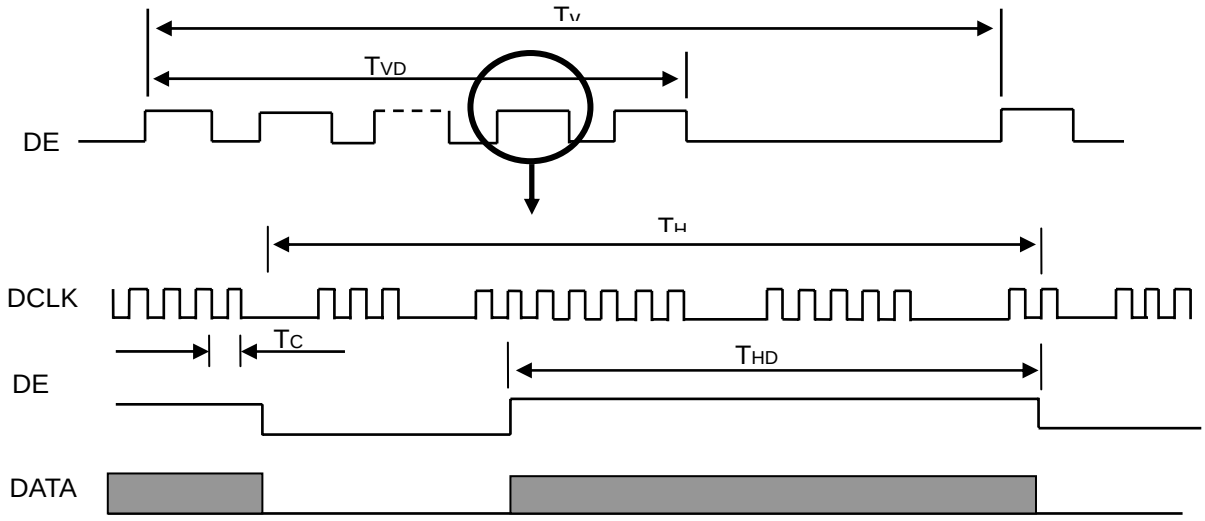

7.2 POWER ON/OFF SEQUENCE

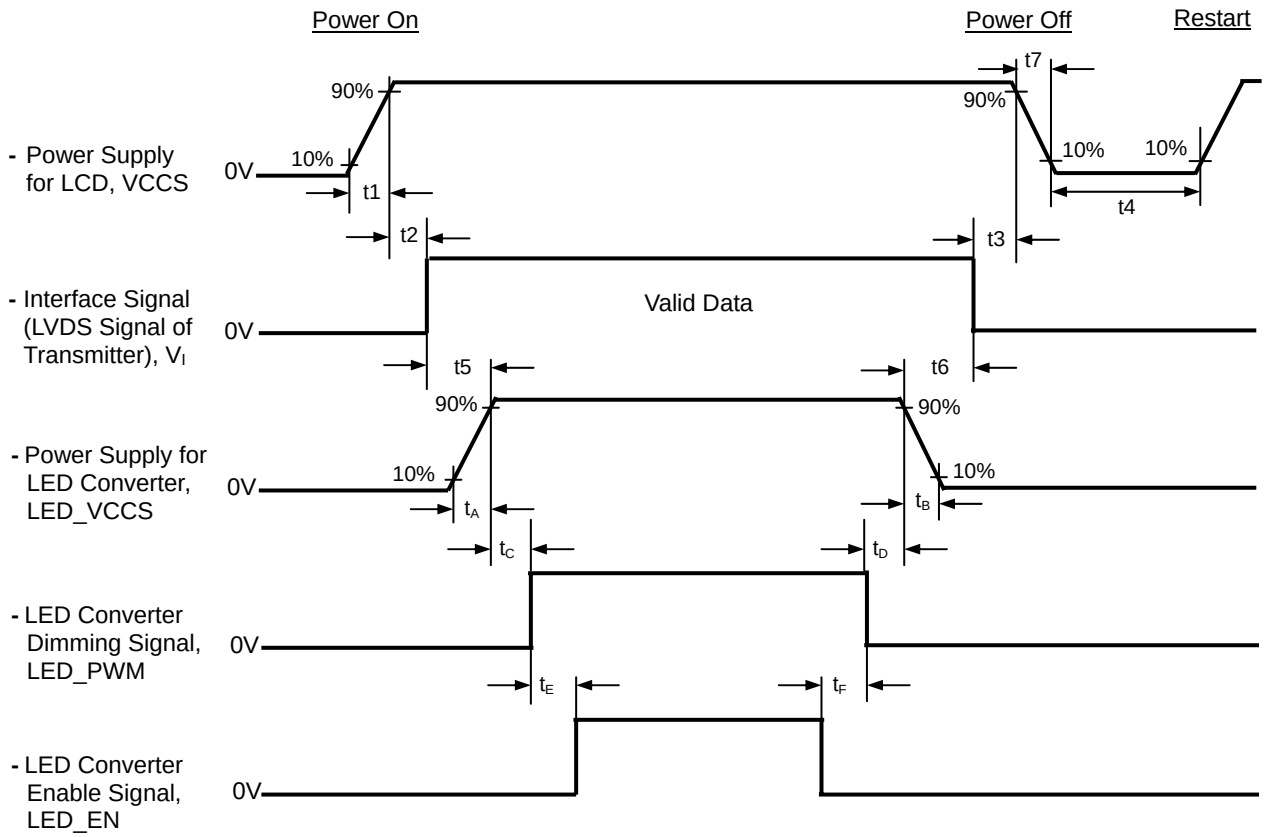

Timing Specifications:

0.5≦t1≦ 10 ms

0 ≦t2≦ 50 ms

0 ≦t3≦ 50 ms

t4 ≧ 500 ms

t5 ≧ 200 ms

t6 ≧ 200 ms

0.5≦t7≦ 10 ms

0.5≦t_A≦ 10 ms

0 ≦ t_B≦ 10 ms

t_C ≧ 10 ms

t_D ≧ 10 ms

t_E ≧ 10 ms

t_F ≧ 10 ms

Note (1) Please follow the power on/off sequence described above. Otherwise, the LCD module might be damaged.

Note (2) Please avoid floating state of interface signal at invalid period. When the interface signal is invalid, be sure to pull down the power supply of LCD VCCS to 0 V.


Note (3) The Backlight converter power must be turned on after the power supply for the logic and the interface signal is valid. The Backlight converter power must be turned off before the power supply for the logic and the interface signal is invalid.

Note (4) Please follow the LED converter power sequence as above. If the customer could not follow, it might cause backlight flash issue during display ON/OFF or damage the LED backlight controller

8. TOUCH PANEL SPECIFICATION

8.1 ELECTRICAL CHARACTRISTICS

Parameter	Symbol	Value			Unit	Note
		Min.	Typ.	Max.		
Operation Voltage	V_{TP}	-	-	5	V	
Linearity		-	-	1.5	%	
Terminal Resistance	R_X	600	-	1300	Ω	X direction
	R_Y	150	-	500	Ω	Y direction
Insulation Resistance	R_{IR}	20	-	-	MΩ	DC25V
Chattering		-	-	10	ms	(1)

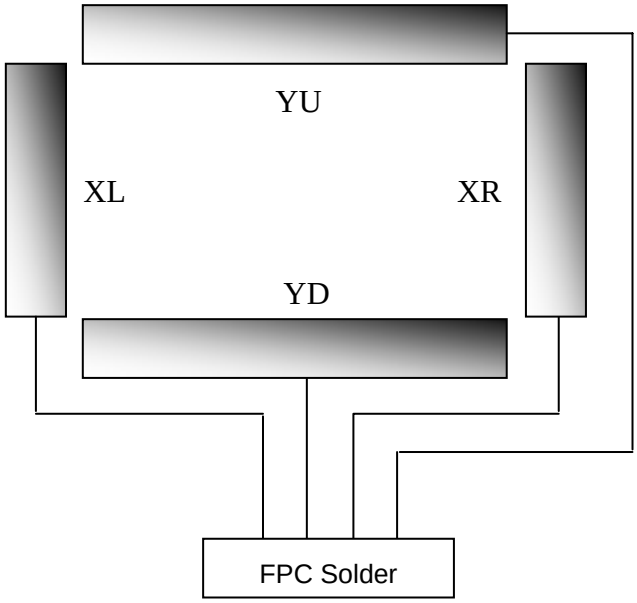

Top View

Note (1) The test condition is R 8.0mm silicon finger hardness 60°, loading 250g and measured by TD210 digital real-time oscilloscope.

8.2 MECHANICAL & RELIABILITY CHARACTERISTICS

Parameter	Symbol	Value			Unit	Note
		Min.	Typ.	Max.		
Operation force		60	-	100	g	(1)
Durability (Stylus Hitting)		1,000,000	-	-	times	(2)
Durability (Pen Touch Sliding)		100,000	-	-	times	(3)
Surface Hardness		3	-	-	H	JIS K5600-5-4

Note (1) With R8.0mm silicone finger

Note (2) Pit 1,000,000 times on the Film

-Pen: R8 mm silicon rubber

-Load: 250g

-Frequency: 240 times/min

-Measurement position:1 point of touch panel active area

Note (3) Measurement for Surface area


-Writing with R0.8mm plastic stylus pen; writing force 150g in active area.

(Inside Active area 5mm)

-Speed is 60mm/sec.


8.3 BLISTERING CHARACTRISTICS

Check through any 0.4mm gauge whether a panel surface film does not contact a measuring face.

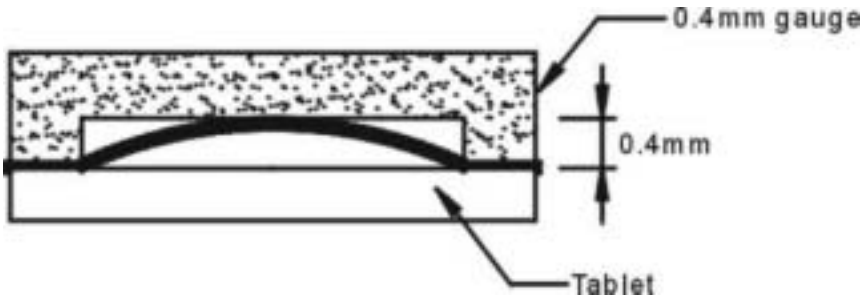

8.4 DESIGN GUIDE

Bezel edge must be positioned in the area between the Active area and View area. The bezel may press the touch screen and cause activation if the edge touches the active area. A gap of approximately 0.5mm is needed between the bezel and the top electrode. It may cause unexpected activation if the gap is too narrow. There is a tolerance of 0.2 to 0.3mm for the outside dimensions of the touch panel and tail. A gap must be made to absorb the tolerance in the case and connector.

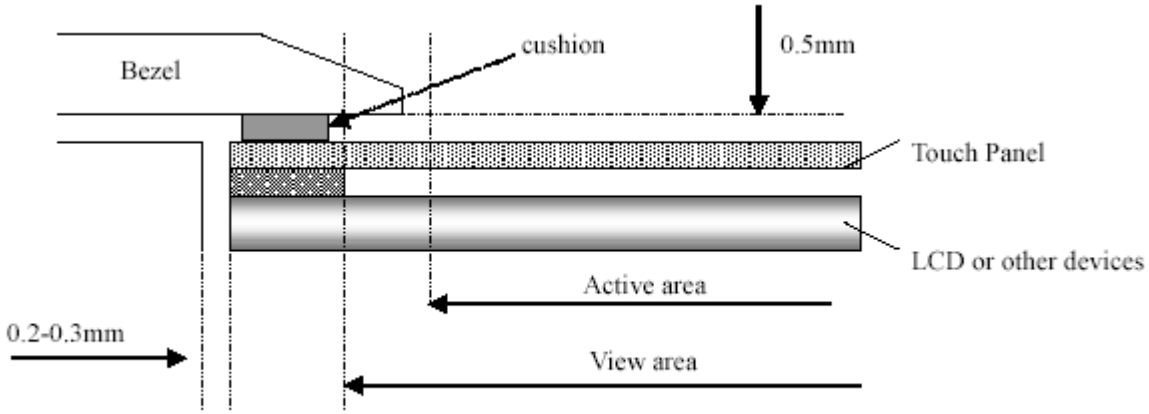

9. OPTICAL CHARACTERISTICS


9.1 TEST CONDITIONS

Item	Symbol	Value	Unit
Ambient Temperature	Ta	25±2	°C
Ambient Humidity	Ha	50±10	%RH
Supply Voltage	V_{CC}	3.3	V
Input Signal	According to typical value in "3. ELECTRICAL CHARACTERISTICS"		
LED Light Bar Input Current	I_L	140	mA

9.2 OPTICAL SPECIFICATIONS

Item		Symbol	Condition	Min.	Typ.	Max.	Unit	Note
Contrast Ratio		CR	θ_x=0° , θ_Y =0° Viewing Normal Angle	300	500	-	-	(2), (5)
Response Time		T_R		-	3	8	ms	(3)
		T_F		-	7	12	ms	
Average Luminance of White		L_{AVE}		230	260	-	cd/m^2	(4), (5)
Color Chromaticity	Red	Rx		TYP. -0.03	0.576	TYP. +0.03	-	(1)
		Ry			0.353		-	
	Green	Gx			0.342		-	
		Gy			0.580		-	
	Blue	Bx			0.157		-	
		By			0.126		-	
	White	Wx			0.318		-	
		Wy			0.341		-	
Viewing Angle	Horizontal	θ_x+	CR≥10	40	45	-	Deg.	(1),(5)
		θ_x-		40	45	-		
	Vertical	θ_Y+		15	20	-		
		θ_Y-		40	45	-		
White Variation of 5 Points		δW_{5p}	θ_x=0° , θ_Y =0°		-	1.25	%	(5),(6)

Note (1) Definition of Viewing Angle (θx, θy):

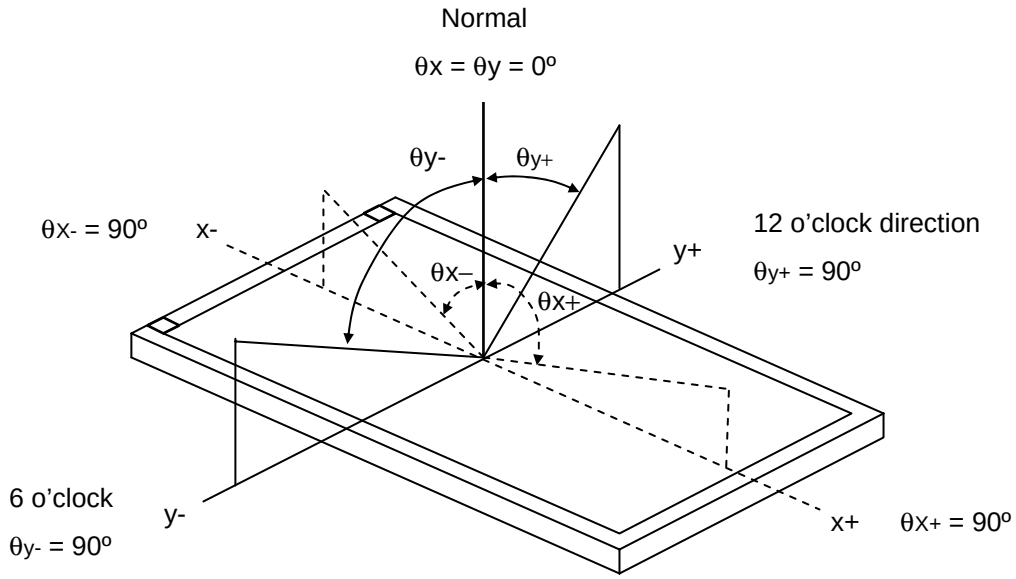

Note (2) Definition of Contrast Ratio (CR):

The contrast ratio can be calculated by the following expression.

Contrast Ratio (CR) = L63 / L0


L63: Luminance of gray level 63

L 0: Luminance of gray level 0

CR = CR (1)

CR (X) is corresponding to the Contrast Ratio of the point X at Figure in Note (6).

Note (3) Definition of Response Time (T_R, T_F):

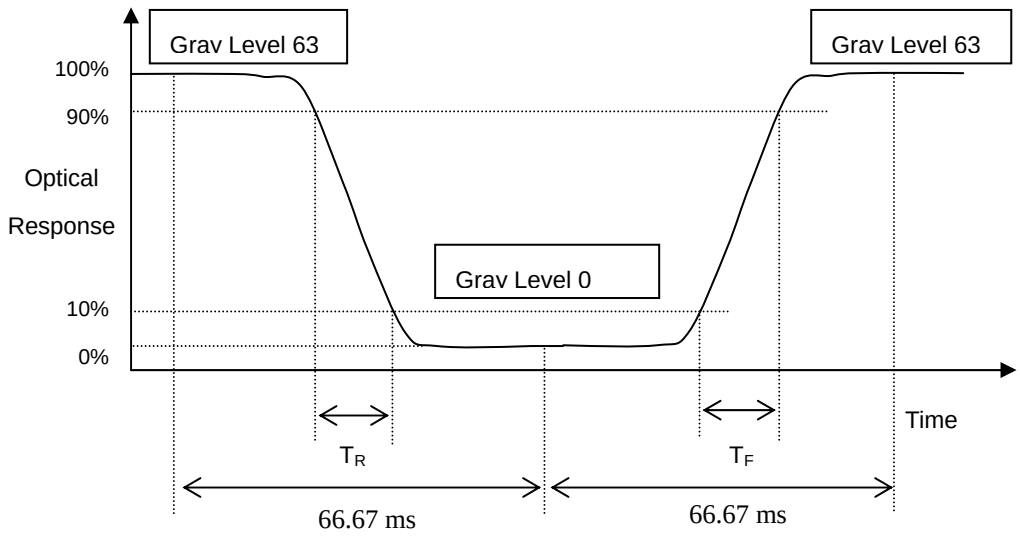

Note (4) Definition of Average Luminance of White (L_{AVE}):


Measure the luminance of gray level 63 at 5 points

L_{AVE} = [L (1)+ L (2)+ L (3)+ L (4)+ L (5)] / 5

L (x) is corresponding to the luminance of the point X at Figure in Note (6)

Note (5) Measurement Setup:


The LCD module should be stabilized at given temperature for 20 minutes to avoid abrupt temperature change during measuring. In order to stabilize the luminance, the measurement should be executed after lighting Backlight for 20 minutes in a windless room.

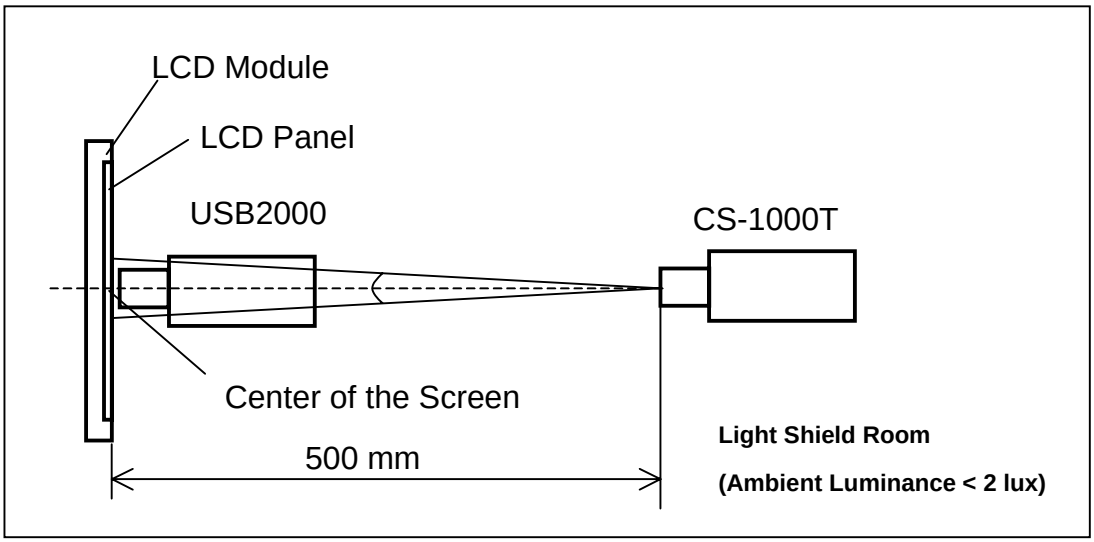

Note (6) Definition of White Variation (δW):

Measure the luminance of gray level 63 at 5 points

δW_{5p} = Maximum [L (1)+ L (2)+ L (3)+ L (4)+ L (5)] / Minimum [L (1)+ L (2)+ L (3)+ L (4)+ L (5)]

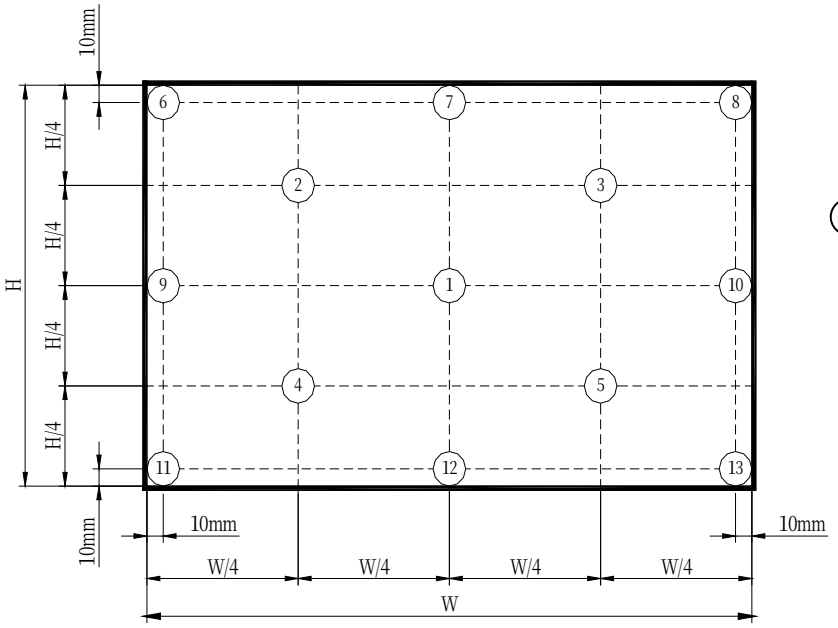

Ⓧ : Test Point

X=1 to 13

Active area

10. PRECAUTIONS

10.1 SYSTEM MATCHING PRECAUTIONS

(1) Refer to the drawing.

(2) To avoid wireless noise interference, please keep the antenna away from LCD control board.

10.2 HANDLING PRECAUTIONS

(1) The module should be assembled into the system firmly by using every mounting hole. Be careful not to twist or bend the module.

(2) While assembling or installing modules, it can only be in the clean area. The dust and oil may cause electrical short or damage the polarizer.

(3) Use fingerstalls or soft gloves in order to keep display clean during the incoming inspection and assembly process.

(4) Do not press or scratch the surface harder than a HB pencil lead on the panel because the polarizer is very soft and easily scratched.

(5) If the surface of the polarizer is dirty, please clean it by some absorbent cotton or soft cloth. Do not use Ketone type materials (ex. Acetone), Ethyl alcohol, Toluene, Ethyl acid or Methyl chloride. It might permanently damage the polarizer due to chemical reaction.

(6) Wipe off water droplets or oil immediately. Staining and discoloration may occur if they left on panel for a long time.

(7) If the liquid crystal material leaks from the panel, it should be kept away from the eyes or mouth. In case of contacting with hands, legs or clothes, it must be washed away thoroughly with soap.

(8) Protect the module from static electricity, it may cause damage to the C-MOS Gate Array IC.

(9) Do not disassemble the module.

(10) Do not pull or fold the lamp wire.

(11) Pins of I/F connector should not be touched directly with bare hands.

10.3 STORAGE PRECAUTIONS

(1) High temperature or humidity may reduce the performance of module. Please store LCD module within the specified storage conditions.

(2) It is dangerous that moisture come into or contacted the LCD module, because the moisture may damage LCD module when it is operating.

(3) It may reduce the display quality if the ambient temperature is lower than 10 ºC. For example, the response time will become slowly, and the starting voltage of lamp will be higher than the room temperature.

10.4 OPERATION PRECAUTIONS

(1) Do not pull the I/F connector in or out while the module is operating.

(2) Always follow the correct power on/off sequence when LCD module is connecting and operating. This can prevent the CMOS LSI chips from damage during latch-up.

(3) The startup voltage of Backlight is approximately 1000 Volts. It may cause electrical shock while assembling with inverter. Do not disassemble the module or insert anything into the Backlight unit.

10.5 OTHER PRECAUTIONS

(1) When fixed patterns are displayed for a long time, remnant image is likely to occur.

11. PACKING

11.1 CARTON

Box Dimensions : 489(L)*382(W)*320(H)
Weight: Approx. 13.4kg(30 module .per. 1 box)

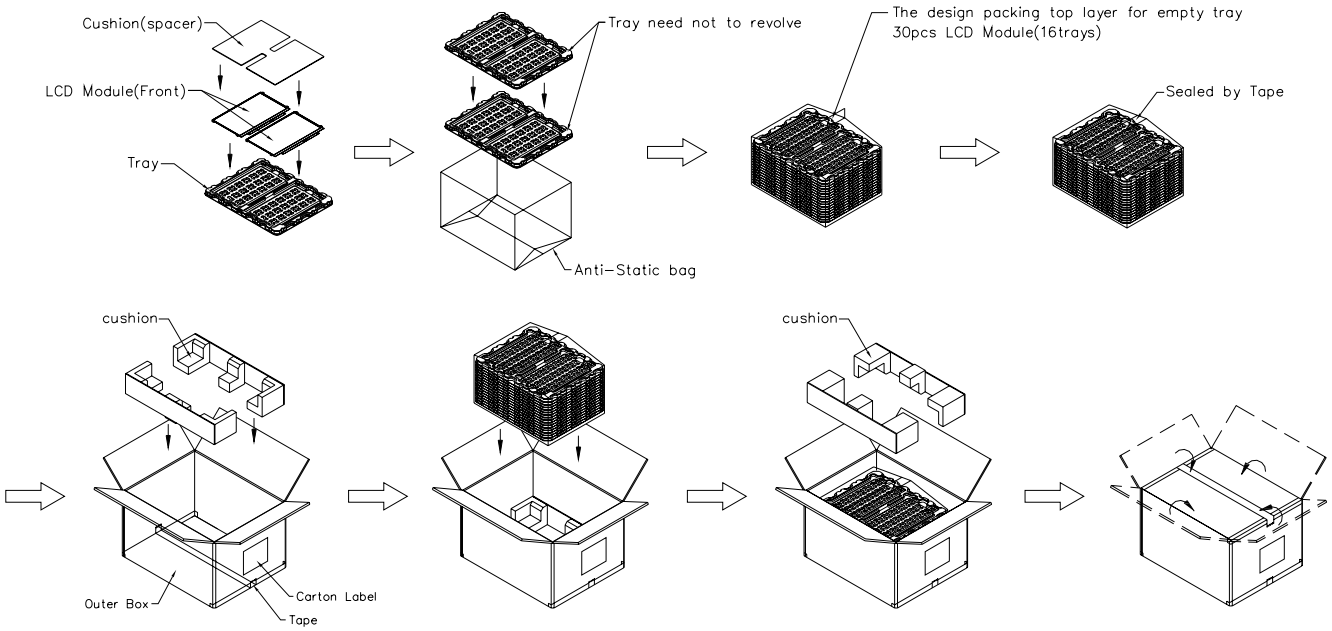


Figure. 11-1 Packing method

11.2 PALLET

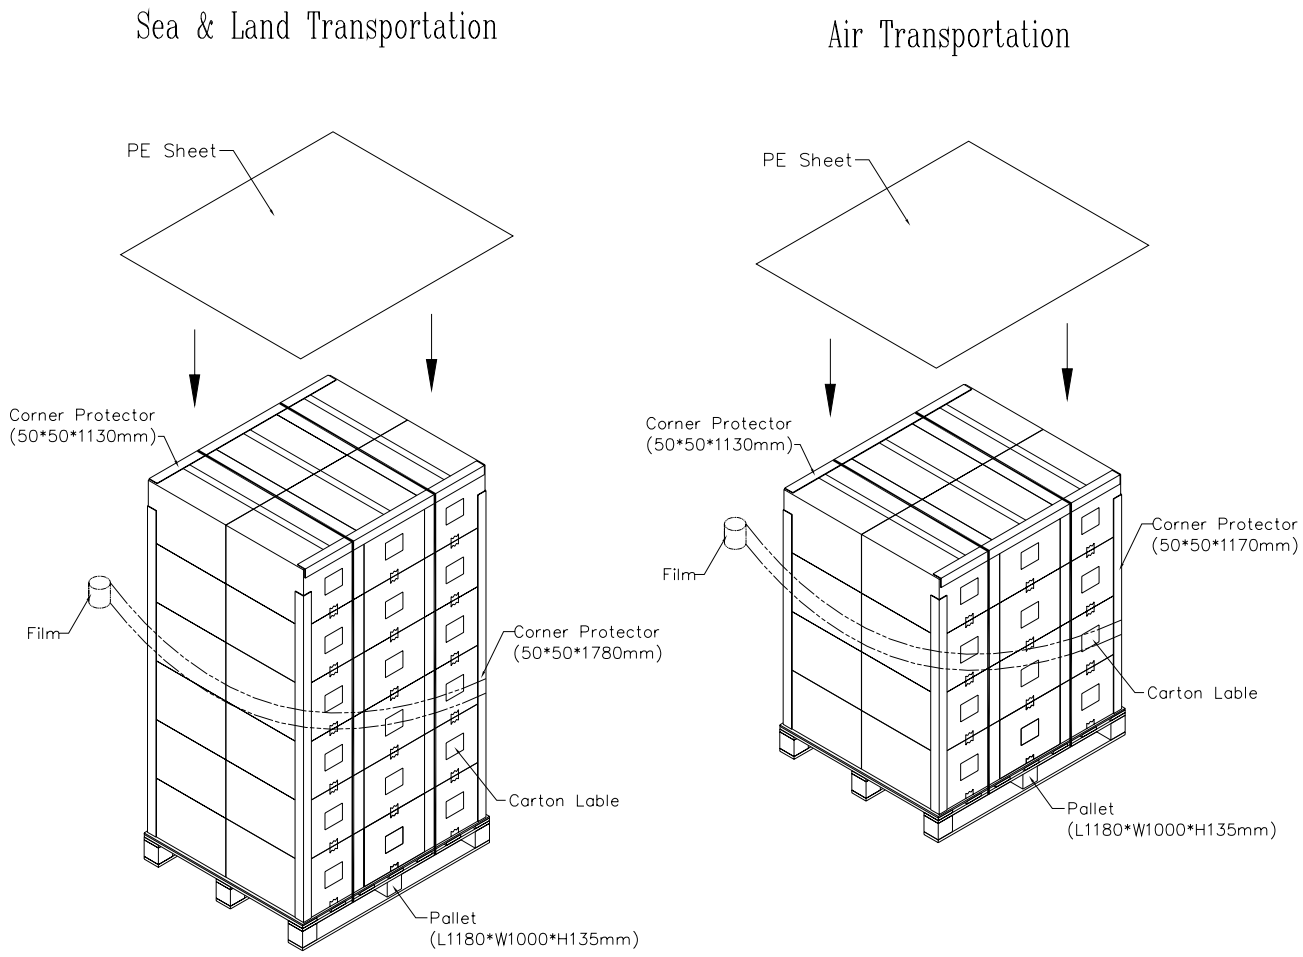


Figure. 11-2 Packing method

12. DEFINITION OF LABELS

12.1 CMO MODULE LABEL

The barcode nameplate is pasted on each module as illustration, and its definitions are as following explanation.



(a) Model Name: N116B6 - L07

(b) Revision: Rev. XX, for example: A1, …, C1, C2 …etc.

(c) Serial ID: X X X X X X Y M D X N N N N

- Serial No.
- CMO Internal Use
- Year, Month, Date
- CMO Internal Use
- Revision
- CMO Internal Use

(d) Production Location: MADE IN XXXX. XXXX stands for production location.

Serial ID includes the information as below:

(a) Manufactured Date: Year: 1~9, for 2001~2009


Month: 1~9, A~C, for Jan. ~ Dec.

Day: 1~9, A~Y, for 1st to 31st, exclude I , O and U


(b) Revision Code: cover all the change

(c) Serial No.: Manufacturing sequence of product

12.2 CARTON LABEL

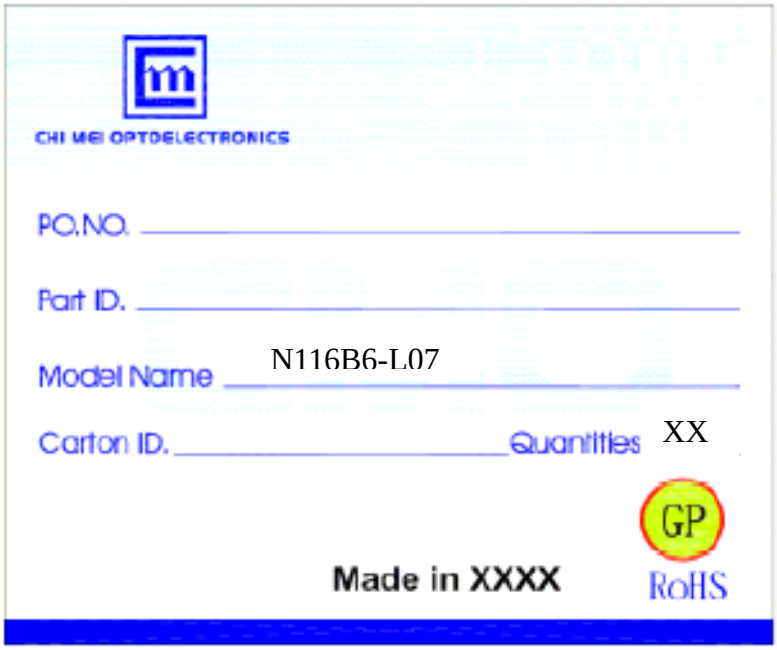



Production location: Made In XXXX. XXXX stands for production location.

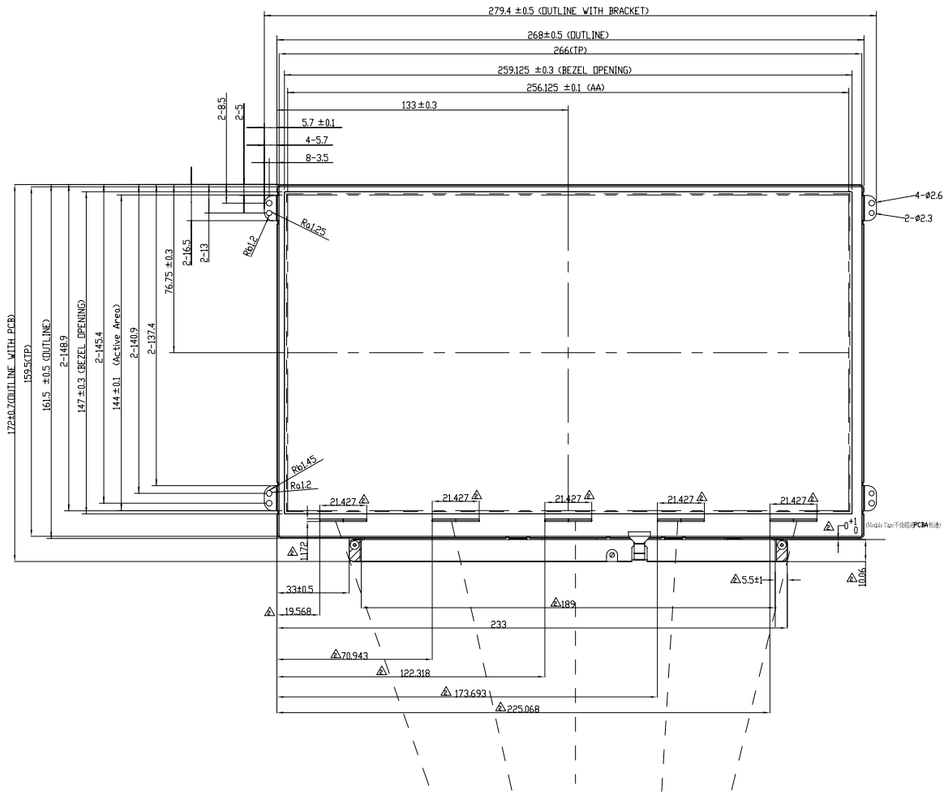

IN ORDER TO AVOID ABNORMAL DISPLAY , POOLING AND WHITE SPOT ,
NO OVERLAPPING IS SUGGESTED AT CABLES , ANTENNAS , CAMERA , WLAN,
WAN OR OTHER FOREIGN OBJECTS OVER COF DRIVER IC , TCON AND VR LOCATIONS.



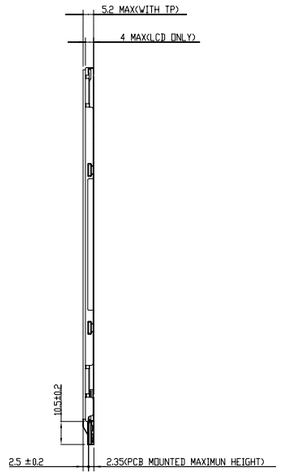

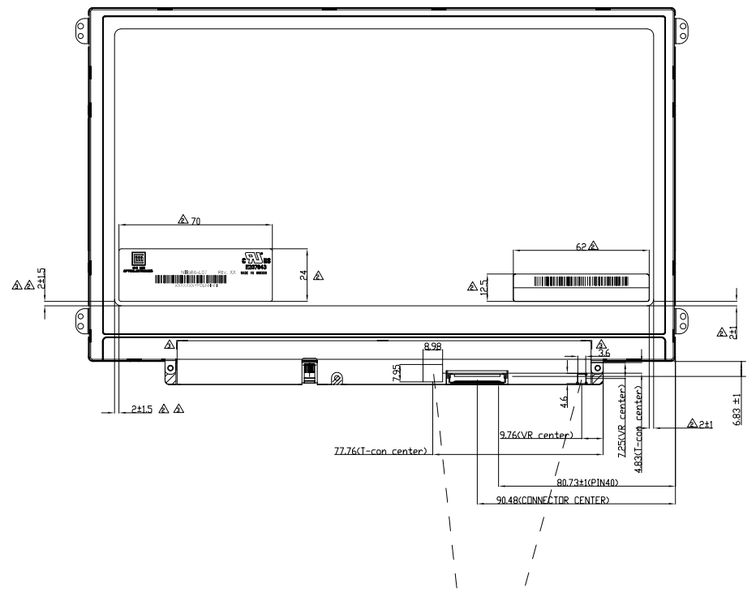

IN ORDER TO AVOID ABNORMAL DISPLAY , POOLING AND WHITE SPOT ,
NO OVERLAPPING IS SUGGESTED AT CABLES , ANTENNAS , CAMERA , WLAN,
WAN OR OTHER FOREIGN OBJECTS OVER COF DRIVER IC , TCON AND VR LOCATIONS.

NOTES:
1.LCD MODULE INPUT CONNECTOR: IPEX, 20455-040E-12 OR EQUIVALENT.
Ⓟ 2.LCD MODULE FLATNESS : MAX 0.5 mm.

Mark	Description	Date	Changed_By	Approved_By	ECN No.	Remark
3	MODIFY LABEL TOLERANCE CHANGE DIMENSION	20090723	ANDY_LEE	SHUNNAN		
2	ADD MYLAR and LABEL POSITION ADD COG IC POSITION	20090723	ANDY_LEE	SHUNNAN		

TITLE	MODULE_OUTLINE_DRAWING_N116B6-L07			2D REV.	3
				3D REV.	
Approved	SHUNNAN	Drawing No.	N116340133		
Checked	JACKSON CHEN	Part No.	NA		
Designer	BRIAN_JU	Material	TBD	Sheet	1 / 1 A0
Drawn	BRIAN_JU	Date	16-FEB-2009	Scale	1:1 Unitmm

General Tolerance Unless Specified					
0~3	±0.05	30~120	±0.15	1000~2000	±0.5
3~6	±0.05	120~400	±0.2	2000~4000	-
6~30	±0.1	400~1000	±0.3	VERTICAL ANGLE / HORIZONTAL ANGLE	45° / 45°

CHI MEI OPTOELECTRONICS CORP.

ALL RIGHTS RESERVED, COPYING FORBIDDEN.