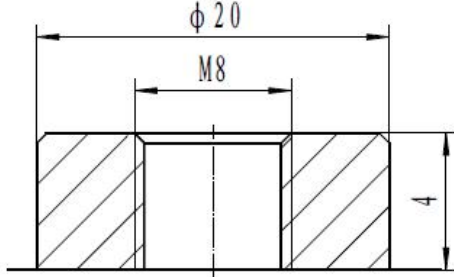


电池特性				电池照片															
标称电压		12 V																	
额定容量		150 Ah																	
电池质量（± 5%）		52.0/114.6 kg/lbs																	
外形尺寸（± 1.5%）																			
长	482/18.99	mm/in.																	
宽	170/6.70	mm/in.																	
高	236/9.30	mm/in.																	
总高	236/9.30	mm/in.																	
质量比能量	34.6	Wh/kg																	
体积比能量	93.1	Wh/dm ³																	
容量（25℃，77°F）				端子类型															
3hr（50A，10.5V）		150 Ah																	
20hr（8.65A，10.5V）		173 Ah																	
5hr（33A，10.5V）		165 Ah																	
2hr（67.5A，10.5V）		135 Ah																	
荷电态内阻		3.8 mΩ																	
初充电电流（推荐）		25.0 A																	
放电电流(10s)		1340 A																	
短路电流		3200 A																	
浮充电压/单体		2.35 V										端子材料：铜（镀锡）							
均充电压/单体		2.45 V										扭 矩：10~12N·m							
放电保持电压/单体		1.75 V		产品执行标准：GB/T 32620.1-2016															
80%循环寿命		700 次		电动道路车用铅酸蓄电池															
99.99%循环寿命		400 次		产品参考标准：IEC 61982-3 2001															
恒电流放电参数表（at 25℃,77°F）—— 安（A）																			
终止电压 （伏/单体）	放电时间（分钟）																		
	10	20	30	45	60	90	120	180	300	600	1200								
1.60	464.6	266.1	193.2	158.0	122.6	85.37	68.11	50.41	33.24	17.30	8.692								
1.65	450.1	262.1	192.1	157.4	122.2	85.06	67.91	50.27	33.15	17.26	8.672								
1.70	440.6	259.7	191.3	156.8	121.7	84.82	67.74	50.15	33.07	17.23	8.657								
1.75	427.8	255.8	190.0	156.0	121.2	84.50	67.50	50.00	33.00	17.20	8.650								
恒功率放电参数表（at 25℃,77°F）—— 瓦特（W）/ 单体																			
终止电压 （伏/单体）	放电时间（分钟）																		
	10	20	30	45	60	90	120	180	300	600	1200								
1.60	816.2	479.1	355.0	294.8	232.0	163.6	131.9	98.83	65.73	34.42	17.34								
1.65	805.1	479.3	357.4	297.0	233.2	164.0	132.3	99.03	65.79	34.42	17.34								
1.70	799.3	480.5	359.7	299.1	234.4	164.8	132.9	99.29	65.91	34.48	17.37								
1.75	786.8	479.3	361.3	300.4	235.5	165.6	133.5	99.55	66.00	34.50	17.40								

修订日期: 2014-02-10