



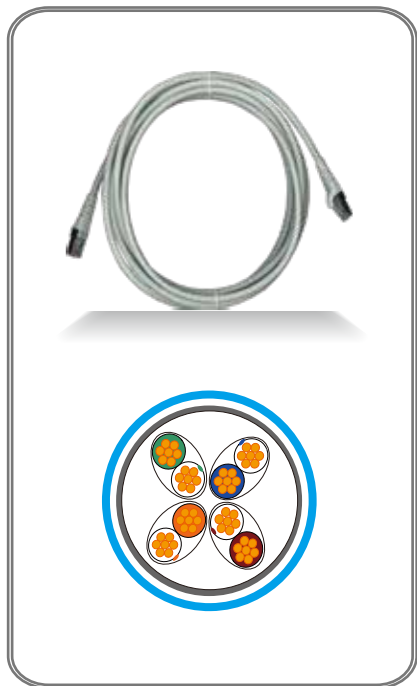

# 超六类屏蔽跳线 S/FTP, 26AWG

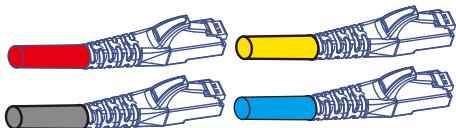

## 产品优势

- 符合ANSI/TIA 568.2-D、TIA/EIA 568-B.2-10 Cat.6A及ISO/IEC 11801 2nd Class EA规范标准, 传输带宽达500MHz。
- 采用Cat.6A双层屏蔽S/FTP 26AWG多股铜绞线; 二端压接屏蔽标准RJ45接头。
- 外被覆材质为PVC或LSOH低烟无卤素型。
- 支援10G Base-T应用, 同时向下兼容任何Class E(Cat.6)与Class D(Cat.5E)的系统布线。
- 符合RoHS 2011/65/EU 环保规范标准。

## 产品特性

RJ45 接头符合 UL/CSA FCC Part 68, Subpart F

线缆绝缘材质符合 UL-94V-0

触点镀层: 50 $\mu$  镀金/ 100 $\mu$  镀镍

接口插拔次数: >1000(IEC 603.7/ClassA)

插拔耐拉力: 最小11lbf (50N)

最大直流电阻: <9.38 $\Omega$ /100m at 20 $^{\circ}$ C

互电容: <5.6nF/100m

适用温度: -20 $^{\circ}$ C to +75 $^{\circ}$ C

绝缘强度(导体-导体): 1000VAC,60Hz/1min

绝缘阻抗: >500M ohms(500VDC)

触点阻抗: <35m ohm

额定电压/电流: 150VAC/1.5Ampere

内导体线规: Stranded copper(26AWG)

线缆外皮材质: PVC或LSOH; 低烟无卤符合IEC 60332-1-2

## 可应用于

10/100Base-TX

1000Base-T

2.5G/5GBase-T

10GBase-T

155/622Mbps ATM

1.2/2.4Gbps ATM

TP-PMD

4/16Mbps Token Ring

ISDN

VoIP

4PPoE compliant

## 符合标准

TIA/EIA 568-B.2-10 Category 6A

ANSI/TIA 568.2-D Category 6A

ISO/IEC 11801 2nd Edition Class EA

EN 50173 2nd Edition

EN 55022 Class B

## 订购讯息

产品型号	描述	包装
FL-6ASH08-01-W	Cat.6A S/FTP Patch Cord 26AWG,PVC,1M,molding	1pc/pk
FL-6ASL08-01-W	Cat.6A S/FTP Patch Cord 26AWG,LSOH,1M,molding	1pc/pk
FL-6ASH08-02-W	Cat.6A S/FTP Patch Cord 26AWG,PVC,2M,molding	1pc/pk
FL-6ASL08-02-W	Cat.6A S/FTP Patch Cord 26AWG,LSOH,2M,molding	1pc/pk
FL-6ASH08-02-S	Cat.6A S/FTP Patch Cord 26AWG,PVC,2M,short boot,assembly	1pc/pk
FL-6ASL08-02-S	Cat.6A S/FTP Patch Cord 26AWG,LSOH,2M,short boot,assembly	1pc/pk

-W



molding  
注塑型常规护套

-S



short boot, assembly  
组装型, 短护套