



The engineer's choice

**ebmpapst**

# The new RadiCal centrifugal fans

**Impellers made of one piece of plastic with an optimised flow channel, combined with a proven single-phase asynchronous motor or compact GreenTech EC motor: these are the outstanding features of the new generation of backward-curved centrifugal fans for operation without scroll housing. That's RadiCal!**

The impellers of size 133 to 250 are manufactured in one piece - because there are no joints, they attain a high rotational speed, which in turn provides high power density of the fan. The styling of the impeller has been optimised using complex simulation models that are adjusted using measurements of prototypes. The result is an optimal, low-loss flow of air through the impeller without drastic cross-sectional changes, which are a well-known source of losses in the impeller. A uniform flow profile without laminar separation also means fewer noise sources and thus better acoustics. That's RadiCal too!

The motor in GreenTech EC technology is likewise new. The integrated control electronics of the motor are now designed such that the EC GreenTech fan has the same mounting dimensions as the combination of the same impeller with an asynchronous motor. In addition, the specified EC centrifugal fan attains significantly higher air performance than the AC variant with identical dimensions. The GreenTech EC fans are available in two different control configurations: one with two fixed speed stages and another with the familiar continuous control option via a combined 0-10V/PWM control input.


This opens up entirely new possibilities for applications in ventilation and air-conditioning technology as well as other areas. For example, ebmpapst AC fans can be replaced with the latest fans in GreenTech EC technology without expensive modifications.







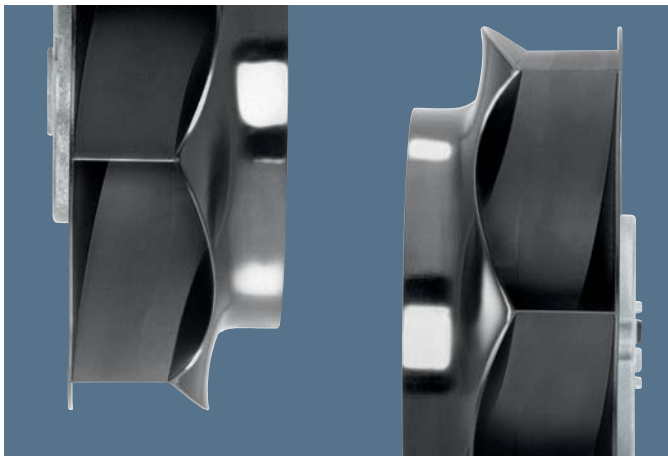

#### **The advantages at a glance:**

- High efficiency with improved impeller technology and new EC motors
- Extremely quiet running with optimised flow of air through the impeller
- Significantly reduced rotation noise
- Unmatched compactness
- Mechanical compatibility of AC and EC fans
- EC fans with 2 speeds or continuous control
- High power density
- Robust design and maintenance-free operation
- Includes ErP\* compliance (see individual designation)

\*ErP: Energy related Product – defined minimum requirements for fans in accordance with the EcoDesign directive for fans with a drive output of 125 W and above.

## Table of contents



 The new RadiCal centrifugal fans	2
 GreenTech: The Green Company	4
 EC centrifugal fans RadiCal Ø 133-250	6
 AC centrifugal fans RadiCal Ø 133-250	36
 Accessories	62
 Electrical connections EC/AC	64
 Technical parameters & scope	66
 ebm-papst representatives & subsidiaries	70

Sustainability is at the centre of our thoughts and actions. Out of conviction!

*Eco-friendliness and sustainability have always been at the core of our thoughts and actions. For decades, we have worked according to the simple but strict creed of our co-founder Gerhard Sturm: "Each new product we develop has to be better than the last one in terms of economy and ecology." GreenTech is the ultimate expression of our corporate philosophy.*





**GreenTech is pro-active development.**

Even in the design phase, the materials and processes we use are optimised for the greatest possible eco-friendliness, energy balance and – wherever possible – recyclability. We continually improve the material and performance of our products, as well as the flow and noise characteristics. At the same time, we significantly reduce energy consumption. Close co-operation with universities and scientific institutes and the professorship we endow in the area of power engineering and regenerative energies allows us to profit from the latest research findings in these fields – and at the same time ensure highly qualified young academics.

**GreenTech is eco-friendly production.**

GreenTech also stands for maximum energy efficiency in our production processes. There, the intelligent use of industrial waste heat and ground-water cooling, photovoltaics and, of course, our own cooling and ventilation technology are of the utmost importance. Our most modern plant, for instance, consumes 91% less energy than currently specified and required. In this way, our products contribute to protecting the environment, from their origin to their recyclable packaging.

**GreenTech is acknowledged and certified.**

Every step in our chain of production meets the stringent standards of environmental specialists and the public. The 2008 Environmental Prize of Baden-Wuerttemberg, the Green Award 2009, the Energy Efficiency Award 2009 of the dena – to give just a few examples – testify to this. The environmental advantage gained in the performance of the products developed from our GreenTech philosophy can also be measured in the fulfilment of the most stringent energy and environmental standards. In many instances, our products are already well below the thresholds energy legislation will impose a few years from now – several times over.

**Our customers profit from this every day.**

The heart of GreenTech is future-oriented EC technology from ebmpapst. The EC technology at the core of our most efficient motors and fans allows efficiency of up to 90%, saves energy at a very high level, significantly extends service life and makes our products maintenance-free. These values pay off not only for the environment, but every cent also pays off for the user! All ebmpapst products – even those for which GreenTech EC technology does not (yet) make sense from an application viewpoint – feature the greatest possible connection of economy and ecology.



# EC centrifugal fans RadiCal


EC centrifugal fans RadiCal Ø 133-250

8



# EC centrifugal fans RadiCal

backward curved, Ø 133

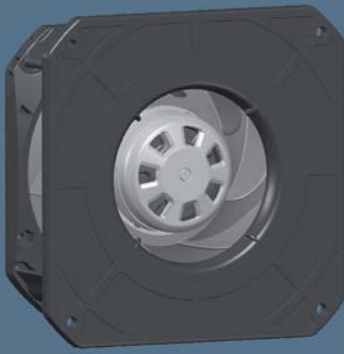


- **Material:** Housing: Plastic PA 6, fibreglass-reinforced  
Impeller: Plastic PA 6, fibreglass-reinforced  
Rotor: Thick layer passivated  
Electronics housing: Die-cast aluminium
- **Number of blades:** 7
- **Direction of rotation:** Clockwise, seen on rotor
- **Type of protection:** IP 54
- **Insulation class:** "B"
- **Mounting position:** Any
- **Condensate discharges:** None, open rotor
- **Mode of operation:** Continuous operation (S1)
- **Bearings:** Maintenance-free ball bearings

Nominal data		Curve	Nominal voltage range	Frequency	Speed/rpm <sup>(1)</sup>	Max. input power <sup>(1)</sup>	Max. current draw <sup>(1)</sup>	Perm. amb. temp.	Electr. connection
Type	Motor	VAC	Hz	rpm	W	A	°C	p. 64/65	
*3G 133	M3G 045-AI	Ⓐ	1~ 200-240	50/60	3730	27	0,26	-25..+60	H3)
*3G 133	M3G 045-AI	Ⓑ	1~ 200-240	50/60	3730	27	0,26	-25..+60	H4)

subject to alterations

(1) Nominal data in operating point with maximum load and 230 VAC

## Curves (2 Speed stages)

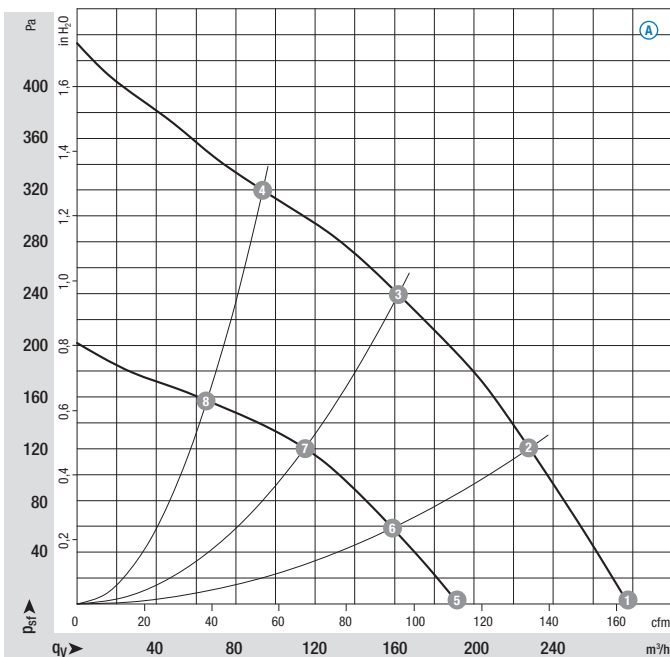

Air performance measured as per: ISO 5801, Installation category A, without protection against accidental contact

Suction-side noise levels: L<sub>WA</sub> as per ISO 13347, L<sub>pA</sub> measured at 1 m distance to fan axis

The acoustic values given are only valid under the measurement conditions listed and may vary depending on the installation situation.

With any deviation to the standard setup, the specific values have to be checked and reviewed once installed or fitted!

For detailed information see page 66 ff.

	n rpm	P <sub>e</sub> W	I A	L <sub>WA</sub> dB(A)
Ⓐ 1	3930	24	0,23	66
Ⓐ 2	3800	26	0,26	63
Ⓐ 3	3730	27	0,26	61
Ⓐ 4	3835	26	0,25	65
Ⓐ 5	2755	10	0,11	58
Ⓐ 6	2690	10	0,12	56
Ⓐ 7	2655	11	0,13	53
Ⓐ 8	2705	10	0,12	57



- **Technical features** ④ : • Speed adjustment input (230V) • Electronics / motor overtemperature protection • Locked-rotor protection
- **Technical features** ⑥ : • Control input 0-10 VDC / PWM • Output 10 VDC max. 1,1 mA • Tach output • Locked-rotor protection • Electronics / motor overtemperature protection
- **EMC:** Interference emission acc. to EN 61000-6-3  
Interference immunity acc. to EN 61000-6-2  
Harmonics acc. to EN 61000-3-2/3
- **Leakage current:** < 3,5 mA acc. to EN 60950-1
- **Cable exit:** Variable
- **Protection class:** I
- **Product conforming to standard:** EN 60335-1, CE
- **Approvals:** VDE, UL, CSA, CCC, GOST are applied for




Mass of centrifugal fan



Mass of centrifugal module with support basket

Centrifugal fan	kg	Centrifugal module	kg
R3G 133-RA01 -01	0,5	K3G 133-RA01 -01	0,75
R3G 133-RA01 -03	0,5	K3G 133-RA01 -03	0,75

### Curves (Speed-controlled)

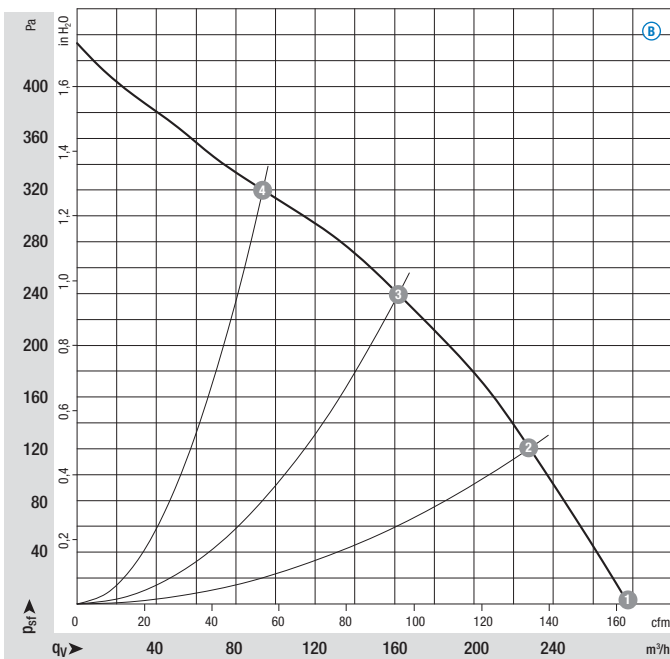

Air performance measured as per: ISO 5801, Installation category A, without protection against accidental contact

	n rpm	P <sub>e</sub> W	I A	L <sub>WA</sub> dB(A)
①	3930	24	0,23	66
②	3800	26	0,26	63
③	3730	27	0,26	61
④	3835	26	0,25	65

Suction-side noise levels: L<sub>WA</sub> as per ISO 13347, L<sub>pA</sub> measured at 1 m distance to fan axis

The acoustic values given are only valid under the measurement conditions listed and may vary depending on the installation situation.


With any deviation to the standard setup, the specific values have to be checked and reviewed once installed or fitted!

For detailed information see page 66 ff.


# EC centrifugal fans RadiCal

backward curved, Ø 133, 2 Speed stages

R3G 133-RA01-01

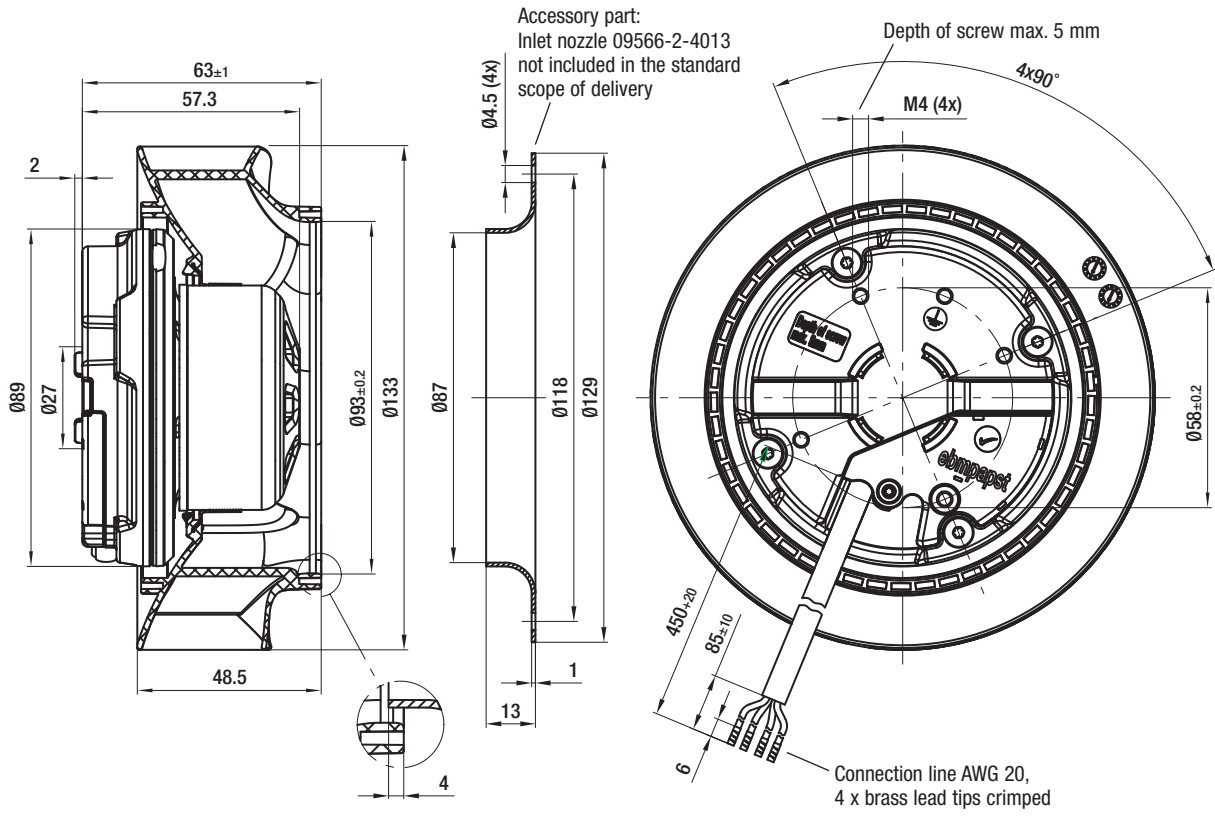


K3G 133-RA01-01

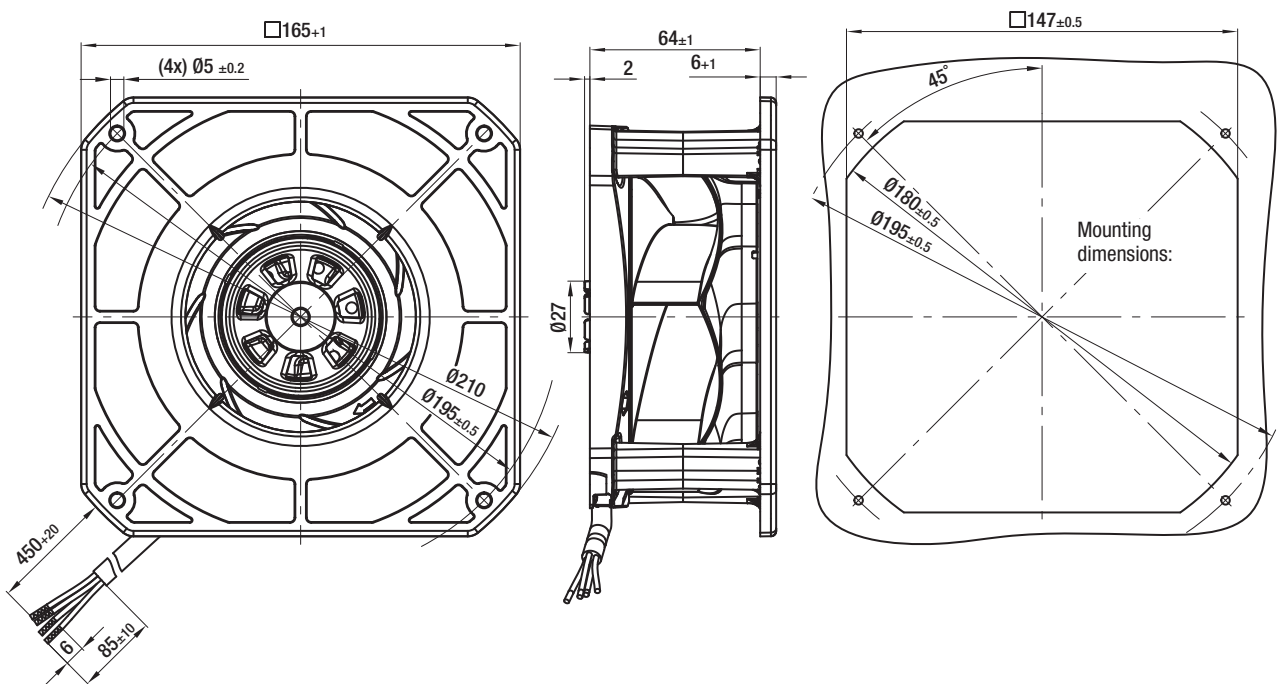


# EC centrifugal fans RadiCal

backward curved, Ø 133, Speed-controlled

R3G 133-RA01-03

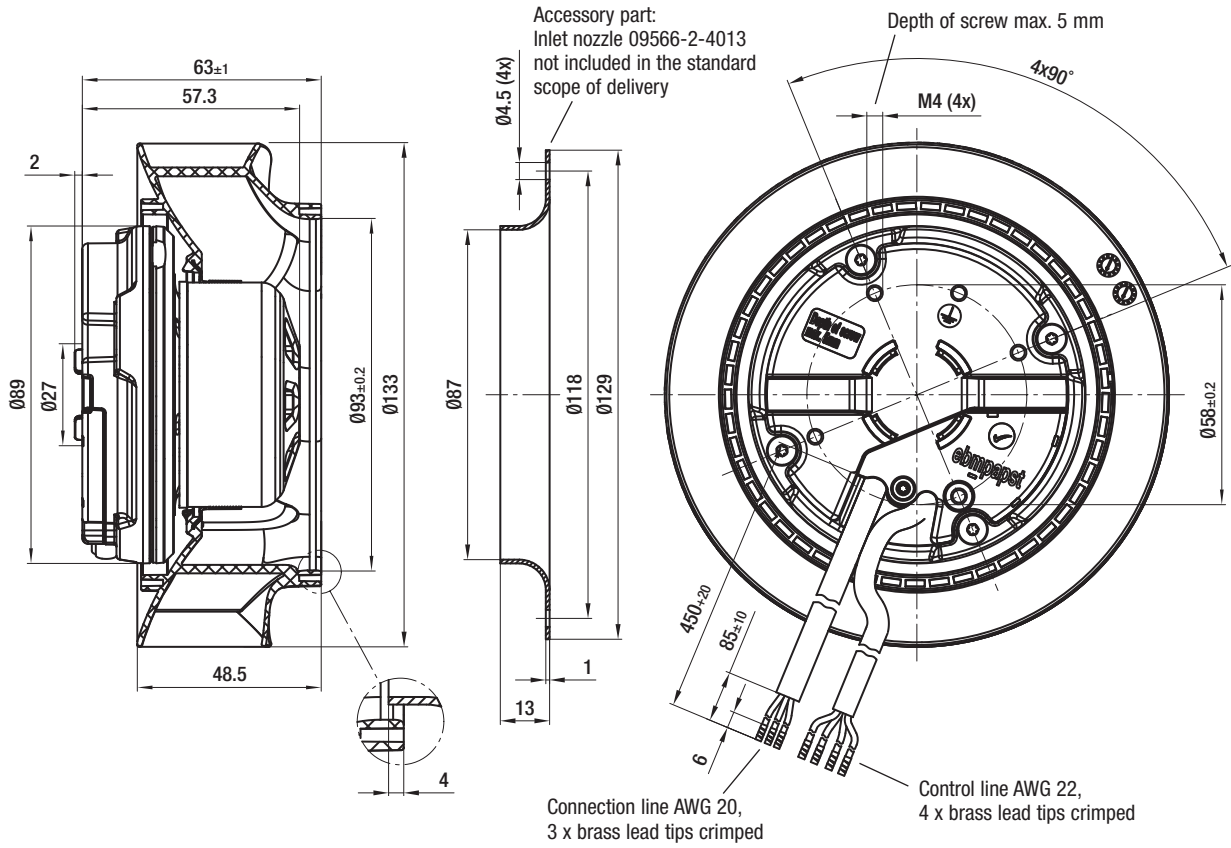


K3G 133-RA01-03

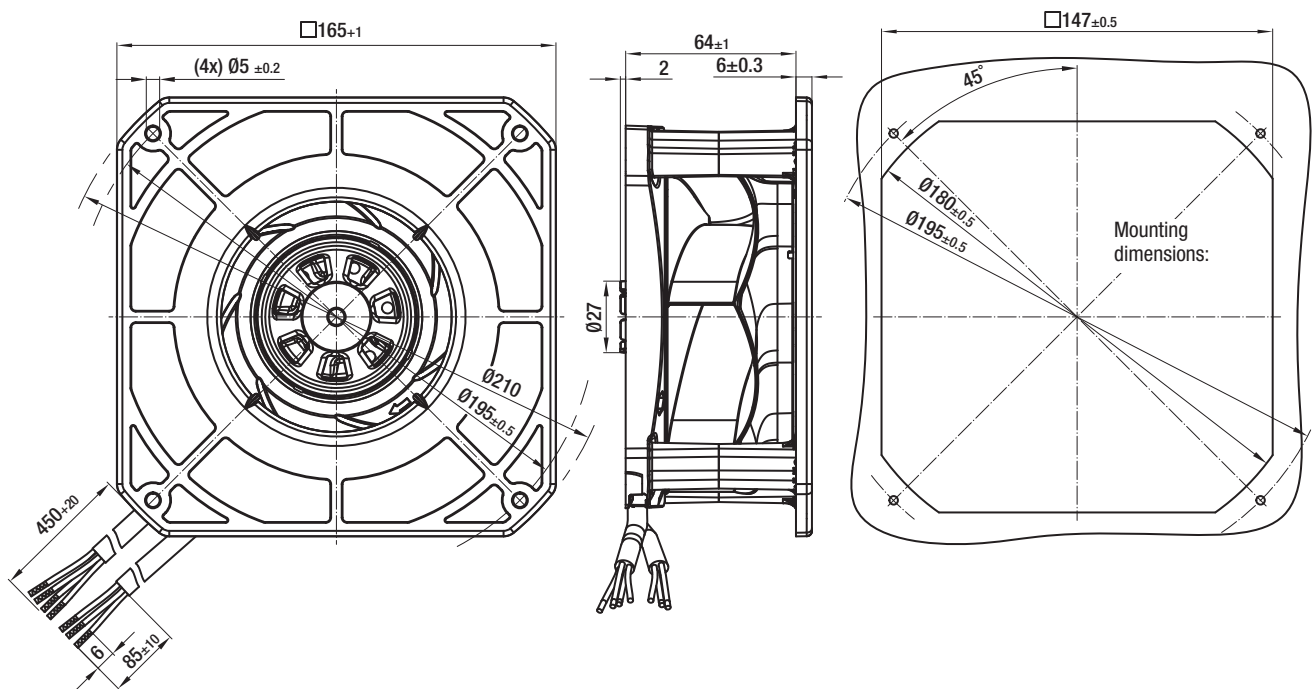

# EC centrifugal fans RadiCal

backward curved, Ø 190

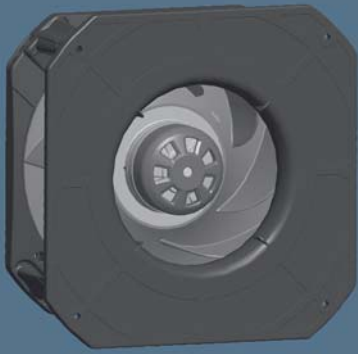


- **Material:** Housing: Plastic PA 6, fibreglass-reinforced  
Impeller: Plastic PA 6, fibreglass-reinforced  
Rotor: Thick layer passivated  
Electronics housing: Die-cast aluminium
- **Number of blades:** 7
- **Direction of rotation:** Clockwise, seen on rotor
- **Type of protection:** IP 54
- **Insulation class:** "B"
- **Mounting position:** Any
- **Condensate discharges:** None, open rotor
- **Mode of operation:** Continuous operation (S1)
- **Bearings:** Maintenance-free ball bearings

Nominal data		Curve	Nominal voltage range	Frequency	Speed/rpm <sup>(1)</sup>	Max. input power <sup>(1)</sup>	Max. current draw <sup>(1)</sup>	Perm. amb. temp.	Electr. connection
Type	Motor	VAC	Hz	rpm	W	A	°C	p. 64/65	
*3G 190	M3G 055-BD	Ⓐ	1~ 200-240	50/60	2710	57	0,43	-25..+60	H3)
*3G 190	M3G 055-CF	Ⓑ	1~ 200-240	50/60	4060	170	1,40	-25..+60	H3)
*3G 190	M3G 055-BI	Ⓒ	1~ 200-240	50/60	3200	85	0,75	-25..+60	H4)
*3G 190	M3G 055-CF	Ⓓ	1~ 200-240	50/60	4060	170	1,40	-25..+60	H4)

subject to alterations

(1) Nominal data in operating point with maximum load and 230 VAC

## Curves (2 Speed stages)

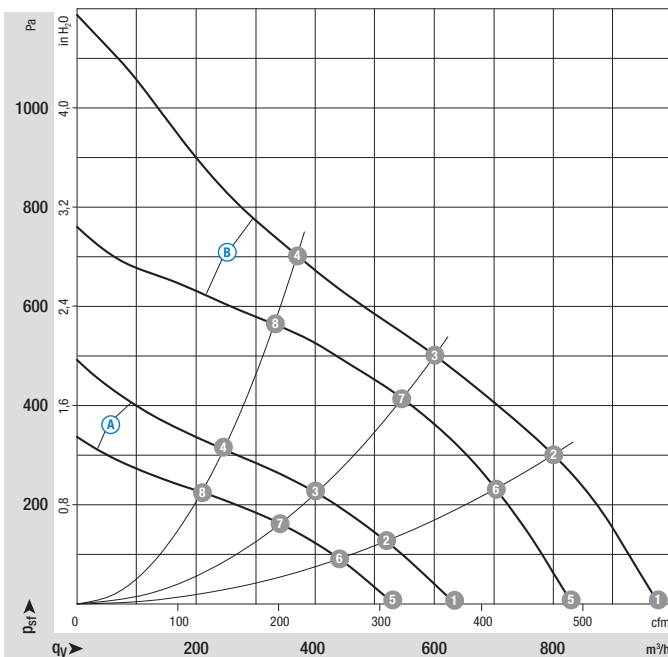

Air performance measured as per: ISO 5801, Installation category A, without protection against accidental contact

Suction-side noise levels: L<sub>WA</sub> as per ISO 13347, L<sub>PA</sub> measured at 1 m distance to fan axis

The acoustic values given are only valid under the measurement conditions listed and may vary depending on the installation situation.

With any deviation to the standard setup, the specific values have to be checked and reviewed once installed or fitted!

For detailed information see page 66 ff.

	n rpm	P <sub>e</sub> W	I A	L <sub>WA</sub> dB(A)
Ⓐ 1	2880	49	0,36	69
Ⓐ 2	2815	52	0,40	64
Ⓐ 3	2710	57	0,43	62
Ⓐ 4	2775	54	0,41	66
Ⓐ 5	2435	30	0,23	65
Ⓐ 6	2390	32	0,25	60
Ⓐ 7	2325	35	0,27	59
Ⓐ 8	2355	33	0,26	63
Ⓑ 1	4440	161	1,39	79
Ⓑ 2	4235	165	1,40	73
Ⓑ 3	4060	170	1,40	71
Ⓑ 4	4155	160	1,37	73
Ⓑ 5	3810	104	0,95	75
Ⓑ 6	3765	117	1,10	71
Ⓑ 7	3700	126	1,11	69
Ⓑ 8	3745	117	1,07	71

- **Technical features** (A) (B) : • Speed adjustment input (230V) • Electronics / motor overtemperature protection • Motor current limitation • Locked rotor protection • Soft start
- **Technical features** (C) (D) : • Control input 0-10 VDC / PWM • Output 10 VDC max. 1,1 mA • Tach output • Electronics / motor overtemperature protection • Motor current limitation • Locked rotor protection • Soft start
- **EMC:** Interference emission acc. to EN 61000-6-3  
Interference immunity acc. to EN 61000-6-2  
Harmonics acc. to EN 61000-3-2/3
- **Leakage current:** < 3,5 mA acc. to EN 60950-1
- **Cable exit:** Variable
- **Protection class:** I
- **Product conforming to standard:** EN 60335-1
- **Approvals:** VDE, UL, CSA, CCC, GOST are applied for




Mass of centrifugal fan



Mass of centrifugal module with support basket

Centrifugal fan	kg	Centrifugal module	kg
R3G 190-RB01 -01	0,85	K3G 190-RB01 -01	1,40
R3G 190-RD45 -01	1,36	K3G 190-RD45 -01	1,91
R3G 190-RC05 -03	1,06	K3G 190-RC05 -03	1,61
R3G 190-RD45 -03	1,36	K3G 190-RD45 -03	1,91

### Curves (Speed-controlled)

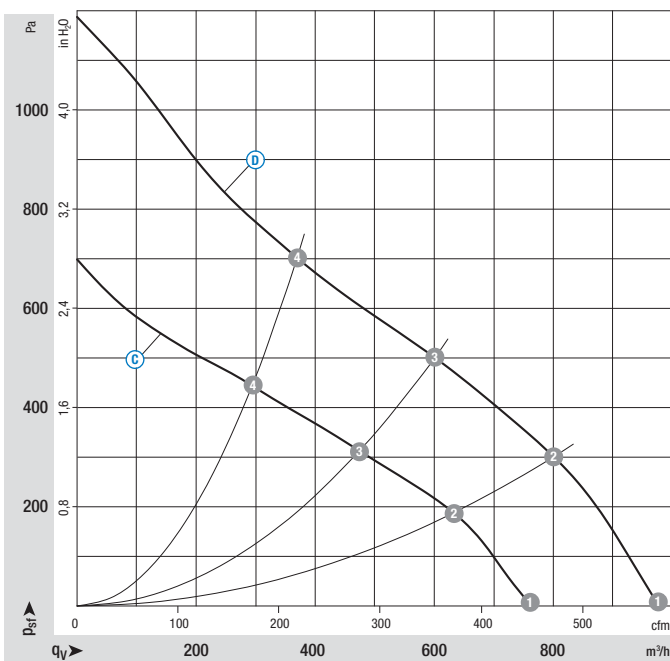

Air performance measured as per: ISO 5801, Installation category A, without protection against accidental contact

Suction-side noise levels:  $L_{wA}$  as per ISO 13347,  $L_pA$  measured at 1 m distance to fan axis

The acoustic values given are only valid under the measurement conditions listed and may vary depending on the installation situation.

With any deviation to the standard setup, the specific values have to be checked and reviewed once installed or fitted!


For detailed information see page 66 ff.

	n rpm	$P_e$ W	I A	$L_{wA}$ dB(A)
(C) 1	3435	80	0,69	73
(C) 2	3335	85	0,73	68
(C) 3	3200	85	0,75	66
(C) 4	3300	85	0,74	70
(D) 1	4440	161	1,39	79
(D) 2	4235	165	1,40	73
(D) 3	4060	170	1,40	71
(D) 4	4155	160	1,37	73


# EC centrifugal fans RadiCal

backward curved, Ø 190, 2 Speed stages, 85 W

R3G 190-RB01-01

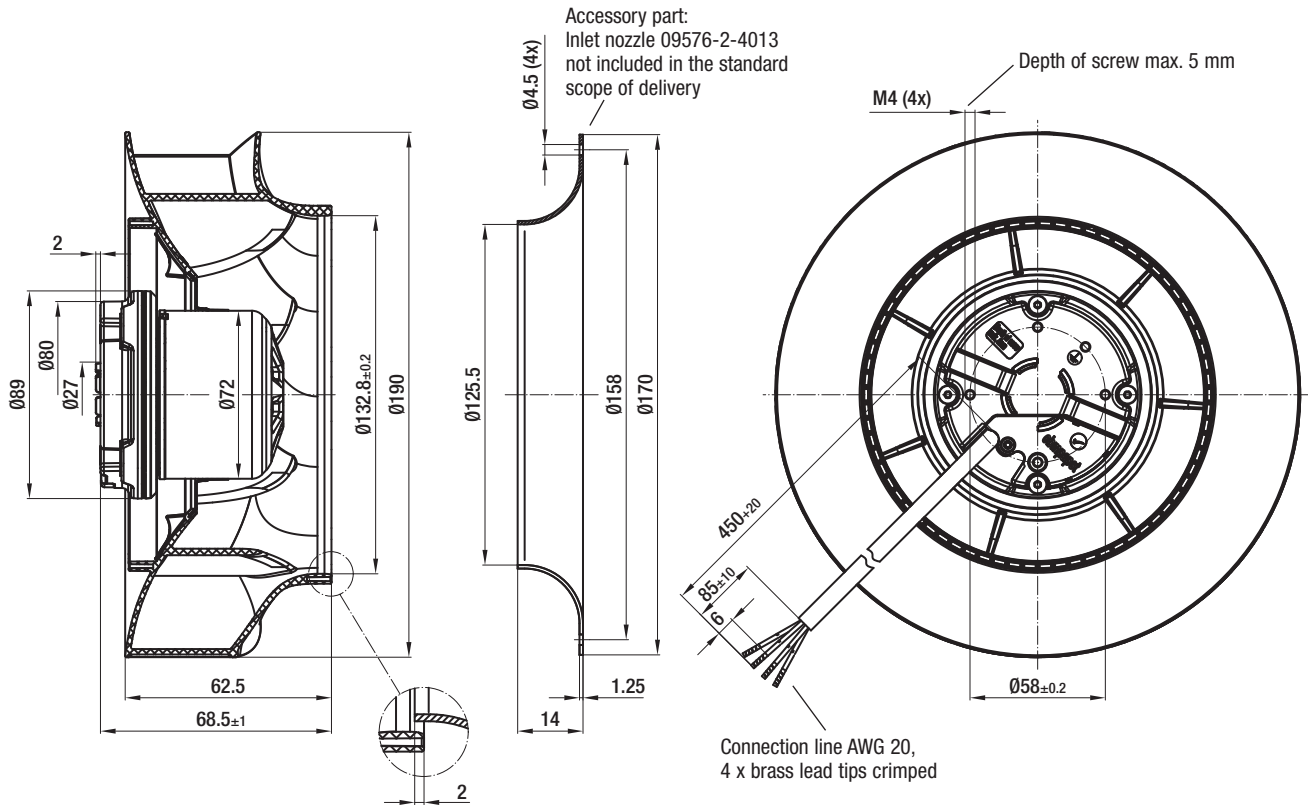


K3G 190-RB01-01

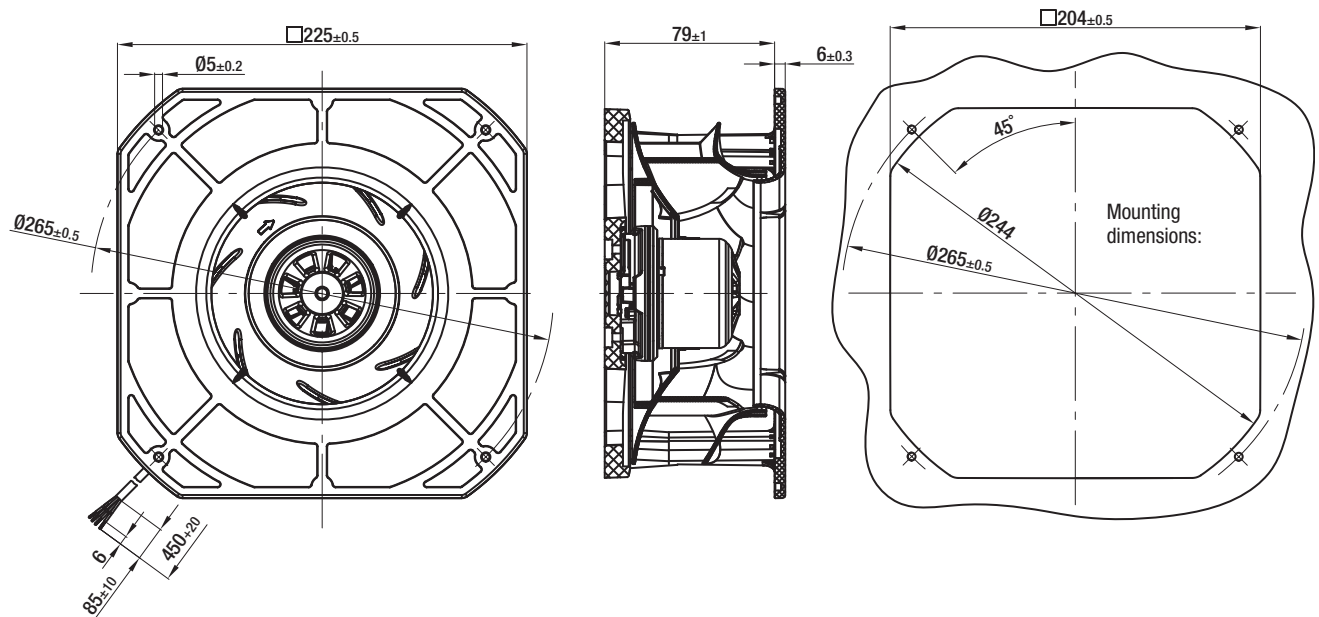


# EC centrifugal fans RadiCal

backward curved, Ø 190, 2 Speed stages, 170 W

R3G 190-RD45-01

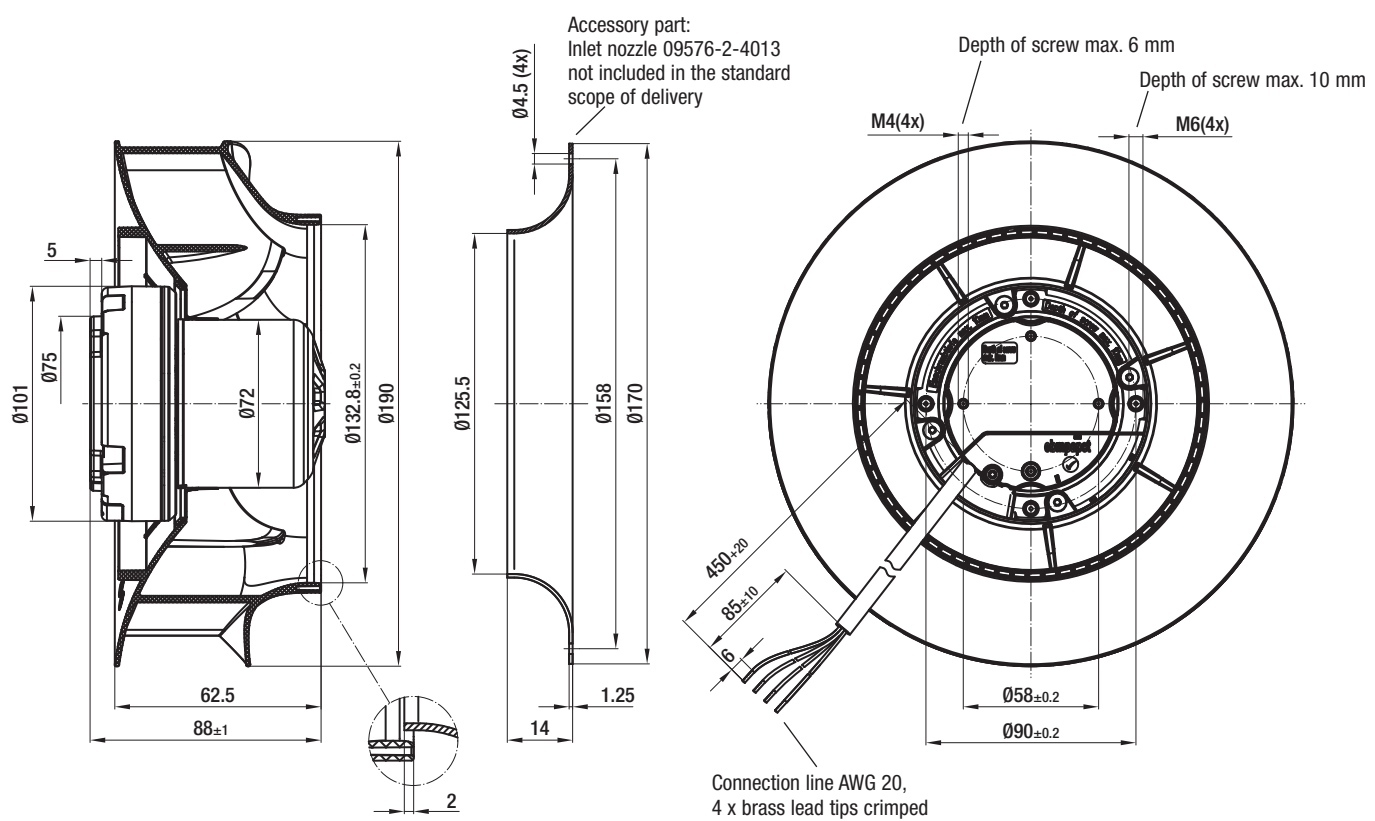


K3G 190-RD45-01

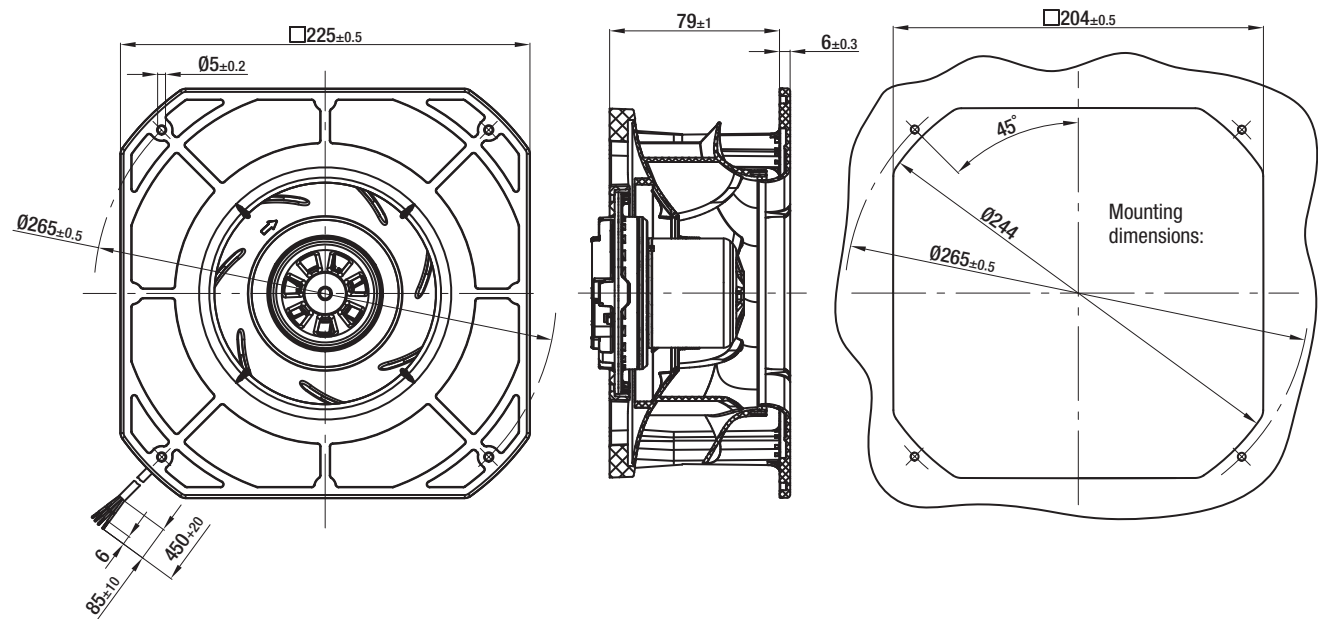


# EC centrifugal fans RadiCal

backward curved, Ø 190, Speed-controlled, 85 W

R3G 190-RC05-03

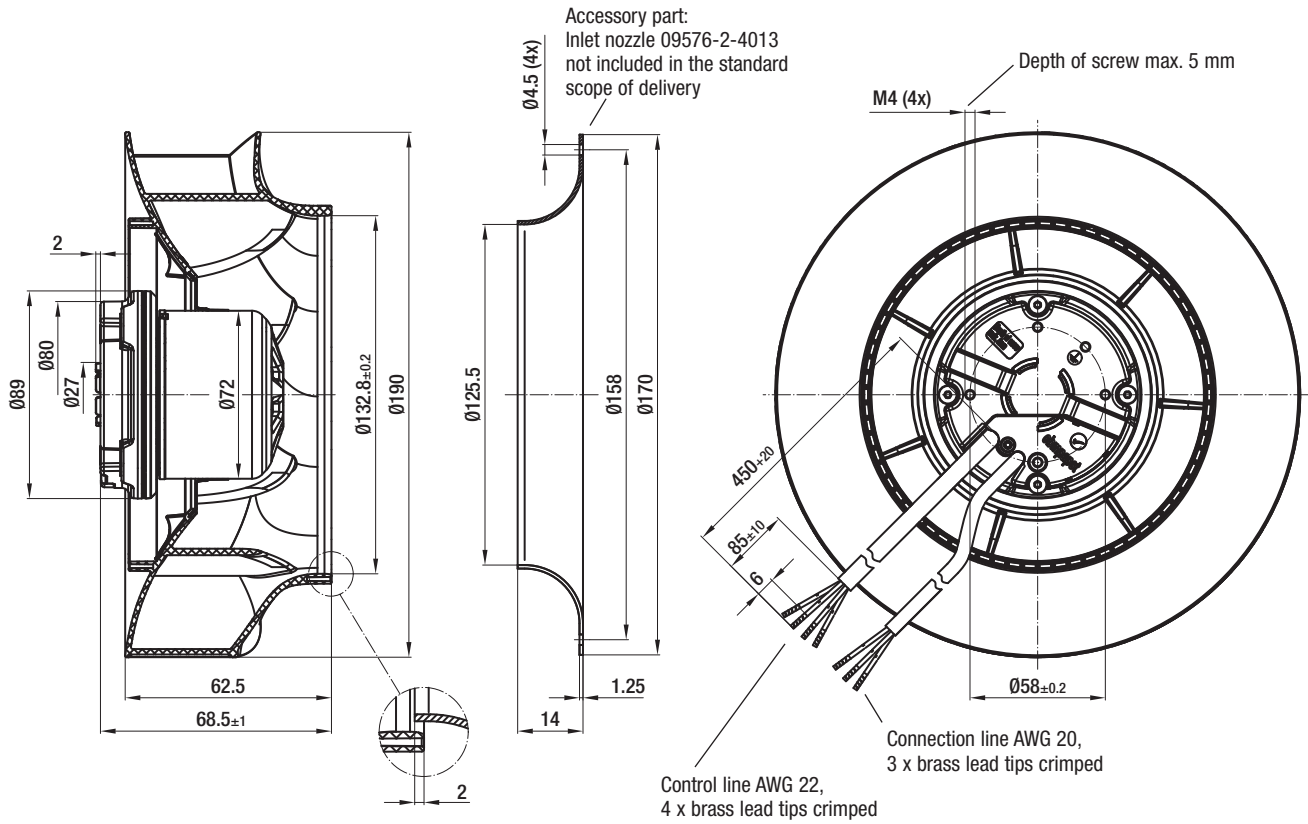

K3G 190-RC05-03

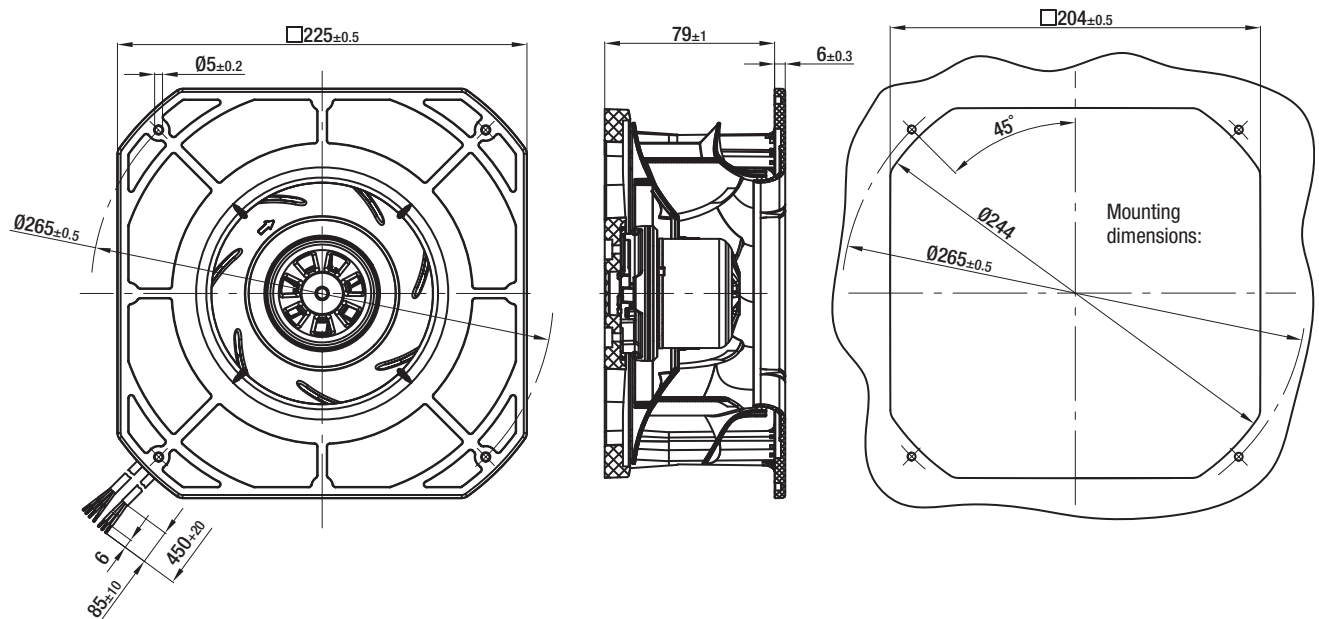





# EC centrifugal fans RadiCal

backward curved, Ø 190, Speed-controlled, 170 W

R3G 190-RD45-03

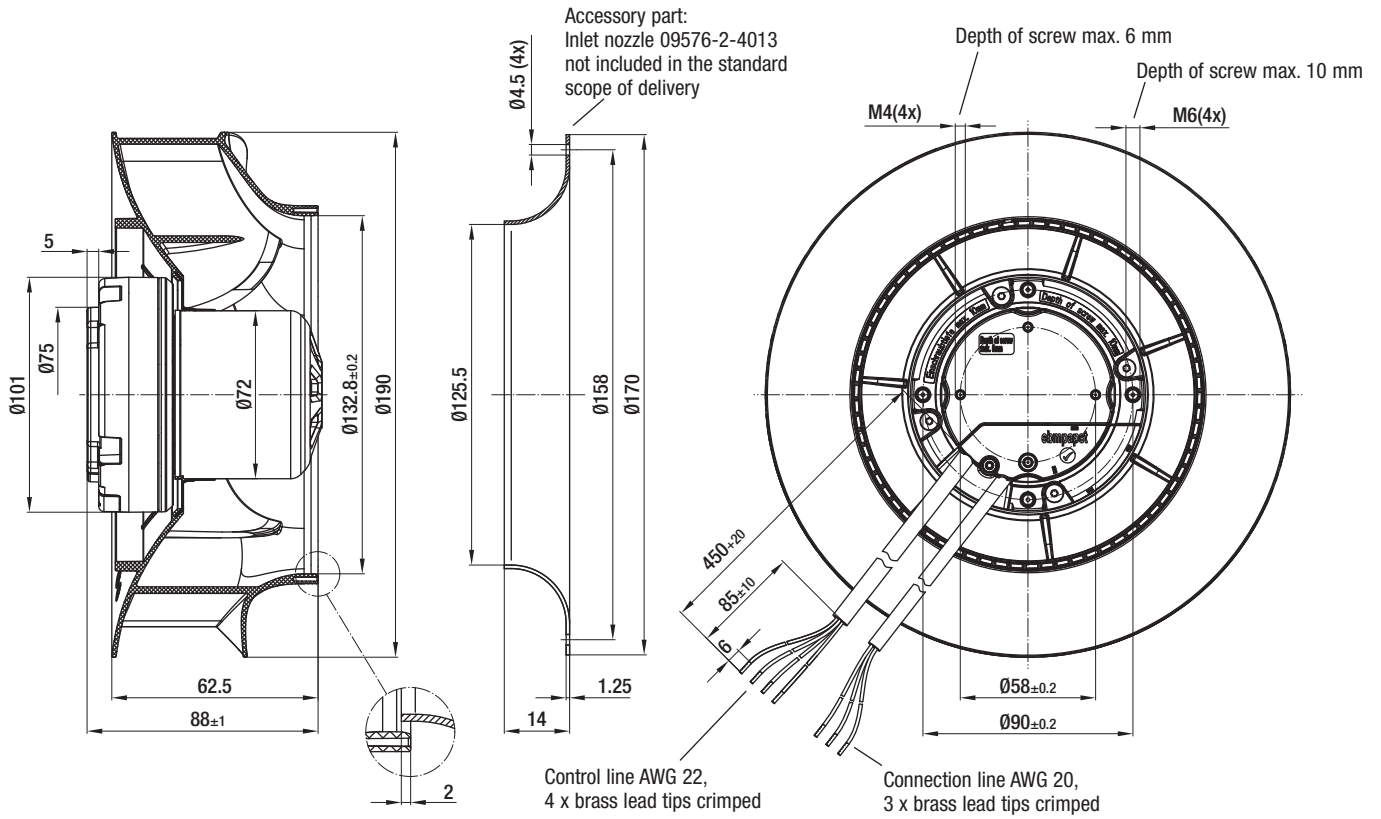


K3G 190-RD45-03

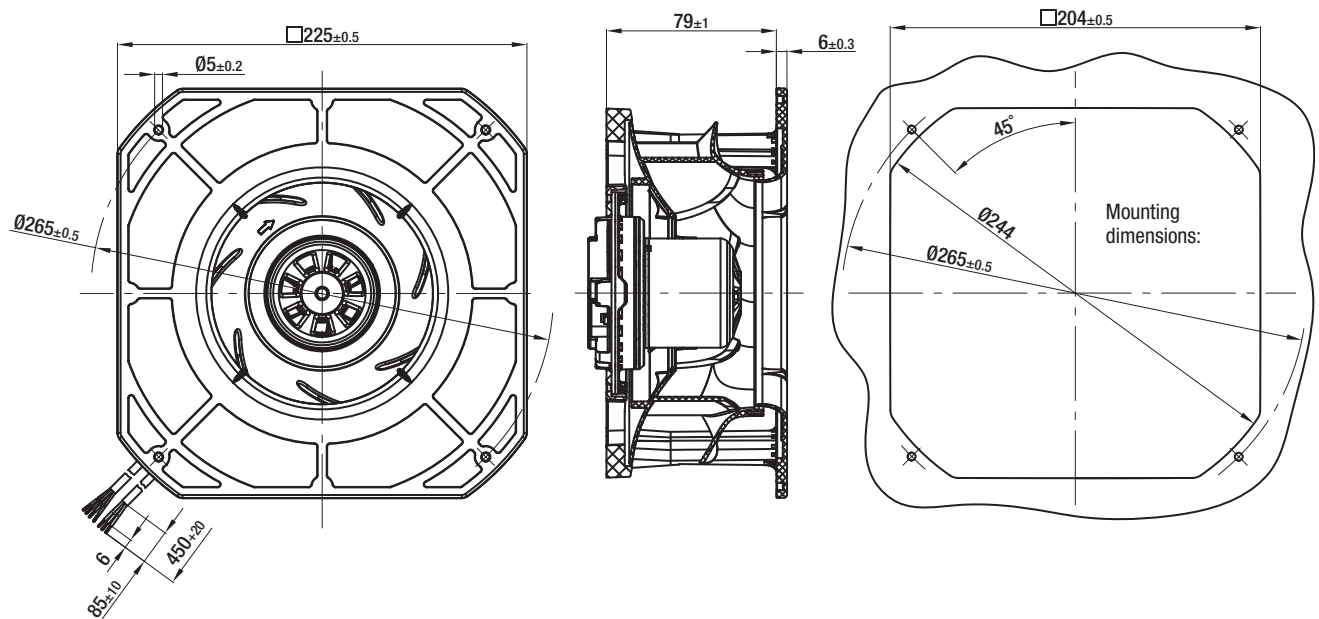

# EC centrifugal fans RadiCal

backward curved, Ø 220

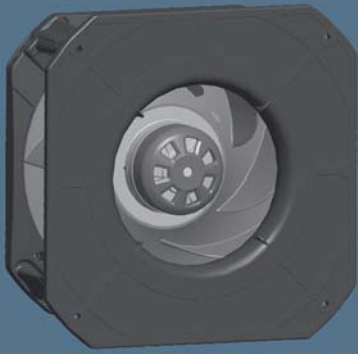


- **Material:** Housing: Plastic PA 6, fibreglass-reinforced  
Impeller: Plastic PA 6, fibreglass-reinforced  
Rotor: Thick layer passivated  
Electronics housing: Die-cast aluminium
- **Number of blades:** 7
- **Direction of rotation:** Clockwise, seen on rotor
- **Type of protection:** IP 54
- **Insulation class:** "B"
- **Mounting position:** Any
- **Condensate discharges:** None, open rotor
- **Mode of operation:** Continuous operation (S1)
- **Bearings:** Maintenance-free ball bearings

Nominal data		Curve	Nominal voltage range	Frequency	Speed/rpm <sup>(1)</sup>	Max. input power <sup>(1)</sup>	Max. current draw <sup>(1)</sup>	Perm. amb. temp.	Electr. connection
Type	Motor	VAC	Hz	rpm	W	A	°C	p. 64/65	
*3G 220	M3G 055-BI	Ⓐ	1~ 200-240	50/60	2580	85	0,70	-25..+60	H3)
*3G 220	M3G 055-CF	Ⓑ	1~ 200-240	50/60	3210	170	1,35	-25..+45	H3)
*3G 220	M3G 055-BI	Ⓒ	1~ 200-240	50/60	2580	85	0,70	-25..+60	H4)
*3G 220	M3G 055-CF	Ⓓ	1~ 200-240	50/60	3210	170	1,35	-25..+45	H4)

subject to alterations

(1) Nominal data in operating point with maximum load and 230 VAC

## Curves (2 Speed stages)

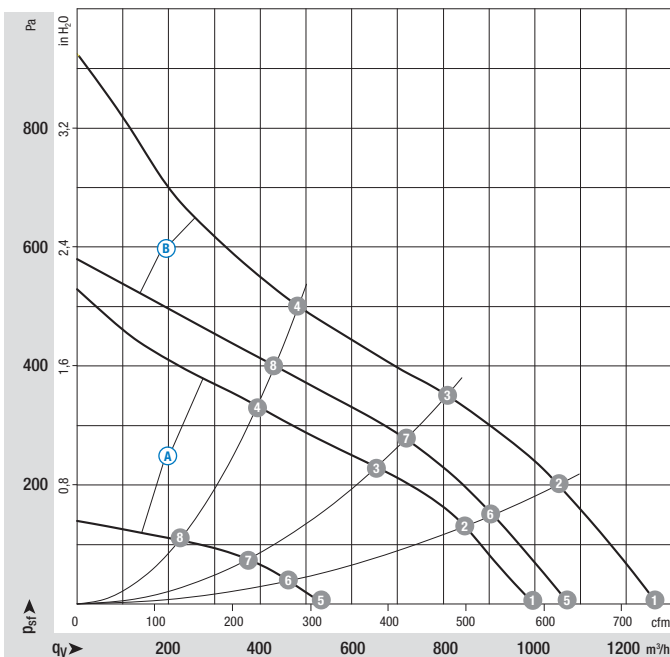

Air performance measured as per: ISO 5801, Installation category A, without protection against accidental contact

Suction-side noise levels: L<sub>wA</sub> as per ISO 13347, L<sub>pA</sub> measured at 1 m distance to fan axis

The acoustic values given are only valid under the measurement conditions listed and may vary depending on the installation situation.

With any deviation to the standard setup, the specific values have to be checked and reviewed once installed or fitted!

For detailed information see page 66 ff.

	n rpm	P <sub>e</sub> W	I A	L <sub>wA</sub> dB(A)
Ⓐ 1	2765	79	0,67	71
Ⓐ 2	2700	84	0,69	67
Ⓐ 3	2580	85	0,70	65
Ⓐ 4	2635	85	0,70	67
Ⓐ 5	1505	15	0,18	57
Ⓐ 6	1485	16	0,20	54
Ⓐ 7	1465	17	0,21	51
Ⓐ 8	1485	17	0,19	52
Ⓑ 1	3490	161	1,29	76
Ⓑ 2	3350	166	1,35	72
Ⓑ 3	3210	170	1,35	69
Ⓑ 4	3240	165	1,35	71
Ⓑ 5	2970	100	0,85	72
Ⓑ 6	2910	110	0,94	69
Ⓑ 7	2865	120	1,10	67
Ⓑ 8	2910	118	1,01	69

- **Technical features** (A) (B) : • Speed adjustment input (230V) • Electronics / motor overtemperature protection • Motor current limitation • Locked rotor protection • Soft start
- **Technical features** (C) (D) : • Control input 0-10 VDC / PWM • Output 10 VDC max. 1,1 mA • Tach output • Electronics / motor overtemperature protection • Motor current limitation • Locked rotor protection • Soft start
- **EMC:** Interference emission acc. to EN 61000-6-3  
Interference immunity acc. to EN 61000-6-2  
Harmonics acc. to EN 61000-3-2/3
- **Leakage current:** < 3,5 mA acc. to EN 60950-1
- **Cable exit:** Variable
- **Protection class:** I
- **Product conforming to standard:** EN 60335-1
- **Approvals:** VDE, UL, CSA, CCC, GOST are applied for




Mass of centrifugal fan



Mass of centrifugal module with support basket

Centrifugal fan	kg	Centrifugal module	kg
R3G 220-RC05 -01	1,13	K3G 220-RC05 -01	2,03
R3G 220-RD21 -01	1,53	K3G 220-RD21 -01	2,43
R3G 220-RC05 -03	1,20	K3G 220-RC05 -03	2,10
R3G 220-RD21 -03	1,53	K3G 220-RD21 -03	2,43

### Curves (Speed-controlled)

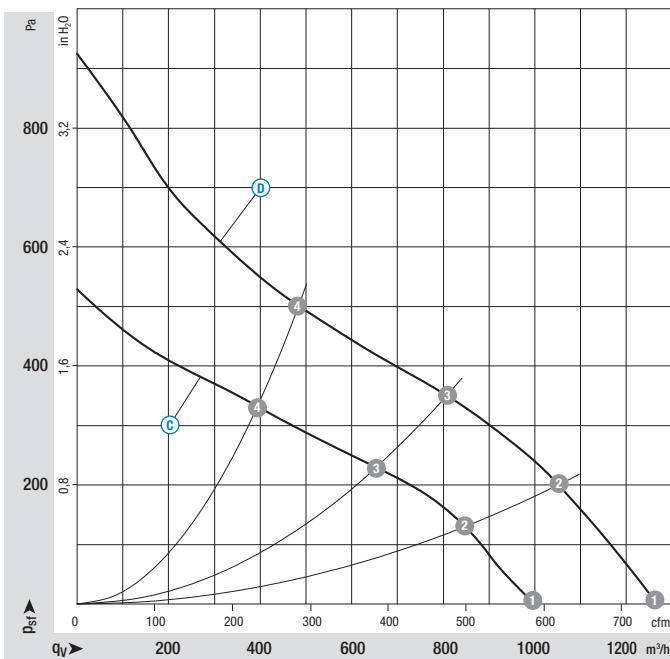

Air performance measured as per: ISO 5801, Installation category A, without protection against accidental contact

Suction-side noise levels:  $L_{wA}$  as per ISO 13347,  $L_pA$  measured at 1 m distance to fan axis

The acoustic values given are only valid under the measurement conditions listed and may vary depending on the installation situation.

With any deviation to the standard setup, the specific values have to be checked and reviewed once installed or fitted!


For detailed information see page 66 ff.

	n rpm	$P_e$ W	I A	$L_{wA}$ dB(A)
(C) 1	2765	79	0,67	71
(C) 2	2700	84	0,69	67
(C) 3	2580	85	0,70	65
(C) 4	2635	85	0,70	67
(D) 1	3490	161	1,29	76
(D) 2	3350	166	1,35	72
(D) 3	3210	170	1,35	69
(D) 4	3240	165	1,35	71


# EC centrifugal fans RadiCal

backward curved, Ø 220, 2 Speed stages, 85 W

R3G 220-RC05-01

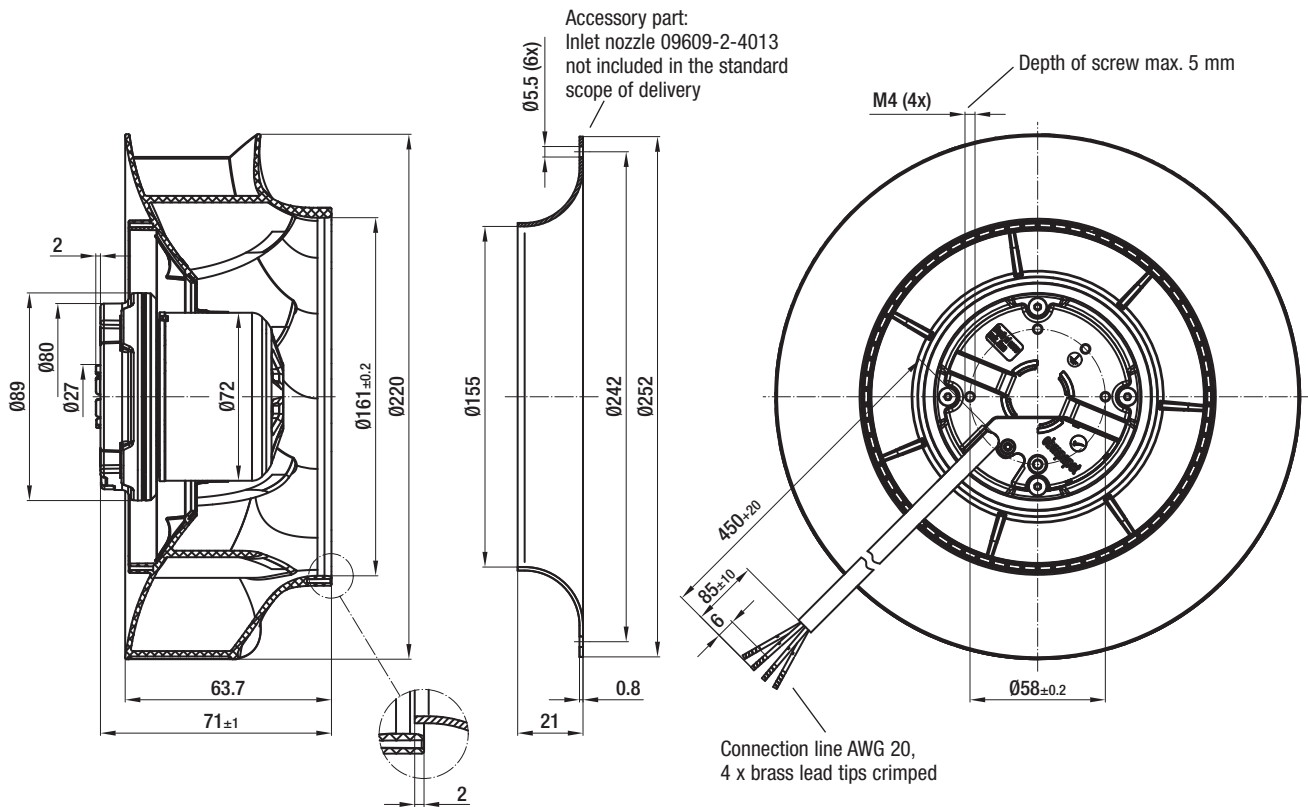


K3G 220-RC05-01

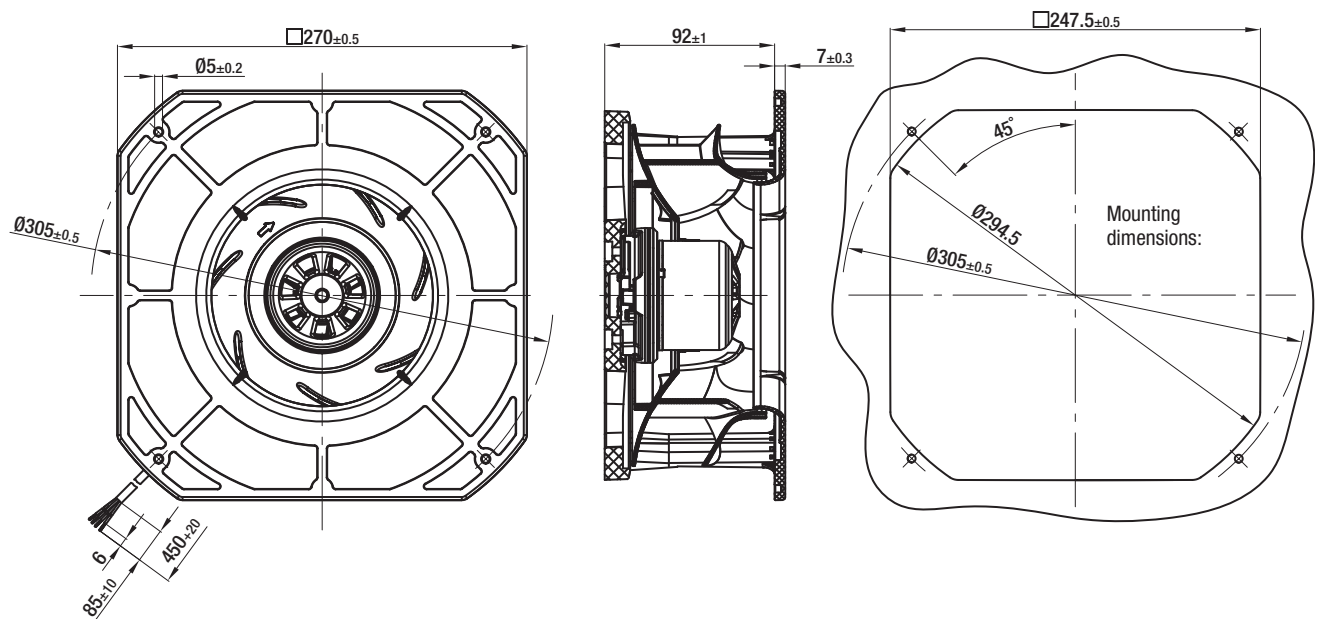


# EC centrifugal fans RadiCal

backward curved, Ø 220, 2 Speed stages, 170 W

R3G 220-RD21-01

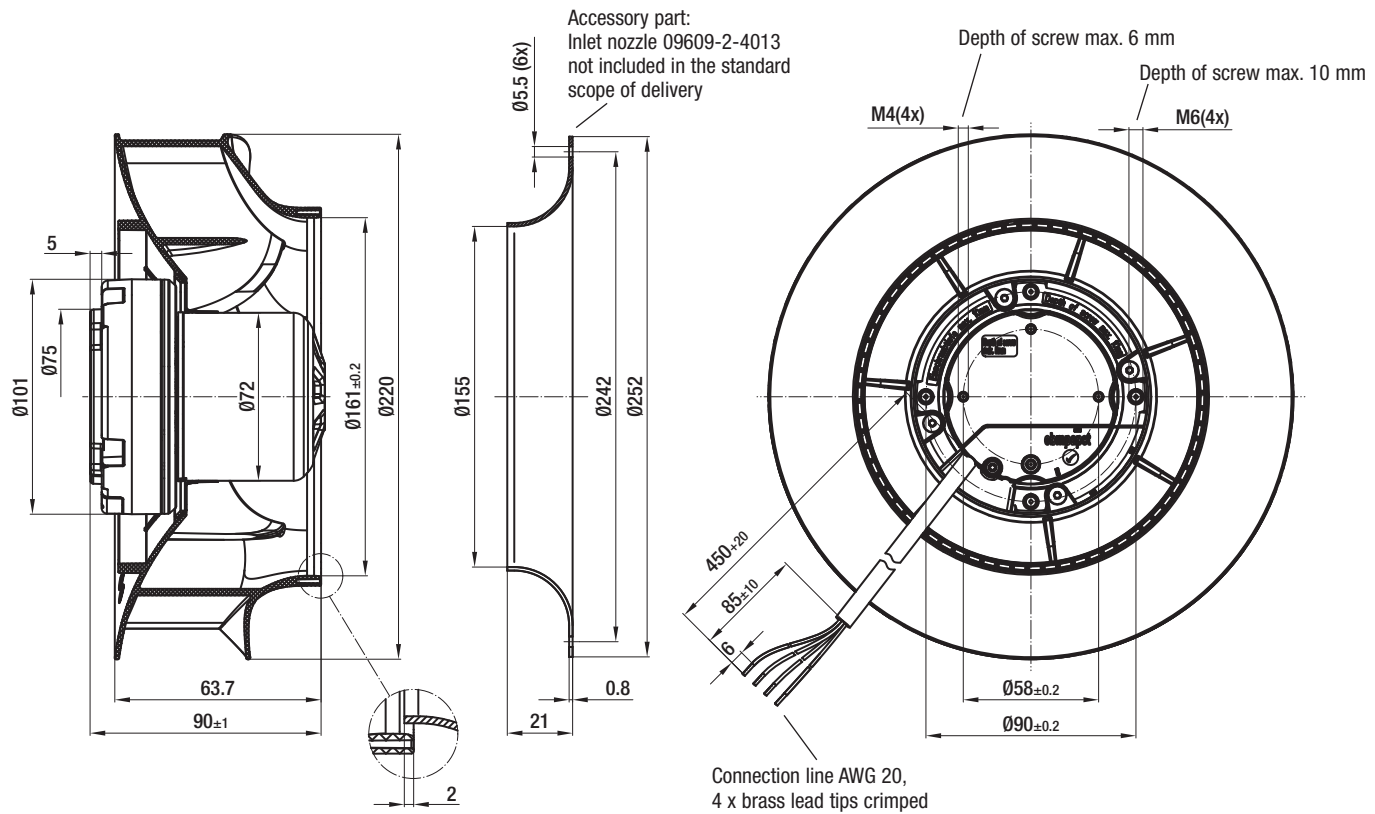


K3G 220-RD21-01

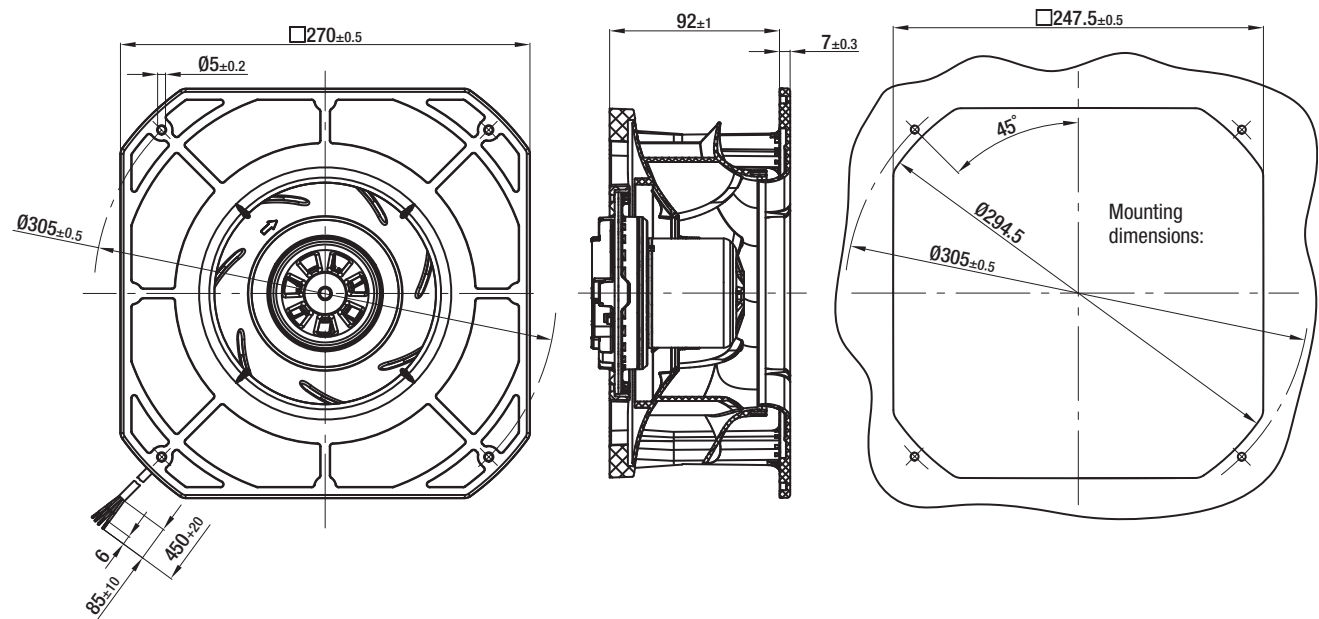


# EC centrifugal fans RadiCal

backward curved, Ø 220, Speed-controlled, 85 W

R3G 220-RC05-03

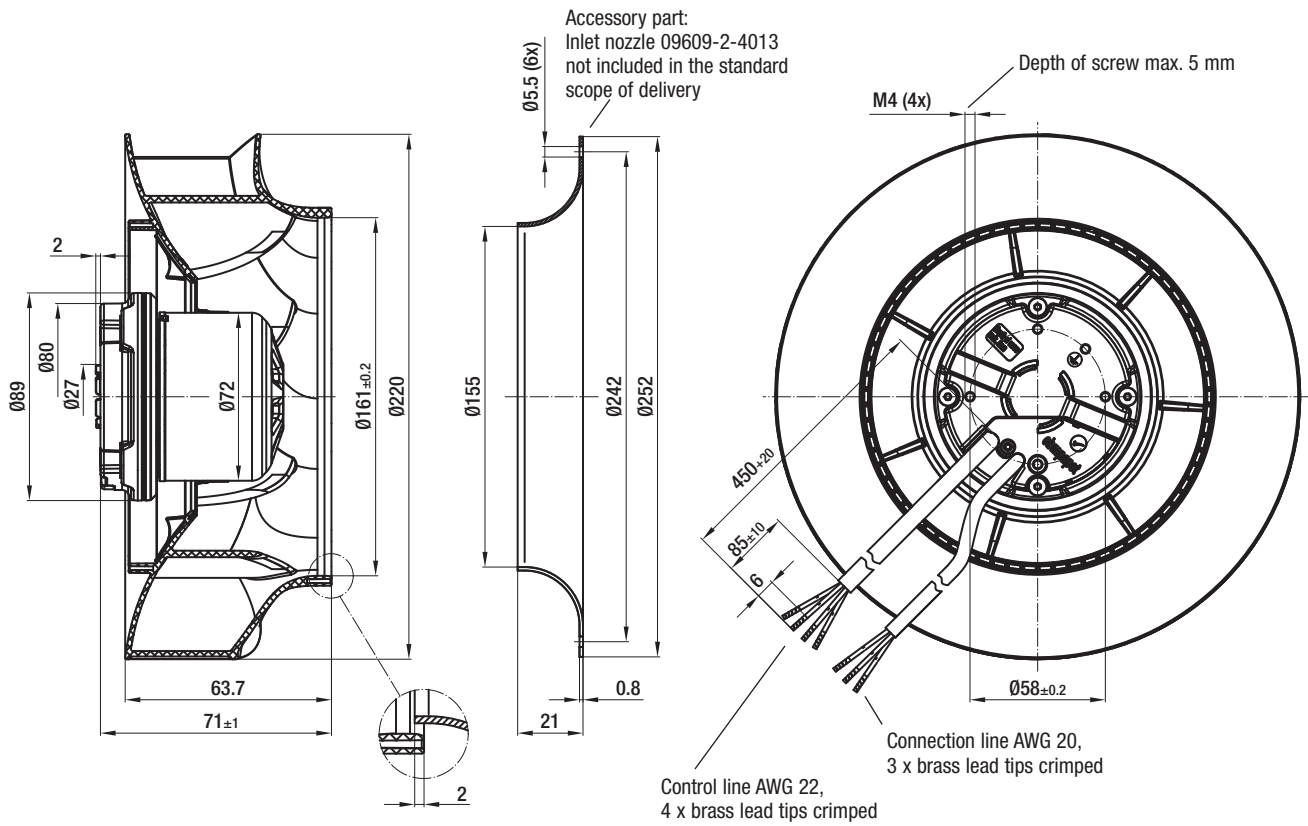


K3G 220-RC05-03

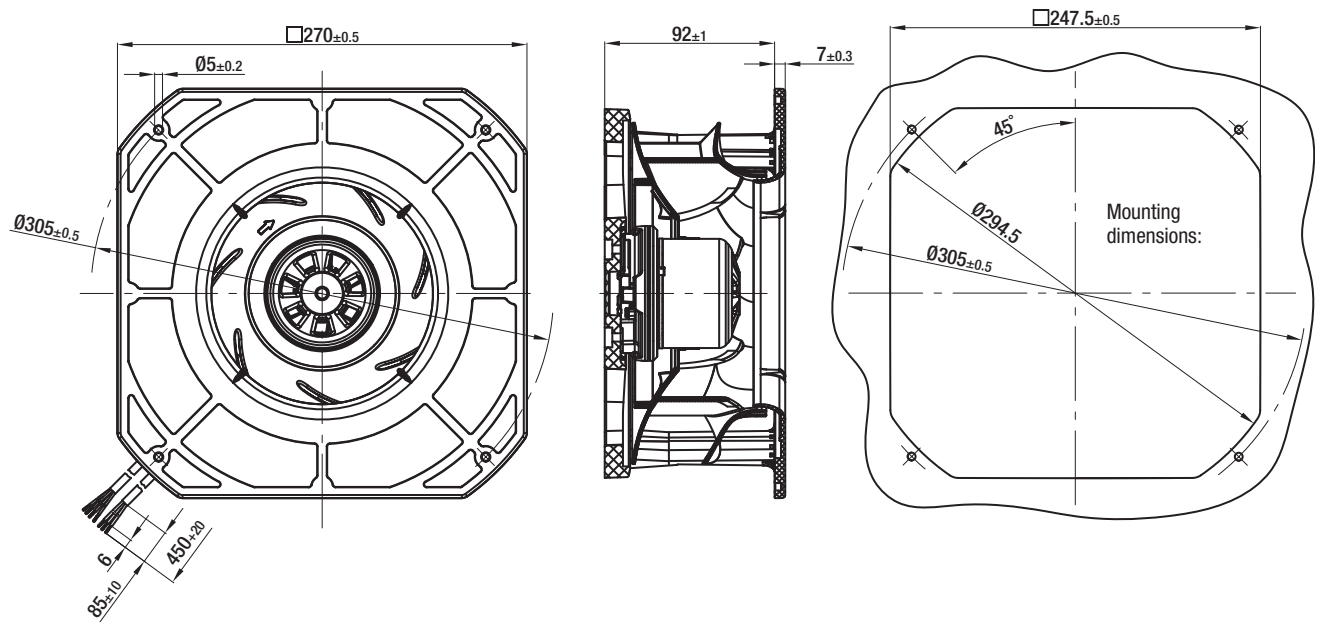


# EC centrifugal fans RadiCal

backward curved, Ø 220, Speed-controlled, 170 W

R3G 220-RD21-03

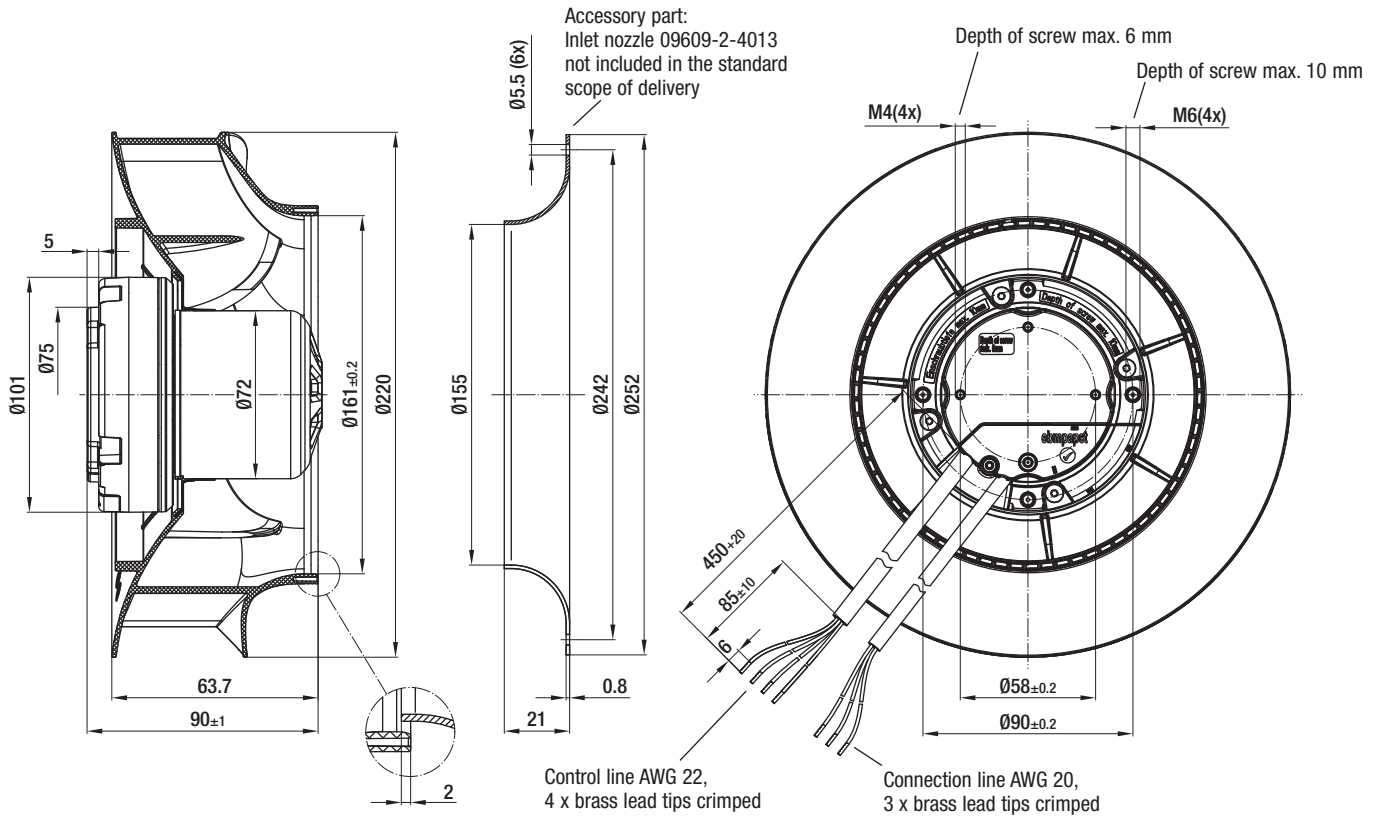


K3G 220-RD21-03

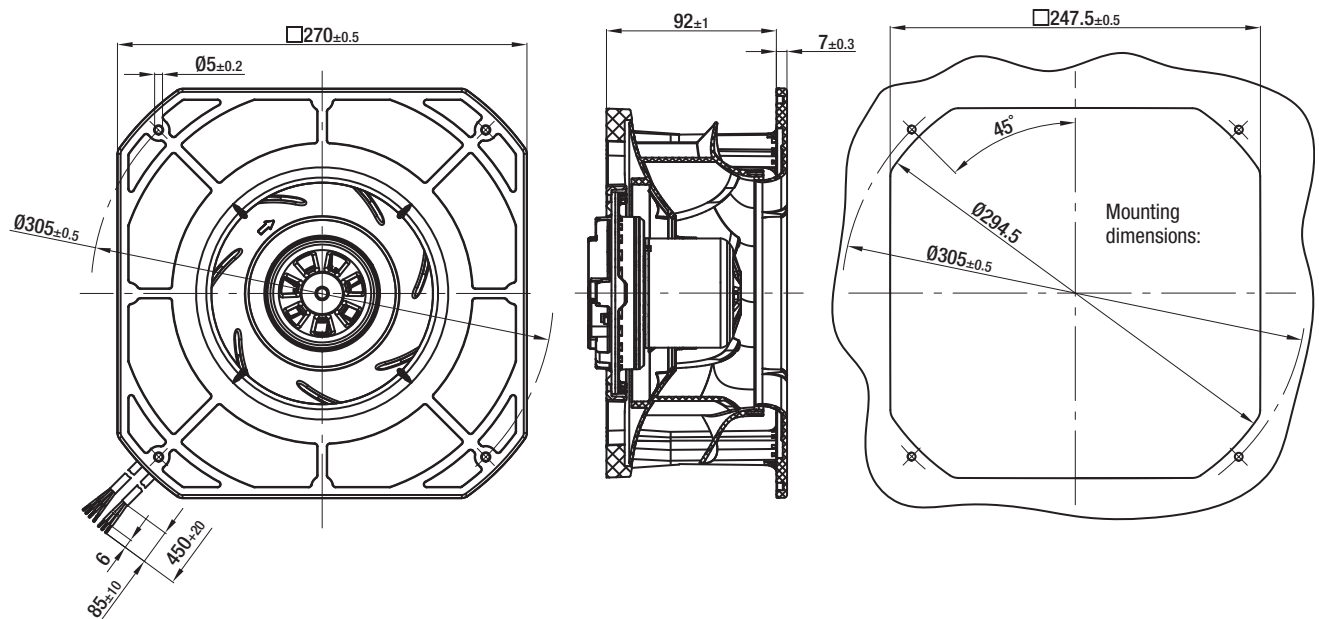

# EC centrifugal fans RadiCal

backward curved, Ø 225

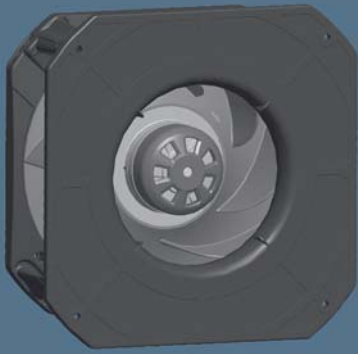


- **Material:** Housing: Plastic PA 6, fibreglass-reinforced  
Impeller: Plastic PA 6, fibreglass-reinforced  
Rotor: Thick layer passivated  
Electronics housing: Die-cast aluminium
- **Number of blades:** 7
- **Direction of rotation:** Clockwise, seen on rotor
- **Type of protection:** IP 54
- **Insulation class:** "B"
- **Mounting position:** Any
- **Condensate discharges:** None, open rotor
- **Mode of operation:** Continuous operation (S1)
- **Bearings:** Maintenance-free ball bearings

Nominal data		Curve	Nominal voltage range	Frequency	Speed/rpm <sup>(1)</sup>	Max. input power <sup>(1)</sup>	Max. current draw <sup>(1)</sup>	Perm. amb. temp.	Electr. connection
Type	Motor	VAC	Hz	rpm	W	A	°C	p. 64/65	
*3G 225	M3G 055-CF	Ⓐ	1~ 200-240	50/60	2200	82	0,70	-25..+60	H3)
*3G 225	M3G 055-DF	Ⓑ	1~ 200-240	50/60	2900	170	1,45	-25..+60	H3)
*3G 225	M3G 055-CF	Ⓒ	1~ 200-240	50/60	2200	82	0,70	-25..+60	H4)
*3G 225	M3G 055-DF	Ⓓ	1~ 200-240	50/60	2900	170	1,45	-25..+60	H4)

subject to alterations

(1) Nominal data in operating point with maximum load and 230 VAC

## Curves (2 Speed stages)

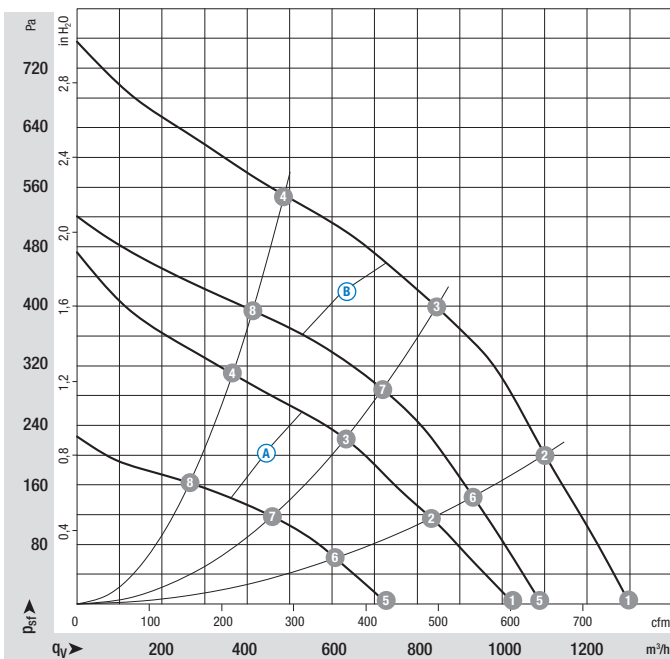

Air performance measured as per: ISO 5801, Installation category A, without protection against accidental contact

Suction-side noise levels: L<sub>WA</sub> as per ISO 13347, L<sub>pA</sub> measured at 1 m distance to fan axis

The acoustic values given are only valid under the measurement conditions listed and may vary depending on the installation situation.

With any deviation to the standard setup, the specific values have to be checked and reviewed once installed or fitted!

For detailed information see page 66 ff.

	n rpm	P <sub>e</sub> W	I A	L <sub>WA</sub> dB(A)
Ⓐ 1	2290	70	0,62	69
Ⓐ 2	2170	77	0,66	65
Ⓐ 3	2200	82	0,70	60
Ⓐ 4	2225	73	0,63	66
Ⓐ 5	1640	27	0,28	61
Ⓐ 6	1585	31	0,31	58
Ⓐ 7	1590	31	0,32	53
Ⓐ 8	1630	28	0,29	58
Ⓑ 1	3030	151	1,25	78
Ⓑ 2	2910	168	1,40	74
Ⓑ 3	2900	170	1,45	68
Ⓑ 4	2970	157	1,35	73
Ⓑ 5	2550	91	0,83	74
Ⓑ 6	2495	104	0,94	70
Ⓑ 7	2490	105	0,93	65
Ⓑ 8	2525	97	0,89	69



- **Technical features** (A) (B) : • Speed adjustment input (230V) • Electronics / motor overtemperature protection • Motor current limitation • Locked rotor protection • Soft start
- **Technical features** (C) (D) : • Control input 0-10 VDC / PWM • Output 10 VDC max. 1,1 mA • Tach output • Electronics / motor overtemperature protection • Motor current limitation • Locked rotor protection • Soft start
- **EMC:** Interference emission acc. to EN 61000-6-3  
Interference immunity acc. to EN 61000-6-2  
Harmonics acc. to EN 61000-3-2/3
- **Leakage current:** < 3,5 mA acc. to EN 60950-1
- **Cable exit:** Variable
- **Protection class:** I
- **Product conforming to standard:** EN 60335-1
- **Approvals:** VDE, UL, CSA, CCC, GOST are applied for




Mass of centrifugal fan



Mass of centrifugal module with support basket

Centrifugal fan	kg	Centrifugal module	kg
R3G 225-RD05 -01	1,40	K3G 225-RD05 -01	2,00
R3G 225-RE07 -01	1,60	K3G 225-RE07 -01	2,20
R3G 225-RD05 -03	1,40	K3G 225-RD05 -03	2,00
R3G 225-RE07 -03	1,60	K3G 225-RE07 -03	2,20

### Curves (Speed-controlled)

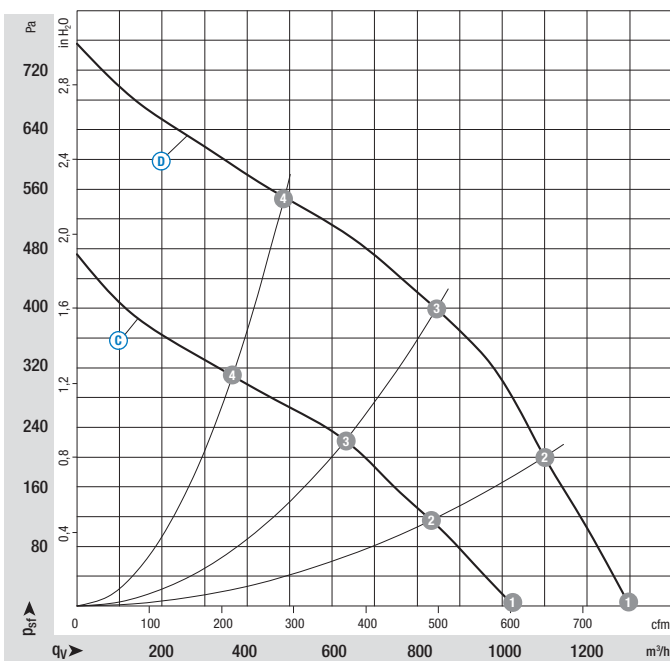

Air performance measured as per: ISO 5801, Installation category A, without protection against accidental contact

Suction-side noise levels:  $L_{wA}$  as per ISO 13347,  $L_pA$  measured at 1 m distance to fan axis

The acoustic values given are only valid under the measurement conditions listed and may vary depending on the installation situation.

With any deviation to the standard setup, the specific values have to be checked and reviewed once installed or fitted!


For detailed information see page 66 ff.

	n rpm	$P_e$ W	I A	$L_{wA}$ dB(A)
(C) 1	2290	70	0,62	69
(C) 2	2170	77	0,66	65
(C) 3	2200	82	0,70	60
(C) 4	2225	73	0,63	66
(D) 1	3030	151	1,25	78
(D) 2	2910	168	1,40	74
(D) 3	2900	170	1,45	68
(D) 4	2970	157	1,35	73


# EC centrifugal fans RadiCal

backward curved, Ø 225, 2 Speed stages, 85 W

R3G 225-RD05-01

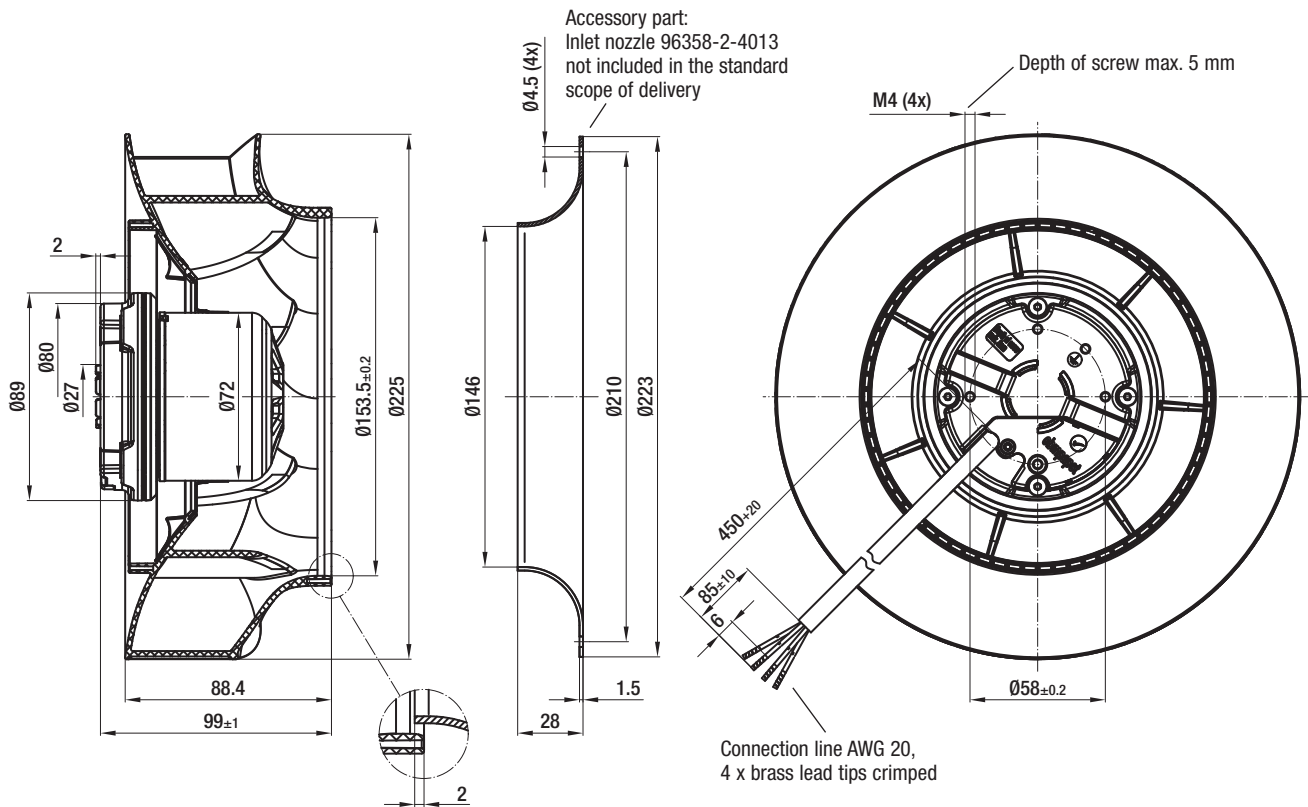


K3G 225-RD05-01

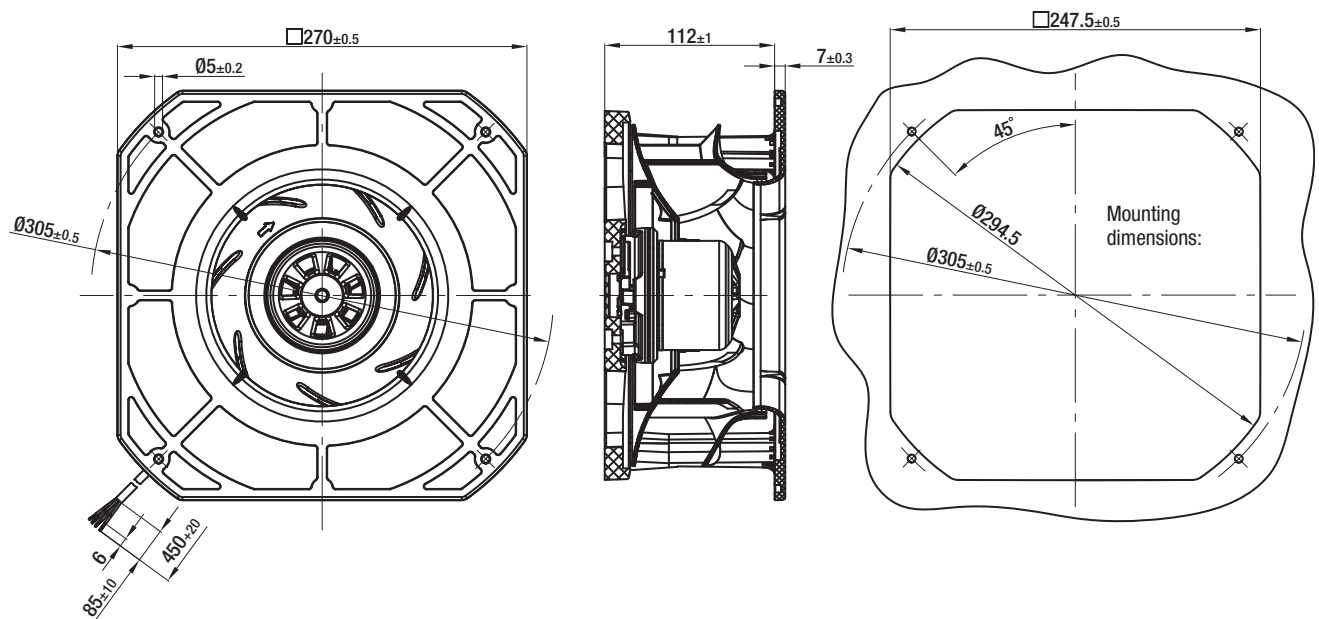


# EC centrifugal fans RadiCal

backward curved, Ø 225, 2 Speed stages, 170 W

R3G 225-RE07-01

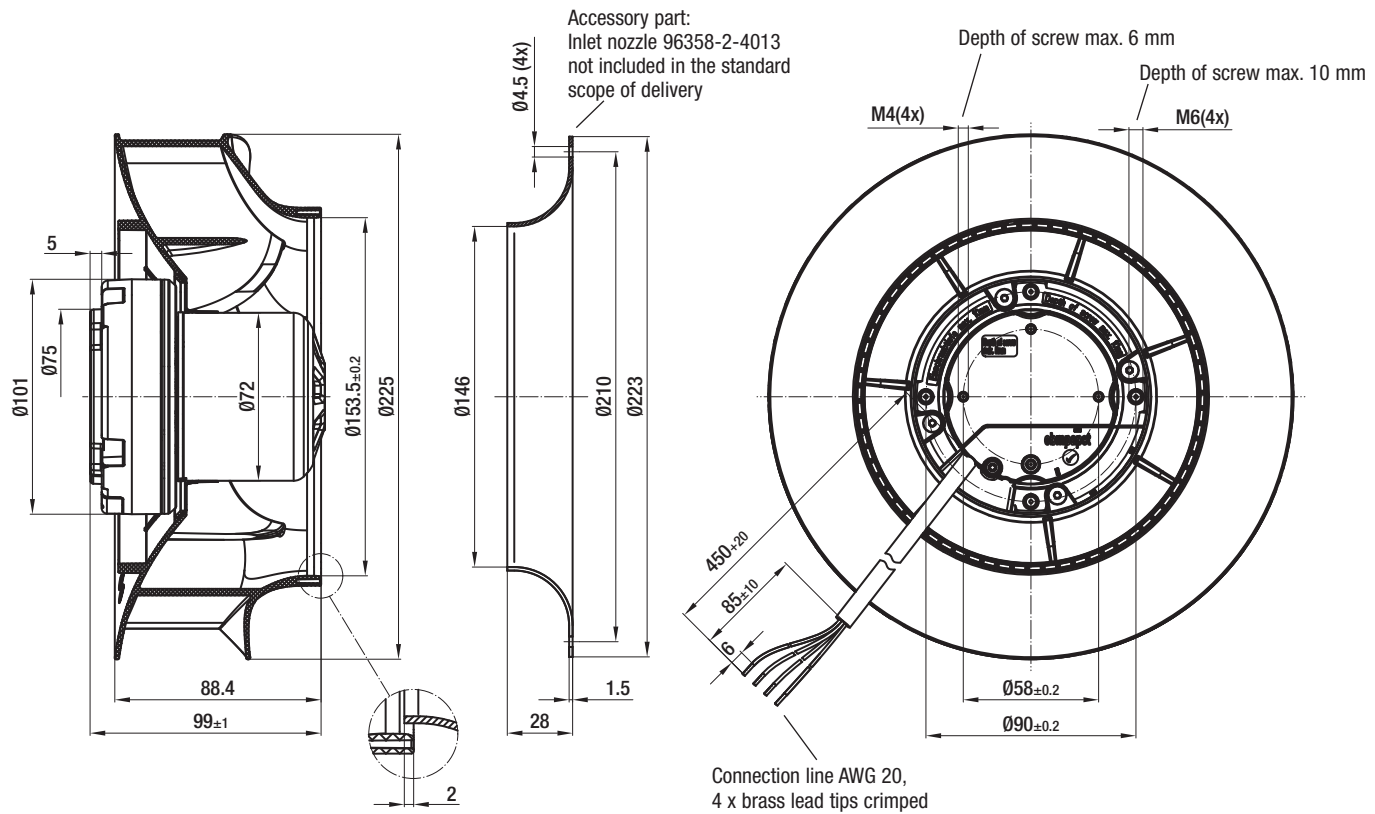


K3G 225-RE07-01

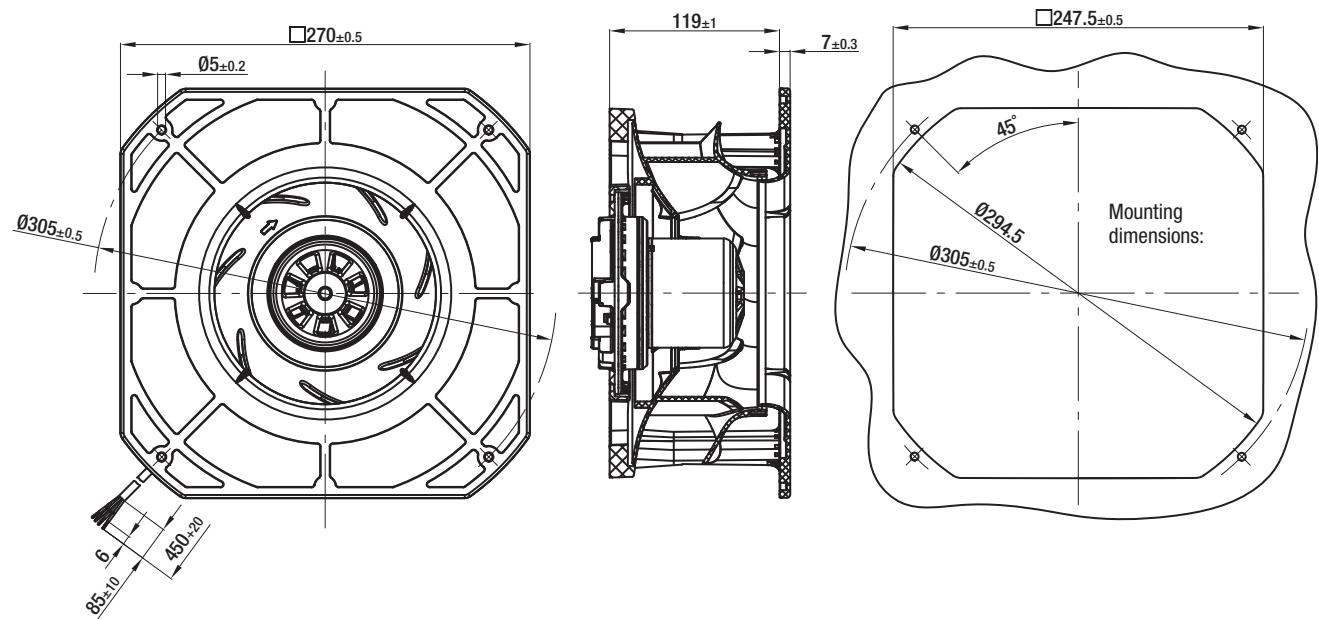


# EC centrifugal fans RadiCal

backward curved, Ø 225, Speed-controlled, 85 W

R3G 225-RD05-03

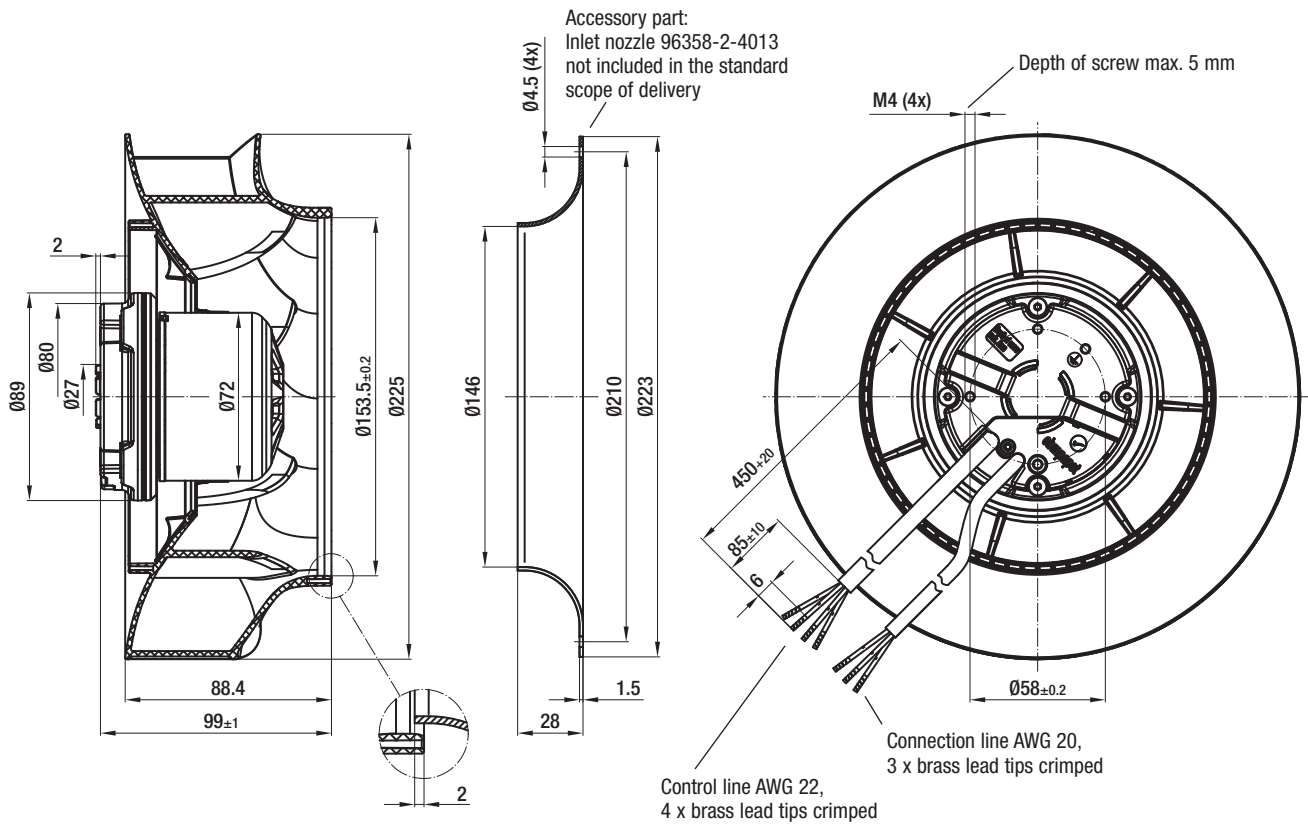


K3G 225-RD05-03

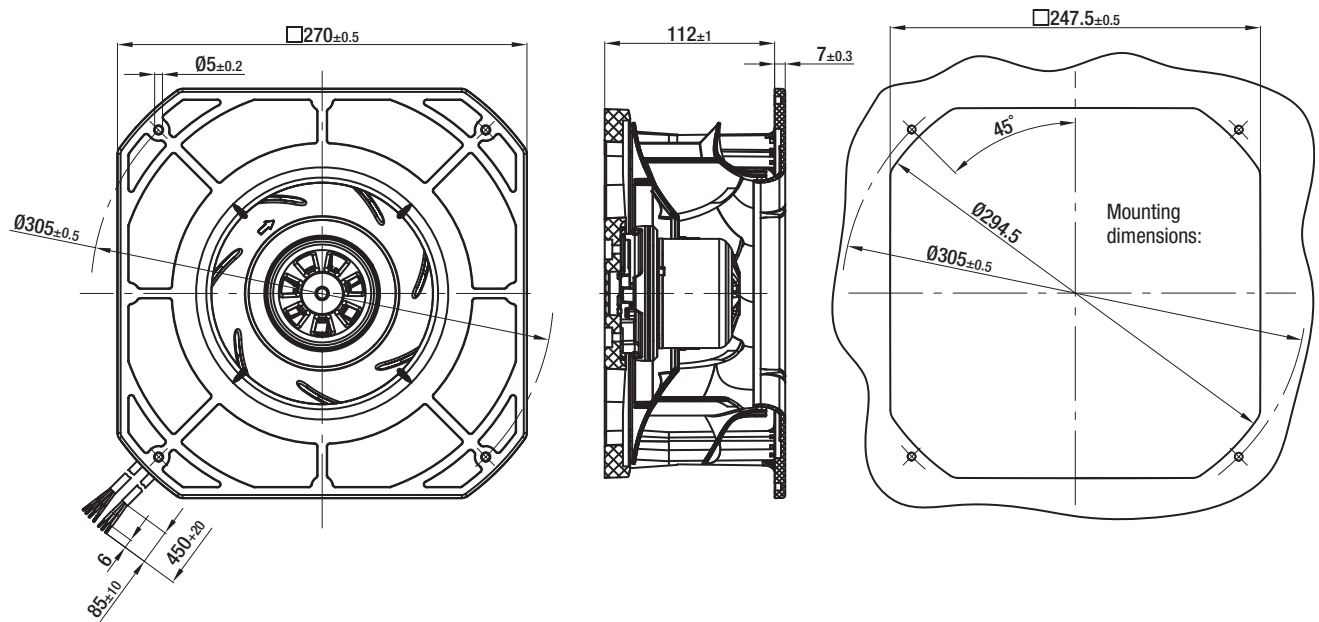


# EC centrifugal fans RadiCal

backward curved, Ø 225, Speed-controlled, 170 W

R3G 225-RE07-03

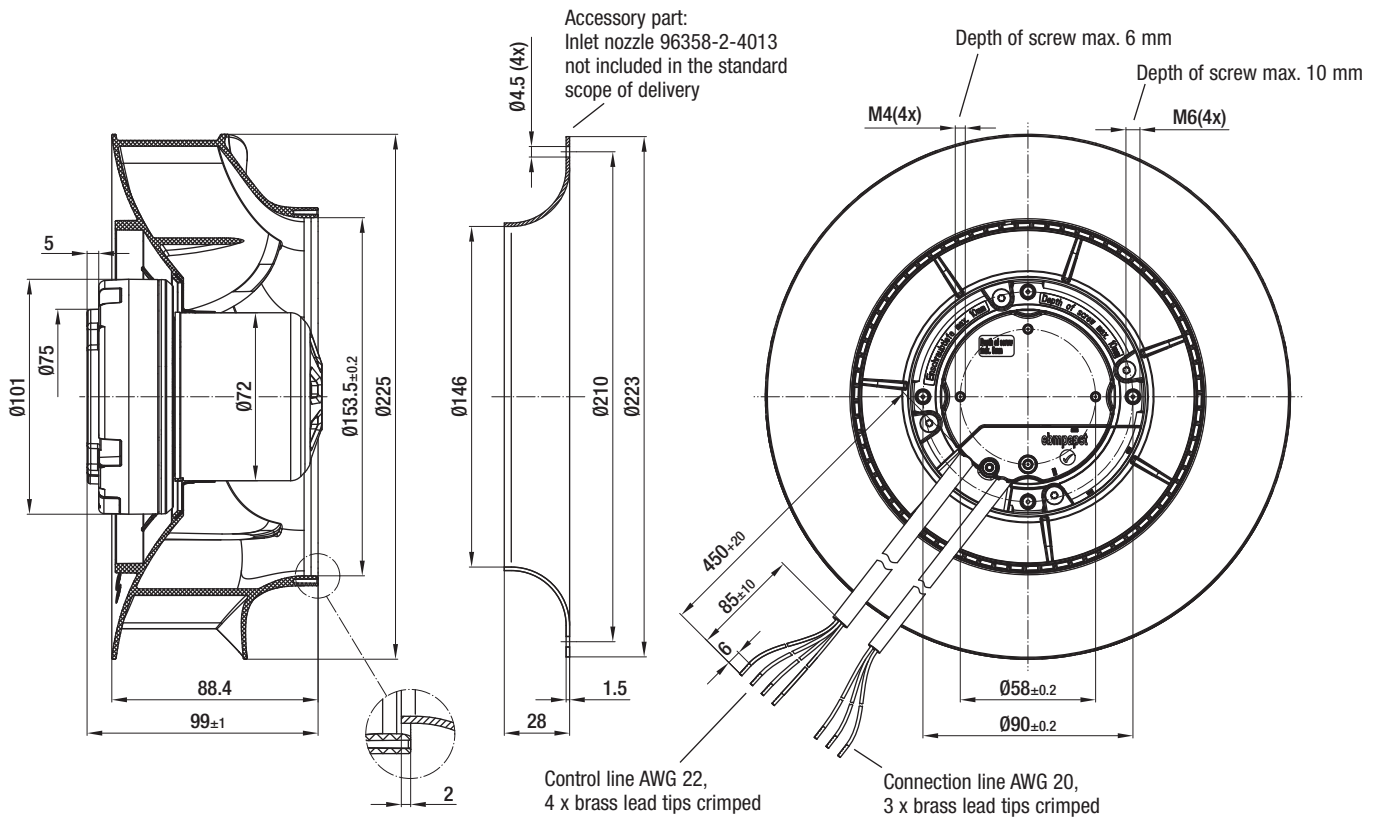


K3G 225-RE07-03

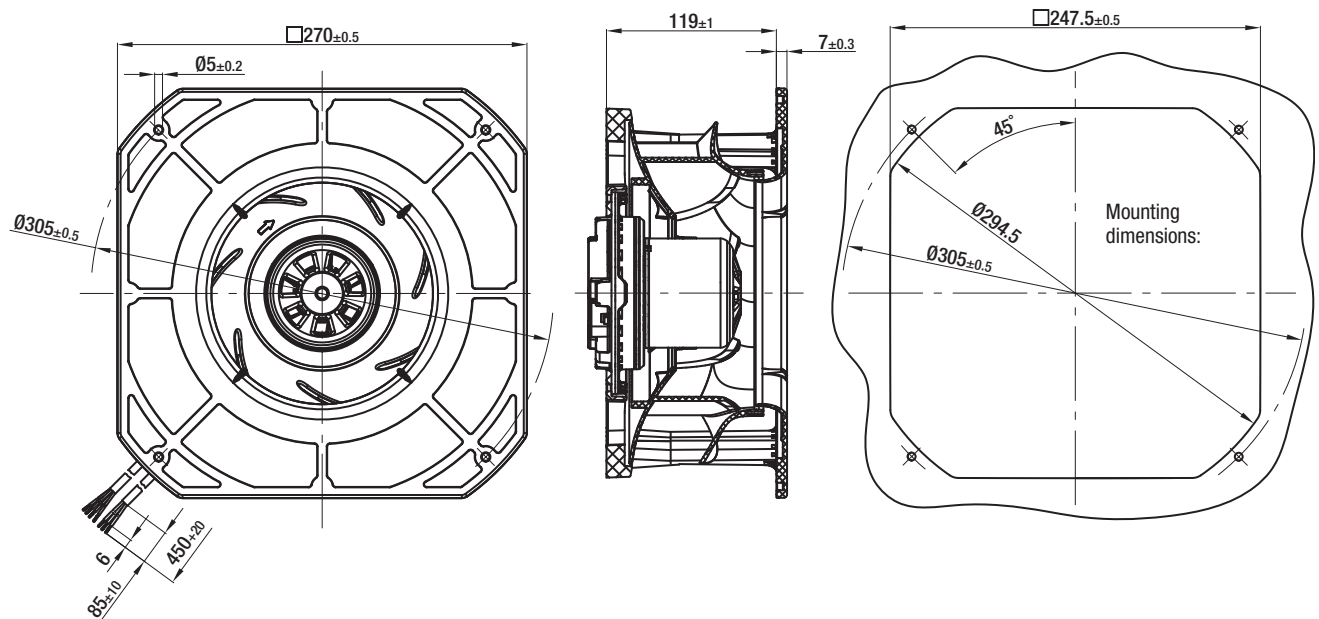

# EC centrifugal fans RadiCal

backward curved, Ø 250

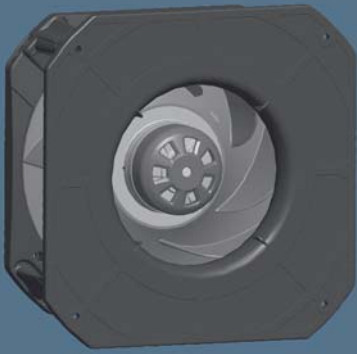


- **Material:** Housing: Plastic PA 6, fibreglass-reinforced  
Impeller: Plastic PA 6, fibreglass-reinforced  
Rotor: Thick layer passivated  
Electronics housing: Die-cast aluminium
- **Number of blades:** 7
- **Direction of rotation:** Clockwise, seen on rotor
- **Type of protection:** IP 54
- **Insulation class:** "B"
- **Mounting position:** Any
- **Condensate discharges:** None, open rotor
- **Mode of operation:** Continuous operation (S1)
- **Bearings:** Maintenance-free ball bearings

Nominal data		Curve	Nominal voltage range	Frequency	Speed/rpm <sup>(1)</sup>	Max. input power <sup>(1)</sup>	Max. current draw <sup>(1)</sup>	Perm. amb. temp.	Electr. connection
Type	Motor	VAC	Hz	rpm	W	A	°C	p. 64/65	
*3G 250	M3G 055-CF	Ⓐ	1~ 200-240	50/60	1950	85	0,69	-25..+60	H3)
*3G 250	M3G 055-DF	Ⓑ	1~ 200-240	50/60	2550	170	1,35	-25..+60	H3)
*3G 250	M3G 055-CF	Ⓒ	1~ 200-240	50/60	1950	85	0,69	-25..+60	H4)
*3G 250	M3G 055-DF	Ⓓ	1~ 200-240	50/60	2550	170	1,35	-25..+60	H4)

subject to alterations

(1) Nominal data in operating point with maximum load and 230 VAC

## Curves (2 Speed stages)

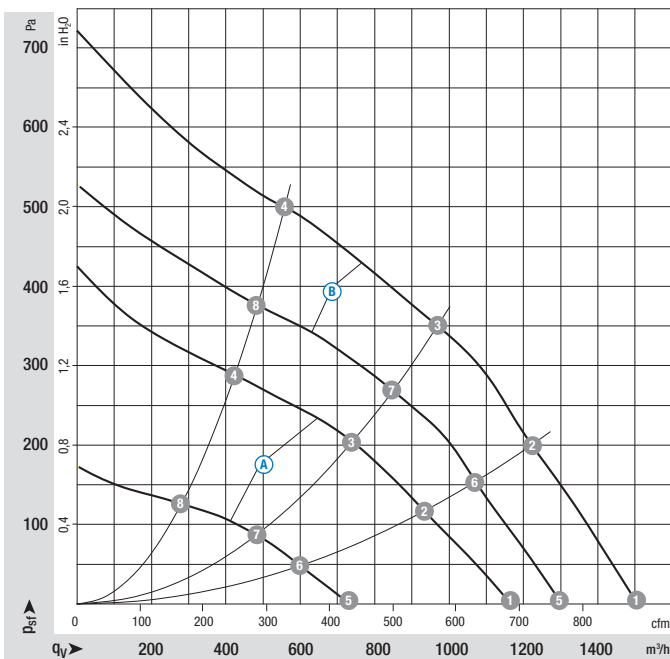

Air performance measured as per: ISO 5801, Installation category A, without protection against accidental contact

Suction-side noise levels: L<sub>WA</sub> as per ISO 13347, L<sub>pA</sub> measured at 1 m distance to fan axis

The acoustic values given are only valid under the measurement conditions listed and may vary depending on the installation situation.

With any deviation to the standard setup, the specific values have to be checked and reviewed once installed or fitted!

For detailed information see page 66 ff.

	n rpm	P <sub>e</sub> W	I A	L <sub>WA</sub> dB(A)
Ⓐ 1	2050	70	0,60	69
Ⓐ 2	1965	82	0,68	66
Ⓐ 3	1950	85	0,69	61
Ⓐ 4	1990	78	0,65	66
Ⓐ 5	1325	22	0,23	60
Ⓐ 6	1290	26	0,26	57
Ⓐ 7	1290	26	0,28	53
Ⓐ 8	1330	26	0,26	57
Ⓑ 1	2680	146	1,17	76
Ⓑ 2	2565	170	1,35	71
Ⓑ 3	2550	170	1,35	67
Ⓑ 4	2610	160	1,28	73
Ⓑ 5	2330	96	0,80	72
Ⓑ 6	2265	112	0,92	67
Ⓑ 7	2250	116	0,96	64
Ⓑ 8	2285	109	0,93	68

- **Technical features** (A) (B) : • Speed adjustment input (230V) • Electronics / motor overtemperature protection • Motor current limitation • Locked rotor protection • Soft start
- **Technical features** (C) (D) : • Control input 0-10 VDC / PWM • Output 10 VDC max. 1,1 mA • Tach output • Electronics / motor overtemperature protection • Motor current limitation • Locked rotor protection • Soft start
- **EMC:** Interference emission acc. to EN 61000-6-3  
Interference immunity acc. to EN 61000-6-2  
Harmonics acc. to EN 61000-3-2/3
- **Leakage current:** < 3,5 mA acc. to EN 60950-1
- **Cable exit:** Variable
- **Protection class:** I
- **Product conforming to standard:** EN 60335-1
- **Approvals:** VDE, UL, CSA, CCC, GOST are applied for




Mass of centrifugal fan



Mass of centrifugal module with support basket

Centrifugal fan	kg	Centrifugal module	kg
R3G 250-RD43 -01	1,50	K3G 250-RD43 -01	2,28
R3G 250-RE09 -05	1,91	K3G 250-RE09 -05	2,69
R3G 250-RD43 -03	1,50	K3G 250-RD43 -03	2,28
R3G 250-RE09 -07	1,91	K3G 250-RE09 -07	2,69

### Curves (Speed-controlled)

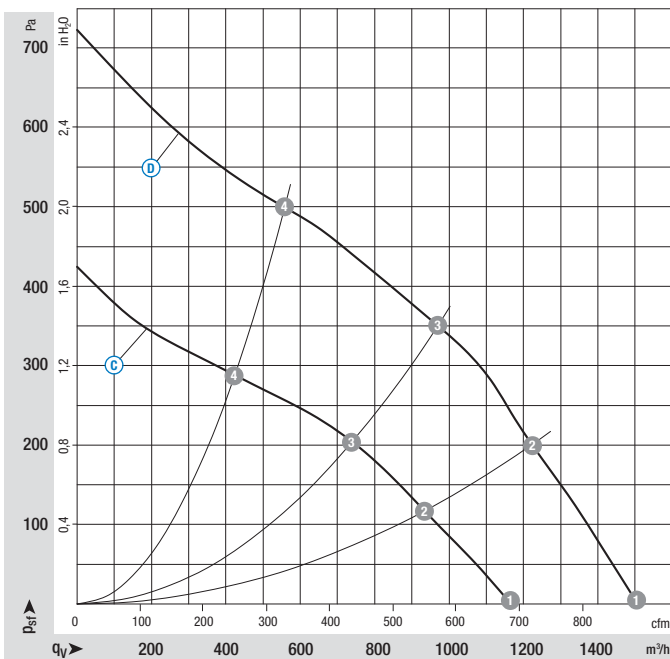

Air performance measured as per: ISO 5801, Installation category A, without protection against accidental contact

Suction-side noise levels:  $L_{wA}$  as per ISO 13347,  $L_pA$  measured at 1 m distance to fan axis

The acoustic values given are only valid under the measurement conditions listed and may vary depending on the installation situation.

With any deviation to the standard setup, the specific values have to be checked and reviewed once installed or fitted!


For detailed information see page 66 ff.

	n rpm	$P_e$ W	I A	$L_{wA}$ dB(A)
(C) 1	2050	70	0,60	69
(C) 2	1965	82	0,68	66
(C) 3	1950	85	0,69	61
(C) 4	1990	78	0,65	66
(D) 1	2680	146	1,17	76
(D) 2	2565	170	1,35	71
(D) 3	2550	170	1,35	67
(D) 4	2610	160	1,28	73


# EC centrifugal fans RadiCal

backward curved, Ø 250, 2 Speed stages, 85 W

R3G 250-RD43-01

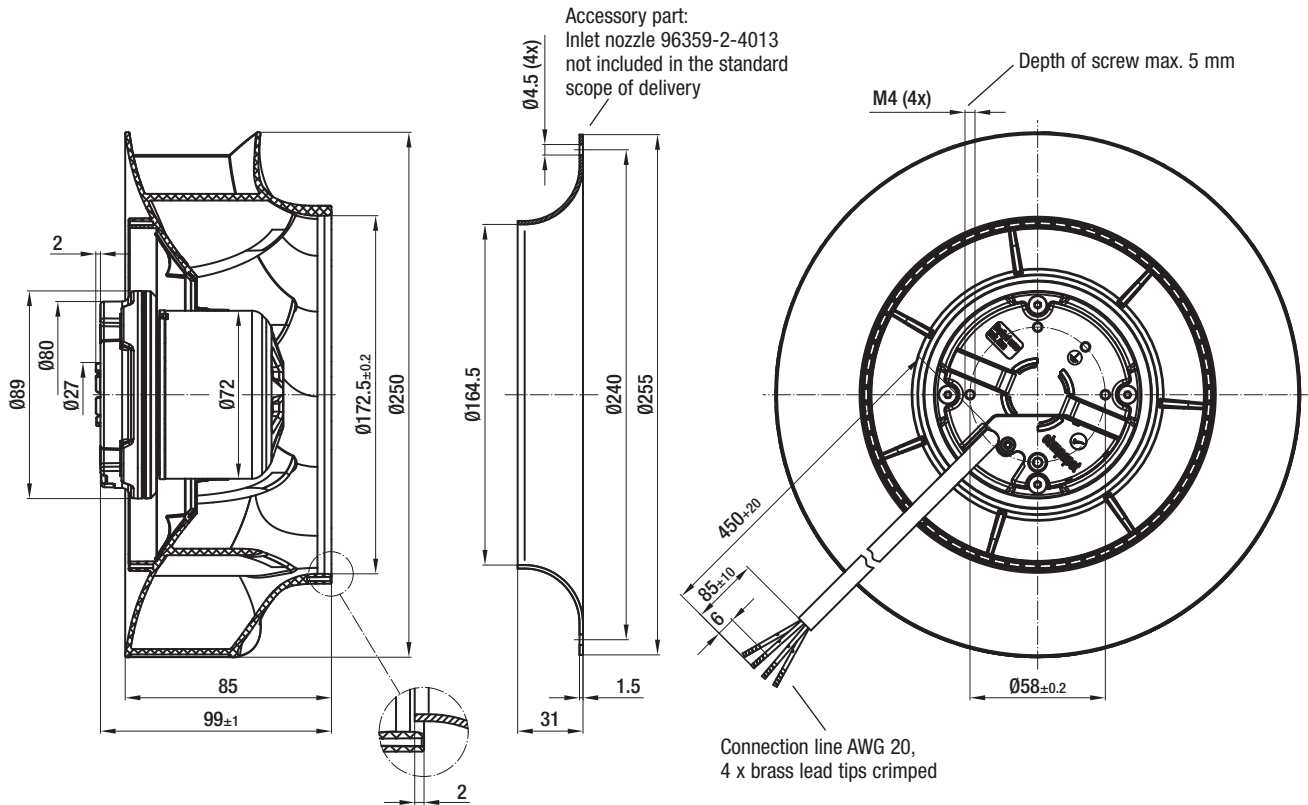

K3G 250-RD43-01

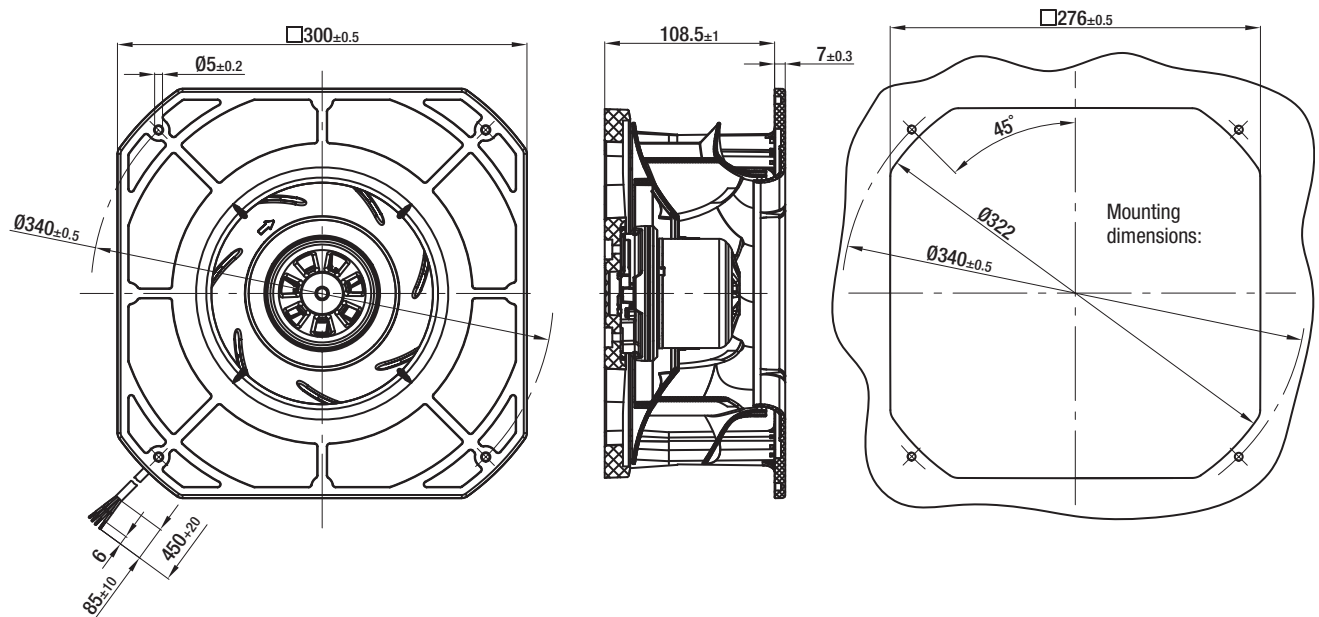





# EC centrifugal fans RadiCal

backward curved, Ø 250, 2 Speed stages, 170 W

R3G 250-RE09-05

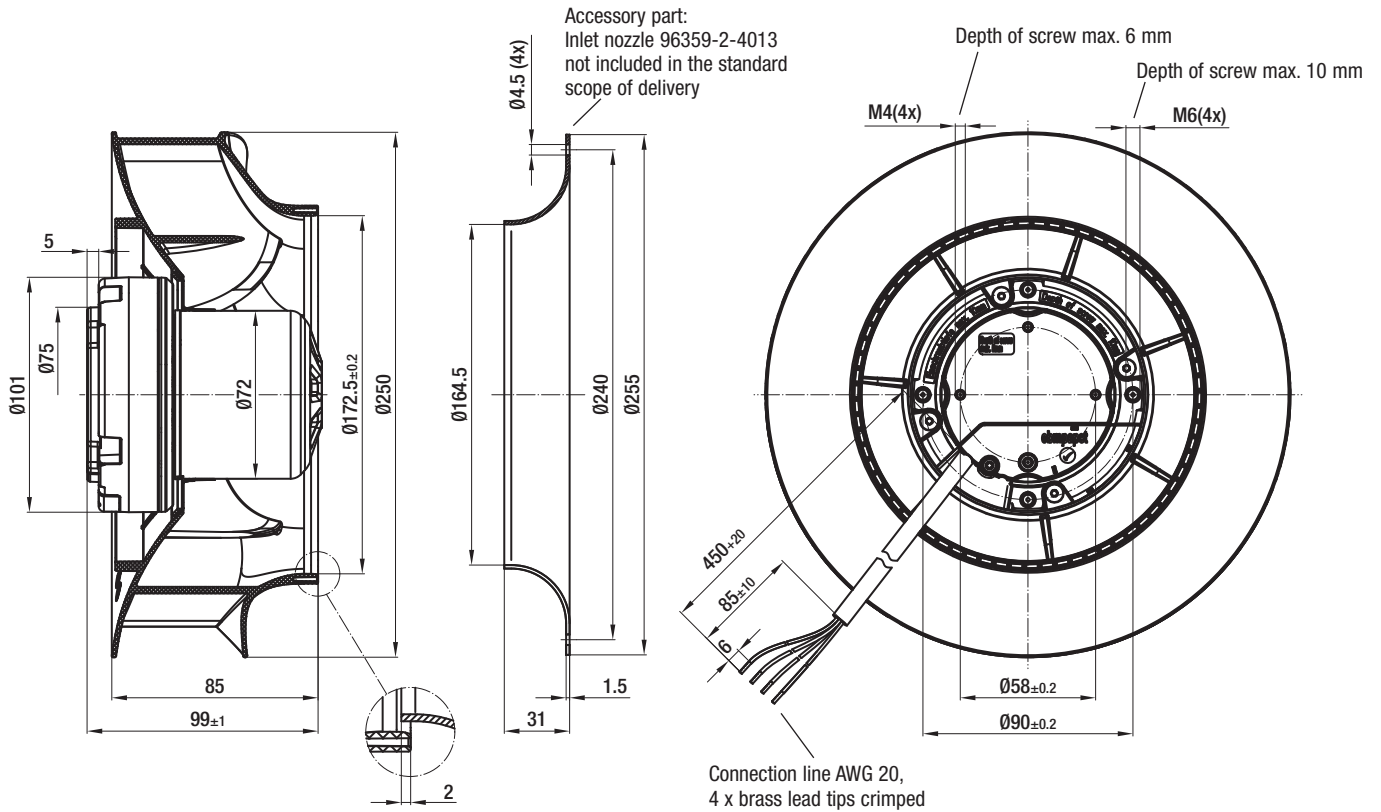


K3G 250-RE09-05

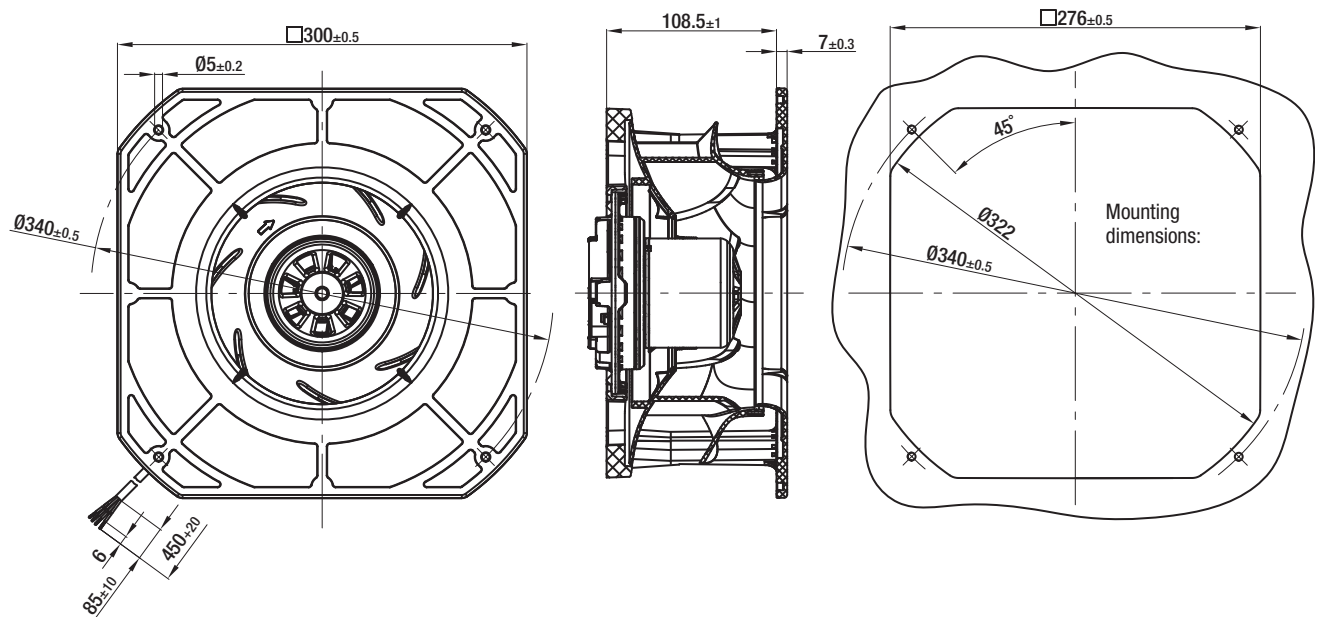


# EC centrifugal fans RadiCal

backward curved, Ø 250, Speed-controlled, 85 W

R3G 250-RD43-03

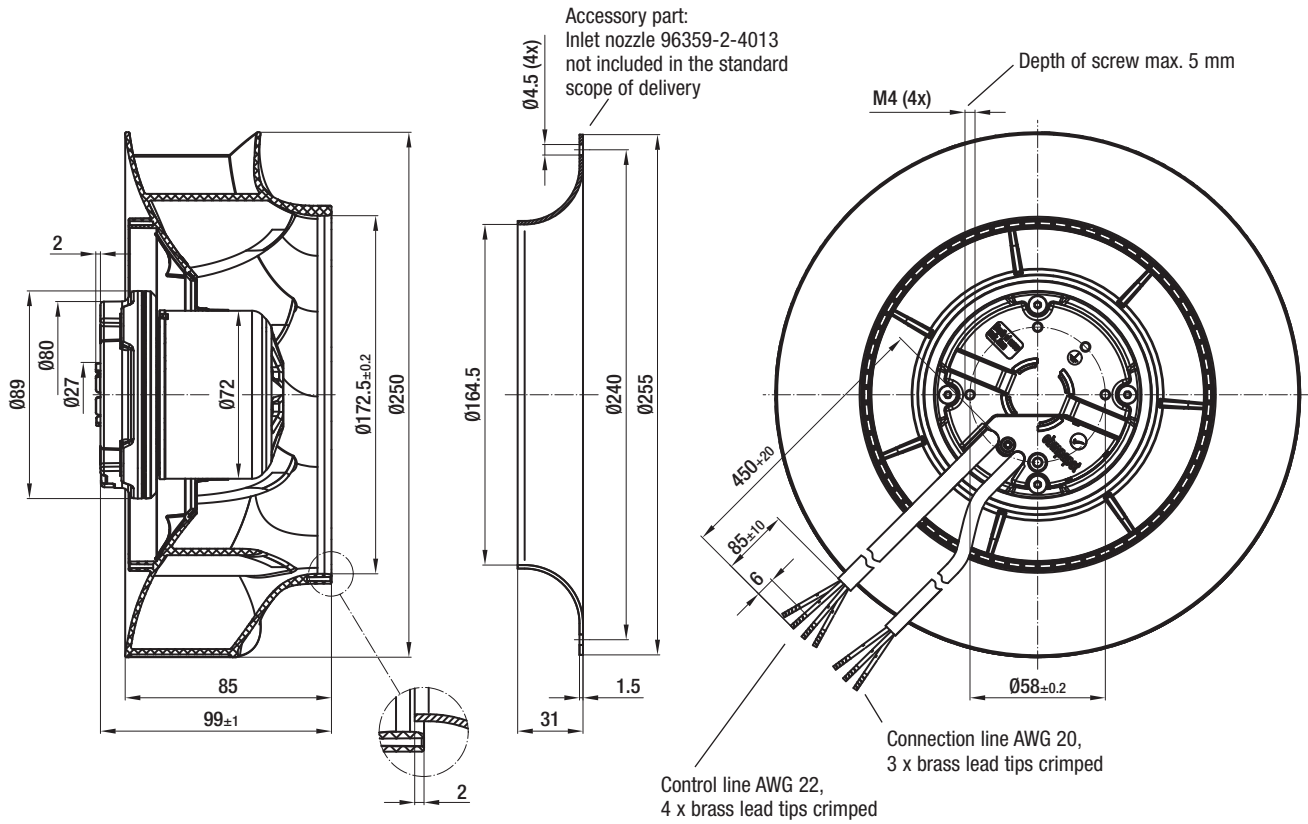


K3G 250-RD43-03

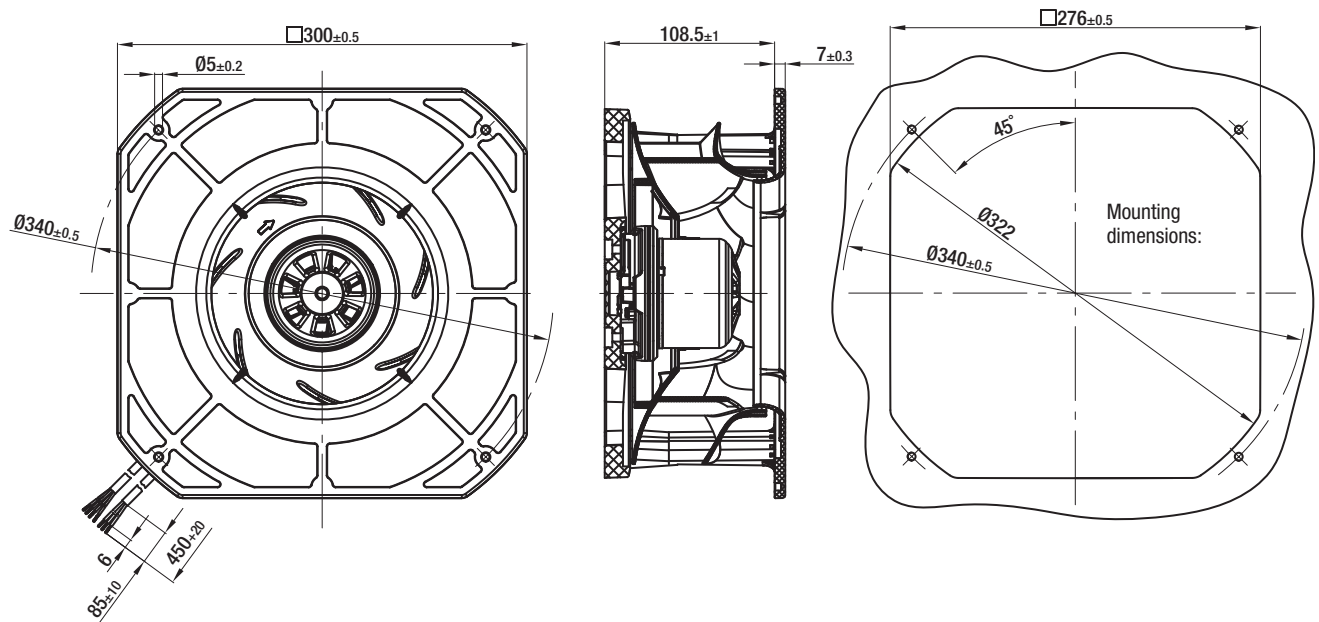


# EC centrifugal fans RadiCal

backward curved, Ø 250, Speed-controlled, 170 W

R3G 250-RE09-07

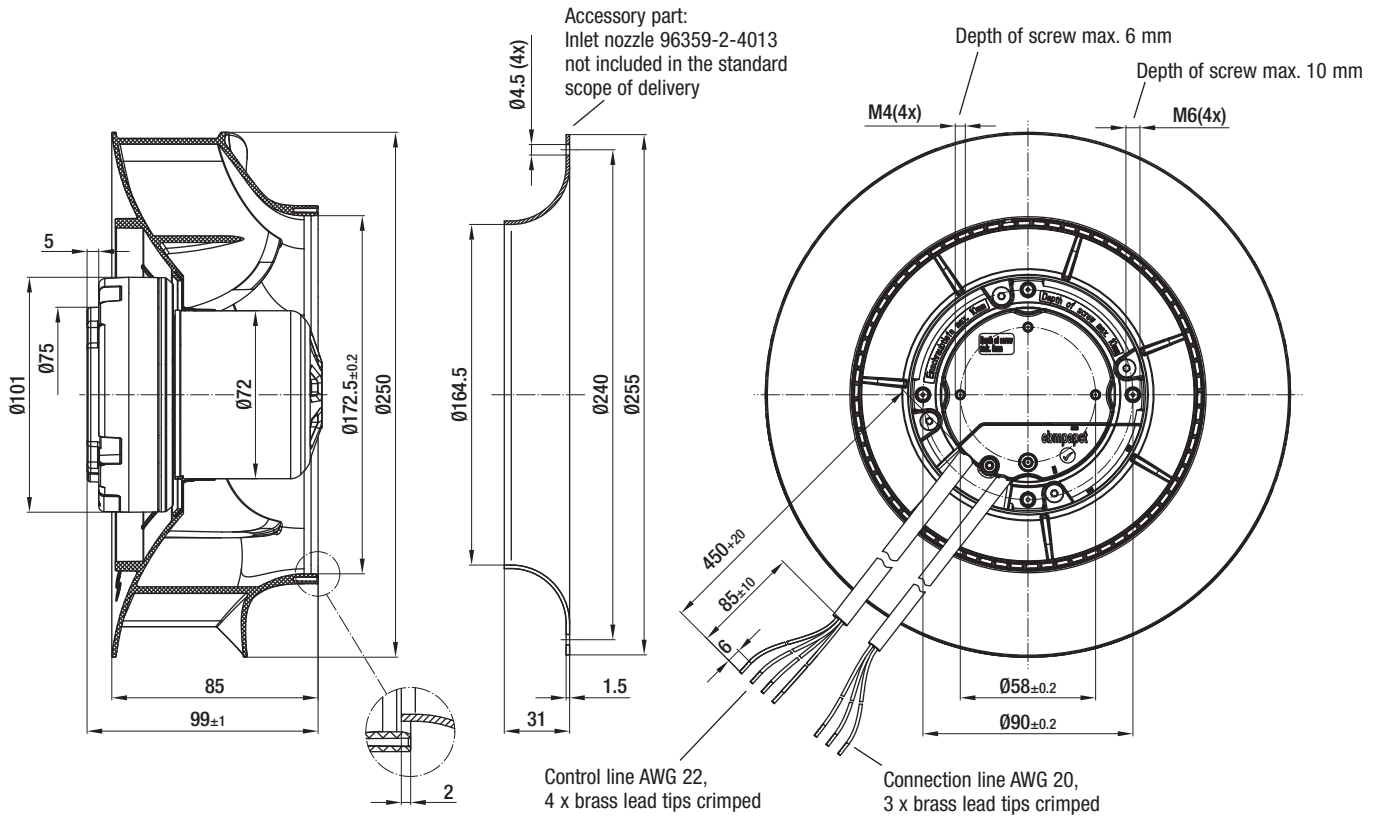

K3G 250-RE09-07

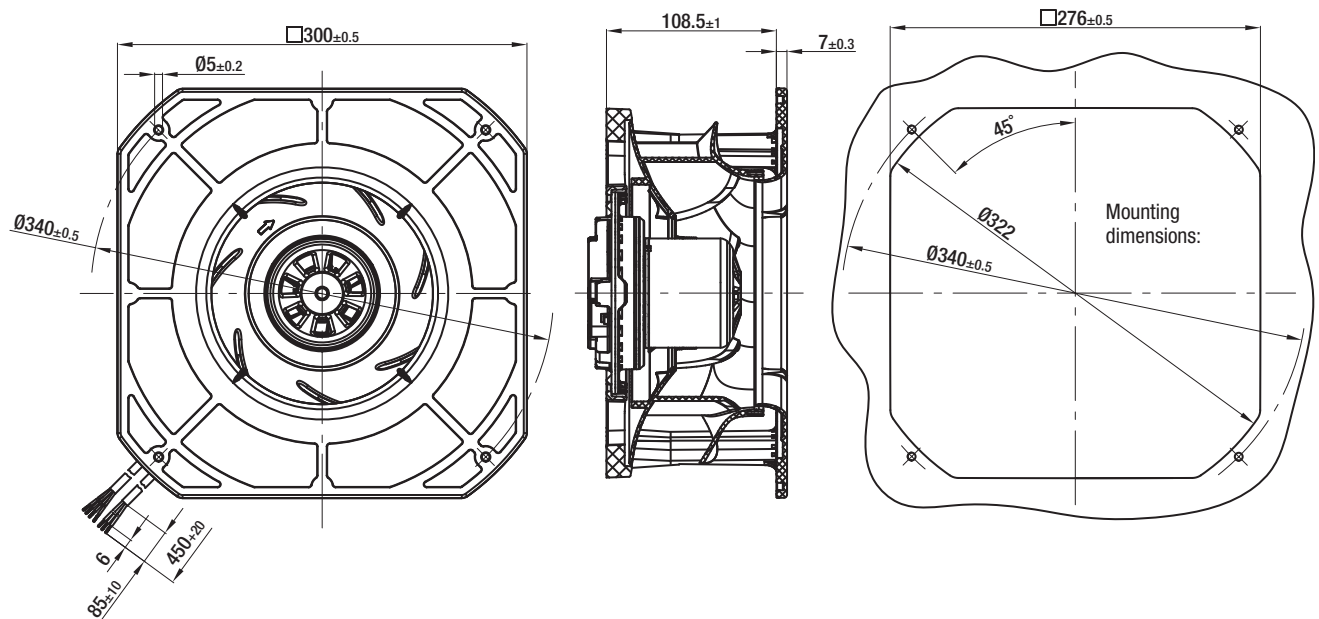




# AC centrifugal fans RadiCal


AC centrifugal fans RadiCal Ø 133-250

38

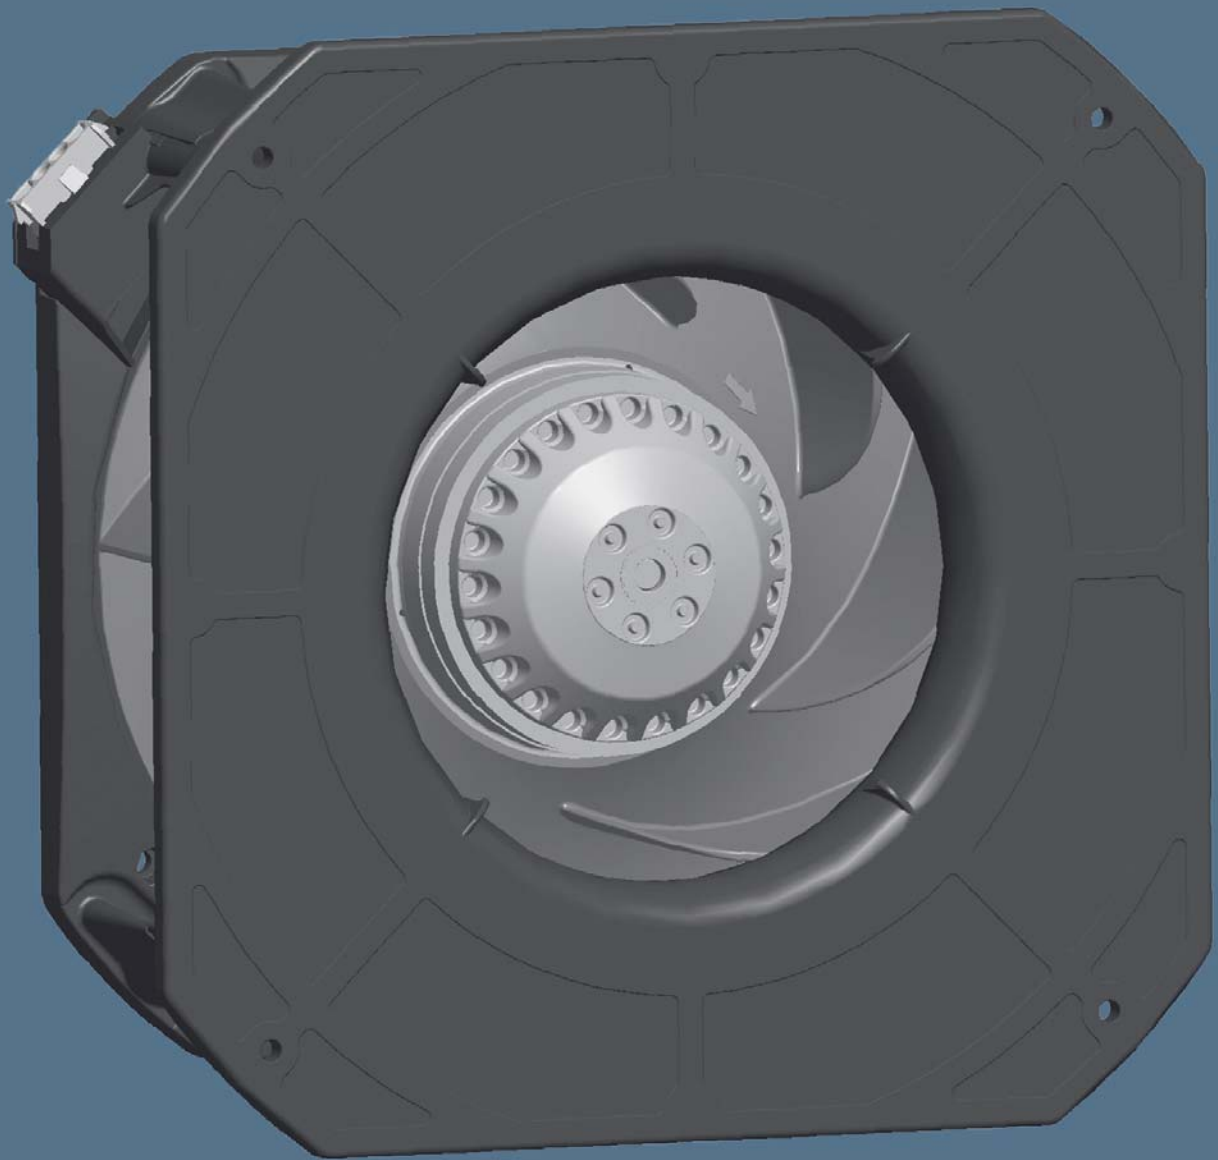

# AC centrifugal fans RadiCal

backward curved, Ø 133




- **Material:** Housing: Plastic PA 6, fibreglass-reinforced  
Impeller: Plastic PA 6, fibreglass-reinforced  
Rotor: Coated in black
- **Number of blades:** 7
- **Direction of rotation:** Clockwise, seen on rotor
- **Type of protection:** IP 42, depending on installation and position in acc. to EN 60034-5
- **Insulation class:** "B"
- **Mounting position:** Any
- **Condensate discharges:** Rotor-side
- **Mode of operation:** Continuous operation (S1)
- **Bearings:** Maintenance-free ball bearings

Nominal data		Curve	Nominal voltage	Frequency	Speed/rpm	Input power	Current draw	Capacitor	Perm. amb. temp.	Electr. connection
Type	Motor	VAC	Hz	rpm	W	A	µF/VDB	°C	p. 64	
*2E 133	M2E 042-CA	Ⓐ 1~ 230	50	2750	25	0,11	1,5 / 400	-25..+45	A1)	
		Ⓑ 1~ 230	60	3200	25	0,13	1,5 / 400	-25..+60		

subject to alterations

## Curves

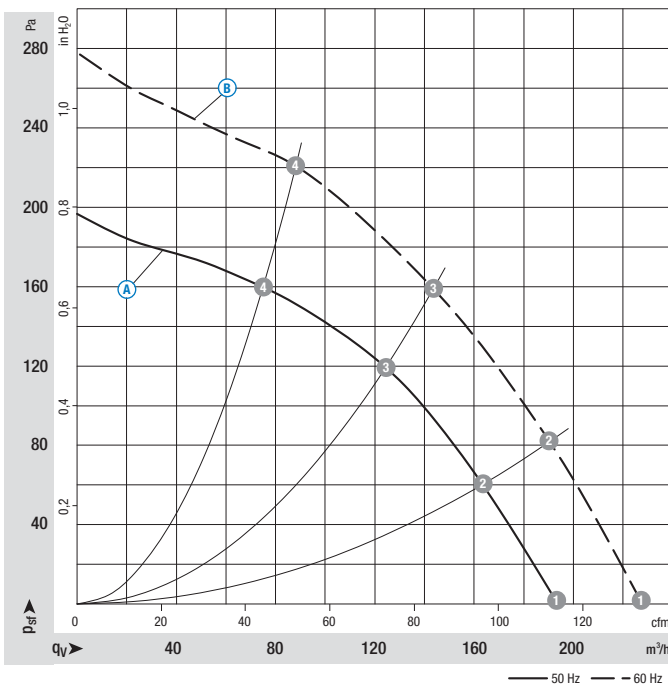

Air performance measured as per: ISO 5801, Installation category A, without protection against accidental contact

Suction-side noise levels: L<sub>wA</sub> as per ISO 13347, L<sub>pA</sub> measured at 1 m distance to fan axis

The acoustic values given are only valid under the measurement conditions listed and may vary depending on the installation situation.

With any deviation to the standard setup, the specific values have to be checked and reviewed once installed or fitted!

For detailed information see page 66 ff.

	n rpm	P <sub>e</sub> W	I A	L <sub>wA</sub> dB(A)
Ⓐ 1	2750	25	0,11	58
Ⓐ 2	2730	25	0,11	56
Ⓐ 3	2710	25	0,11	53
Ⓐ 4	2730	24	0,11	57
Ⓑ 1	3200	25	0,13	62
Ⓑ 2	3170	26	0,13	59
Ⓑ 3	3125	26	0,14	57
Ⓑ 4	3185	25	0,13	60

- **Motor protection:** TOP wired internally
- **Leakage current:** < 0,75 mA
- **Cable exit:** Variable
- **Protection class:** I
- **Product conforming to standards:** EN 60335-1, CE



Mass of centrifugal fan




Mass of centrifugal module with support basket

Centrifugal fan	kg	Centrifugal module	kg
R2E 133-RA03 -01	0,6	K2E 133-RA03 -01	0,8


# AC centrifugal fans RadiCal

backward curved, Ø 133

R2E 133-RA03-01

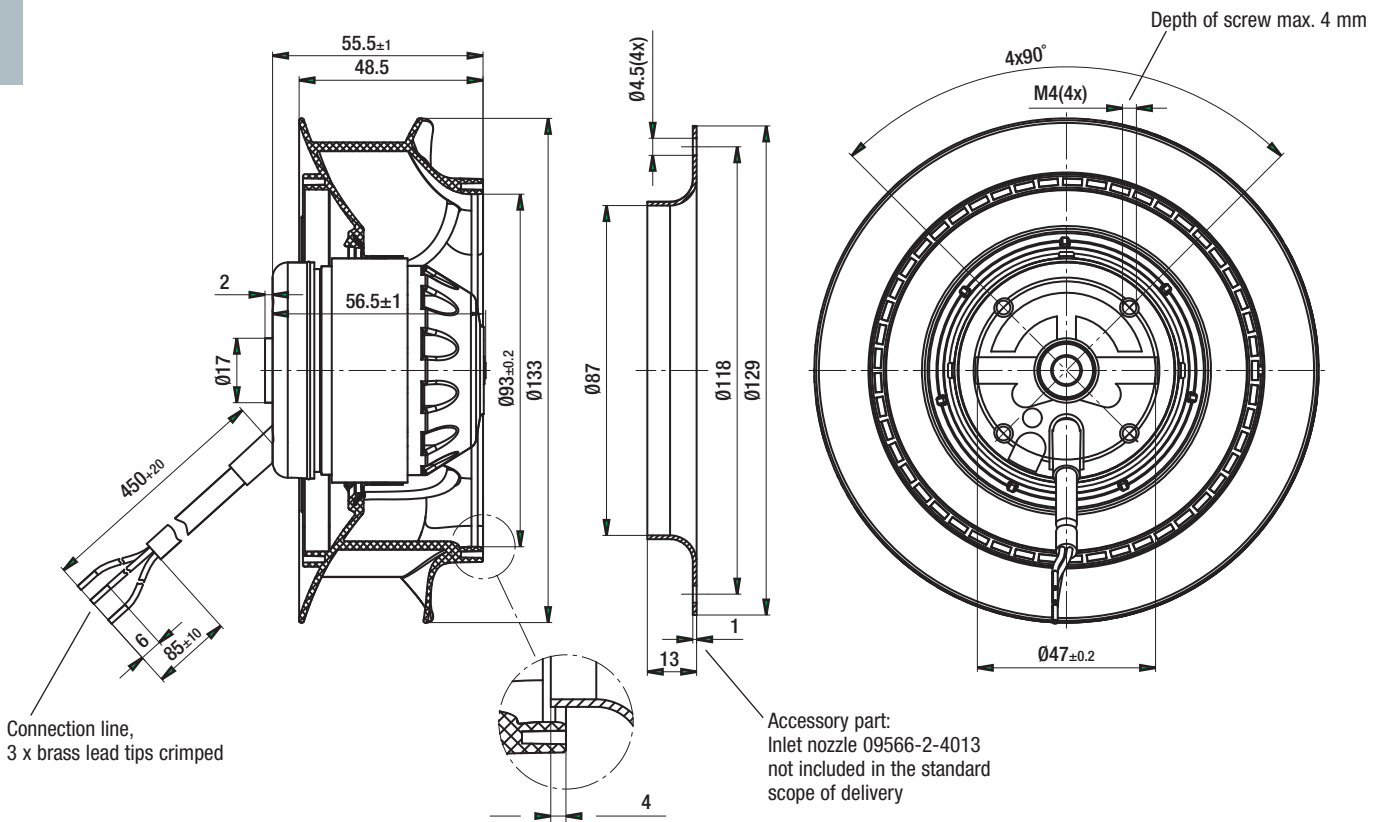

K2E 133-RA03-01

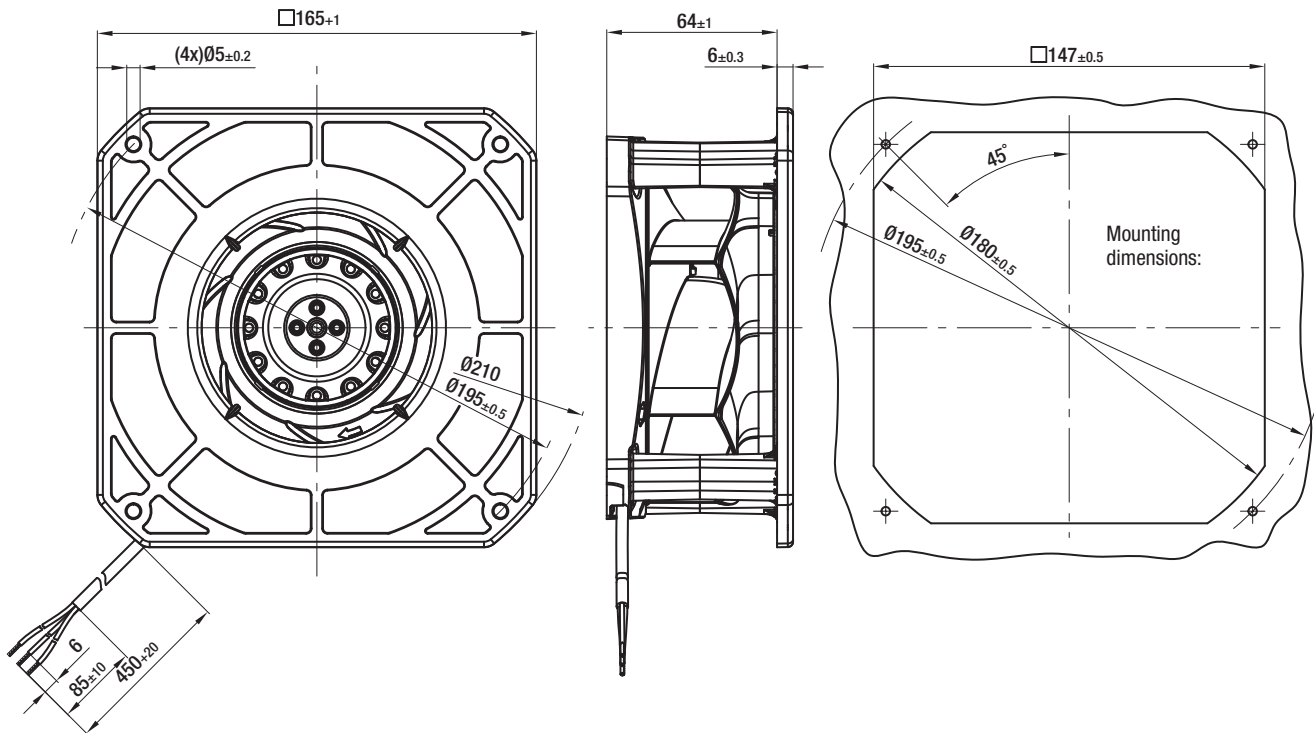






# AC centrifugal fans RadiCal

backward curved, Ø 190

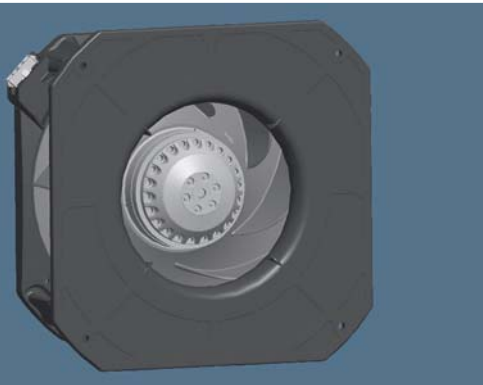


- **Material:** Housing: Plastic PA 6, fibreglass-reinforced  
Impeller: Plastic PA 6, fibreglass-reinforced  
Rotor: Coated in black
- **Number of blades:** 7
- **Direction of rotation:** Clockwise, seen on rotor
- **Type of protection:** IP 44, depending on installation and position in acc. to EN 60034-5
- **Insulation class:** "B"
- **Mounting position:** Any
- **Condensate discharges:** Rotor-side
- **Mode of operation:** Continuous operation (S1)
- **Bearings:** Maintenance-free ball bearings

Nominal data		Curve	Nominal voltage	Frequency	Speed/rpm	Input power	Current draw	Capacitor	Perm. amb. temp.	Electr. connection
Type	Motor	VAC	Hz	rpm	W	A	µF/VDB	°C	p. 64	
*2E 190	M2E 068-BF	Ⓐ 1~ 230	50	2480	48	0,22	1,5 / 400	-25..+65	A1)	
		Ⓑ 1~ 230	60	2720	60	0,27	1,5 / 400	-25..+75		

subject to alterations

## Curves

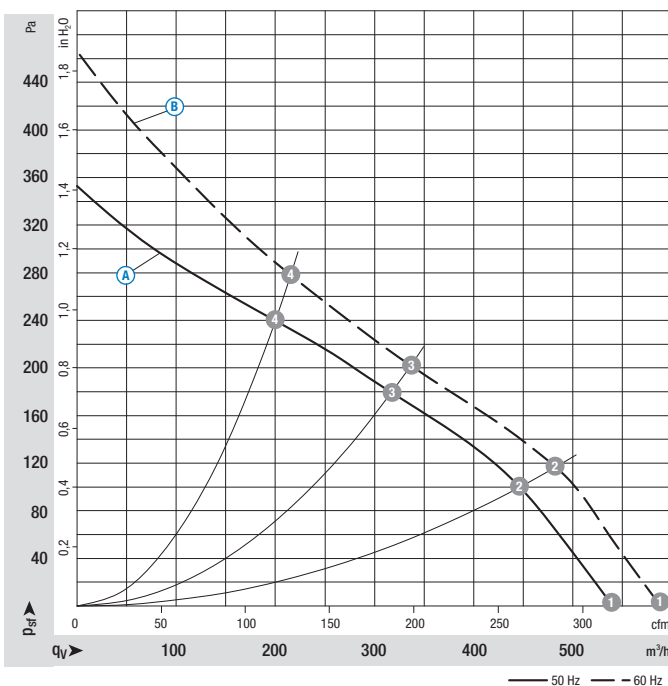

Air performance measured as per: ISO 5801, Installation category A, without protection against accidental contact

Suction-side noise levels: L<sub>wA</sub> as per ISO 13347, L<sub>pA</sub> measured at 1 m distance to fan axis

The acoustic values given are only valid under the measurement conditions listed and may vary depending on the installation situation.

With any deviation to the standard setup, the specific values have to be checked and reviewed once installed or fitted!

For detailed information see page 66 ff.

	n rpm	P <sub>e</sub> W	I A	L <sub>wA</sub> dB(A)
Ⓐ 1	2480	48	0,22	66
Ⓐ 2	2440	49	0,22	63
Ⓐ 3	2370	52	0,23	60
Ⓐ 4	2435	50	0,22	62
Ⓑ 1	2720	60	0,27	68
Ⓑ 2	2645	62	0,27	66
Ⓑ 3	2505	65	0,28	62
Ⓑ 4	2615	62	0,27	65

- **Motor protection:** TOP wired internally
- **Leakage current:** < 0,75 mA
- **Cable exit:** Variable (R2E...)
- **Connection leads:** Plug system (K2E...)
- **Protection class:** I
- **Product conforming to standard:** EN 60335-1, CE
- **Approvals:** VDE, CCC, GOST



Mass of centrifugal fan




Mass of centrifugal module with support basket

Centrifugal fan	kg	Centrifugal module	kg
R2E 190-RA26 -05	1,3	K2E 190-RA26 -01	1,7


# AC centrifugal fans RadiCal

backward curved, Ø 190

R2E 190-RA26-05

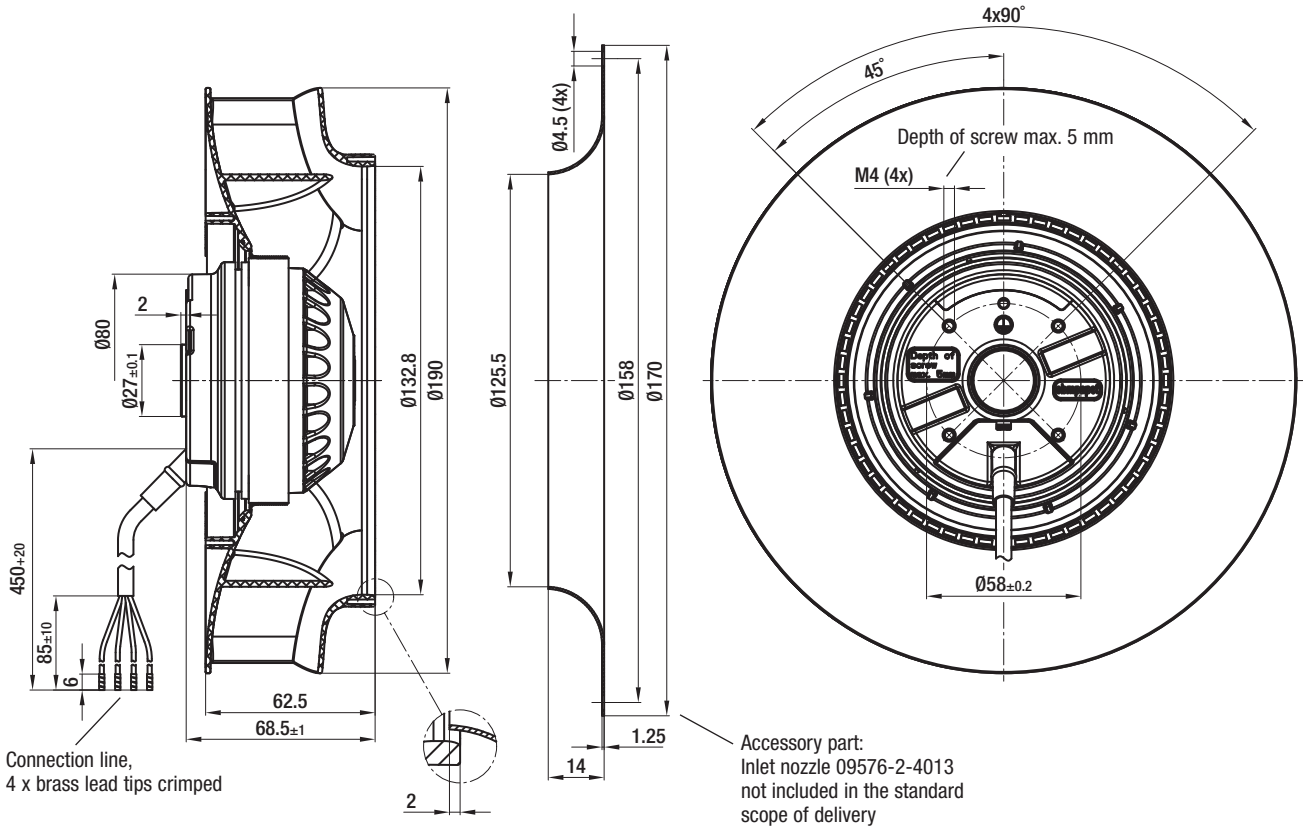


K2E 190-RA26-01

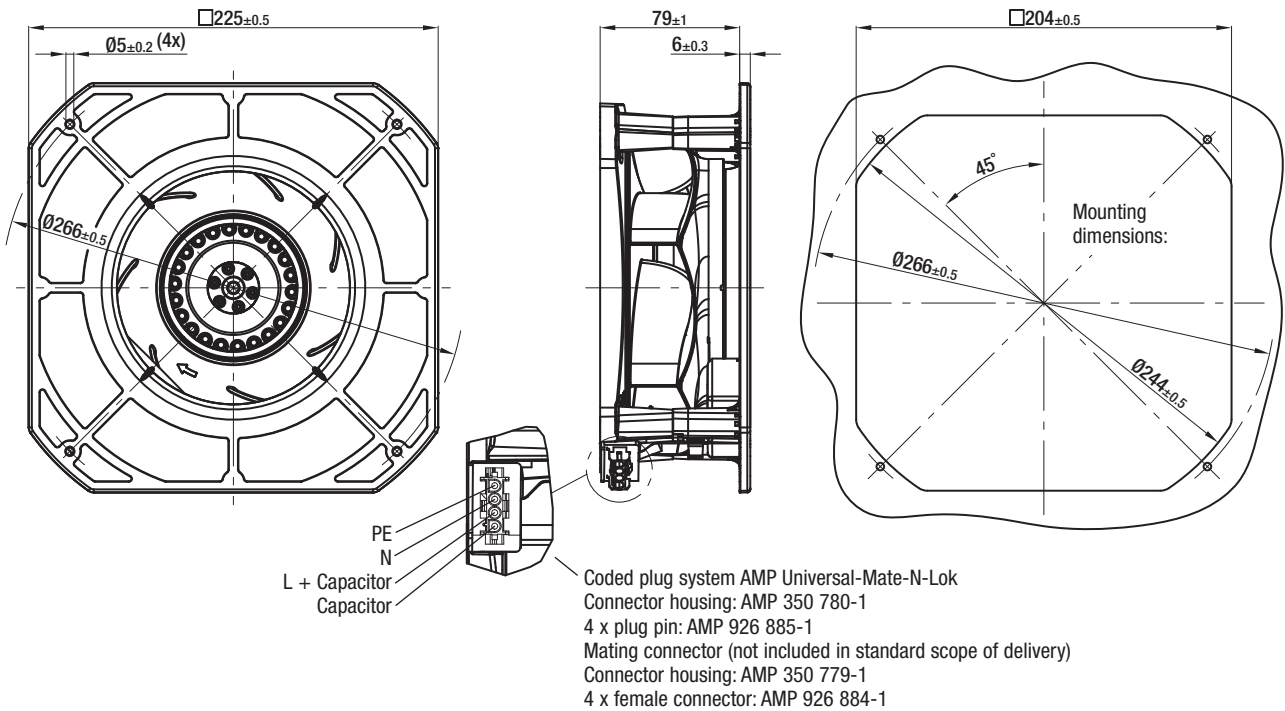



# AC centrifugal fans RadiCal

backward curved, Ø 220

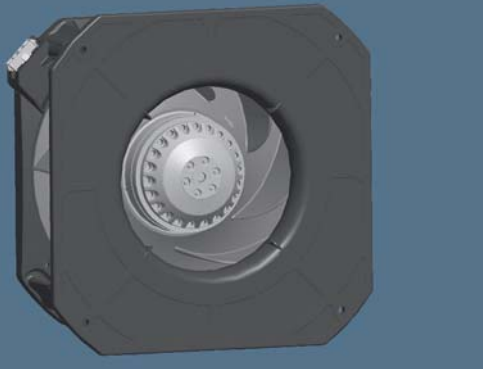


- **Material:** Housing: Plastic PA 6, fibreglass-reinforced  
Impeller: Plastic PA 6, fibreglass-reinforced  
Rotor: Coated in black
- **Number of blades:** 7
- **Direction of rotation:** Clockwise, seen on rotor
- **Type of protection:** IP 44, depending on installation and position in acc. to EN 60034-5
- **Insulation class:** "F"
- **Mounting position:** Any
- **Condensate discharges:** Rotor-side
- **Mode of operation:** Continuous operation (S1)
- **Bearings:** Maintenance-free ball bearings

Nominal data		Curve	Nominal voltage	Frequency	Speed/rpm	Input power	Current draw	Capacitor	Perm. amb. temp.	Electr. connection
Type	Motor	VAC	Hz	rpm	W	A	µF/VDB	°C	p. 64	
*2E 220	M2E 068-BF	Ⓐ 1~ 230	50	2350	80	0,36	2,0 / 450	-25..+50	A1)	
		Ⓑ 1~ 230	60	2450	102	0,46	2,0 / 450	-25..+60		
*2E 220	M2E 068-CF	Ⓒ 1~ 230	50	2600	90	0,40	2,5 / 400	-25..+60	A1)	
		Ⓓ 1~ 230	60	2900	120	0,53	2,5 / 400	-25..+70		

subject to alterations

## Curves

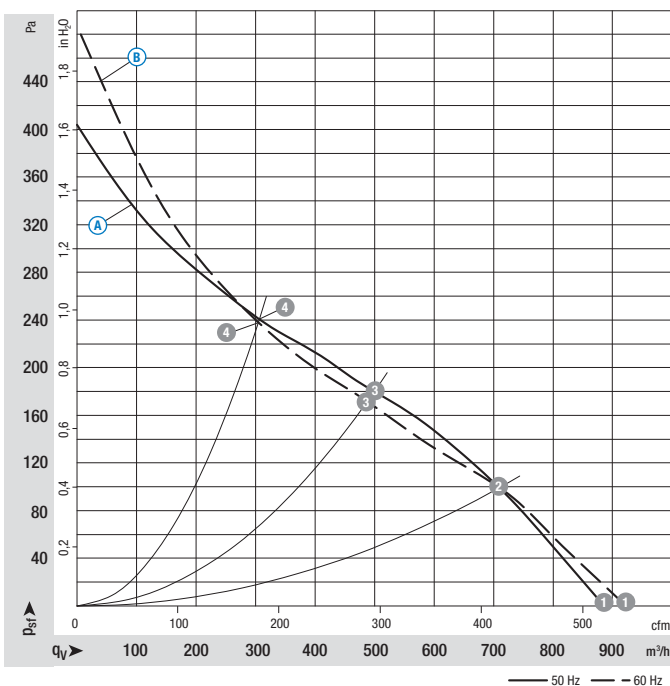

Air performance measured as per: ISO 5801, Installation category A, without protection against accidental contact

Suction-side noise levels: L<sub>WA</sub> as per ISO 13347, L<sub>pA</sub> measured at 1 m distance to fan axis

The acoustic values given are only valid under the measurement conditions listed and may vary depending on the installation situation.

With any deviation to the standard setup, the specific values have to be checked and reviewed once installed or fitted!

For detailed information see page 66 ff.

	n rpm	P <sub>e</sub> W	I A	L <sub>WA</sub> dB(A)
Ⓐ 1	2350	80	0,36	68
Ⓐ 2	2240	86	0,38	62
Ⓐ 3	2130	88	0,39	60
Ⓐ 4	2185	86	0,38	63
Ⓑ 1	2450	102	0,46	69
Ⓑ 2	2220	106	0,46	62
Ⓑ 3	2075	107	0,47	60
Ⓑ 4	2165	106	0,46	63

- **Motor protection:** TOP wired internally
- **Leakage current:** < 0,75 mA
- **Cable exit:** Variable (R2E...)
- **Connection leads:** Plug system (K2E...)
- **Protection class:** I
- **Product conforming to standard:** EN 60335-1, CE
- **Approvals:** VDE, CCC, GOST




Mass of centrifugal fan



Mass of centrifugal module with support basket

Centrifugal fan	kg	Centrifugal module	kg
R2E 220-RA38 -01	1,30	K2E 220-RA38 -01	2,10
R2E 220-RB06 -01	1,80	K2E 220-RB06 -01	2,60

### Curves

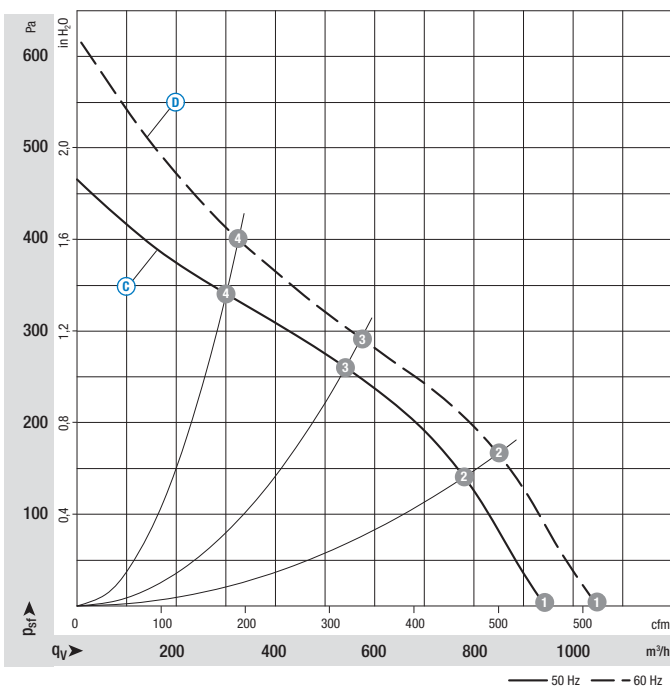

Air performance measured as per: ISO 5801, Installation category A, without protection against accidental contact

Suction-side noise levels: L<sub>WA</sub> as per ISO 13347, L<sub>pA</sub> measured at 1 m distance to fan axis

The acoustic values given are only valid under the measurement conditions listed and may vary depending on the installation situation.

With any deviation to the standard setup, the specific values have to be checked and reviewed once installed or fitted!


For detailed information see page 66 ff.

	n rpm	P <sub>e</sub> W	I A	L <sub>WA</sub> dB(A)
Ⓒ 1	2600	90	0,40	70
Ⓒ 2	2575	95	0,43	66
Ⓒ 3	2520	102	0,45	64
Ⓒ 4	2580	95	0,42	67
Ⓓ 1	2900	120	0,53	73
Ⓓ 2	2790	128	0,56	68
Ⓓ 3	2665	135	0,59	66
Ⓓ 4	2795	126	0,55	69


# AC centrifugal fans RadiCal

backward curved, Ø 220

R2E 220-RA38-01 / R2E 220-RB06-01

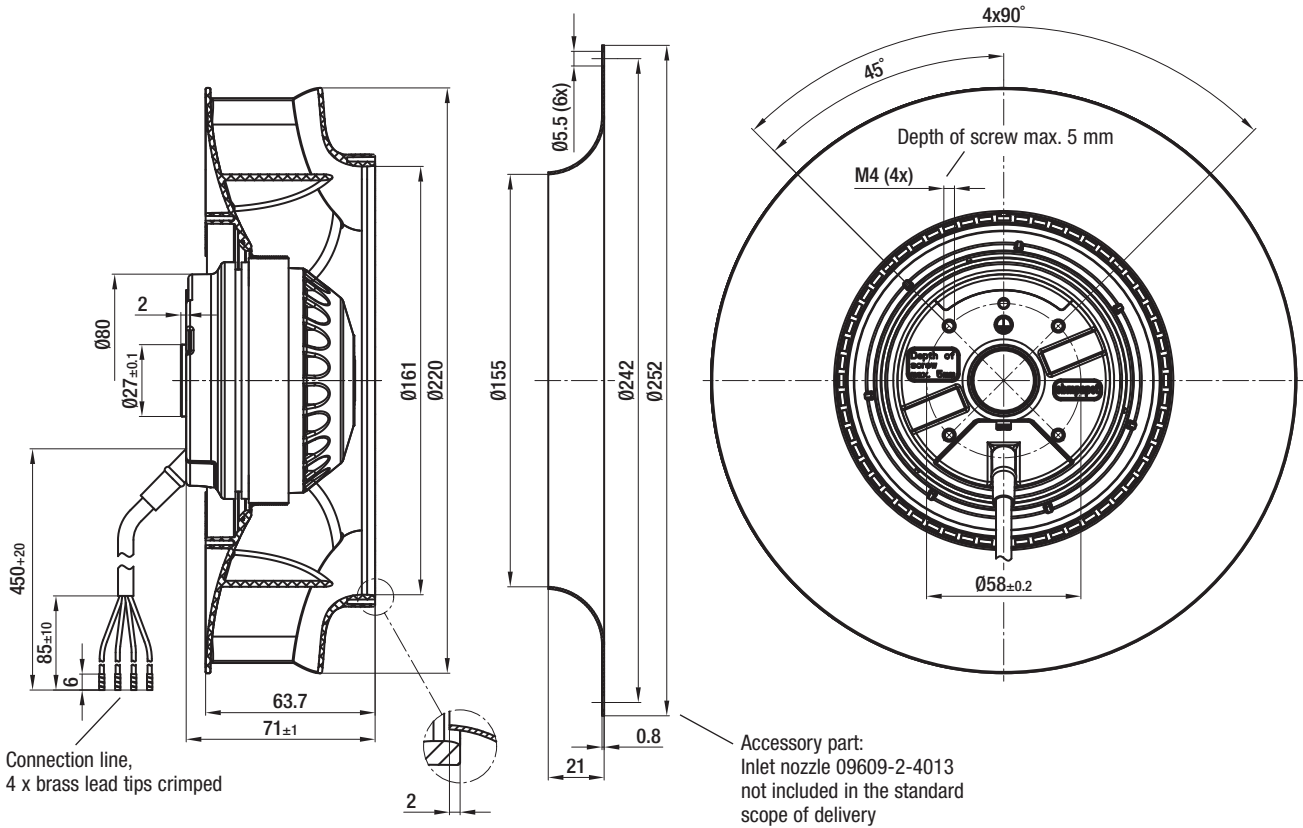

K2E 220-RA38-01 / K2E 220-RB06-01

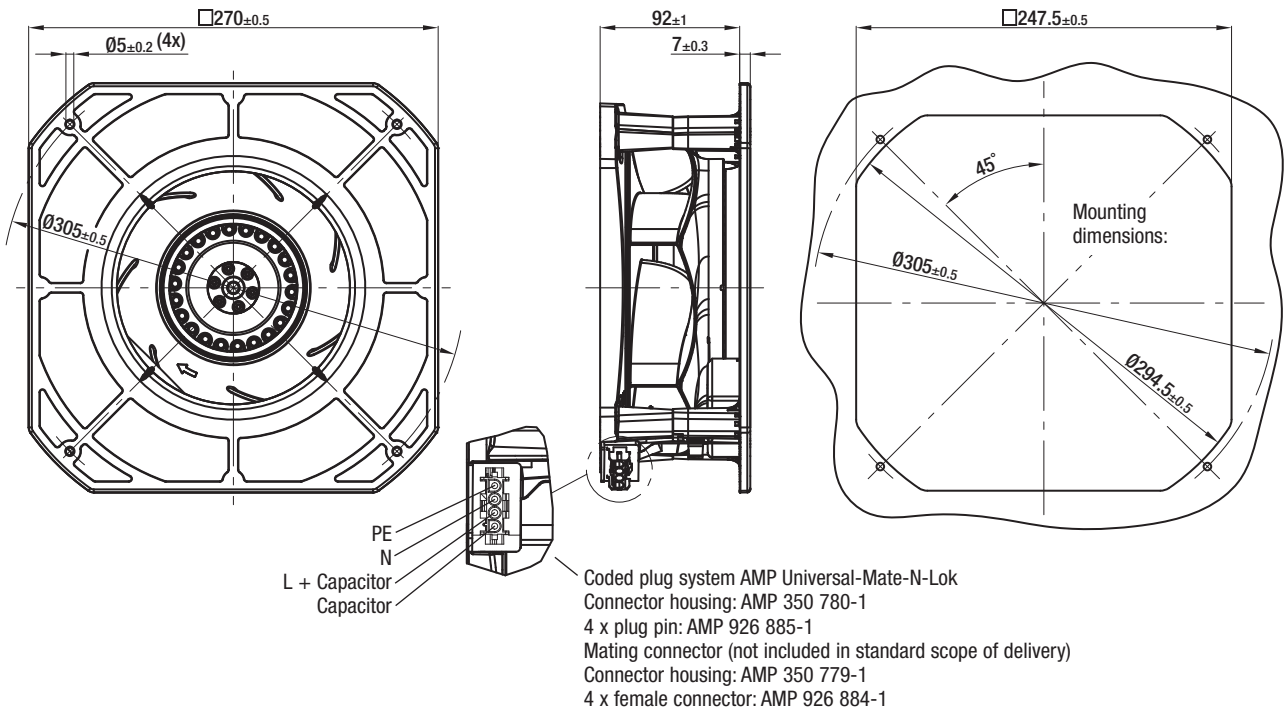






# AC centrifugal fans RadiCal

backward curved, Ø 225

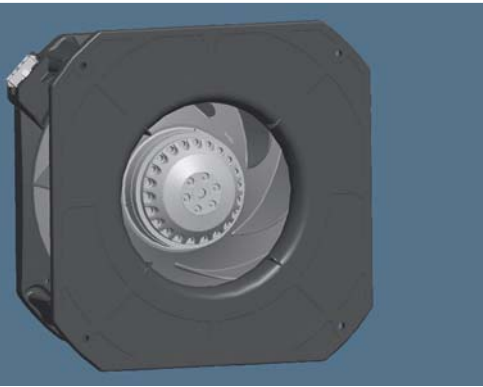


- **Material:** Housing: Plastic PA 6, fibreglass-reinforced  
Impeller: Plastic PA 6, fibreglass-reinforced  
Rotor: Coated in black
- **Number of blades:** 7
- **Direction of rotation:** Clockwise, seen on rotor
- **Type of protection:** IP 44, depending on installation and position in acc. to EN 60034-5
- **Insulation class:** "F"
- **Mounting position:** Any
- **Condensate discharges:** Rotor-side
- **Mode of operation:** Continuous operation (S1)
- **Bearings:** Maintenance-free ball bearings

Nominal data		Curve	Nominal voltage	Frequency	Speed/rpm	Input power	Current draw	Capacitor	Perm. amb. temp.	Electr. connection
Type	Motor	VAC	Hz	rpm	W	A	µF/VDB	°C	p. 64	
*2E 225	M2E 068-DF	(A) 1~ 230	50	2660	130	0,57	3,5 / 450	-25..+60	A1)	
		(B) 1~ 230	60	2900	190	0,83	3,5 / 450	-25..+60		

subject to alterations

## Curves

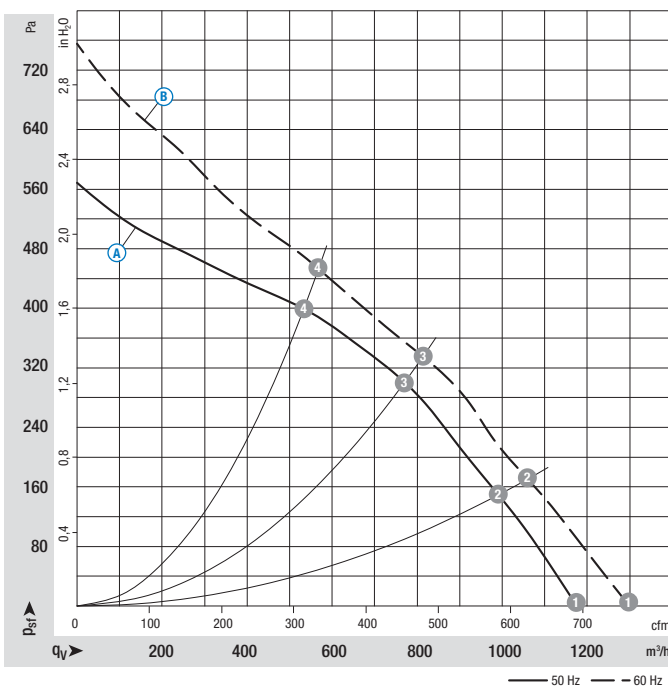

Air performance measured as per: ISO 5801, Installation category A, without protection against accidental contact

Suction-side noise levels: L<sub>WA</sub> as per ISO 13347, L<sub>pA</sub> measured at 1 m distance to fan axis

The acoustic values given are only valid under the measurement conditions listed and may vary depending on the installation situation.

With any deviation to the standard setup, the specific values have to be checked and reviewed once installed or fitted!

For detailed information see page 66 ff.

	n rpm	P <sub>e</sub> W	I A	L <sub>WA</sub> dB(A)
(A) 1	2660	130	0,57	73
(A) 2	2575	147	0,64	72
(A) 3	2560	149	0,65	66
(A) 4	2590	144	0,63	69
(B) 1	2900	190	0,83	76
(B) 2	2735	205	0,89	73
(B) 3	2700	207	0,90	68
(B) 4	2750	202	0,88	71

- **Motor protection:** TOP wired internally
- **Leakage current:** < 0,75 mA
- **Cable exit:** Variable (R2E...)
- **Connection leads:** Plug system (K2E...)
- **Protection class:** I
- **Product conforming to standard:** EN 60335-1, CE
- **Approvals:** VDE, CCC, GOST



Mass of centrifugal fan




Mass of centrifugal module with support basket

Centrifugal fan	kg	Centrifugal module	kg
R2E 225-RA92 -09	2,30	K2E 225-RA92 -01	3,50


# AC centrifugal fans RadiCal

backward curved, Ø 225

R2E 225-RA92-09

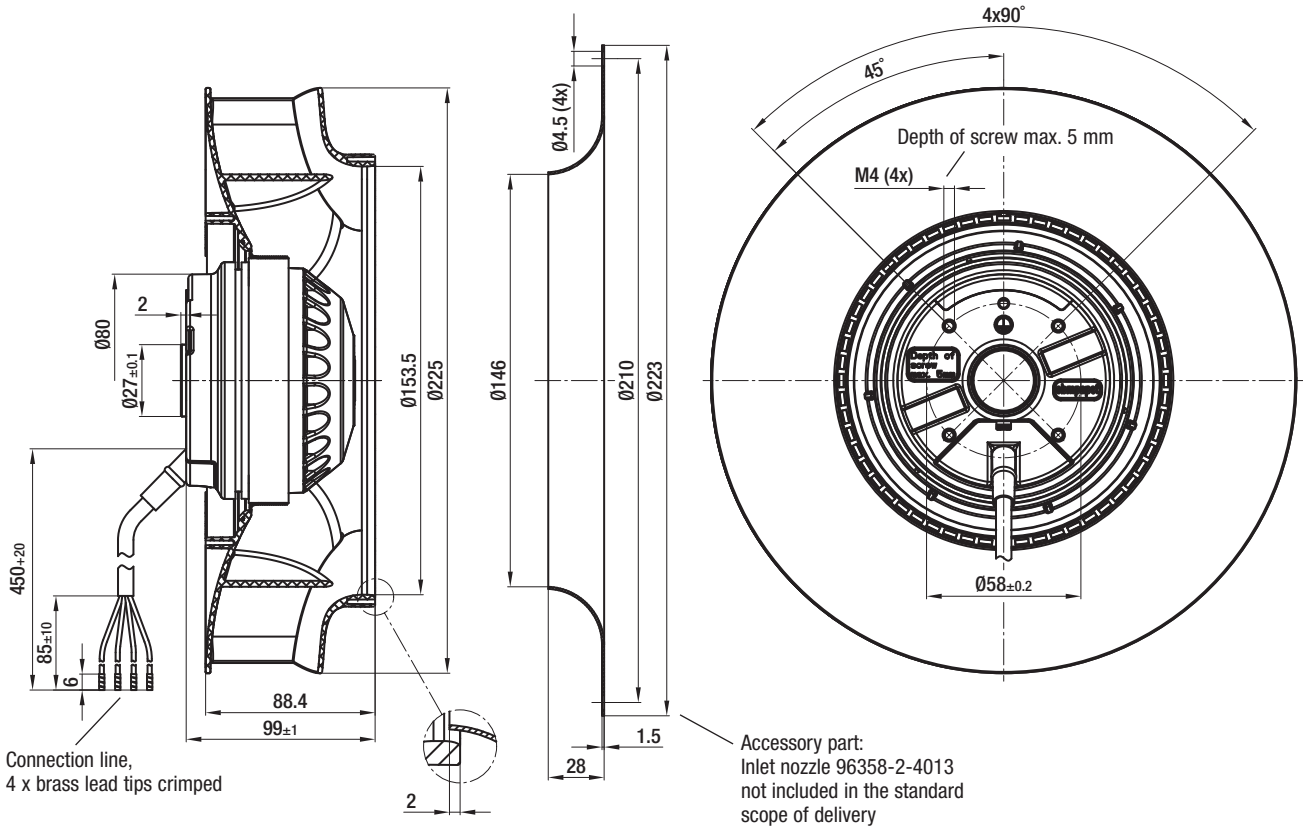


K2E 225-RA92-01

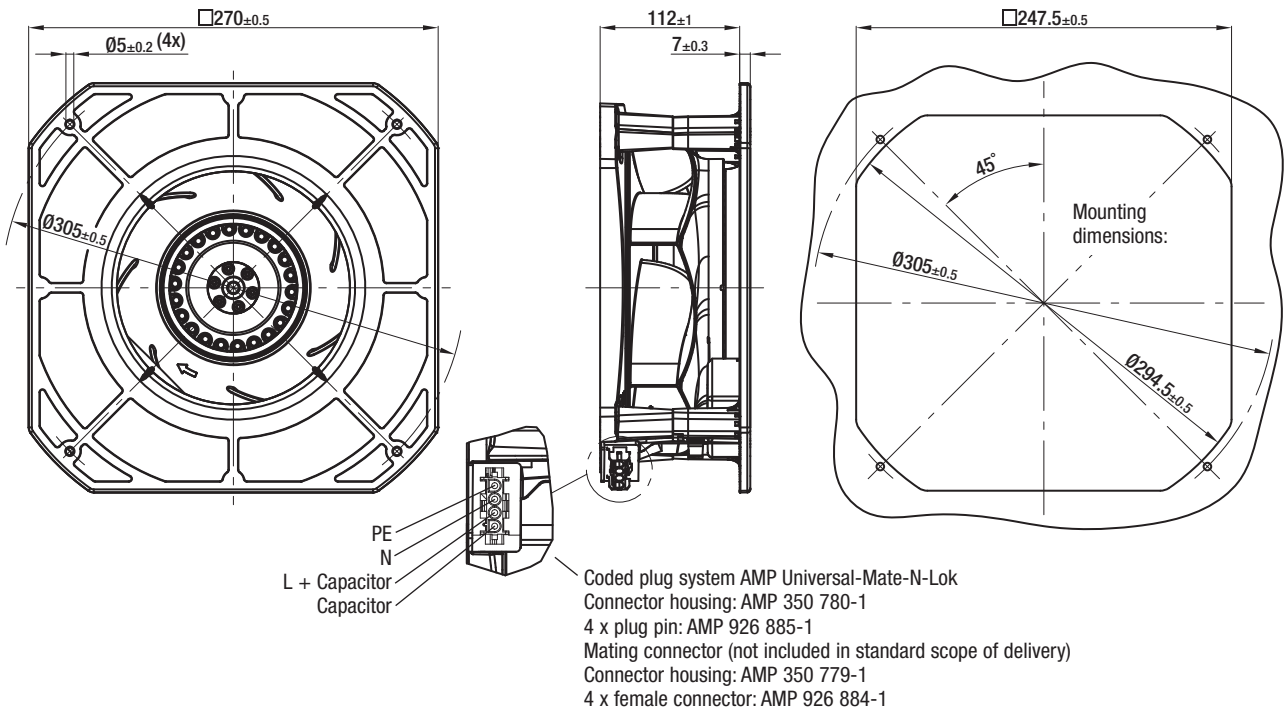



# AC centrifugal fans RadiCal

backward curved, Ø 250

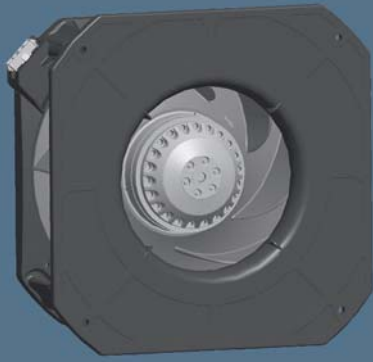


- **Material:** Housing: Plastic PA 6, fibreglass-reinforced  
Impeller: Plastic PA 6, fibreglass-reinforced  
Rotor: Coated in black
- **Number of blades:** 7
- **Direction of rotation:** Clockwise, seen on rotor
- **Type of protection:** IP 44, depending on installation and position in acc. to EN 60034-5
- **Insulation class:** "F"
- **Mounting position:** Any
- **Condensate discharges:** Rotor-side
- **Mode of operation:** Continuous operation (S1)
- **Bearings:** Maintenance-free ball bearings

## Nominal data

Type	Motor	Curve	Nominal voltage VAC	Frequency Hz	Speed/rpm	Input power W	Current draw A	Capacitor µF/VDB	Perm. amb. temp. °C	Electr. connection p. 64
*2E 250	M2E 068-EC	(A)	1~ 230	50	2650	185	0,82	6,0 / 400	-25..+50	A1)
		(B)	1~ 230	60	2850	260	1,15	6,0 / 400	-25..+35	

subject to alterations

## Curves

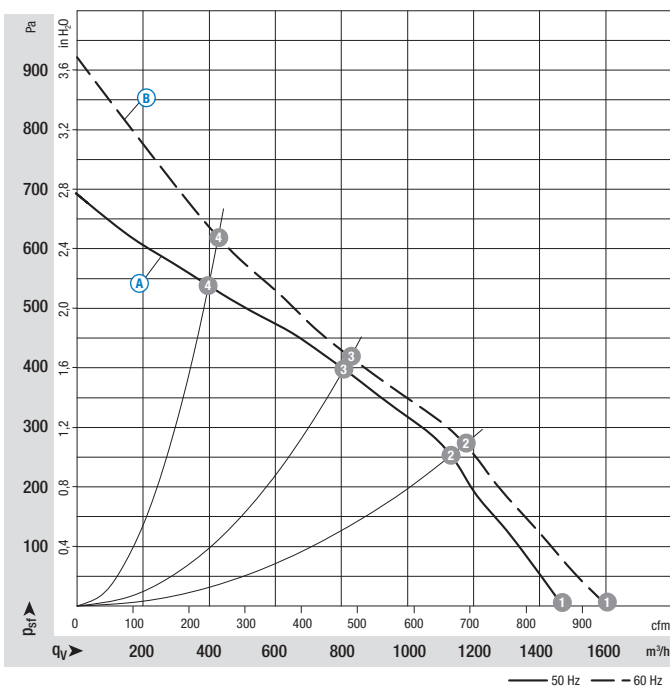

Air performance measured as per: ISO 5801, Installation category A, without protection against accidental contact

Suction-side noise levels:  $L_{wA}$  as per ISO 13347,  $L_{pA}$  measured at 1 m distance to fan axis

The acoustic values given are only valid under the measurement conditions listed and may vary depending on the installation situation.

With any deviation to the standard setup, the specific values have to be checked and reviewed once installed or fitted!

For detailed information see page 66 ff.

	n rpm	$P_e$ W	I A	$L_{wA}$ dB(A)
(A) 1	2650	185	0,82	75
(A) 2	2555	208	0,90	69
(A) 3	2530	212	0,92	67
(A) 4	2645	182	0,79	75
(B) 1	2850	260	1,15	78
(B) 2	2645	284	1,23	70
(B) 3	2590	288	1,25	69
(B) 4	2820	263	1,15	77

- **Motor protection:** TOP wired internally
- **Leakage current:** < 0,75 mA
- **Cable exit:** Variable (R2E...)
- **Connection leads:** Plug system (K2E...)
- **Protection class:** I
- **Product conforming to standard:** EN 60335-1, CE
- **Approvals:** CCC, GOST



Mass of centrifugal fan




Mass of centrifugal module with support basket

Centrifugal fan	kg	Centrifugal module	kg
R2E 250-RA50 -01	2,90	K2E 250-RA50 -01	3,70


# AC centrifugal fans RadiCal

backward curved, Ø 250

R2E 250-RA50-01

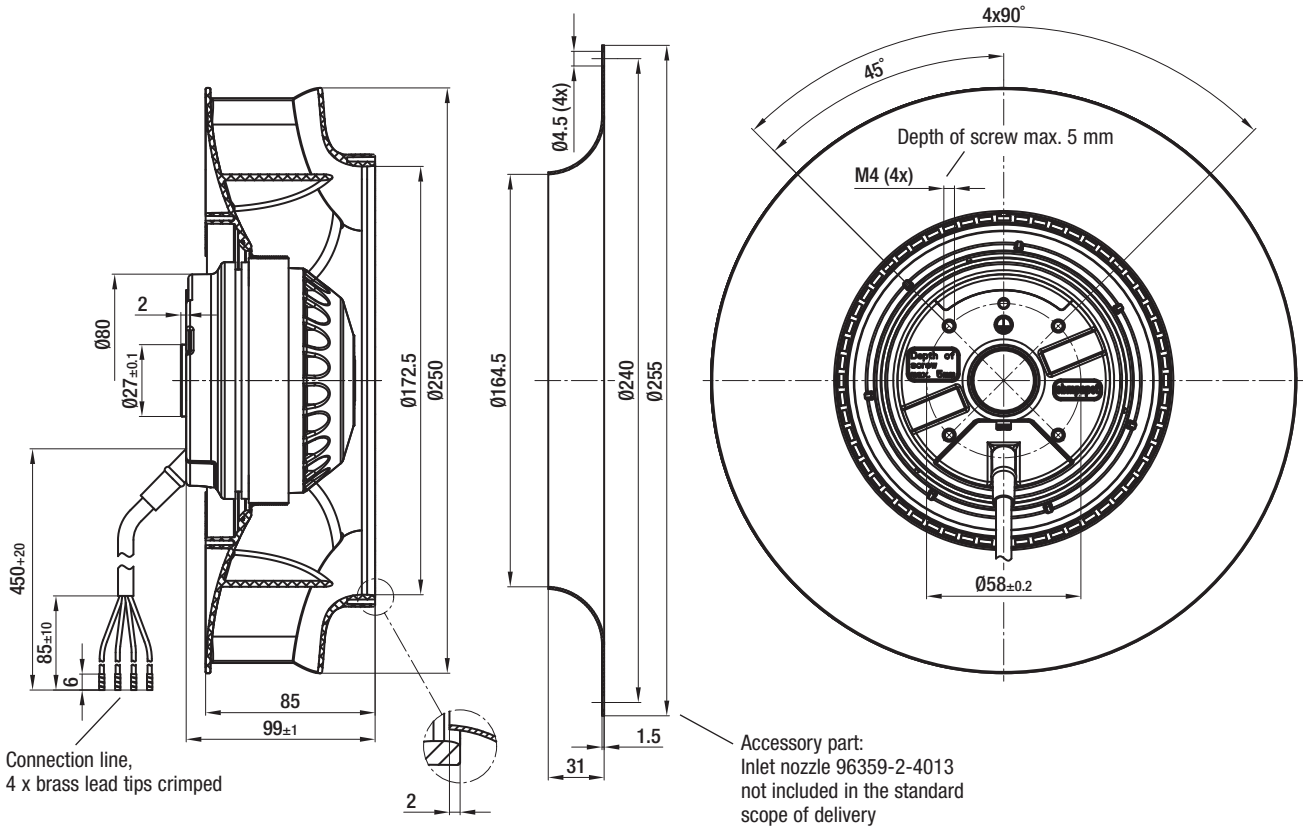

K2E 250-RA50-01

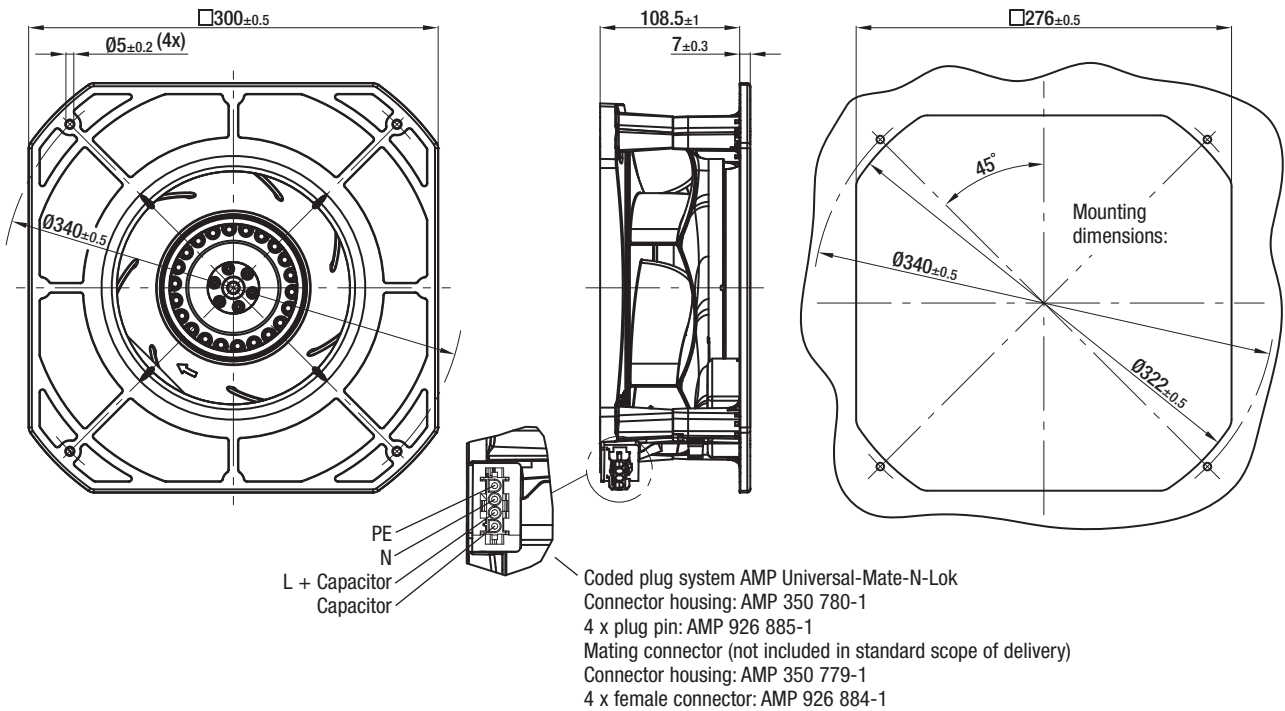





# AC centrifugal fans RadiCal

backward curved, Ø 250




- **Material:** Impeller: Plastic PA 6, fibreglass-reinforced  
Rotor: Coated in black
- **Number of blades:** 7
- **Direction of rotation:** Clockwise, seen on rotor
- **Type of protection:** IP 44, depending on installation and position in acc. to EN 60034-5
- **Insulation class:** "F"
- **Mounting position:** Any
- **Condensate discharges:** Rotor-side
- **Mode of operation:** Continuous operation (S1)
- **Bearings:** Maintenance-free ball bearings

Nominal data		Curve	Nominal voltage	Frequency	Speed/rpm	Input power	Current draw	Capacitor	Perm. amb. temp.	Electr. connection
Type	Motor	VAC	Hz	rpm	W	A	µF/VDB	°C	p. 64	
*2E 250	M2E 074-EI	Ⓐ 1~ 230	50	2800	215	0,95	5,0 / 450	-25..+70	A1)	
		Ⓑ 1~ 230	60	3200	345	1,51	5,0 / 450	-25..+55		

subject to alterations

## Curves

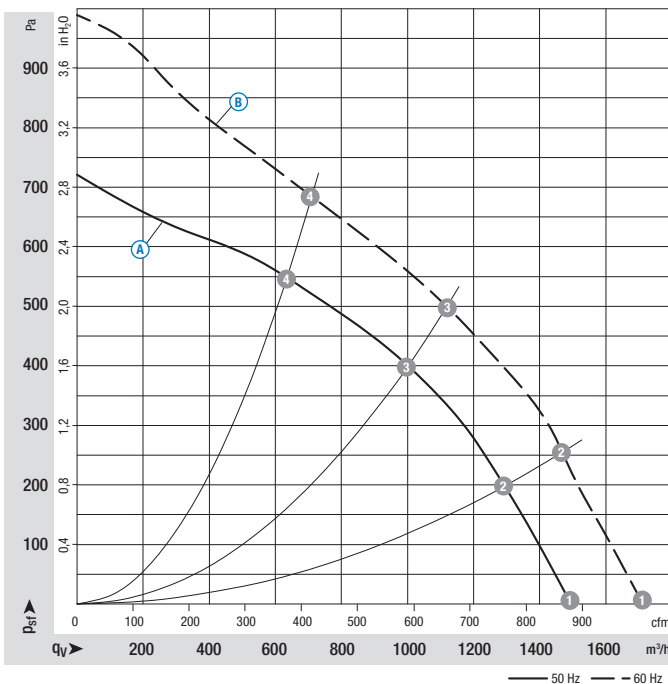

Air performance measured as per: ISO 5801, Installation category A, without protection against accidental contact

Suction-side noise levels: L<sub>wA</sub> as per ISO 13347, L<sub>pA</sub> measured at 1 m distance to fan axis

The acoustic values given are only valid under the measurement conditions listed and may vary depending on the installation situation.

With any deviation to the standard setup, the specific values have to be checked and reviewed once installed or fitted!

For detailed information see page 66 ff.

	n rpm	P <sub>e</sub> W	I A	L <sub>wA</sub> dB(A)
Ⓐ 1	2800	215	0,95	78
Ⓐ 2	2790	236	1,03	74
Ⓐ 3	2775	246	1,07	71
Ⓐ 4	2800	228	0,99	74
Ⓑ 1	3200	345	1,51	81
Ⓑ 2	3150	368	1,61	77
Ⓑ 3	3090	386	1,68	73
Ⓑ 4	3140	369	1,61	79

- **Motor protection:** TOP wired internally
- **Leakage current:** < 0,75 mA
- **Cable exit:** Variable
- **Protection class:** I
- **Product conforming to standard:** EN 60335-1, CE



Mass of  
centrifugal fan

Centrifugal fan

kg


R2E 250-RB06 -01

4,10

# AC centrifugal fans RadiCal


backward curved, Ø 250

R2E 250-RB06-01

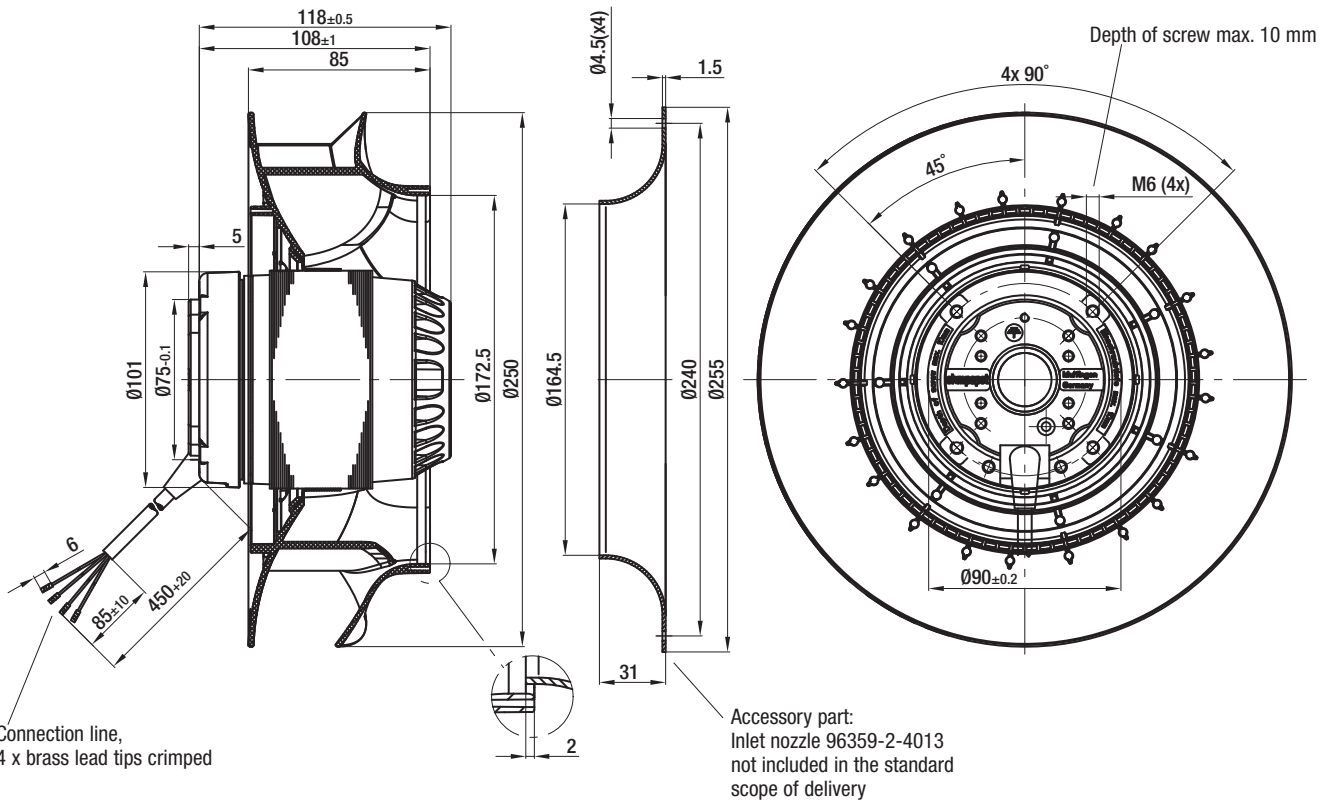



# Capacitors

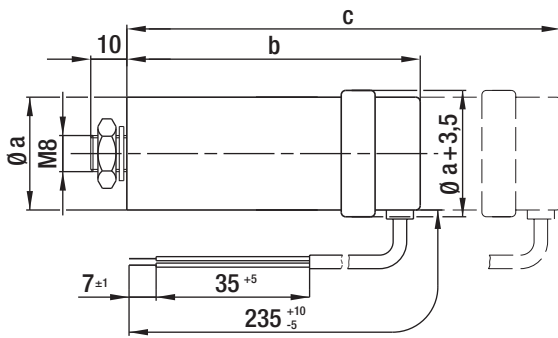


- **Material:** Plastic cap, aluminium cup
- **Designation:** FPU or P2 according to IEC 252 (non-flammable, non-explosive, circuit-breaking)
- **Approval:** VDE according to DIN EN 60252 (VDE 0560/8)
- **Calculated life time:**  
 420 V; -25 to +85°C; 30,000 hrs; class A  
 470 V; -25 to +85°C; 10,000 hrs; class B  
 500 V; -25 to +85°C; 3,000 hrs; class C

## MKP motor capacitors FPU or P2 (with fuse)

Part no.	Capacity	a	b (max.)	c (max.)
02155-4-7320	1,5 $\mu$ F	25,0	77,0	92,0
02156-4-7320	2,0 $\mu$ F	25,0	77,0	92,0
02159-4-7320	2,5 $\mu$ F	30,0	71,0	92,0
02179-4-7320	3,5 $\mu$ F	30,0	75,0	82,0
02162-4-7320	5,0 $\mu$ F	25-30	104,0	113,0
02163-4-7320	6,0 $\mu$ F	30,0	101,0	110,0

subject to alterations




- **Pull-off protector:** The housing expands by max. 9 mm. The protector responds to overload by the generated excess pressure snapping off the internal lead in a predetermined breaking point.
- **Mounting:** c is the overall dimension of the capacitor which has to be taken into account when mounting the part. The capacitor design, however, depends on the manufacturer. The expansion (9 mm) is either added to dimension b, or it is already integrated in the capacitor.




# Electrical connections EC/AC

## H3) EC motors M3G 045 / M3G 055 (2 Speed stages)

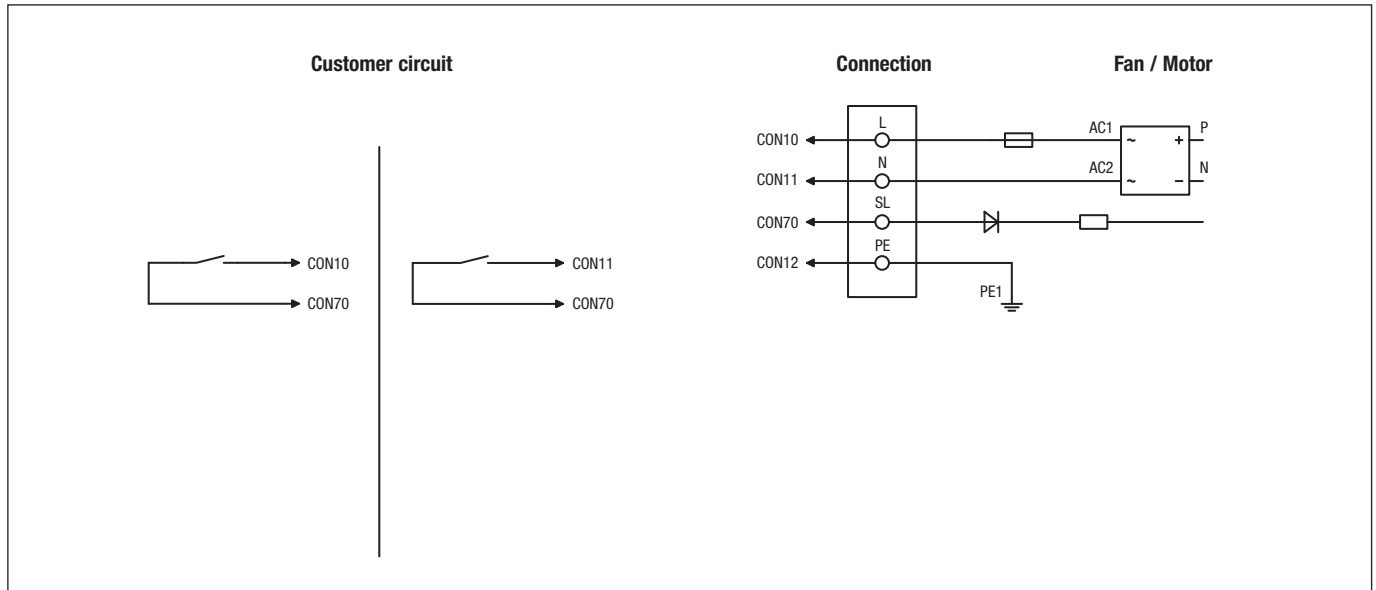


Line	Connection	Colour	Assignment / function
CON10	L	black	Power supply 230 VAC, 50 - 60 Hz
CON11	N	blue	Neutral conductor
CON12	PE	green/yellow	Protective earth
CON70	SL	brown	Speed selection: switch open = speed 1; switch closed = speed 2

### A1) Single-phase capacitor motor with TOP wired internally

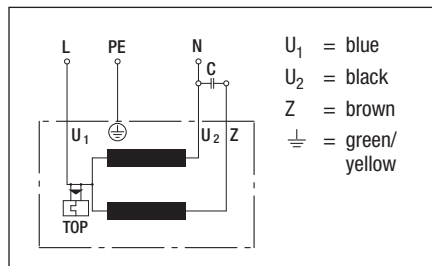



#### H4) EC motors M3G 045 / M3G 055 (Speed-controlled)

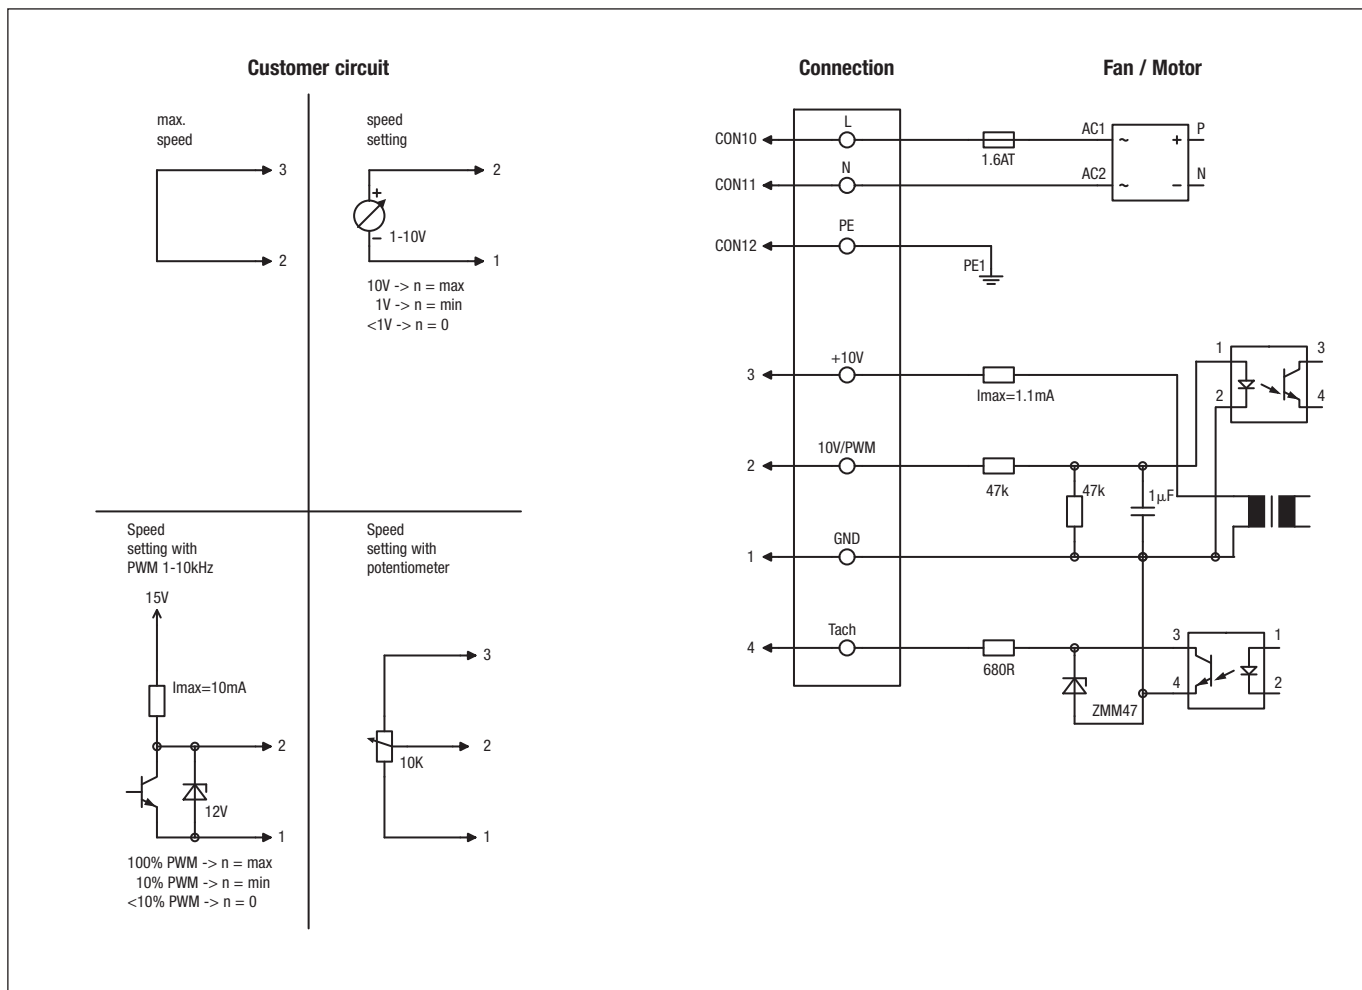

Line	Connection	Colour	Assignment / function
CON10	L	black	Power supply 230 VAC, 50 - 60 Hz, see type plate for voltage range
CON11	N	blue	Neutral conductor
CON12	PE	green/yellow	Protective earth
1	GND	blue	GND - Connection for control interface
2	0-10V PWM	yellow	Control input 0 - 10 V or PWM, electrically isolated
3	10V/max.1.1mA	red	Voltage output 10V / 1.1mA, electrically isolated, not short-circuit-proof
4	Tach	white	Tach output: Open Collector, 1 pulse per revolution, electrically isolated

# Technical parameters & scope



## High standards for all ebm-papst products

*Here at ebm-papst, we constantly strive to further improve our products in order to be able to offer you the best possible product for your application. Careful monitoring of the market ensures that technical innovations are reflected in the improvements of our products.*

*Based on the technical parameters listed below and the ambience you want our product to operate in, we here at ebm-papst can always work out the best solution for your specific application.*

## General performance parameters

Any deviations from the technical data and parameters described here are listed on the product-specific data sheet.

### Type of protection

The type of protection is specified in the product-specific data sheets.

### Insulation class

The insulation class is specified in the product-specific data sheets.

### Mounting position

The mounting position is specified in the product-specific data sheets.

### Condensate discharge holes

Information on the condensate discharge holes is provided in the product-specific data sheets.

### Mode of operation

The mode of operation is specified in the product-specific data sheets.

### Protection class

The protection class is specified in the product-specific data sheets..

## Service life

The service life of ebm-papst products depends on two major factors:

- The service life of the insulation system
- The service life of the bearing system

The service life of the insulation system mainly depends on voltage level, temperature and ambient conditions, such as humidity and condensation. The service life of the bearing system depends mainly on the thermal load on the bearing.

The majority of our products use maintenance-free ball bearings for any mounting position possible. As an option, sleeve bearings can be used, which is indicated on the product-specific data sheet wherever applicable.

The service life L10 of the ball bearings can be taken as approx. 40,000 operating hours at an ambient temperature of 40 °C, yet this estimate can vary according to the actual ambient conditions.

We will gladly provide you with a lifetime calculation taking into account your specific operating conditions.

## Motor protection / thermal protection

Information on motor protection and thermal protection is provided in the product-specific data sheets.


Depending on motor type and field of application, the following protective features are realised:

- Thermal overload protection (TOP), either in-circuit or external
- PTC with electronic diagnostics
- Impedance protection
- Thermal overload protection (TOP) with electronic diagnostics
- Current limitation via electronics

If an external TOP is connected, the customer has to make sure to connect a conventional trigger device for switching it off.

Products without fitted TOP and without protection against improper use, a motor protection complying with the valid standards has to be installed.

*Left: Endurance test room  
Middle: Shock test  
Right: Chamber test rig*

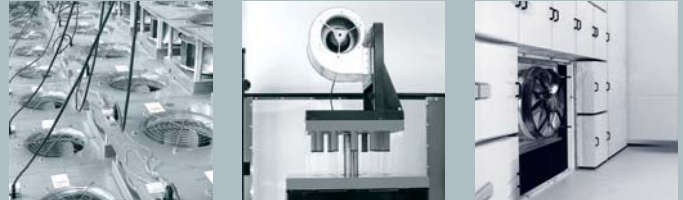

### ■ Mechanical strain / performance parameters

All ebm-papst products are subjected to comprehensive tests complying with the normative specifications. In addition to this, the tests also reflect the vast experience and expertise of ebm-papst.

#### Vibration test

Vibration tests are carried out in compliance with

- Vibration test in operation according to DIN IEC 68, parts 2-6
- Vibration test at standstill according to DIN IEC 68, parts 2-6

#### Shock load

Shock load tests are carried out in compliance with

- Shock load according to DIN IEC 68, parts 2-27

#### Balancing quality

Testing the balancing quality is carried out in compliance with

- Residual imbalance according to DIN ISO 1940
- Standard balancing quality level G 6.3

Should you require a higher balancing quality level for your specific application, please let us know and specify this when ordering your product.

### ■ Chemo-physical strain / performance parameters

Should you have questions about chemo-physical strain, please direct them to your ebm-papst contact.

### ■ Fields of application, industries and applications

Our products are used in various industries and applications:

Ventilation, air-conditioning and refrigeration technology, clean room technology, automotive and rail technology, medical and laboratory technology, electronics, computer and office technology, telecommunications, household appliances, heating, machines and plants, drive engineering. Our products are not designed for use in the aviation and aerospace industry!

### ■ Legal and normative directives

The products described in this catalogue are designed, developed and produced in keeping with the standards in place for the relevant product and, if known, the conditions governing the relevant fields of application.

#### Standards

Information on standards is provided in the product-specific data sheets.

#### EMC

Information on EMC standards is provided in the product-specific data sheets.

Complying with the EMC standards has to be established on the final appliance, as different mounting situations can result in changed EMC properties.

#### Leakage current

Information on the leakage current is provided in the product-specific data sheets.

Measuring is according to IEC 60990.

#### Approvals

In case you require a specific approval for your ebm-papst product (VDE, UL, GOST, CCC, CSA, etc.) please let us know.

Most of our products can be supplied with the relevant approval.

Information on existing approvals is provided in the product-specific data sheets.

### ■ Air performance measurements

All air performance measurements are carried out on suction side and on chamber test beds conforming to the specifications as per ISO 5801 and DIN 24163. The fans under test are installed in the measuring chamber at free air intake and exhaust (installation category A) and are operated at nominal voltage, with AC also at nominal frequency, and without any additional components such as guard grilles.

As required by the standard, the air performance curves correspond to an air density of 1.2 kg/m<sup>3</sup>.

Room for precision noise measuring



### Measurement conditions for air and noise measurement

ebm-papst products are measured under the following conditions:

- Axial and diagonal fans in direction of rotation “V” in full nozzle and without guard grille
- Backward curved centrifugal fans, free-running and with inlet nozzle
- Forward curved single and dual inlet centrifugal fans with housing

### Noise measurements

All noise measurements are carried out in low-reflective test rooms with reverberant floor. Thus the ebm-papst acoustic test chambers meet the requirements of precision class 1 according to DIN EN ISO 3745. For noise measurement, the fans being tested are placed in a reverberant wall and operated at nominal voltage (for AC, also at nominal frequency) without additional attachments such as the guard grille.

### Sound pressure level and sound level

All acoustic values are established according to ISO 13347, DIN 45635 and ISO 3744/3745 to accuracy class 2 and given in A-rated form.

When the sound pressure level ( $L_p$ ) is measured, the microphone is on the intake side of the fan being tested, usually at a distance of 1 m on the fan axis.

To measure the sound level ( $L_w$ ), 10 microphones are distributed over an enveloping surface on the intake side of the fan being tested (see graphic). The sound level measured can be roughly calculated from the sound pressure level by adding 7 dB.


Measuring configuration as per ISO 13347-3 respectively DIN 45635-38:

- 10 measuring points

$$d \geq D$$

$$h = 1,5d \dots 4,5d$$


$$\text{Measurement area } S = 6d^2 + 7d(h + 1,5d)$$

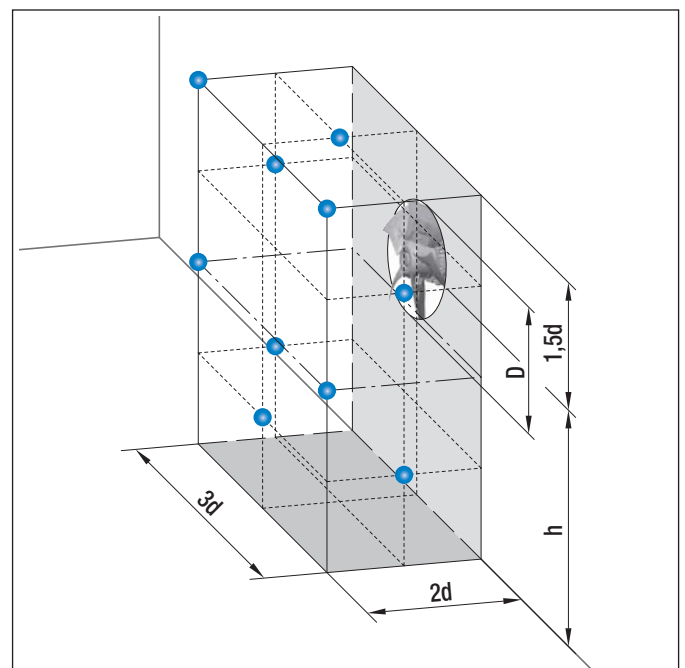

### Adding multiple noise sources with the same level

Adding 2 noise sources with the same volume results in a level increase of approx. 3 dB. The noise characteristics of multiple identical fans can be determined in advance based on the noise values specified in the data sheet. This is shown in the diagram opposite.


Example: 8 A3G800 axial fans are on a condenser. According to the data sheet, the sound pressure level of a fan is approximately 75 dB(A). The level increase measured from the diagram is 9 dB. Thus the overall sound level of the installation can be expected to be 84 dB(A).

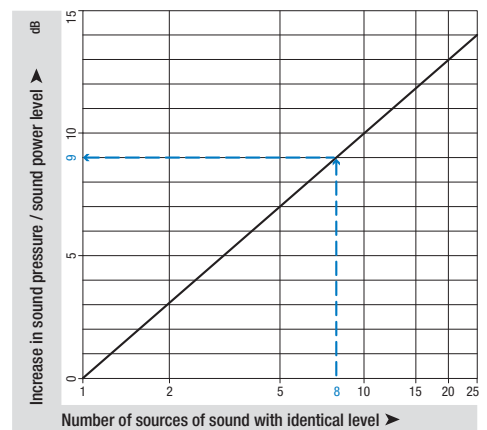

### Adding two noise sources with different levels

The acoustic performance of two different fans can be predetermined based on the sound levels given in the data sheet. This is shown in the diagram opposite.


Example: There is an axial fan A3G800 with a sound pressure level of 75 dB(A) at the operating point and an axial fan A3G710 with 71 dB(A) in a ventilation unit. The level difference is 4 dB. The level increase can now be read in the diagram as approx. 1.5 dB. This means that the overall sound level of the unit can be expected to be 76.5 dB(A).

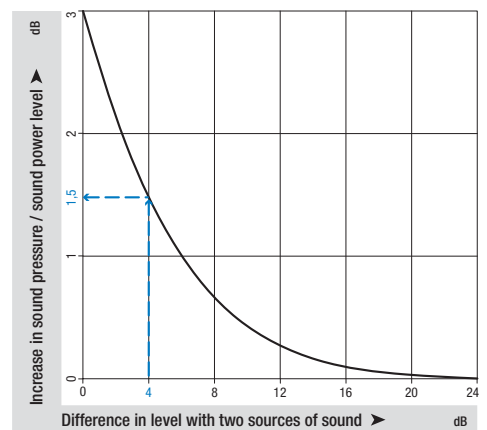





### Distance laws

Sound power level is independent of distance to the sound source. In contrast to this, sound pressure level decreases the further away the noise source is. The adjacent diagram shows the decrease in level under far sound field conditions. Far sound field conditions apply whenever the distance between microphone and fan is big when compared to fan diameter and wavelength to be considered. For more information on far sound field, please consult the relevant literature on this complex topic. Per doubling of distance, the level in the far sound field decreases by 6 dB. In the near field of the fan, other correlations apply and the decrease in levels can be considerably smaller. The following example only applies to far sound field conditions and can vary strongly depending on the installation effects:

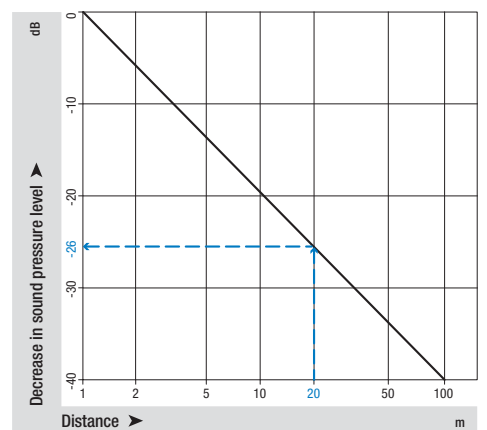With an axial fan A3G300, a sound pressure level of 65 dB(A) was measured at a distance of 1 m. According to the adjacent diagram, at a distance of 20 m we would get a reduction by 26 dB, i.e. a sound pressure level of 39 dB(A).



-  fan agent
-  compact fan agent
-  motor specialist
-  motor agent

# ebm-papst in Germany

## Germany

### ebm-papst Mulfingen GmbH & Co. KG

Bachmühle 2  
D-74673 Mulfingen  
Phone +49 7938 81-0  
Fax +49 7938 81-110  
info1@de.ebmpapst.com

www.ebmpapst.com

### ebm-papst St. Georgen GmbH & Co. KG




Hermann-Papst-Straße 1  
D-78112 St. Georgen  
Phone +49 7724 81-0  
Fax +49 7724 81-1309  
info2@de.ebmpapst.com

www.ebmpapst.com

### ebm-papst Landshut GmbH

Hofmark-Aich-Straße 25  
D-84030 Landshut  
Phone +49 871 707-0  
Fax +49 871 707-465  
info3@de.ebmpapst.com

www.ebmpapst.com

 **Berlin**  
Dipl.-Ing. (TH) Jens Duchow  
 Händelstraße 7  
 D-16341 Panketal  
Phone +49 30 944149-62  
Fax +49 30 944149-63  
Jens.Duchow@de.ebmpapst.com

 **Bielefeld**  
Dipl.-Ing. (FH) Wolf-Jürgen Weber  
 Niehausweg 13  
 D-33739 Bielefeld  
Phone +49 5206 91732-31  
Fax +49 5206 91732-35  
Wolf-Juergen.Weber@de.ebmpapst.com

 **Dortmund**  
Dipl.-Ing. (FH) Hans-Joachim Pundt  
 Auf den Steinern 3  
 D-59519 Möhnese-Völlinghausen  
Phone +49 2925 800-407  
Fax +49 2925 800-408  
Hans-Joachim.Pundt@de.ebmpapst.com

 **Frankfurt**  
Dipl.-Ing. Christian Kleffmann  
 Dr.-Hermann-Krause-Straße 23  
 D-63452 Hanau  
Phone +49 6181 1898-12  
Fax +49 6181 1898-13  
Christian.Kleffmann@de.ebmpapst.com

 **Halle**  
Dipl.-Ing. (TU) Michael Hanning  
 Lercheneck 4  
 D-06198 Salzatal / OT Lieskau  
Phone +49 345 55124-56  
Fax +49 345 55124-57  
Michael.Hanning@de.ebmpapst.com

 **Hamburg**  
Ingenieurbüro Breuell GmbH  
 Ing. Dirk Kahl  
 Elektroingenieur  
Grützmühlenweg 40  
D-22339 Hamburg  
Phone +49 40 538092-19  
Fax +49 40 538092-84  
Dirk.Kahl@de.ebmpapst.com

 **Heilbronn / Heidelberg**  
Dipl.-Ing. Mark Gartner  
 Gehrweg 12  
 D-74199 Unterheinriet  
Phone +49 7130 404569-1  
Fax +49 7130 404569-2  
Mark.Gartner@de.ebmpapst.com

 **Kassel**  
Dipl.-Ing. (FH) Ralph Brück  
 Hoherainstraße 3 b  
 D-35075 Gladenbach  
Phone +49 6462 4071-10  
Fax +49 6462 4071-11  
Ralph.Brueck@de.ebmpapst.com

 **Koblenz**  
Winfried Schaefer  
 Hinter der Kirch 10  
 D-56767 Uersfeld  
Phone +49 2657 16-96  
Fax +49 2657 16-76  
Winfried.Schaefer@de.ebmpapst.com

 **Munich**  
Dipl.-Wirt.-Ing. (FH) Jens Peter  
 Uhlandstraße 6  
 D-74427 Fichtenberg  
Phone +49 7971 260-180  
Fax +49 7971 260-221  
Jens.Peter@de.ebmpapst.com

 **Nuremberg**  
Dipl.-Wirt.-Ing. (FH) Axel Resch  
 Steinsfeldstraße 80  
 D-74626 Bretzfeld  
Phone +49 7946 94401-02  
Fax +49 7946 94401-03  
Axel.Resch@de.ebmpapst.com

 **Offenburg**  
Dipl.-Ing. (FH) Ralf Braun  
 Hubeneck 21  
 D-77704 Oberkirch  
Phone +49 7802 9822-52  
Fax +49 7802 9822-53  
Ralf.Braun@de.ebmpapst.com

 **Stuttgart**  
Dipl.-Ing. (FH) Rudi Weinmann  
 Hindenburgstraße 100/1  
 D-73207 Plochingen  
Phone +49 7153 9289-80  
Fax +49 7153 9289-81  
Rudi.Weinmann@de.ebmpapst.com

 **Ulm**  
M.Sc. Reinhard Sommerreißer  
 Am Silbermannpark 10  
 D-86161 Augsburg  
Phone +49 821 6610-7023  
Fax +49 821 6610-7024  
Reinhard.Sommerreisser@de.ebmpapst.com

## Distributors

 **Frankfurt**  
R.E.D. Handelsgesellschaft mbH  
Gutenbergstraße 3  
D-63110 Rodgau - Jügesheim  
Phone +49 6106 841-0  
Fax +49 6106 841-111  
info@red-elektromechanik.de  
www.red-elektromechanik.de

 **Hamburg**  
Breuell + Hilgenfeldt GmbH  
Grützmühlenweg 40  
D-22339 Hamburg  
Phone +49 40 538092-20  
Fax +49 40 538092-84  
info@breuell-hilgenfeldt.de

 **Munich**  
A. Schweiger GmbH  
Ohmstraße 1  
D-82054 Sauerlach  
Phone +49 8104 897-0  
Fax +49 8104 897-90  
info@schweiger-gmbh.de  
www.schweiger-gmbh.com

● **Express Service-Center** (1 to 5 pieces)

 **North**  
Breuell + Hilgenfeldt GmbH  
 Grützmühlenweg 40  
 D-22339 Hamburg  
Phone +49 40 538092-20  
Fax +49 40 538092-84  
ebmpapst@breuell-hilgenfeldt.de

 **South**  
HDS Ventilatoren Vertriebs GmbH  
 Glaswiesenstraße 1  
 D-74677 Dörzbach  
Phone +49 7937 8033520  
Fax +49 7937 8033525  
info@hds-gmbh.net

## Europe

 **Austria**  
 ebm-papst Motoren & Ventilatoren GmbH  
 Straubingstraße 17  
A-4030 Linz  
Phone +43 732 321150-0  
Fax +43 732 321150-20  
info@at.ebmpapst.com  
www.ebmpapst.at

 **Belarus**  
 ebm-papst Bel AgmbH  
 P.O. Box 117  
BY-220138 Minsk  
Phone +375 17 3851556  
Fax +375 17 3851556  
info@by.ebmpapst.com  
www.ebmpapst.by

 **Belgium**  
 ebm-papst Benelux B.V.  
 Sales office Belgium-Luxemburg  
Romeinsestraat 6/0101  
Research Park Haasrode  
B-3001 Heverlee-Leuven  
Phone +32 16 396-200  
Fax +32 16 396-220  
info@be.ebmpapst.com  
www.ebmpapst.be

 **Bulgaria**  
 ebm-papst Romania S.R.L.  
 Str. Tarnavei Nr. 20  
RO-500327 Brasov  
Phone +40 268 312-805  
Fax +40 268 312-805  
dudasludovic@xnet.ro

 **Croatia**  
 ebm-papst Industries Kft.  
 Ezred u. 2.  
H-1044 Budapest  
Phone +36 1 8722-190  
Fax +36 1 8722-194  
office@hu.ebmpapst.com

 **Czech Republic / Slovakia**  
 ebm-papst CZ s.r.o.  
 Kaštanová 34a  
CZ-620 00 Brno  
Phone +420 544 502-411  
Fax +420 547 232-622  
info@ebmpapst.cz  
www.ebmpapst.cz

 **Denmark**  
 ebm-papst Denmark ApS  
 Vallensbækvej 21  
DK-2605 Brøndby  
Phone +45 43 631111  
Fax +45 43 630505  
mail@dk.ebmpapst.com  
www.ebmpapst.dk

 **Estonia**  
 ebm-papst Oy, Eesti Filiaal  
 Kesk tee 13  
Aaviku küla, Jüri Tehnopark  
EST-75301 Rae Vald, Harjumaa  
Phone +372 65569-78  
Fax +372 65569-79  
www.ebmpapst.ee

 **Finland**  
 ebm-papst Oy  
 Puistotie 1  
FIN-02760 Espoo  
Phone +358 9 887022-0  
Fax +358 9 887022-13  
mailbox@ebmpapst.fi  
www.ebmpapst.fi

 **France**  
 ebm-papst sarl  
 ZI Nord - rue A. Mohler  
BP 62  
F-67212 Obernai Cedex  
Phone +33 820 326266  
Fax +33 3 88673883  
info@ebmpapst.fr  
www.ebmpapst.fr

 **Greece**  
 Helcoma  
 Th. Rotas & Co OE  
Davaki 65  
GR-17672 Kallithea-Attiki  
Phone +30 210 9513-705  
Fax +30 210 9513-490  
contact@helcoma.gr  
www.helcoma.gr

 **Hungary**  
 ebm-papst Industries Kft.  
 Ezred u. 2.  
H-1044 Budapest  
Phone +36 1 8722-190  
Fax +36 1 8722-194  
office@hu.ebmpapst.com





 **Iceland**  
 RJ Engineers  
 Stangarhyl 1a  
IS-110 Reykjavik  
Phone +354 567 8030  
Fax +354 567 8015  
rj@rj.is  
www.rj.is

 **Ireland**  
 ebm-papst UK Ltd.  
 Chelmsford Business Park  
GB-Chelmsford Essex CM2 5EZ  
Phone +44 1245 468555  
Fax +44 1245 466336  
sales@uk.ebmpapst.com  
www.ebmpapst.co.uk

 AuBren Limited  
 Portlaoise Business & Technology Park  
Mountrath Road  
IRL-Portlaoise, Co. Laois  
Phone +353 57 8664343  
Fax +353 57 8664346  
sales@ie.aubren.com  
www.aubren.com

 **Italy**  
 ebm-papst Srl  
 Via Cornaggia 108  
I-22076 Mozzate (Co)  
Phone +39 0331 836201  
Fax +39 0331 821510  
info@it.ebmpapst.com  
www.ebmpapst.it

 **Macedonia**  
 ebm-papst Industries Kft.  
 Ezred u. 2.  
H-1044 Budapest  
Phone +36 1 8722-190  
Fax +36 1 8722-194  
office@hu.ebmpapst.com

-  fan agent
-  compact fan agent
-  motor specialist
-  motor agent

# ebm-papst in Europe


 **Netherlands**  
 ebm-papst Benelux B.V.  
 Engelseweg 127  
 NL-5705 AC Helmond  
 Phone +31 492 502-900  
 Fax +31 492 502-950  
 verkoop@nl.ebmpapst.com  
 www.ebmpapst.nl

 **Norway**  
 ebm-papst AS  
 P.B. 173 Holmlia  
 N-1203 Oslo  
 Phone +47 22 763340  
 Fax +47 22 619173  
 mailbox@ebmpapst.no  
 www.ebmpapst.no

 **Poland**  
 ebm-papst Polska Sp. z o.o.  
 ul. Annopol 4A  
 PL-03236 Warszawa  
 Phone +48 22 6757819  
 Fax +48 22 6769587  
 office@ebmpapst.pl  
 www.ebmpapst.pl

 **Portugal**  
 ebm-papst (Portugal), Lda.  
 Centro Empresarial de Alverca  
 Rua de Adarse, Vale D'Ervas  
 Corpo D / Fracção 3  
 P-2615-178 Alverca do Ribatejo  
 Phone +351 218 394 880  
 Fax +351 218 394 759  
 info@pt.ebmpapst.com  
 www.ebmpapst.pt

 **Romania**  
 ebm-papst Romania S.R.L.  
 Str. Tarnavei Nr. 20  
 RO-500327 Brasov  
 Phone +40 268 312-805  
 Fax +40 268 312-805  
 dadasludovic@xnet.ro

 **Russia**  
 ebm-papst Ural GmbH  
 Posadskaja-Strasse, 23(E), 3  
 RU-620102 Ekaterinburg  
 Phone +7 343 2338000  
 Fax +7 343 2337788  
 Konstantin.Molokov@ru.ebmpapst.com  
 www.ebmpapst.ur.ru

 ebm-papst Rus GmbH  
 proezd 4529, vladenie 5, stroenie 1  
 RU-141000 Mytistschi, Oblast Moskau  
 Phone +7 495 9807524  
 Fax +7 495 5140924  
 info@ebmpapst.ru  
 www.ebmpapst.ru




 **Serbia & Montenegro**  
 ebm-papst Industries Kft.  
 Ezred u. 2.  
 H-1044 Budapest  
 Phone +36 1 8722-190  
 Fax +36 1 8722-194  
 office@hu.ebmpapst.com

 **Spain**  
 ebm-papst Ibérica S.L.  
 Avda. del Sistema Solar, 29  
 E-28830 San Fernando de Henares (Madrid)  
 Phone +34 91 6780894  
 Fax +34 91 6781530  
 ventas@ebmpapst.es

 **Sweden**  
 ebm-papst AB  
 Äggelundavägen 2  
 S-17562 Järfälla  
 Phone +46 8 7619400  
 Fax +46 8 362306  
 info@ebmpapst.se  
 www.ebmpapst.se

 **Switzerland**  
 ebm-papst AG  
 Rütisbergstrasse 1  
 CH-8156 Oberhasli  
 Phone +41 44 73220-70  
 Fax +41 44 73220-77  
 verkauf@ebmpapst.ch  
 www.ebmpapst.ch

 **Turkey**  
 Akantel Elektronik San. Tic. LTD. Sti.  
 Atatürk Organize Sanayi  
 Bölgesi 10007 SK. No.:6  
 TR-35620 Cigli-Izmir  
 Phone +90 232 3282090  
 Fax +90 232 3280270  
 akantel@akantel.com.tr  
 www.ebmpapst.com.tr

 **Ukraine**  
 ebm-papst Ukraine LLC  
 Lapse Boulevard, 4, Building 47  
 UA-03067 Kiev  
 Phone +38 044 2063091  
 Fax +38 044 2063091  
 mail@ebmpapst.ua  
 www.ebmpapst.ua

 **United Kingdom**  
 ebm-papst UK Ltd.  
 Chelmsford Business Park  
 GB-Chelmsford Essex CM2 5EZ  
 Phone +44 1245 468555  
 Fax +44 1245 466336  
 sales@uk.ebmpapst.com  
 www.ebmpapst.co.uk

 ebm-papst Automotive & Drives (UK) Ltd.  
 The Smithy  
 Fidlers Lane  
 GB-East Ilsley, Berkshire RG20 7LG  
 Phone +44 1635 2811-11  
 Fax +44 1635 2811-61  
 A&Dsales@uk.ebmpapst.com  
 www.ebmpapst-ad.com



# ebm-papst in America and Africa

## America



### Argentina



ebm-papst de Argentina S.A.  
Hernandarias 148 Lomas del Mirador  
Pcia. de Buenos Aires (1752)  
Phone +54 11 46576135  
Fax +54 11 46572092  
ventas@ar.ebmpapst.com  
www.ebmpapst.com.ar



### Brasil



ebm-papst Motores Ventiladores Ltda.  
Av. José Giorgi, 301 Galpões B6+B7  
Condominio Logical Center  
BR-06707-100 Cotia - São Paulo  
Phone +55 11 4613-8700  
Fax +55 11 3164-8924  
vendas@br.ebmpapst.com  
www.ebmpapst.com.br



### Canada



ebm-papst Canada Inc.  
1800 Ironstone Manor, Unit 2  
CDN-Pickering, Ontario, L1W3J9  
Phone +1 905 420-3533  
Fax +1 905 420-3772  
sales@ca.ebmpapst.com  
www.ebmpapst.ca



### Mexico



ebm Industrial S.de R.L. de C.V.  
Paseo de Tamarindos 400-A-5º Piso  
Col. Bosques de las Lomas  
MEX-Mexico 05120, D.F.  
Phone +52 55 3300-5144  
Fax +52 55 3300-5243  
sales@mx.ebmpapst.com  
www.ebmpapst.com.mx

## USA



ebm-papst Inc.  
P.O. Box 4009  
100 Hyde Road  
USA-Farmington, CT 06034  
Phone +1 860 674-1515  
Fax +1 860 674-8536  
sales@us.ebmpapst.com  
www.ebmpapst.us



ebm-papst Automotive & Drives, Inc.  
3200 Greenfield, Suite 255  
USA-Dearborn, MI 48120  
Phone +1 313 406-8080  
Fax +1 313 406-8081  
automotive@us.ebmpapst.com  
www.ebmpapst-automotive.us





## Africa



### South Africa



ebm-papst South Africa (Pty) Ltd.  
P.O. Box 3124  
1119 Yacht Avenue  
ZA-2040 Honeydew  
Phone +27 11 794-3434  
Fax +27 11 794-5020  
info@za.ebmpapst.com  
www.ebmpapst.co.za

-  fan agent
-  compact fan agent
-  motor specialist
-  motor agent

# ebm-papst in Asia and Australia

## Asia

 **China**  
 ebm-papst Ventilator (Shanghai) Co., Ltd.  
 No. 418, Huajing Road  
 WaiGaoQiao Free Trade Zone  
 No. 2001, Yang Gao (N) Road  
 VRC-200131 Shanghai, P.R. of China  
 Phone +86 21 5046-0183  
 Fax +86 21 5046-1119  
 sales@cn.ebmpapst.com  
 www.ebmpapst.com.cn

 **Hong Kong**  
 ebm-papst Hong Kong Ltd.  
 Unit No. 13,9 / F  
 Technology Park, 18 On Lai Street  
 Siu Lek Yuen, Shatin N.T.  
 Hong Kong - P.R. of China  
 Phone +852 2145-8678  
 Fax +852 2145-7678  
 info@hk.ebmpapst.com

 **India**  
 ebm-papst India Pvt. Ltd.  
 26/3, G.N.T. Road, Erukkencherry  
 IND-Chennai-600118  
 Phone +91 44 25372556  
 Fax +91 44 25371149  
 sales@in.ebmpapst.com  
 www.ebmpapst.in

 **Indonesia**  
 ebm-papst Indonesia  
 Representative Office  
 German Centre, 4th Floor, Suite 4470  
 Jl. Kapt. Subijono Dj. Bumi Serpong Damai  
 RI-15321 Tangerang  
 Phone +62 21 5376250  
 Fax +62 21 5388305  
 salesdept@id.ebmpapst.com

 **Israel**  
 Polak Bros. Import Agencies Ltd.  
 9 Hamefalsim Street  
 IL-Kiryat Arie, Petach-Tikva 49514  
 Phone +972 3 9100300  
 Fax +972 3 5796679  
 polak@polak.co.il  
 www.polak.co.il

 **Japan**  
 ebm-papst Industries Japan K.K.  
 12 Floor, Benex S-3 Bldg.  
 3-20-8 Shinyokohama, Kohoku-ku  
 J-222-0033 Yokohama  
 Phone +81 45 47057-51  
 Fax +81 45 47057-52  
 info@jp.ebmpapst.com  
 www.ebmpapst.jp

 **Korea**  
 ebm-papst Korea Co. Ltd.  
 6F, Trutec Bldg.  
 B 6-2, Digital Media City (DMC)  
 Sangam-Dong, Mapo-Gu  
 ROK-Seoul 121-270  
 Phone +82 2 366213-24  
 Fax +82 2 366213-26  
 info@kr.ebmpapst.com  
 www.ebmpapst.co.kr

 **Malaysia**  
 ebm-papst Malaysia  
 Representative Office  
 Unit 12-2, Jalan USJ Sentral 3  
 Persiaran Subang, Selangor Darul Ehsan  
 MAL-47600 Subang Jaya  
 Phone +60 3 8024-1680  
 Fax +60 3 8024-8718  
 salesdept@my.ebmpapst.com

 **Singapore**  
 ebm-papst SEA Pte. Ltd.  
 No. 23 Ubi Road 4  
 #06-00 Olympia Industrial Building  
 SGP-Singapore 408620  
 Phone +65 65513789  
 Fax +65 68428439  
 salesdept@sg.ebmpapst.com

 **Taiwan**  
 ETECO Engineering & Trading Corp.  
 10F-I, No. 92, Teh-Wei Str.  
 RC-Tsow-Inn District, Kaohsiung  
 Phone +886 7 557-4268  
 Fax +886 7 557-2788  
 eteco@ms22.hinet.net  
 www.ebmpapst.com.tw

 **Thailand**  
 ebm-papst Thailand Co., Ltd.  
 99/349 Na-Nakorn Bldg., 4th Floor  
 Chaeng Wattana Road, Thungsonghong,  
 THA-10210 Laksi, BKK  
 Phone +66 2 57615-24  
 Fax +66 2 57615-42  
 salesdept@th.ebmpapst.com

 **United Arab Emirates**  
 ebm-papst Middle East FZE  
 PO Box 17755  
 Jebel Ali Free Zone / FZS1 / AP05  
 UAE-Dubai  
 Phone +971 4 88608-26  
 Fax +971 4 88608-27  
 info@ae.ebmpapst.com  
 www.ebmpapst.ae

 **Vietnam**  
 ebm-papst Vietnam  
 Representative Office  
 Room #102, 25 Nguyen Van Thu Street  
 District 1  
 VN-Ho Chi Minh City  
 Phone +84 8 39104099  
 Fax +84 8 39103970  
 linh.nguyen@vn.ebmpapst.com

## Australia

---



### Australia

ebm-papst A&NZ Pty Ltd.



10 Oxford Road



AUS-Laverton North, Victoria, 3026

Phone +61 3 9360-6400

Fax +61 3 9360-6464

[sales@ebmpapst.com.au](mailto:sales@ebmpapst.com.au)

[www.ebmpapst.com.au](http://www.ebmpapst.com.au)



### New Zealand

ebm-papst A&NZ Pty Ltd.



102 Henderson Valley Road



NZ-Henderson, Auckland 1230

Phone +64 9 837-1884

Fax +64 9 837-1899

[sales@ebmpapst.com.au](mailto:sales@ebmpapst.com.au)

[www.ebmpapst.com.au](http://www.ebmpapst.com.au)

**ebm-papst**  
**Mulfingen GmbH & Co. KG**

Bachmühle 2  
D-74673 Mulfingen  
Phone +49 7938 81-0  
Fax +49 7938 81-110  
info1@de.ebmpapst.com

[www.ebmpapst.com](http://www.ebmpapst.com)

