


Technical Data Sheet

Rosenberger

CABLE ASSEMBLY
FAKRA MALE / MALE

LM4-CA1267-XXX-Y-Y

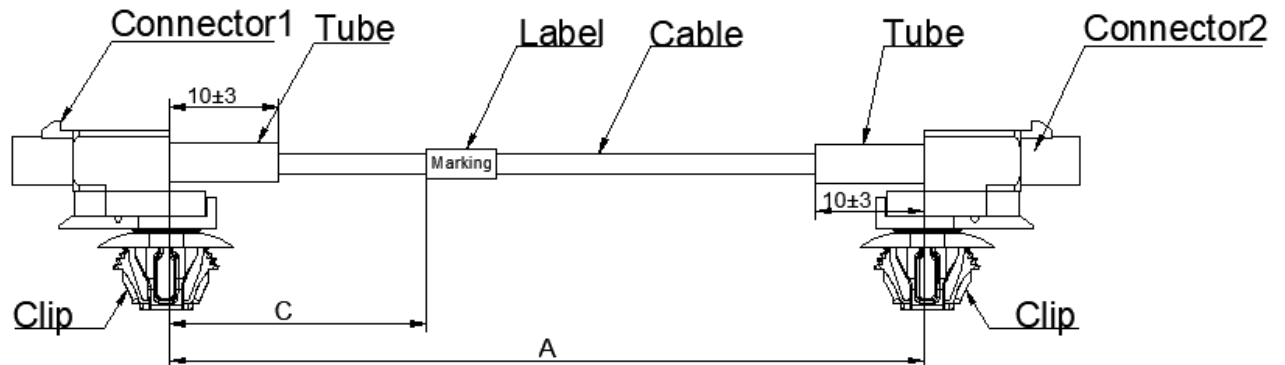

All dimensions are in mm; tolerances according to ISO 2768 c

Parts

Connector 1 (single male)	59S16A-1M4T4+59Z074-C00y
Connector 2 (single male)	59S16A-1M4T4+59Z074-C00y
Cable	Dacar 302-3
Label	Stick label
Clip	C92231K
Tube	Black, Shrinkable tube*2

Available Variants Weight

Customer Type	Rosenberger Type	Marking	Connector 1 colour	Connector 2 colour	A Length (mm)	C Label (mm)	Weight (g/pcs)
NA	LM4-CA1267-1780-B-B	LM4-CA1267-1780-B-B Rosenberger wwww	White	White	1780±10	100±10	TBD

Electrical data

Test voltage	DC500 V
--------------	---------

Mechanical data

Pull out strength cable	F>110N
-------------------------	--------

Environmental data

RoHS	compliant
Temperature range	-40°C-+105°C

While the information has been carefully compiled to the best of our knowledge, nothing is intended as representation or warranty on our part and no statement herein shall be construed as recommendation to infringe existing patents. In the effort to improve our products, we reserve the right to make changes judged to be necessary.

Draft	Date	Check	Approved	Date	Rev.	Engineering change number	Name	Date
Ryun	09/07/19	Wayne	Thalia	09/07/19	a00	Original design	Ryun	09/07/19

Rosenberger Hochfrequenztechnik GmbH & Co. KG
P.O.Box 1260 D-84526 Tittmoning Germany
Tel. : +49 8684 18-0
Fax : +49 8684 18-499
Email : info@rosenberger.de
www.rosenberger.de

Rosenberger Asia Pacific Electronic Co., Ltd., China
Tianzhu Airport Industrial Zone, Beijing, China
Tel.: +86 10 80481995
Fax: +86 10 80497052
www.rosenbergerap.com
Email: info@rosenbergerap.com

Page

1 / 1