


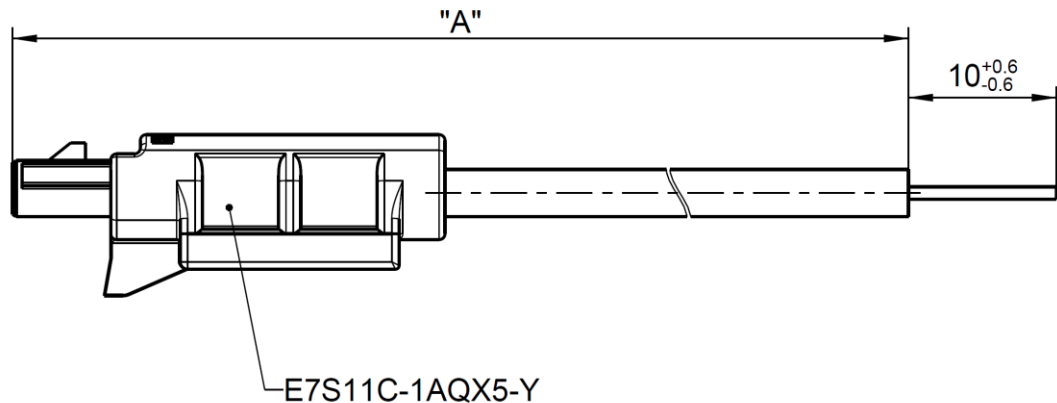

Dimensions (mm)			
Range (length A)	200 to 1000	1001 to 5000	5001 to 50000
Tolerance (mm)	± 10	± 15	± 20

Interface

According to RN_132-01


Documents

Pinning according to RN_131-01

Suitable cables

Dacar 676
GG 160812

Preliminary

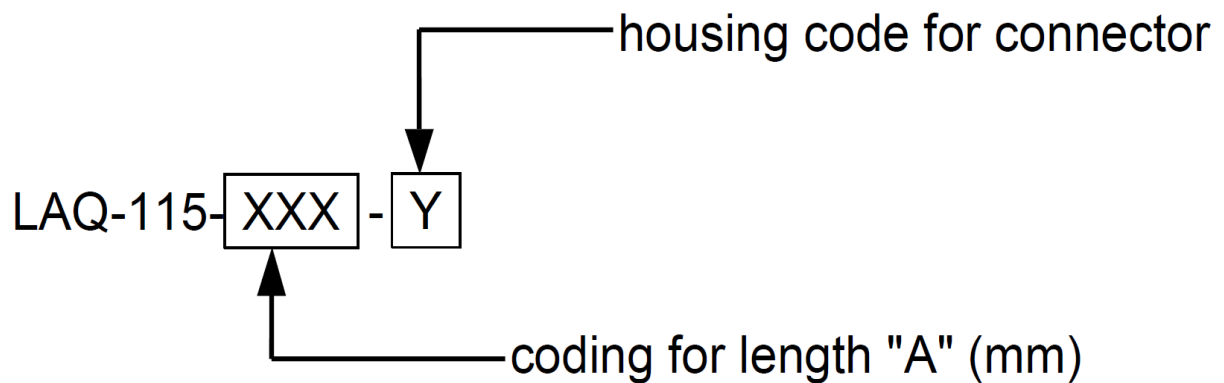

Preliminary

While the information has been carefully compiled to the best of our knowledge, nothing is intended as representation or warranty on our part and no statement herein shall be construed as recommendation to infringe existing patents. In the effort to improve our products, we reserve the right to make changes judged to be necessary.

Draft	Date	Approved	Date	Rev.	Engineering change number	Name	Date
M. Steinbach	06.12.17	A. Eder	16.08.18	400	18-1471	M2.Mamou	16.08.18
Rosenberger Hochfrequenztechnik GmbH & Co. KG P.O.Box 1260 D-84526 Tittmoning Germany www.rosenberger.de					Tel. : +49 8684 18-0 Email : info@rosenberger.de		Page 2 / 2