


Technical Data Sheet

Rosenberger

CABLE ASSEMBLY HSD FEMALE / FEMALE / FEMALE

LD5-CA164-XXX-Y-YY

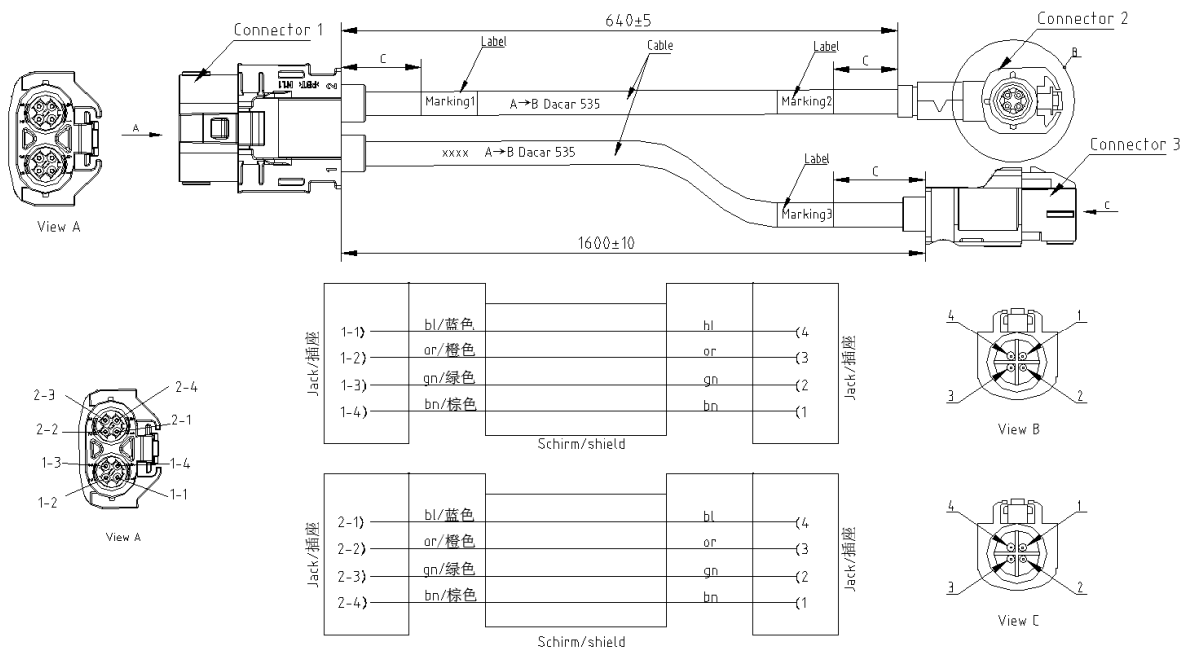

All dimensions are in mm; tolerances according to ISO 2768 c

Parts

Connector 1 (double female)	2*D4K10A-1D5A5 + D4Z009-000y
Connector 2 (single female)	D4K20A-1D5A5-y
Connector 3 (single female)	D4K10A-1D5A5+ D4Z001-000y
Cable	Dacar 535
Label	Stick label

Available Variants Weight

Customer Type	Rosenberger Type	Marking 1	Marking 2	Marking 3	Connector colour	C Label (mm)	weight (g) / pcs
60-0201008-01	LD5-CA164-1600-A-DA	IP35 20-0117025-01 60-0201008-01	IP24 20-0117034-01 60-0201008-01	IP07 20-0117001-01 60-0201008-01	Black - Claret Violet, Black	50 ± 5	TBD

Electrical data

Test voltage DC750 V

Mechanical data

Pull out strength cable $F > 110N$

Environmental data

RoHS compliant
Temperature range -40°C - +105°C

While the information has been carefully compiled to the best of our knowledge, nothing is intended as representation or warranty on our part and no statement herein shall be construed as recommendation to infringe existing patents. In the effort to improve our products, we reserve the right to make changes judged to be necessary.

Draft	Date	Check	Approved	Date	Rev.	Engineering change number	Name	Date
Wangning	11/12/17	Lijing	Qilinhu	30/03/18	a00	Original design	Wangning	30/03/18

Rosenberger Hochfrequenztechnik GmbH & Co. KG P.O.Box 1260 D-84526 Tittmoning Germany Tel. : +49 8684 18-0 Fax : +49 8684 18-499 Email : info@rosenberger.de www.rosenberger.de	Rosenberger Asia Pacific Electronic Co., Ltd., China Tianzhu Airport Industrial Zone, Beijing, China Tel.: +86 10 80481995 Fax: +86 10 80497052 www.rosenbergerap.com Email: info@rosenbergerap.com	Page 1 / 1
---	---	-------------------