




● GENERAL SPECIFICATIONS (电气参数):

| | | | | | | |
|------------------------------|------------------------|------------|------------|------------|------------|-------------|
| Holder type | CRB | | | | | |
| Normal Frequency | 190KHz~1250KHz | | | | | |
| Frequency range (at 25°C) | 190~249KHZ | 250~374KHZ | 375~429KHZ | 430~509KHZ | 510~699KHZ | 700~1250KHZ |
| Resonator Impedance | ≤20Ω | ≤20Ω | ≤20Ω | ≤20Ω | ≤25Ω | ≤80Ω |
| Frequency Stability | ±1.0KHz | ±1.0KHz | ±1.0KHz | ±2.0KHz | ±2.0KHz | ±0.5% |
| Aging for Ten Years | ±0.3% | ±0.3% | ±0.3% | ±0.3% | ±0.3% | ±0.3% |
| Capacitance C (pF) | 330 | 220 | 120 | 100 | 100 | 100 |
| Load Capacitance C (pF) | 470 | 470 | 470 | 100 | 100 | 100 |
| Operation Temperature Range: | -40°C ~ +85°C | | | | | |
| Storage Temperature: | -40°C ~ +100°C | | | | | |
| Test circuit | S&A 250B / 阻抗测试仪/网络分析仪 | | | | | |

● DIMENSIONS SPECIFICATIONS (外形尺寸)

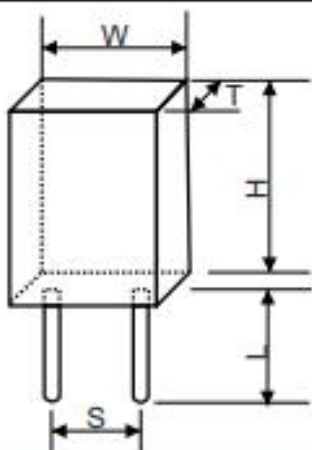

| Frequency Range (KHz) | Width W (mm) | Thickness T (mm) | Height H (mm) | Lead Space S (mm) | Lead Length L (mm) |
|-----------------------|--------------|------------------|---------------|-------------------|--------------------|
| 190~249 | 13.5 | 3.8 | 14.7 | 10.0 | 8.0 |
| 250~374 | 11.0 | 3.8 | 12.2 | 10.0 | 1.0 |
| 375~400 | 7.9 | 3.6 | 9.3 | 7.7 | 7.0 |
| 401~699 | 7.0 | 3.5 | 9.0 | 5.0 | 4.0 (6.0) |
| 700~1250 | 5.2 | 2.8 | 6.8 | 2.5 | 3.5 |