
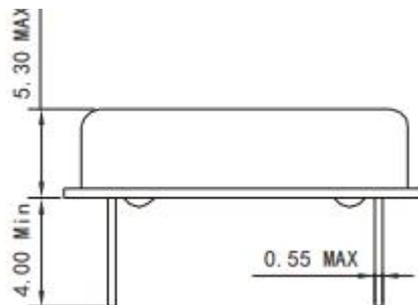
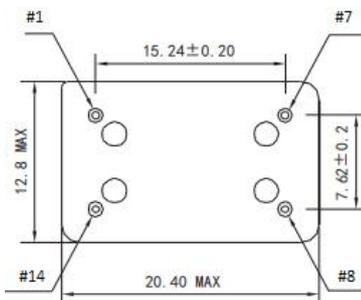



●OSC DIP-14/全尺寸 (电气参数):

Supply Voltage/工作电压	3.3V		5V
Normal Frequency/频率范围	1MHZ~180.000MHZ		
Frequency Tolerance/25±3℃/调整偏差	±10PPM~±20PPM		
Operation Temperature Range/工作温度	-40℃ ~ +85℃		
14.Storage Temperature/存储温度	-55℃ ~ +125℃		
Duty Cycle/占空比	45/55 Standard		
Voltage Vol ( Max. )/Voltage Voh ( Min. )	VOL+10%Vdd/VOH=90%Vdd		
Aging 25±3℃ /年老化率	±3PPM/year	Output Load/输出	15pF HCMOS or 10 TTL
Rise Time / Full Time (上升/下降时间)	≤5ns	Start Up Time 启动时间	<10ns
Supply Current Max 供给电流	1.0~30.0MHZ	20mA max	25mA max
	30.0~50.0MHZ	30mA max	35mA max
	50.0~80.0MHZ	40mA max	40mA max
	80.0~180.0MHZ	60mA max	80mA max

●DIMENSIONS SPECIFICATIONS (外形尺寸)

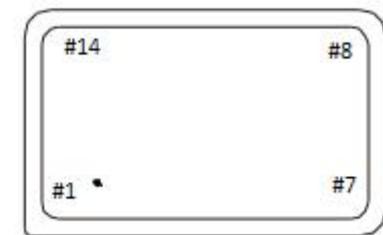

PIN	Connection
	E/D
#1	Not connected
#7	GND
#8	OUTPUT
#14	Vcc

Unit:mm

●Test Circuit(测试电路)

●Reflow Condition(回流焊条件)

