

Multifunctional duct sensors and measuring transducers incl. mounting flange, for humidity, temperature, CO2 content and air quality (VOC), calibratable, with Modbus connection



S+T REGELTECHNIK

Patented quality product (patent no. DE 10 2014 010 719.1)

The maintenance-free duct sensor AERASGARD® KFTM-LQ-CO2-Modbus (max. expansion level) and KCO2/KLQ-CO2/KFTM-CO2-Modbus with Modbus connection, automatic calibration, in an impact-resistant plastic housing with quick-locking screws, plastic sinter filter (replaceable), incl. mounting flange, optionally with/without display, for determining the CO2-content of the air (0...5000 ppm), of the air quality (0...100% VOC), the temperature (-35...+80 °C) and the relative air humidity (0...100% RH). International system of units SI (default) can be changed to imperial (via Modbus). The following parameters can be accessed via the Modbus: Temperature, relative humidity, air quality (VOC), carbon dioxide (CO2) and atmospheric pressure. The sensor is used in offices, hotels, convention centres, apartments, shops, etc. for the purpose of evaluating the indoor climate. This enables energy-saving room ventilation on an as-needed basis, thereby reducing operating costs and improving well-being. One sensor for every 30 m² of space is recommended.

A long-term stable, **digital humidity and temperature sensor** guarantees exact measurement results. The CO2 measurement is performed using an optical **NDIR sensor** (non-dispersive infra-red technology). The detection range is calibrated for standard applications such as monitoring residential rooms and conference rooms. The air quality is detected by a **VOC sensor** (mixed gas sensor for volatile organic substances). This sensor determines the loading of the room air due to contaminated gases such as cigarette smoke, body perspiration, exhaled breathing air, solvent vapours, emissions etc. With regard to the expected air contamination, low, medium or high VOC sensitivity can be selected.

Innovative Modbus sensor with galvanically separated RS485-Modbus-interface, selectable bus termination resistance, DIP switch for setting the bus parameters and bus address in current-free state, internal LEDs for telegram status display, two separate push-in terminals and large three-line display (illuminated; with customised programming in the 7-segment and dot-matrix range). The sensor is factory-calibrated; an environmental precision adjustment by an expert is possible.

TECHNICAL DATA

Voltage supply:	24 V AC / DC ($\pm 10\%$)
Power consumption:	< 4.8 W / 24 V DC typically; < 6.8 VA / 24 V AC typically; peak current 200 mA
System of units:	SI (default) or Imperial (switchable via Modbus)
Data points:	temperature [°C] [°F], relative humidity [% RH], atmospheric pressure [hPa], air quality (VOC) [%], carbon dioxide (CO2) [ppm]

HUMIDITY

Sensors:	digital humidity sensor with integrated temperature sensor, low hysteresis, high long-term stability
Sensor protection:	plastic sinter filter, Ø 16 mm, L = 35 mm, exchangeable (optional metal sinter filter, Ø 16 mm, L = 32 mm)
Measuring range, humidity:	0...100% RH
Operating range, humidity:	0...95% RH (without dew formation)
Deviation in humidity:	typically $\pm 2.0\%$ (20...80% RH) at +25 °C, otherwise $\pm 3.0\%$

TEMPERATURE

Measuring range, temperature:	-35...+80 °C
Operating range, temperature:	-10...+60 °C
Deviation in temperature:	typically $\pm 0.2\text{K}$ at +25 °C

AIR QUALITY (VOC)

Sensor:	VOC sensor (metal oxide) with automatic calibration (VOC = volatile organic compounds)
Measuring range:	0...100% air quality; referred to calibrating gas; multi-range switching VOC sensitivities (low/medium/high)
Measuring accuracy:	typically $\pm 20\%$ of final value (referred to calibrating gas)
Service life	>60 months (under normal load conditions)

CARBON DIOXIDE (CO2)

Sensor:	optical NDIR sensor (non-dispersive infra-red technology) including atmospheric pressure compensation (up to 1100 mbar) with manual calibration (via zero button), with automatic calibration (can be deactivated via Modbus)
Measuring range:	0...5000 ppm
Measuring accuracy:	typically $\pm 30\text{ ppm}$ ($\pm 3\%$ of measured value)
Temperature dependence:	$\pm 5\text{ ppm per }^\circ\text{C}$ or $\pm 0.5\%$ of measured value per $^\circ\text{C}$ (whichever is higher)
Pressure dependence:	$\pm 0.13\%$ per mm Hg
Long-term stability:	< 2% in 15 years
Gas exchange:	by diffusion

Display screen
(cyclic)

Modbus
Tyr 2



Temperature [°C]



Temperature [°F]



Humidity



Air quality (VOC)



Carbon dioxide (CO2)

Display screen
(static)

Atmospheric pressure
(Example Index 5)

Programmable
display screen



Continued on next page!




S+S REGELTECHNIK

AERASGARD® KCO2 / KLQ-CO2 - Modbus

AERASGARD® KFTM-(LQ)-CO2 - Modbus

Multifunctional duct sensors and measuring transducers incl. mounting flange,
for humidity, temperature, CO2 content and air quality (VOC),
calibratable, with Modbus connection

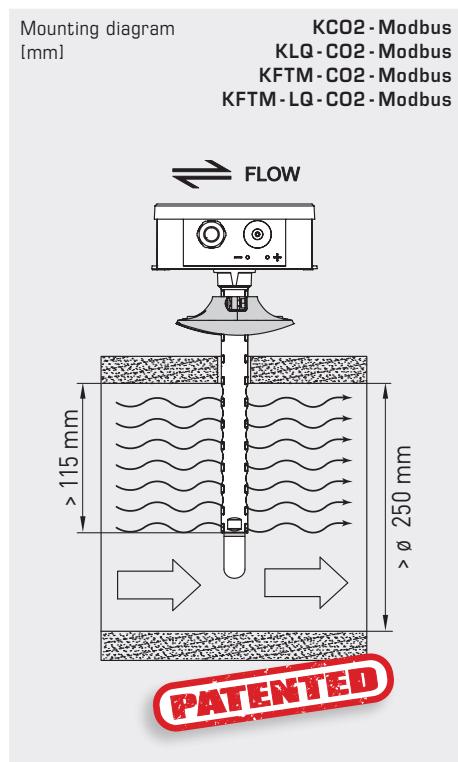

KFTM-CO2 - Modbus
KFTM-LQ-CO2 - Modbus
with plastic sinter filter (standard)



KFTM-CO2 - Modbus
KFTM-LQ-CO2 - Modbus
with display and
plastic sinter filter (standard)



SF-K
Plastic sinter filter (standard)

SF-M
Metal sinter filter (optional)



TECHNICAL DATA

(continued)

Bus protocol:	Modbus (RTU mode), address range 0...247 selectable
Baud rate:	9600, 19200, 38400 Baud
Signal filtering:	4 s / 32 s
Response time:	< 2 minutes, minimal flow velocity 0.3 m/s (air)
Ambient temperature:	-10...+60 °C
Electrical connection:	0.2 - 1.5 mm ² , ia push-in terminal
Cable connection:	cable gland, plastic (M 16 x 1.5; with strain relief, exchangeable, inner diameter 10.4 mm) or M12 connector according to DIN EN 61076-2-101 (optional on request)
Housing:	plastic, UV-resistant, material polyamide, 30% glass-globe reinforced, with quick-locking screws (slotted / Phillips head combination), colour traffic white (similar to RAL 9016), housing cover for display is transparent!
Housing dimensions:	126 x 90 x 50 mm (Tyr 2)
Protective tube:	PLEUROFORM™, material polyamide (PA6), with torsion protection, v _{max} = 30 m/s (air) Ø 20 mm, NL = 202.5 mm without filter, NL = 235 mm with plastic filter (optional 100 mm)
Process connection:	via mounting flange made of plastic (included in scope of delivery)
Protection class:	III (according to EN 60 730)
Protection type:	IP 65 (according to EN 60529) housing in the built-in state (permeable PLEUROFORM: IP 30)
Standards:	CE conformity, electromagnetic compatibility according to EN 61 326, EMC Directive 2014 / 30 / EU
Optional:	Display with illumination, three-line, cutout approx. 70 x 40 mm (W x H), for displaying actual humidity, actual temperature, air quality and the actual CO2 content (cyclic) or a selectable parameter (static) or an individually programmable display value
ACCESSORIES	see table

AERASGARD® KCO2 / KLQ - CO2 - Modbus


AERASGARD® KFTM - (LQ) - CO2 - Modbus

Multifunctional duct sensors and measuring transducers incl. mounting flange, for humidity, temperature, CO2 content and air quality (VOC), calibratable, with Modbus connection



S+S REGELTECHNIK


Dimensional drawing
[mm]

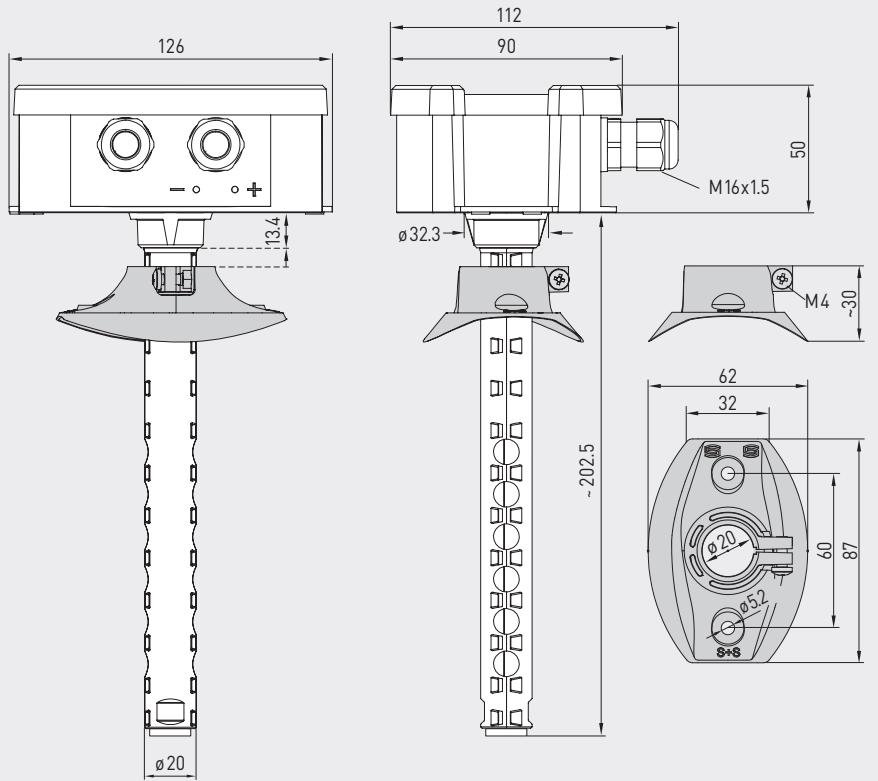

KCO2-Modbus
KLQ - CO2-Modbus



Dimensional drawing
[mm]

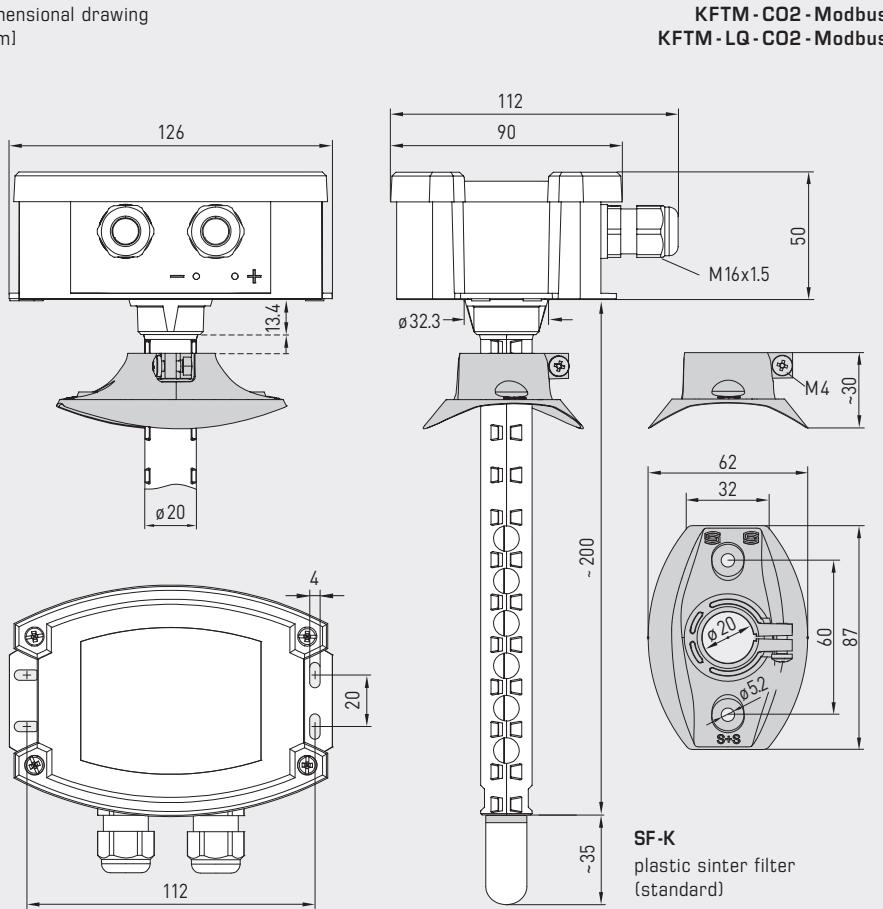

KFTM - CO2 - Modbus
KFTM - LQ - CO2 - Modbus



SF-M
metal sinter filter
(optional)




S+S REGELTECHNIK

AERASGARD® KCO2 / KLQ-CO2 - Modbus

AERASGARD® KFTM-(LQ)-CO2 - Modbus

Multifunctional duct sensors and measuring transducers incl. mounting flange,
for humidity, temperature, CO2 content and air quality (VOC),
calibratable, with Modbus connection

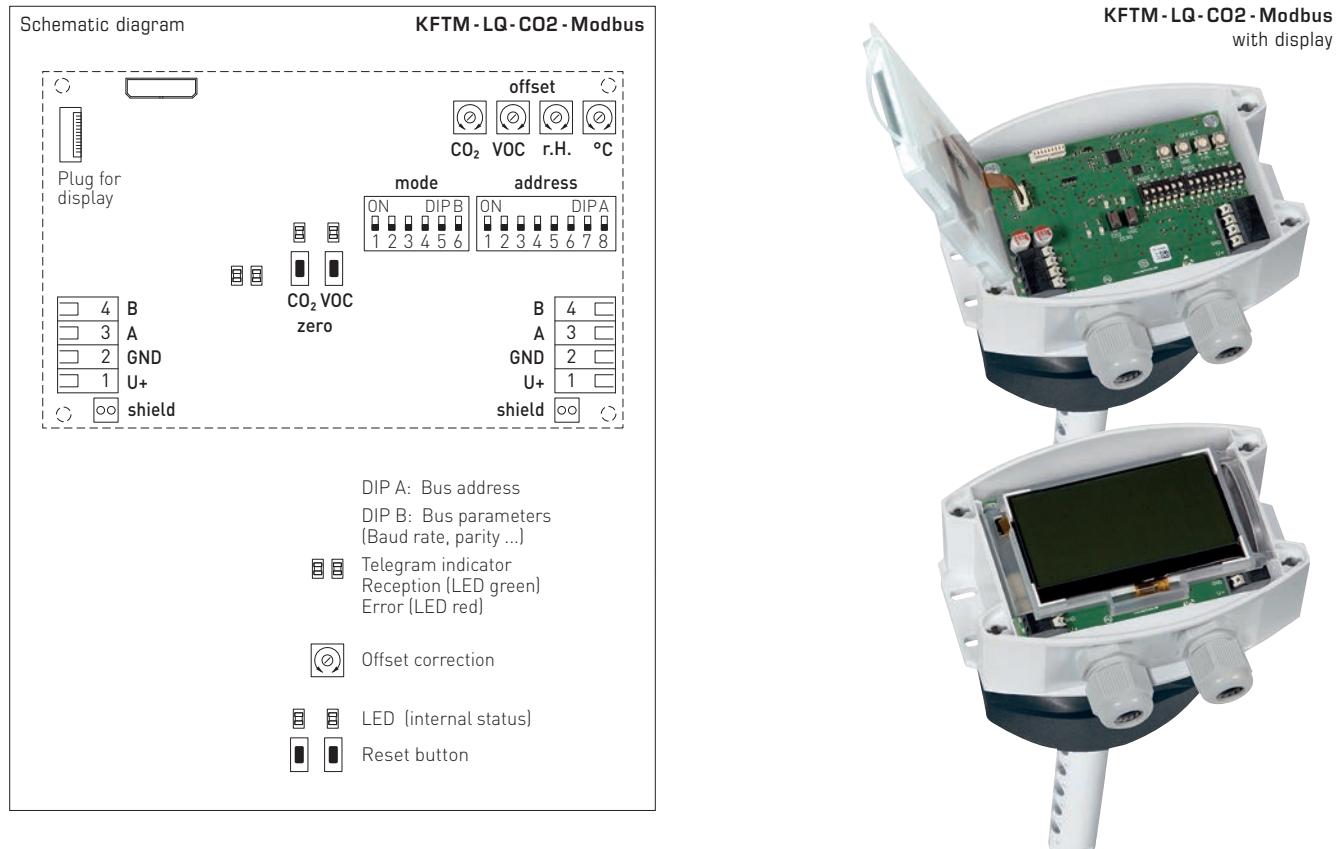

AERASGARD® KCO2 - Modbus

Duct sensor for CO2 content, *Deluxe*

AERASGARD® KLQ-CO2 - Modbus

Duct sensor for air quality (VOC) and CO2 content, *Deluxe*

AERASGARD® KFTM-CO2 - Modbus

Multifunctional duct sensor
for humidity, temperature and CO2 content, *Deluxe*

AERASGARD® KFTM-LQ-CO2 - Modbus

Multifunctional duct sensor
for humidity, temperature, air quality (VOC) and CO2 content, *Deluxe*

Type/VG02	Measuring Range	Display	Item No.	Price								
	Humidity	Temperature*	CO2	VOC								
KCO2-Modbus												
KCO2-Modbus	–	–	5000 ppm	–	1501-8110-6001-200	375,41 €						
KCO2-Modbus LCD	–	–	5000 ppm	–	■ 1501-8110-6071-200	435,63 €						
KLQ-CO2-Modbus												
KLQ-CO2-Modbus	–	–	5000 ppm	0...100 %	1501-8111-6001-500	423,79 €						
KLQ-CO2-Modbus LCD	–	–	5000 ppm	0...100 %	■ 1501-8111-6071-500	495,13 €						
KFTM-CO2-Modbus												
KFTM-CO2-Modbus	0...100 % RH	-35...+80 °C	5000 ppm	–	1501-8116-6001-200	385,09 €						
KFTM-CO2-Modbus LCD	0...100 % RH	-35...+80 °C	5000 ppm	–	■ 1501-8116-6071-200	469,74 €						
KFTM-LQ-CO2-Modbus												
KFTM-LQ-CO2-Modbus	0...100 % RH	-35...+80 °C	5000 ppm	0...100 %	1501-8118-6001-500	503,60 €						
KFTM-LQ-CO2-Modbus LCD	0...100 % RH	-35...+80 °C	5000 ppm	0...100 %	■ 1501-8118-6071-500	591,86 €						
Optional:	Cable connection with M12 connector according to DIN EN 61076-2-101 shortened protective tube PLEUROFORM™ , NL = 100 mm				on request							
					on request							
Note:	This unit must not be used as safety-relevant device!											
* International system of units SI (default) can be changed to imperial (via Modbus).												
ACCESSORIES												
KA2-Modbus	Communication adapter (USB/RS485) for system connection				1906-1200-0000-100	213,99 €						
LA-Modbus	Line termination device (with terminating resistor) as an active bus termination				1906-1300-0000-100	79,81 €						
SF-M	Metal sinter filter, Ø 16 mm, L = 32 mm, exchangeable, stainless steel V4A (1.4404)				7000-0050-2200-100	42,33 €						
MFT-20-K	Mounting flange, plastic (included in the scope of delivery)				7000-0031-0000-000	9,56 €						
For further information, see last chapter Accessories!												