

SPECIFICATION

Current Rating :3A
 Voltage rating :250V AC DC
 Insulator Resistance :1000 Megohms min.
 Contact Resistance :20milliohms max.
 Dielectric Withstanding :AC 500V
 Operating Temperature :-40°C to +105°C
 Contact Material :Brass
 Insulator Matreial :Polyester, UL 94V-0
 Standard :PA6T+30%G.F(black)
 Contact Plated :Gold Flash All Over Nickel

品名/规格	A(mm)	B(mm)	C(mm)	D(mm)	G(mm)
6P	26.82	5.08	12.74	7.62	16.68
8P	29.36	7.62	15.28	10.16	19.22
10P	31.9	10.16	17.82	12.70	21.76
12P	34.44	12.70	20.36	15.24	24.30
14P	36.98	15.24	22.90	17.78	26.84
16P	39.52	17.78	25.44	20.32	29.38
18P	42.06	20.32	27.98	22.86	31.92
20P	44.60	22.86	30.52	25.40	34.46
24P	49.68	27.94	35.60	30.48	39.54
26P	52.22	30.48	38.14	33.02	42.08
30P	57.30	35.56	43.22	38.10	47.16
34P	62.38	40.64	48.30	43.18	52.24
40P	70.00	48.26	55.92	50.8	59.86
50P	82.70	60.96	68.62	63.50	72.56
60P	95.40	73.66	81.32	76.20	85.26
64P	100.48	78.74	86.40	81.28	90.34

PIN位	平整度
≤12P	0.10
≤24P	0.12
≤40P	0.15
≥50P	0.20

东莞市汇豪科技有限公司

REV A.0
 DRAWN:HH
 2021-06-21



Encoding:

CHECKED :

TITLE: 2.54 短耳牛角 XXP BK
 SMT DIP:10.5(1.16) PA6T环保

APPROVED:

SIZE A4
 UNIT mm

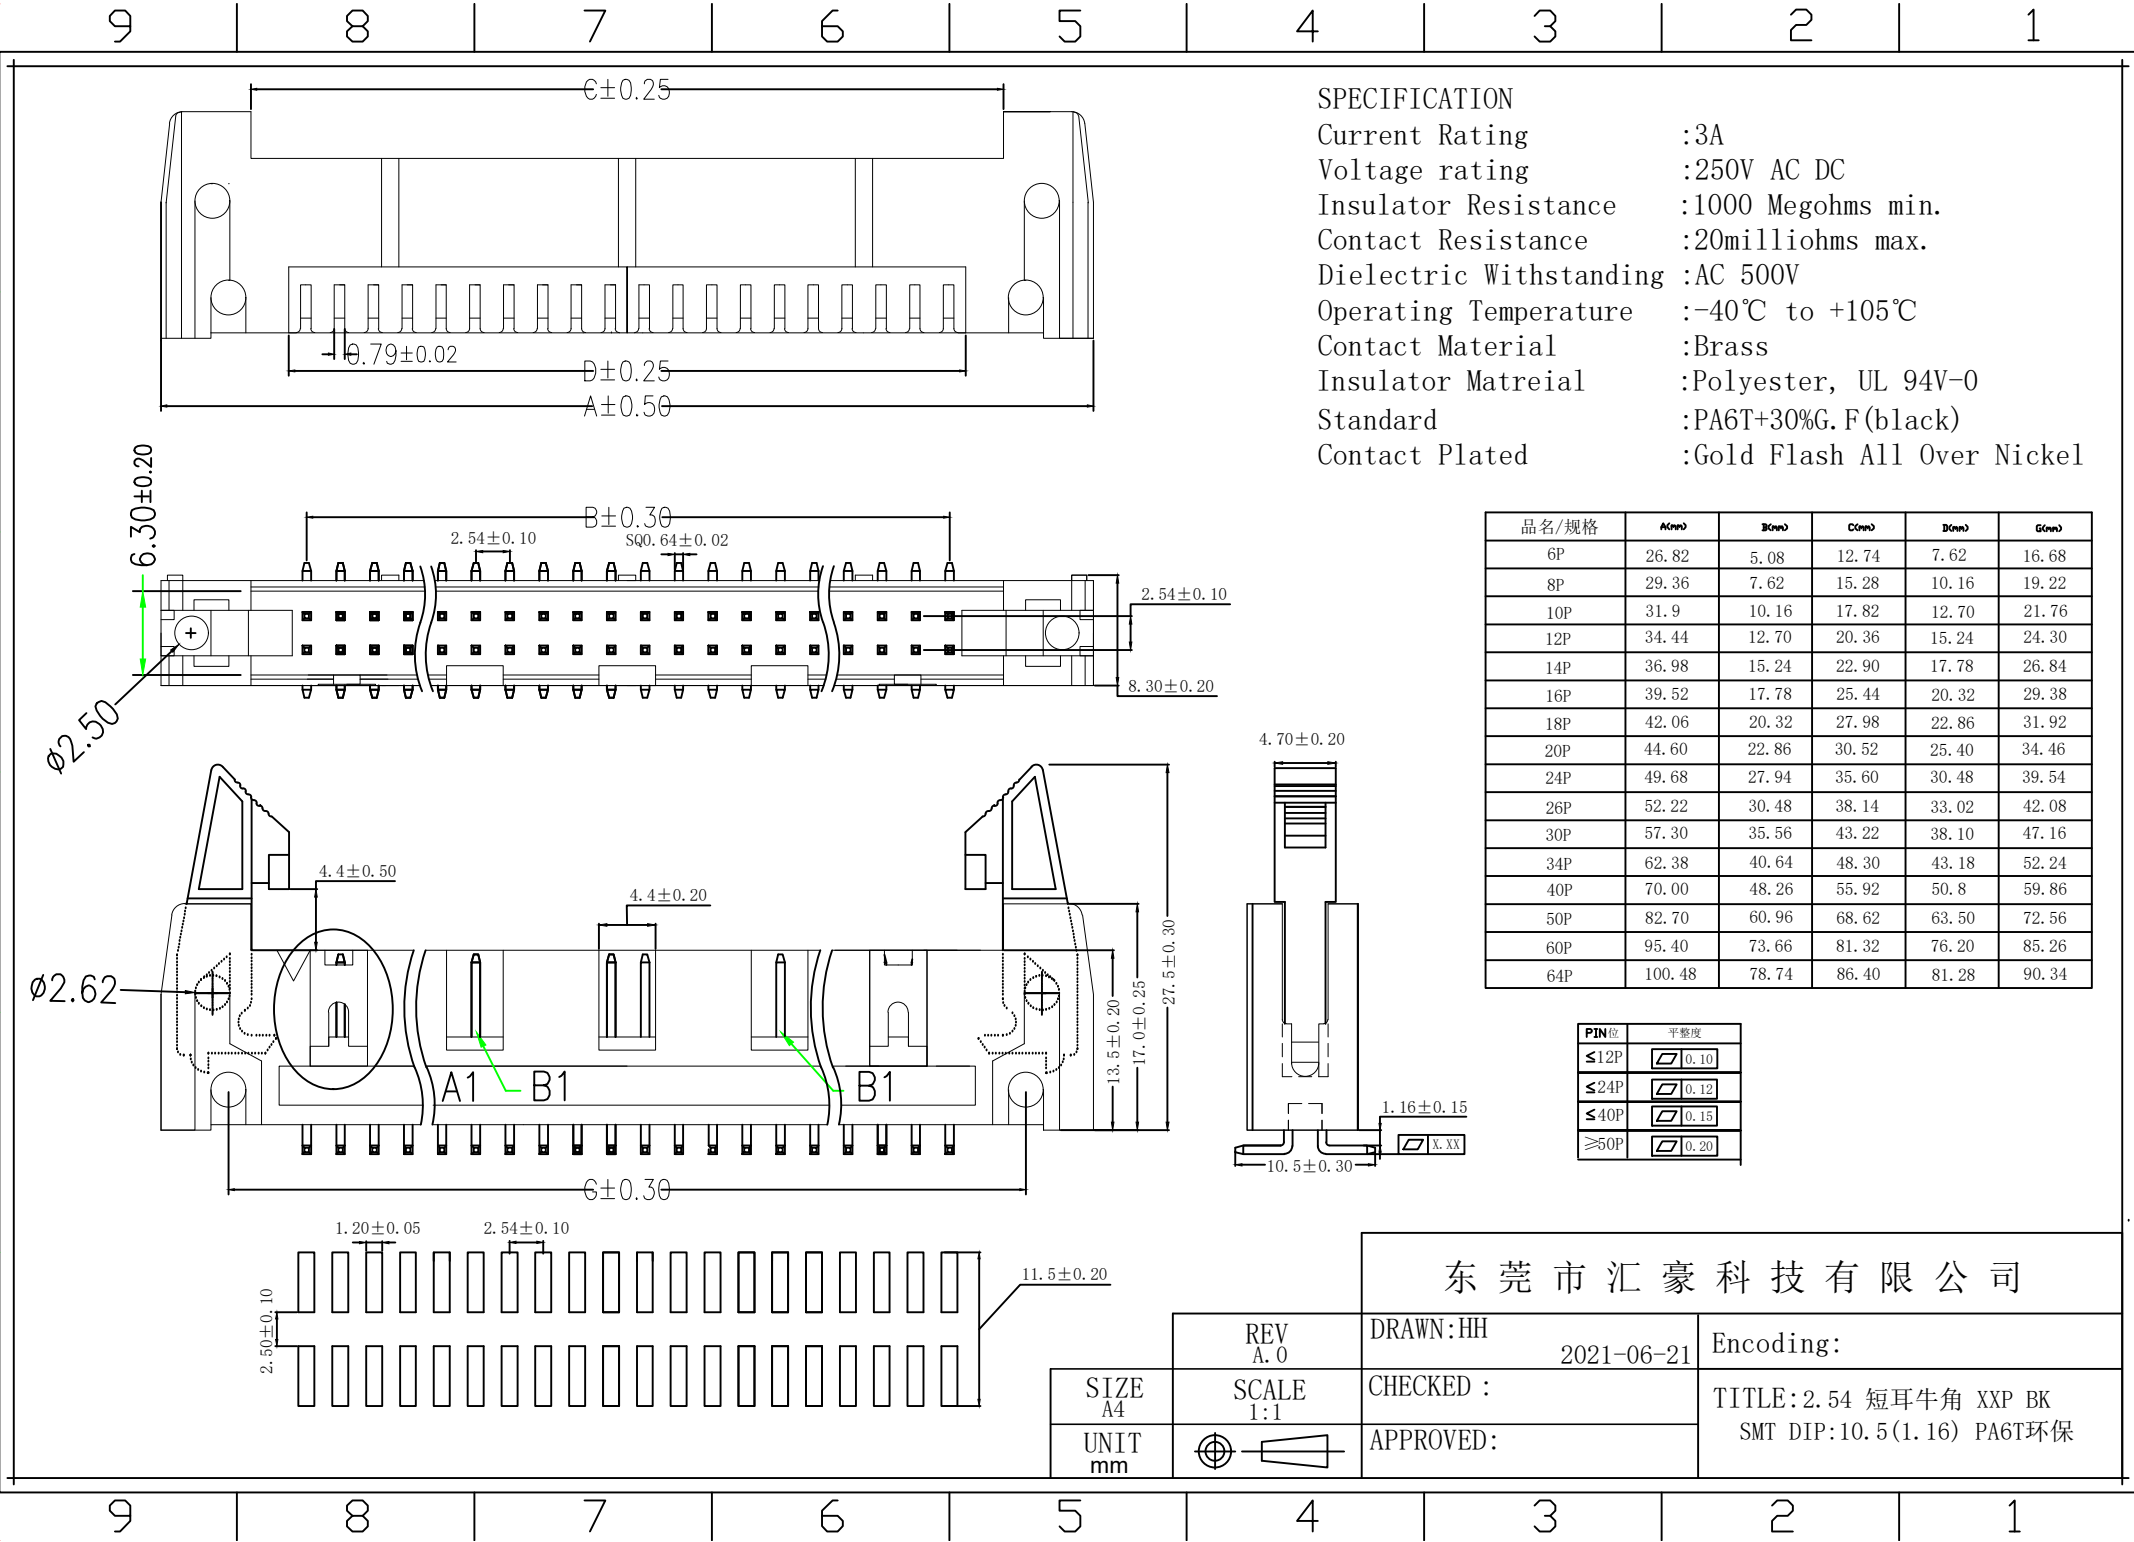

F
E
D
C
B
A

F
E
D
C
B
A

9 8 7 6 5 4 3 2 1

9 8 7 6 5 4 3 2 1