


B 2.0*PIN NO. ±0.50

A 2.0*(PIN NO. -1) ±0.30


2.0 ± 0.10

SQ 0.5 ± 0.02

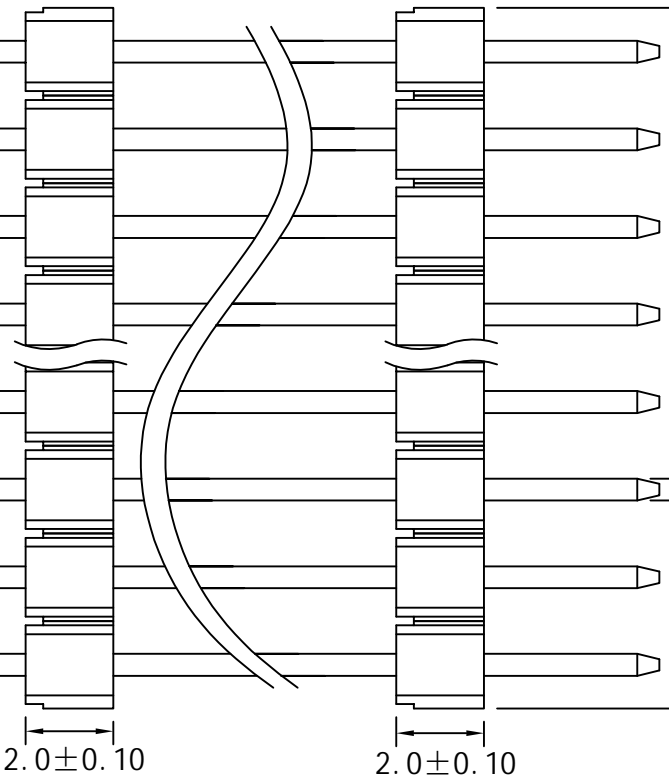

2.0 ± 0.10

2.0 ± 0.10

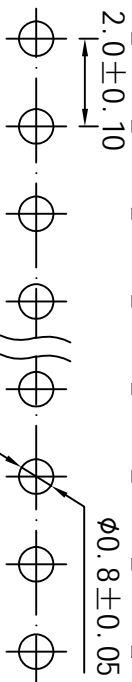

P.C.B LAYOUT

SPECIFICATION

Current Rating : 2A
 Voltage rating : 250V AC DC
 Insulator Resistance : 1000 MΩ min.
 Contact Resistance : 20 mΩ Max.
 Dielectric Withstanding: AC 500V
 Operating Temperature : -40°C to +105°C
 Contact Material : Brass
 Insulator Material : Polyester, UL 94V-0
 Standard : PBT+30%G.F(black)
 Contact Plated : Gold Flash All Over Nickel

PIN NO.	DIMENSION	
	A	B
2	2.0	4.0
3	4.0	6.0
4	6.0	8.0
5	8.0	10.0
6	10.0	12.0
7	12.0	14.0
8	14.0	16.0
...
40	78.0	80.0

东莞市汇豪科技有限公司

DRAWN: HH 2018-06-21

Encoding:

REV A.0

CHECKED :

TITLE: PH2.0 1*XP*2 S022.0

SCALE 1:1

APPROVED:

/4.0/4.0 S/T PBT环保

SIZE A4
 UNIT mm

9 8 7 6 5 4 3 2 1