


**SPECIFICATION**

Current Rating : 2A  
 Insulator Resistance : 1000Megohms Min.  
 Contact Resistance : 20 Milliohms Max.  
 Dielectric With Standing : AC 500V  
 Operating Temperature : -40°C To +105°C  
 Contact Material : Brass  
 Insulator Material : Polyester UL94V-0  
 Standard : Nylon-6T+30%G.F  
 Standard : Gold Flash All Over Nickel

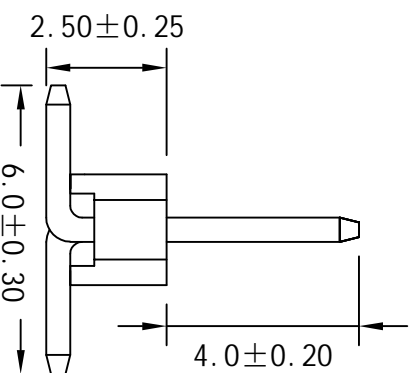

PIN NO.	DIMENSION	
	A	B
2	2.0	4.0
3	4.0	6.0
4	6.0	8.0
5	8.0	10.0
6	10.0	12.0
7	12.0	14.0
8	14.0	16.0
∴	∴	∴
40	78.0	80.0

东莞市汇豪科技有限公司

REV A.0	DRAWN HH	2021-11-03	Encoding:
SCALE 1:1	CHECKED:		TITLE: PH2.0 1*XP S09.0/6.0
UNIT mm	APPROVED:		(0)/4.0 反脚位 NL6T环保