


P.C.B LAYOUT

SPECIFICATION

- Current Rating : 1A
- Insulator Resistance : 1000Megohms Min.
- Contact Resistance : 20 milliohms Max.
- Dielectric With Standing : AC 500V
- Operating Temperature : -40°C To +105°C
- Contact Material : Brass
- Standard : NL6T UL94V-0 BLACK
- Standard : Gold Flash All Over Nickel

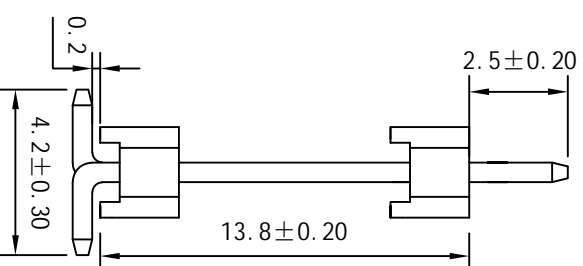

PIN NO.	DIMENSION	
	A	B
2	2.0	4.0
3	4.0	6.0
4	6.0	8.0
5	8.0	10.0
6	10.0	12.0
7	12.0	14.0
8	14.0	16.0
...
40	78.0	80.0

东莞市汇豪科技有限公司

REV A.0	DRAWN HH	2022-09-02	Encoding:
SCALE 1:1	CHECKED :		TITLE: PH2.0 1*XP*2 S018.6/4.2
UNIT mm	APPROVED:		(0.2)/2.5 SMT 正脚位 NL6T环保