

**SPECIFICATION**

Current Rating : 2A

Insulator Resistance : 1000M $\Omega$  Min.

Contact Resistance : 20m $\Omega$  Max.

Dielectric With Standing : AC 500V


Operating Temperature : -40 $^{\circ}$ C To +105 $^{\circ}$ C

Contact Material : Brass

Insulator Material : Polyester UL94V-0

Standard : PBT+30%G.F

Standard : Gold Flash All Over Nickel

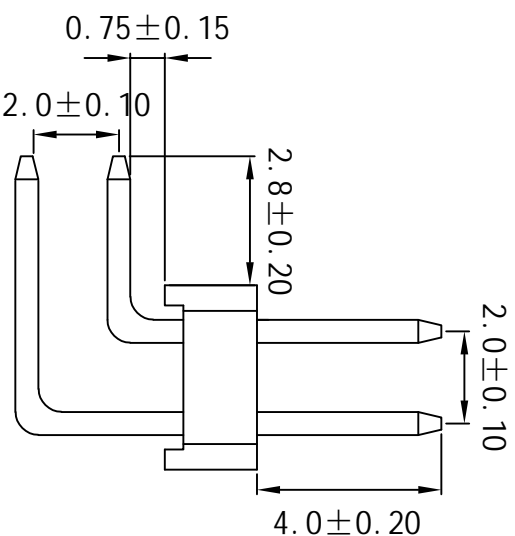

PIN NO.	DIMENSION	
	A	B
2*2	2.0	4.0
2*3	4.0	6.0
2*4	6.0	8.0
2*5	8.0	10.0
2*6	10.0	12.0
2*7	12.0	14.0
2*8	14.0	16.0
...	...	...
2*40	78.0	80.0

东莞市汇豪科技有限公司

REV A.0	DRAWN: HH	2023-1-11	Encoding:
SCALE 1:1	CHECKED:		TITLE: PH2.0 2*5P N2P S010.5/ 14.5/2.8(0.75)/4.0 R/A PBT环保
UNIT mm	APPROVED:		