

SPECIFICATION

Current Rating : 2A

Insulator Resistance : 1000MΩ min.

Contact Resistance : 20mΩ Max.

Dielectric Withstanding: AC 500V



Operating Temperature : -40°C to +105°C

Contact Material : Brass


Insulator Material : Polyester, UL 94V-0

Standard : Nylon-6T+30%G.F (black)

Contact Plated : Gold Flash All Over Nickel

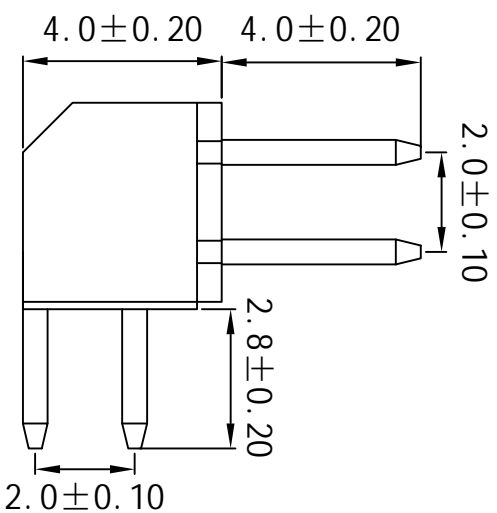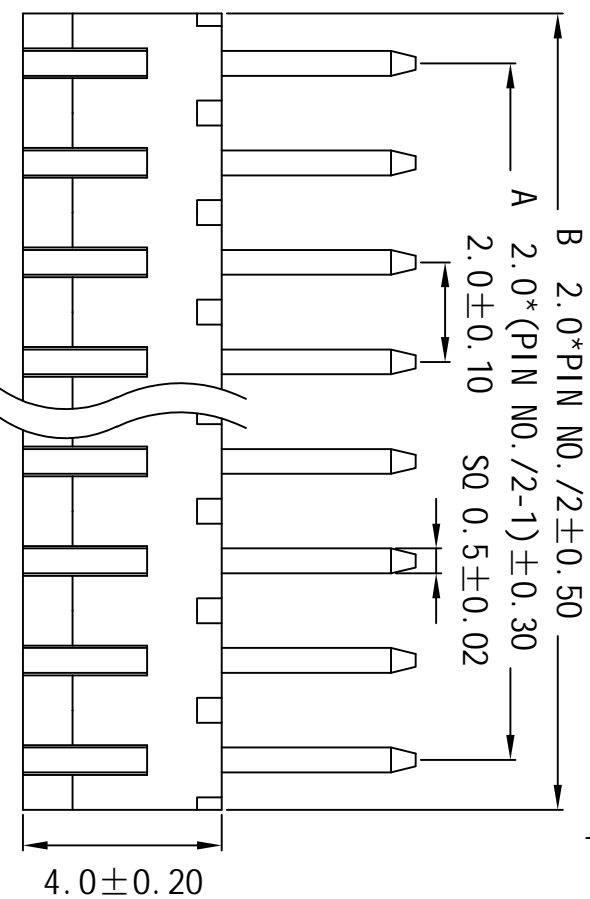

PIN NO.	DIMENSION	
	A	B
2*2	2.0	4.0
2*3	4.0	6.0
2*4	6.0	8.0
2*5	8.0	10.0
2*6	10.0	12.0
2*7	12.0	14.0
2*8	14.0	16.0
⋮	⋮	⋮
2*40	78.0	80.0

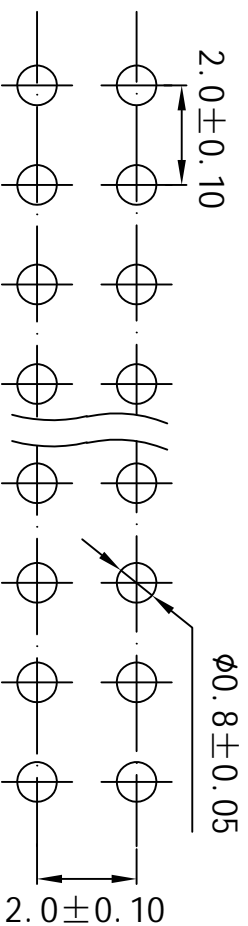

P.C.B LAYOUT

SIZE A4	REV A.0	DRAWN:HH	Encoding:
UNIT mm	SCALE 1:1	CHECKED:	TITLE:PH2.0*4.0 2*XP S09.2
		APPROVED:	/13.3/2.8(0)/4.0 R/A ML6T

东莞市汇豪科技有限公司

环保