


SPECIFICATION

- Current Ration : 3A
- Insulator Resistance : 1000MΩ Min.
- Contact Resistance : 20mΩ Max.
- Dielectric Withstanding : 500V AC/RMS
- Operating Temperature : -40°C to +105°C
- Contact Material : Brass
- Insulator Material : PBT UL 94V-0
- Finish : Gold flash all over nickel

| PIN NO. | DIMENSION | |
|---------|-----------|-------|
| | A | B |
| 2 | 2.54 | 5.08 |
| 3 | 5.08 | 7.62 |
| 4 | 7.62 | 10.16 |
| 5 | 10.16 | 12.7 |
| 6 | 12.7 | 15.24 |
| 7 | 15.24 | 17.78 |
| 8 | 17.78 | 20.32 |
| ... | ... | ... |
| 40 | 99.06 | 101.6 |

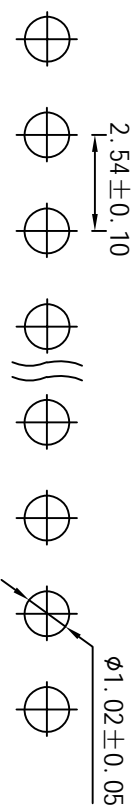

P.C.B LAYOUT

| | |
|-------------------------|---|
| 东莞市汇豪科技有限公司 | |
| REV A.0 | DRAWN: HH 2021-9-8 |
| SIZE SCALE A1 1:1 | CHECKED : |
| UMS | APPROVED: |
| Encoding: | TTITLE: PH2.54 1*2P S011.6/ 3.0S/T PBT环保 |