


**SPECIFICATION**

Current Rating : 3AMP  
 Voltage rating : 250V AC DC  
 Insulator Resistance : 1000 MΩ Min.  
 Contact Resistance : 20 mΩ Max.  
 Dielectric With Standing : AC 500V  
 Operating Temperature : -40°C To +105°C  
 Contact Material : Brass  
 Insulator Material : Polyester UL94V-0  
 Insulator Material : P. B. T+30%G. F (black)  
 Finish : Gold Flash All Over Nickel

PIN NO.	DIMENSION	
	A	B
2	2.54	5.08
3	5.08	7.62
4	7.62	10.16
5	10.16	12.7
6	12.7	15.24
7	15.24	17.78
8	17.78	20.32
...	...	...
40	99.06	101.6

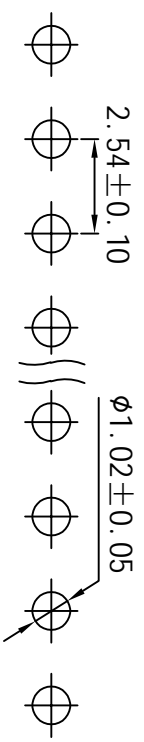

P.C.B LAYOUT

REV A.0	DRAWN: amy	2019-10-30	Encoding:
SCALE 1:1	CHECKED:		TITLE:PH2.54 1*XP*2 S028.0
UNIT mm	APPROVED:		/4.0/4.0 S/T PBT环保 AU

东莞市汇豪科技有限公司

9 8 7 6 5 4 3 2 1

A

B

C

D

E

F

A

B

C

D

E

F