

General Specifications

Impeller: Plastic(Black)94V-0

Frame : Plastic(Black)94V-0

Bearing : Sleeve


Life Expectancy : 30000hrs at 40°C

Operating Temp : -10°C~70°C



Wire/Terminal type : According to the customer's requests

Mass Weight : 50g(Ref)

IP Protection Level : IP50

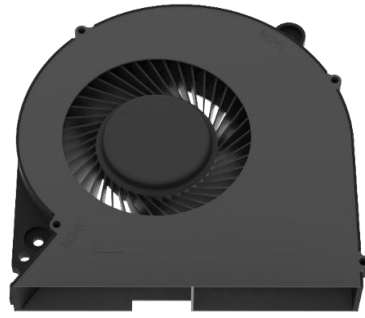

Size (mm)	Model	Voltage (VDC)	Bearing	Speed (RPM)	Air Flow (CFM)	Static Pressure (mm Aq (in free air))	Noise (db(A))
75*75*12	PK7B07512S05P	5	Sleeve	2950	7.8	12.6	36.6

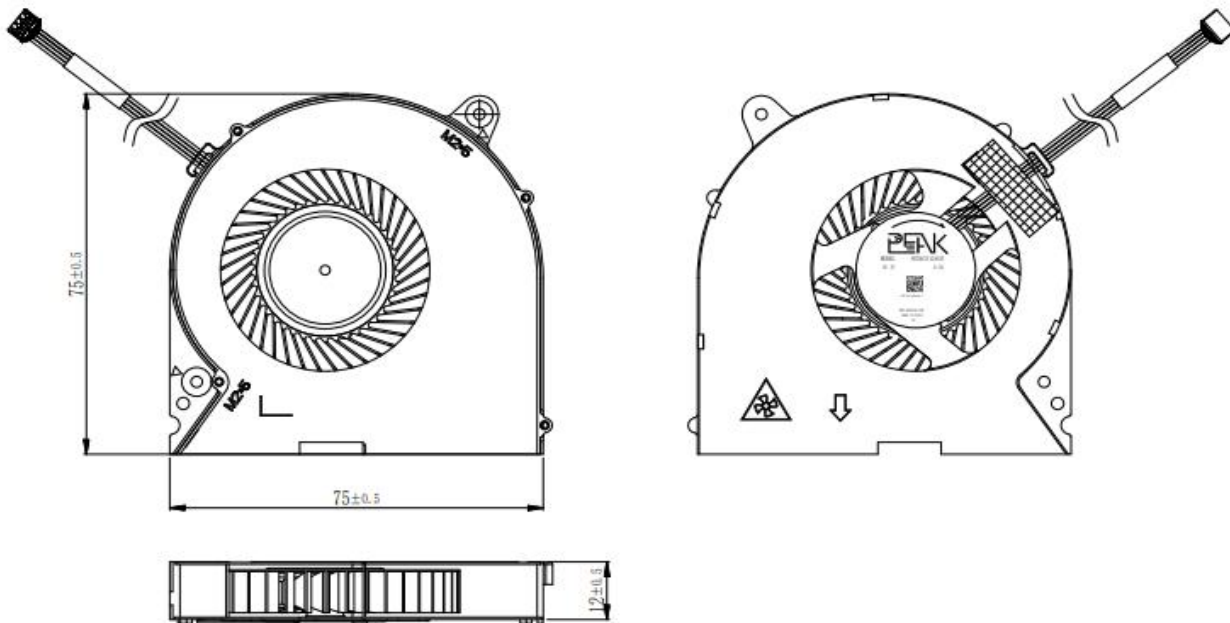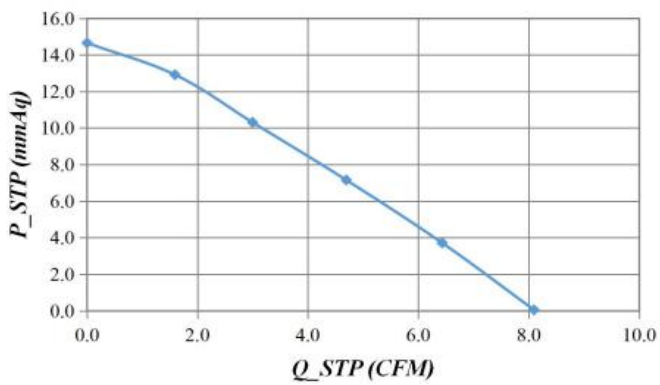

Contact: Ellen / 1 408 817 0141 Email: Ellensun@frd-corp.com
 Add: 1551 McCarthy Blvd ste 101, Milpitas, Ca 95035, USA