
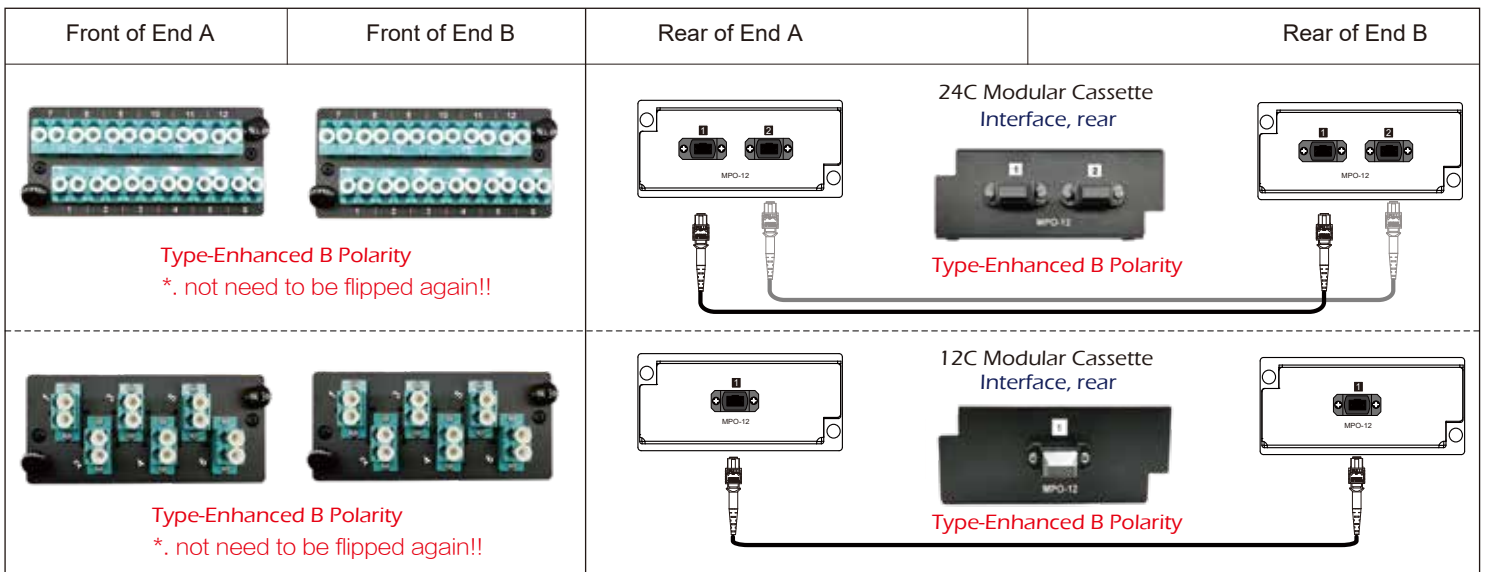


## Coding Rule of Modular Cassette

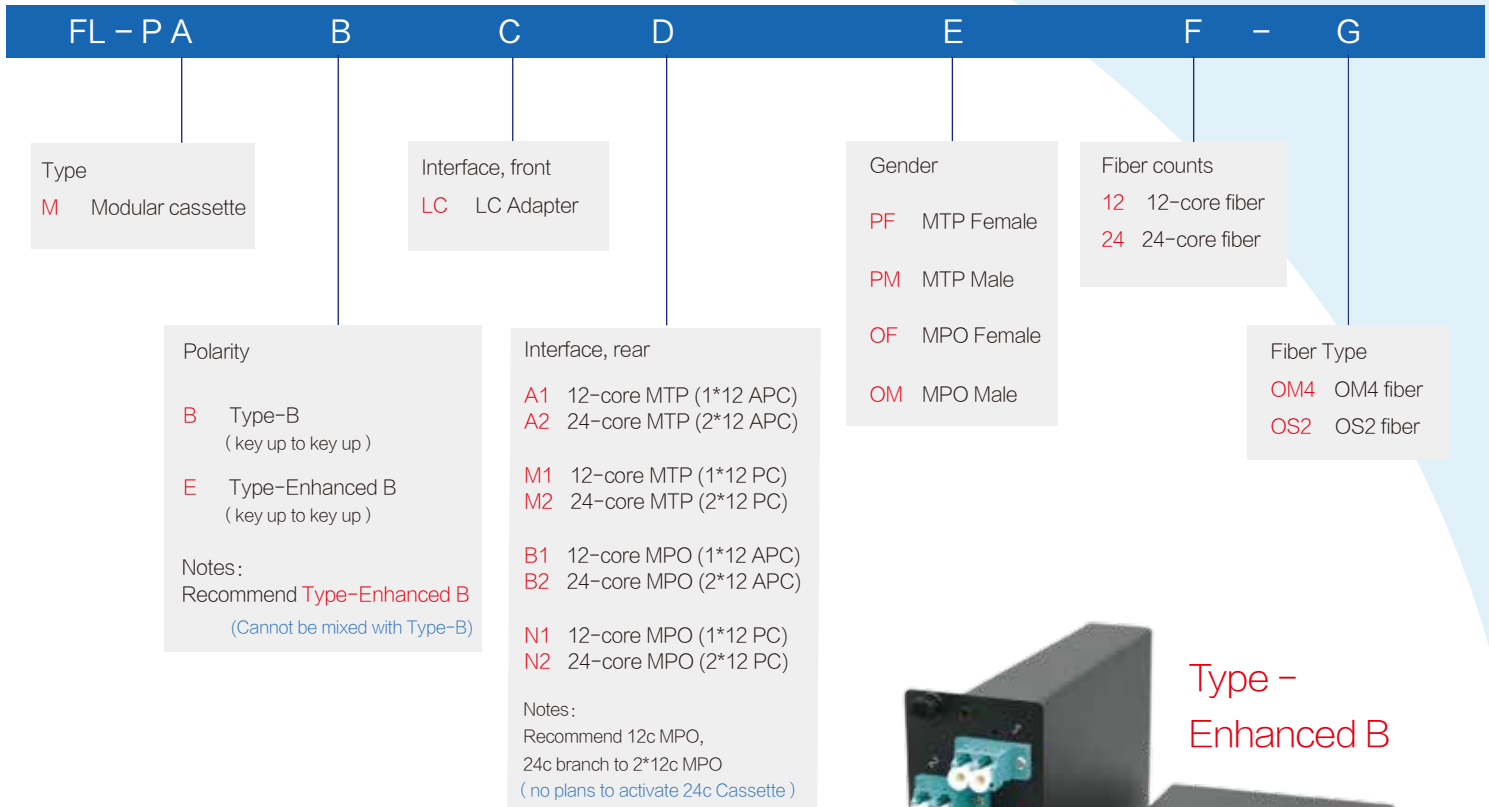

| Item           | Reference    | MPO-SM(APC) | MPO-MM(PC) | LC-SM(UPC) | LC-MM(UPC) |
|----------------|--------------|-------------|------------|------------|------------|
|                |              | Low Loss    | Low Loss   | Low Loss   | Low Loss   |
| Insertion Loss | IEC61300-3-4 | < 0.35dB    | < 0.35dB   | < 0.15dB   | < 0.15dB   |
| Return Loss    | IEC61300-3-6 | > 60dB      | > 20dB     | > 55dB     | > 35dB     |