

提供最有竞争力的传动解决方案和服务，持续为客户创造最大价值！
We always provide the most competitive drive solutions and services,
continue to create the maximum value for customers!



尤尼德（杭州）机械有限公司 YND (HANGZHOU) MACHINERY CO., LTD.

地址: 中国·浙江 杭州市余杭区未来科技城文一西路1378号
1378 West Wenyi Road, Future Technology City, Yuhang District,
Hangzhou City, Zhejiang Province, China.
电话/TEL: 0086-0571-87386872 0086-0571-88613361
0-18806770015
传真/FAX: 0086-0571-87386872 0086-0571-88613661
网址/HTTP: //www.yndgearbox.com
邮箱/E-mail: sales1@yndmachinery.com

北京办事处 Beijing Office

地址: 北京市海淀区新都公寓
Xindu Apartment, Haidian District, Beijing
电话/TEL: 0086-010-82955707
0-17794588868

山东办事处 Shandong Office

地址: 山东省淄博市高新技术开发区裕民路268号
No.268, Yumin Road, High-Tech Zone, Zibo City,
Shandong
电话/TEL: 0086-0533-7747 888
0-17764550541
传真/FAX: 0086-0533-7868 118

广东办事处 Guangdong Office

地址: 深圳市宝安区自由路愉盛综合大厦
Yusheng Comprehensive Building, Free Road,
Bao'an District, Shenzhen
电话/TEL: 0-18958075595

郑州办事处 Zhengzhou Office

地址: 郑州市高新区玉兰街16号龙汇国际
Longhui Interational, No.16, Yulan Street,
High-tech Zone, Zhengzhou
电话/TEL: 0086-0371-63294858 55059702
0-17764584685

湖南办事处 Hunan Office

地址: 湖南省长沙市芙蓉区张公岭龟山路410号
No.410, Guishan Road, Zhanggongling,
Furong District, Changsha, Hunan
电话/TEL: 0086-0731-83108109
0-17764558808

注: 本说明书及图片等已经严格审核, 但差错过漏情况仍有可能存在; 内容说明可能会因市场因素而作技术方面的调整, 恕不另行通知。
因此, 本公司保留最终解释权, 并说明本样本内容不能作为合约的组成部分。

Note: This product content has been looked through strictly, but mistakes neglects maybe also exist so we declare this product content isn't part of the agreement between us, and our company hold the finally explain potency. Instructions in the manual may be technically adjusted upon market factors, and there will be no notice in advance All operations shall take the actual contract as prevail.

生产基地: 浙江杭州
Production base: Hangzhou, Zhejiang

YND 尤尼德传动
YND TRANSMISSION



H/B工业齿轮箱

行星齿轮减速机选型手册



H/B GEAR UNITS
P SERIES PLANETARY
GEARBOX

H/B工业齿轮箱
P系列行星齿轮减速机

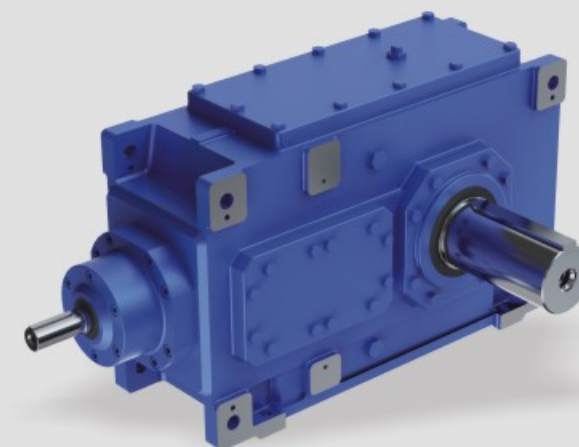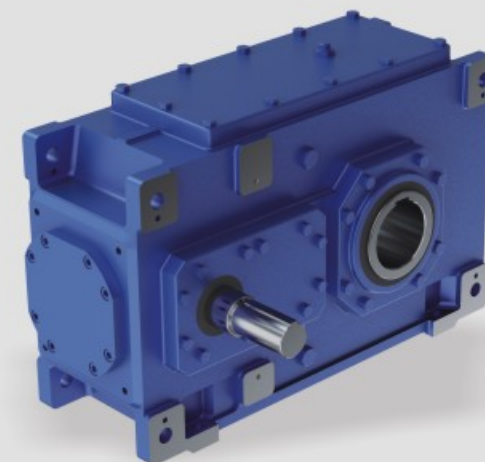

尤尼德（杭州）机械有限公司
YND (Hangzhou) Machinery Co., Ltd.




企业简介 Company

尤尼德(杭州)机械有限公司是一家集产品研发、技术服务、生产经营为一体的专业传动科技型企业。致力于提供更有竞争力的传动解决方案和服务，为客户创造更大的价值！

公司主要产品有R、S、K、F四大系列硬齿面减速机，RV/WP系列蜗轮蜗杆减速机，UD/MB系列无级减速机，P系列精密行星减速机，H/B系列大功率减速机，C/G系列齿轮马达及SWL系列丝杆升降机等。产品广泛应用于环保设备、筑路机械、仓储物流，食品机械、印刷包装、汽车检测、立体车库、石油化工、冶金、陶瓷、玻璃、印染纺织、木工机械等传动设备的各个行业。

围绕“品质至上、服务为先”的战略方针，认真贯彻执行国际质量认证体系，核心产品自主研发并获得多项“国家知识产权局”授予的专利称号，部分产品已列入省技术创新计划项目之中。公司与多家科研机构建立战略合作，并列入“杭州师范大学”教学科研实习基地。年取得了企业自营进出口权，产品远销欧美、东南亚等国家和地区。

“尤尼德”自创立至今始终遵循“诚信、专业、高效、共赢”的科学的和管理和服务理念，真诚期待与您共同携手，开拓美好科技未来。

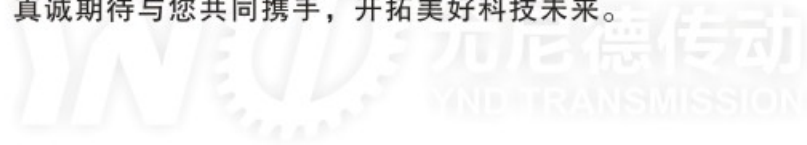

YND (Hangzhou) Machinery Co., Ltd. is a professional transmission technology enterprise integrating product research and development, technical services, production and operation. Committed to providing more competitive transmission solutions and services, to create greater value for customers!

The company's main products are R, S, K, F series geared motor, RV/WP series worm reducer, UD/MB series stepless reducer, P series precision planetary reducer, H/B series high-power reducer, C/G series gear motor and SWL series screw elevator. Products are widely used in environmental protection equipment, road building machinery, storage and logistics, food machinery, printing and packaging, automotive testing, three-dimensional garage, petrochemical, metallurgy, ceramics, glass, printing and dyeing textile, woodworking machinery and other transmission equipment industries.

Around the strategic policy of "quality first, service first", we earnestly implement the international quality certification system. The core products are independently developed and awarded many patent titles by the State Intellectual Property Office. Some of the products have been listed in the provincial technical innovation program. The company has established strategic cooperation with several scientific research institutions and has been listed as the teaching and scientific research practice base of Hangzhou Normal University. In, the company gained the right of self import and export, and its products were exported to Europe and America, Southeast Asia and other countries and regions.

Since its inception, YND has always followed the scientific management and service concept of "integrity, professionalism, efficiency and win-win" and sincerely looks forward to working with you to open up a bright future of science and technology.

CORPORATE CONCEPT

诚：推心置腹，言而有信；精诚所至，始终如一；
志：志不立，天下无可成之事；有志者，事竟成；
恒：锲而不舍，金石可镂；欲稍得成，从恒下手；
专：凡为一事，事皆贵专；以专而精，以纷而散；
实：实事求是，精益求精，差之毫厘，失之千里；
勤：刻苦求进，勤学善思；懒惰误己，勤奋兴财；

Sincerity: Put your heart in your mouth, believe in your words, and be honest and consistent.

Ambition: Nothing can be done without ambition; if there is a will, there will be competition.

Eternal: Perseverance, stone can be carved; want to get a little bit, from constant hands.

Profession: Everything is for the sake of one thing; it is specialized and refined, and scattered in different ways.

Pragmatism: Seeking truth from facts, strives for perfection, and makes a difference.

Industrious: Diligently seeking progress, diligent learning and good thinking; laziness and wrong self, diligence and prosperity.

产品介绍
Product introduction

R、S、K、F系列斜齿轮减速电机 R,S,K,F series helical gear motors



R系列斜齿轮减速电机
R series helical geared motor



S系列斜齿轮-蜗轮蜗杆减速电机
S series helical-worm geared motor



K系列斜齿轮-伞齿轮减速电机
K series helical-bevel geared motor



F系列平行轴-斜齿轮减速电机
F series parallel shaft-helical geared motor

通用减速机系列 General reducer series	
安装方式： 底角，法兰，扭力臂。 Mounting arrangements: foot, flange, torque arm.	
功率 Power(KW)	0.12-200
速比 Ratio	1.3-33000
最大输出扭矩 Output torque(KN.M)	top to 50

HB系列重载齿轮箱 HB series heavy duty gearboxes



H系列斜齿轮减速机
H series helical gearbox



B系列斜齿轮-锥齿轮减速机
B series bevel-helical gearbox

通用减速机系列 General reducer series.	
模块化设计，安装方式多样。可配置逆止器单向传动，以及串联辅助传动。 Highly standard modular designed. No strict limitation to the mounting arrangement. Can be configured to one-way transmission by backstop. Available to install with auxiliary drive.	
功率 Power(KW)	4-6000
速比 Ratio	1.25-450
最大输出扭矩 Output torque(KN.M)	top to 950

产品介绍
Product introduction

重载行星减速机 Heavy duty planetary reducers



N系列行星减速机
N series planetary reducer



P系列行星减速机
P series planetary reducer

通用减速机系列 General reducer series	
单位承载能力极高。 Very high unit capacity.	
功率 Power(KW)	0.37-12000
速比 Ratio	25-4000
最大输出扭矩 Output torque(KN.M)	top to 2600

橡塑行业专用减速机 Special reducers for rubber and plastic industry



单螺杆挤出机减速机
Special reducer for single screw extruder



压延机专用减速机
Special reducer for calendaring machine



平双螺杆挤出机减速机
Special reducer for twin screws extruder



密炼机专用减速机
Special reducer for internal mixer

专用减速机系列 Special reducer series.	
常用于橡塑行业炼胶，挤出，压延设备。 Commonly used in rubber mixer, extruder, calendaring machine of rubber and plastic industry.	
功率 Power(KW)	55-2500
速比 Ratio	8-35
最大输出扭矩 Output torque(KN.M)	top to 300

蜗轮蜗杆减速机 Worm gear motors



RV系列蜗轮减速机
RV series worm gear motor



VF系列蜗轮减速机
VF series worm gear motor



WP系列蜗轮减速机
WP series worm gear motor



UD系列无极变速器
UD series variable speed machine



T系列螺旋伞齿轮转向箱
T series spiral bevel gear reducer



SWL系列蜗轮丝杆升降机
SWL series worm gear screw reducer

通用减速机系列 General reducer series	
铝合金壳体的蜗轮传动减速机。 结构紧凑，多方位安装，免维护。 Aluminum alloy shell, compact structure, multiple installation, maintenance free.	
功率 Power(KW)	0.06-15
速比 Ratio	7.5-100
最大输出扭矩 Output torque(N.M)	top to 1760

摆线针轮减速机 Cycloidal pinwheel reducers



BWD系列摆线减速机
BWD series cycloidal pinwheel reducer



BLD系列摆线减速机
BLD series cycloidal pinwheel reducer



卧式微型摆线减速机
Horizontal micro cycloidal pinwheel reducer



立式微型摆线减速机
Vertical micro cycloidal pinwheel reducer

通用减速机系列 General reducer series	
结构紧凑，通过摆线针轮传递动力。 Compact structure. Cycloidal pinwheel transmission.	
功率 Power(KW)	0.12-90
速比 Ratio	7-650000
最大输出扭矩 Output torque(KN.M)	top to 30

圆柱齿轮减速机 Cylindrical gear reducers



ZDY系列圆柱齿轮减速机
ZDY series cylindrical gear reducer



ZFY系列圆柱齿轮减速机
ZFY series cylindrical gear reducer



ZSY系列圆柱齿轮减速机
ZSY series cylindrical gear reducer



ZLY系列圆柱齿轮减速机
ZLY series cylindrical gear reducer

通用减速机系列 General reducer series	
按行业标准生产，并可配置逆止器单向传动以及串联辅助传动。 Can be configured to one-way transmission by backstop. Available to install with auxiliary drive.	
功率 Power(KW)	1.1-6000
速比 Ratio	1.25-500
最大输出扭矩 Output torque(KN.M)	top to 520

产品介绍
Product introduction

三项异步电机 Three-phase asynchronous motors



YE2系列高效电机
YE2 series high efficiency motor



YBX3系列防爆电机
YBX3 series premium efficiency flameproof motor



YEJ系列制动电机
YEJ series braking motor



YVF2系列变频电机
YVF2 series variable frequency motor

通用电动机系列 General motor series	
常规工业动力。 Conventional industrial power.	
功率 Power(KW)	0.12-315
机座号 Stand No.	63-355
电源频率(Hz) Power frequency	50/60

微小型减速电机 Micro and small gear motors



CH系列减速电机
CH series gear motor



CV系列减速电机
CV series gear moto



直流减速电机
Direct current gear motor




精密行星减速机
High precision planetary reducer

通用减速机系列 General reducer series	
质量轻，噪音低，效率高，寿命长等。 Light weight, low noise, high efficiency, long life etc.	
功率 Power(KW)	0.006-7.5
速比 Ratio	2-200
最大输出扭矩 Output torque(N.M)	top to 7400

产品介绍
Product introduction

双轴桨叶式混合机专用减速机 Special reducer for twin shafts paddle mixe



双轴桨叶式混合机专用减速机
Special reducer for twin shafts paddle mixer



双轴桨叶式混合机
Twin shafts paddle mixer

专用减速机系列 Special reducer series.	
该款减速机专为双轴桨叶式混合机设计，减速机与混合机直联，最大程度的节省了安装空间和生产成本，因而设备运行更加平稳，高效。 The reducer is designed for twin shafts paddle mixer, connect with the mixer directly, saving the installation space and production cost at maximum degree, so the equipment runs more smoothly and efficiently.	
功率 Power(KW)	15-90
速比 Ratio	33-50
最大输出扭矩 Output torque(KN.M)	70

焊接滚轮架专用减速机 Special reducer for welding rotator





焊接滚轮架专用减速机
Special reducer for welding rotator



焊接滚轮架
Welding rotator















专用减速机系列 Special reducer series	
适用于自调式双驱动滚轮架，移动式焊接滚轮架等各种自动焊接的滚轮架驱动。 The reducers apply to bolt adjustable rotator, self aligning rotator, lead screw adjustable rotator, and fit up rotator, etc.	
功率 Power(KW)	0.18-22
速比 Ratio	300-3400
最大输出扭矩 Output torque(KN.M)	180

产品图片
Product Pictures

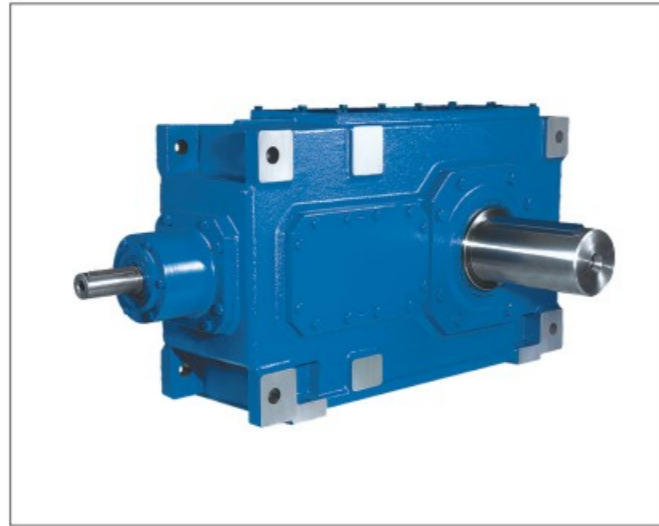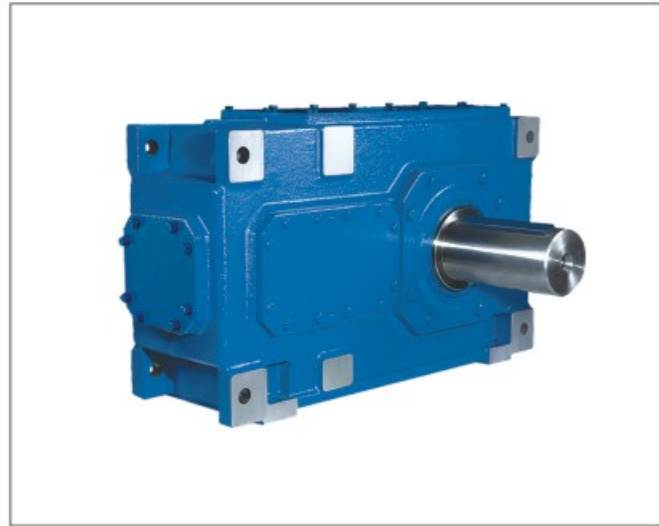

A series of horizontal lines for writing a memorandum.

基本类型概括 summary of basic types		13-15 页 Pages 13-15		
齿轮箱型号表示方法 Gear units designation of types		16 页 Pages 16		
齿轮箱选型, 额定功率, 输出扭矩, 允许的附加径向力 Selection of gear units, nominal power ratings, output torque, permissible additional radial forces.		17-23 页 Pages 17-23		
安装方式 Mounting	卧式安装 Horizontal	平行轴齿轮箱 Helical gear units H1SH	24-25 页 Pages 24-25	18-39 页 Pages 18-39
		平行轴齿轮箱 Helical gear units H2SH, H2HH, H2DH, H2HM, H2DM H3SH, H3HH, H3DH, H3HM, H3DM H4SH, H4HH, H4DH, H4HM, H4DM	26-29 页 Pages 26-29	40-57 页 Pages 40-57
		直交轴齿轮箱 Bevel-helical gear units B2SH, B2HH, B2DH, B2HM, B2DM B3SH, B3HH, B3DH, B3HM, B3DM B4SH, B4HH, B4DH, B4HM, B4DM	30-37 页 Pages 30-37	
	立式安装 Vertical	平行轴齿轮箱 Helical gear units H2SV, H2HV, H2DV H3SV, H3HV, H3DV H4SV, H4HV, H4DV	74-85 页 Pages 74-85	
直交轴齿轮箱 Bevel-helical gear units B2SV, B2HV, B2DV B3SV, B3HV, B3DV B4SV, B4HV, B4DV		86-98 页 Pages 86-98		
平键及键槽的配合精度, 选用标准ISO Selection of ISO fits, parallel keys and keyways		99 页 Pages 99		
带胀紧盘联接的空心轴或带平键联接的空心轴 Hollow shaft for shrink disk or parallel key connections		100-103 页 Pages 100-103		
实际速比 <i>i</i> /转动惯量 <i>J</i> ₁ Actual ratios <i>i</i> , mass moments of inertia <i>J</i> ₁		104-111 页 Pages 104-111		
冷却盘管 Cooling coils		112 页 Pages 112		
立式安装齿轮箱润滑油供给方式 (强制润滑和浸油润滑) Oil supply for vertical gear units (forced and dip lubrication)		113-121 页 Pages 113-121		
减速机电机法兰联接 Gear units motor mounting with flanges		122-123 页 Pages 122-123		
布置形式 Design		124 页 Pages 124		
标准普通电机的参数及安装尺寸 Standard and or dinary motor parameter and mounting dimension		125 页 Pages 125		

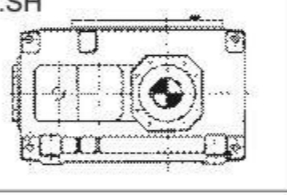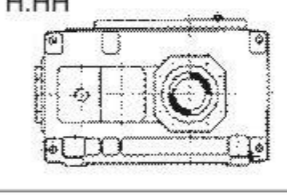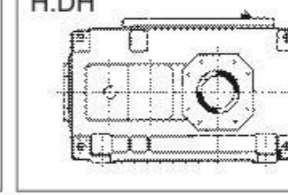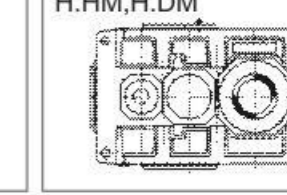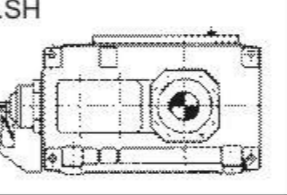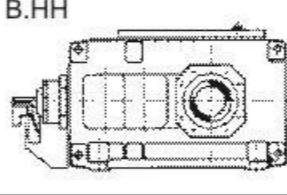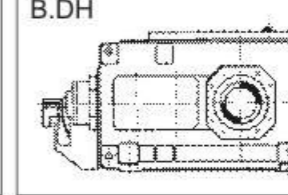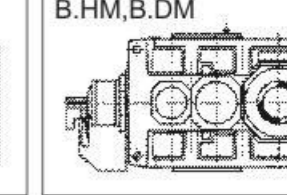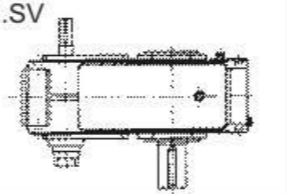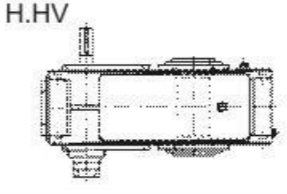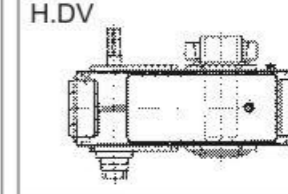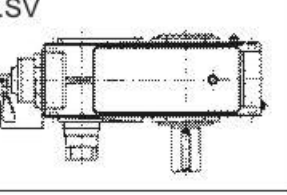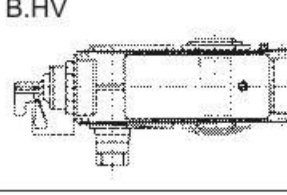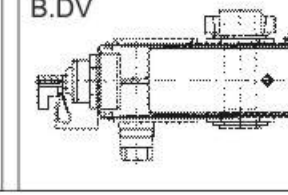卧式安装 平行轴齿轮箱 类型 H1..., H2..., H3..., H4... 1-...4- 级传动, $i_N=1.25-450$	Horizontal mounting position Helical gear units Types H1..., H2..., H3..., H4... 1-...4-stage, $i_N=1.25-450$		
H.SH 	H.HH 	H.DH 	H.HM, H.DM 
直交轴齿轮箱 类型 B2..., B3..., B4... 2-...4- 级传动, $i_N=5-400$	Bevel-helical gear units Types B2..., B3..., B4... 2-...4-stage, $i_N=5-400$		
B.SH 	B.HH 	B.DH 	B.HM, B.DM 
立式安装 平行轴齿轮箱 类型 H2.V, H3.V, H4.V 2-...4- 级传动, $i_N=6.3-450$	Vertical mounting position Helical gear units Types H2.V, H3.V, H4.V 2-...4-stage, $i_N=6.3-450$		
H.SV 	H.HV 	H.DV 	
直交轴齿轮箱 类型 B2.V, B3.V, B4.V 2-...4- 级传动, $i_N=5-400$	Bevel-helical gear units Types B2.V, B3.V, B4.V 2-...4-stage, $i_N=5-400$		
B.SV 	B.HV 	B.DV 	

齿轮箱 Gear Units 性能特点 Characteristic

设计

平行轴和直交轴齿轮箱采用全新设计，其独特的创新之处在于：

- 零部件种类减少，而规格型号增加；
- 运转可靠性提高，传动功率增大；
- 可以提供法兰盘式输出轴，使齿轮箱满足在狭小空间的安装要求（根据客户要求供货）。

安装方式

- 齿轮箱既可卧式安装，也可立式安装。
- 如果用户提出要求，也可以采用其他安装形式。
- 安装电机用法兰，扭力支撑装置均为产品的标准配置。

齿轮的噪音特性

- 采用最新设计思想，通过以下途径彻底改善齿轮的噪音特性；
- 利用吸收噪音的箱体结构；
- 采用特大的齿面接触比。

齿轮箱散热

齿轮箱不仅具有很高的传动效率，而且具有良好的散热性能，主要通过以下方法：

- 增大箱体的表面积；
- 采用大风扇及新型导流风扇罩；
- 根据较低的最大允许油温选择齿轮箱。这样，可因换油周期加长而提供设备运行可靠性，并能降低设备维护费用。

库存

齿轮箱根据单元结构模块化设计原理，大大减少了零部件种类。

Design

Gear units are a completely new design, Outstanding innovations are:

- More size with a reduced variety of parts;
- Higher operational reliability combined with increased power capacity;
- Flanged output shafts to facilitate assembly of gear units in confined spaces (on request).

Mounting position

- Gear units can be supplied for either horizontal or vertical installation.
- Other arrangements are also possible on request.
- Motor bell housings, Torque supports are part of our standard product range.

Noise behaviour

- New concepts were applied to clearly improve the noise emission of the gear units
- Designing noise-absorbing housings
- Achieving exceptionally large contact ratios.

Thermal conduction

Gear units not only have a high efficiency but also a favourable thermal conduction.

- Through enlarged housing surface areas.
- Because large fans incorporating a new type of air conduction fan cowl are being used.
- The selection of gear units is based on a lower maximum oil temperature. By that, the operational reliability will be increased and the cost of maintenance reduced due to longer oil change intervals.

Storing

Gear units have been designed according to a new unit construction principle.

齿轮箱 Gear Units 一般说明 General Informations

注意事项

应严格遵守以下各项：

- 样本中的附图只属范例，并不要求严格一致，所注尺寸可以有所变动。
- 所注重量仅为平均值，并不要求严格一致。
- 为防止发生事故，所有旋转部件均应根据国家和当地安全规定加罩防护。
- 试车之前，必须认真阅读设备操作说明书。减速机供货时已作好运行准备，只是未加润滑油。
- 此处给出的加油量只作为参考值。实际油量以油标上的标记为准。
- 润滑油粘度须以减速机铭牌上的数值为准。
- 减速机供货时带径向轴封。用户如有特别要求，可提供其它形式的密封装置。
- 转动方向是指输出轴 d_2 的方向。

Attention:


The following items are absolutely to be observed:


- Illustrations are examples only and are not strictly binding, Dimensions are subject to change
- The weights are mean values and not strictly binding.
- To prevent accidents, all rotating parts should be guarded according to local and national safety regulations.
- Prior to commissioning, the operating instructions must be observed. The reducers are delivered ready for
- Operation but without oil filling.
- Oil quantities given are guide values only. The exact quantity of oil depends on the marks on the oil dipstick.
- The oil viscosity has to correspond to the data given on the name plate.
- The reducers are supplied with radial shaft seals. Other sealing variants on request.
- Directions of rotation referring to output shaft d_2 .


在标注尺寸的图纸上使用的符号说明如下：

Explanation of symbols used in the dimensioned drawings:

 = 油尺 Oil dipstick

 = 通气孔 Breather

 = 放油孔 Oil drain

 = 加油孔 Oil filler

规格13号以上减速机箱体地脚上配有千斤顶螺丝，箱盖上配有调平面。


From size 13 up jack screws in the housing feet, and leveling pads on the upper housing part.

基础螺栓的最低性能等级为8.8级


Foundation bolts of min. property class 8.8.

齿轮箱 Gear Units

型号表示方法 Designation of Types

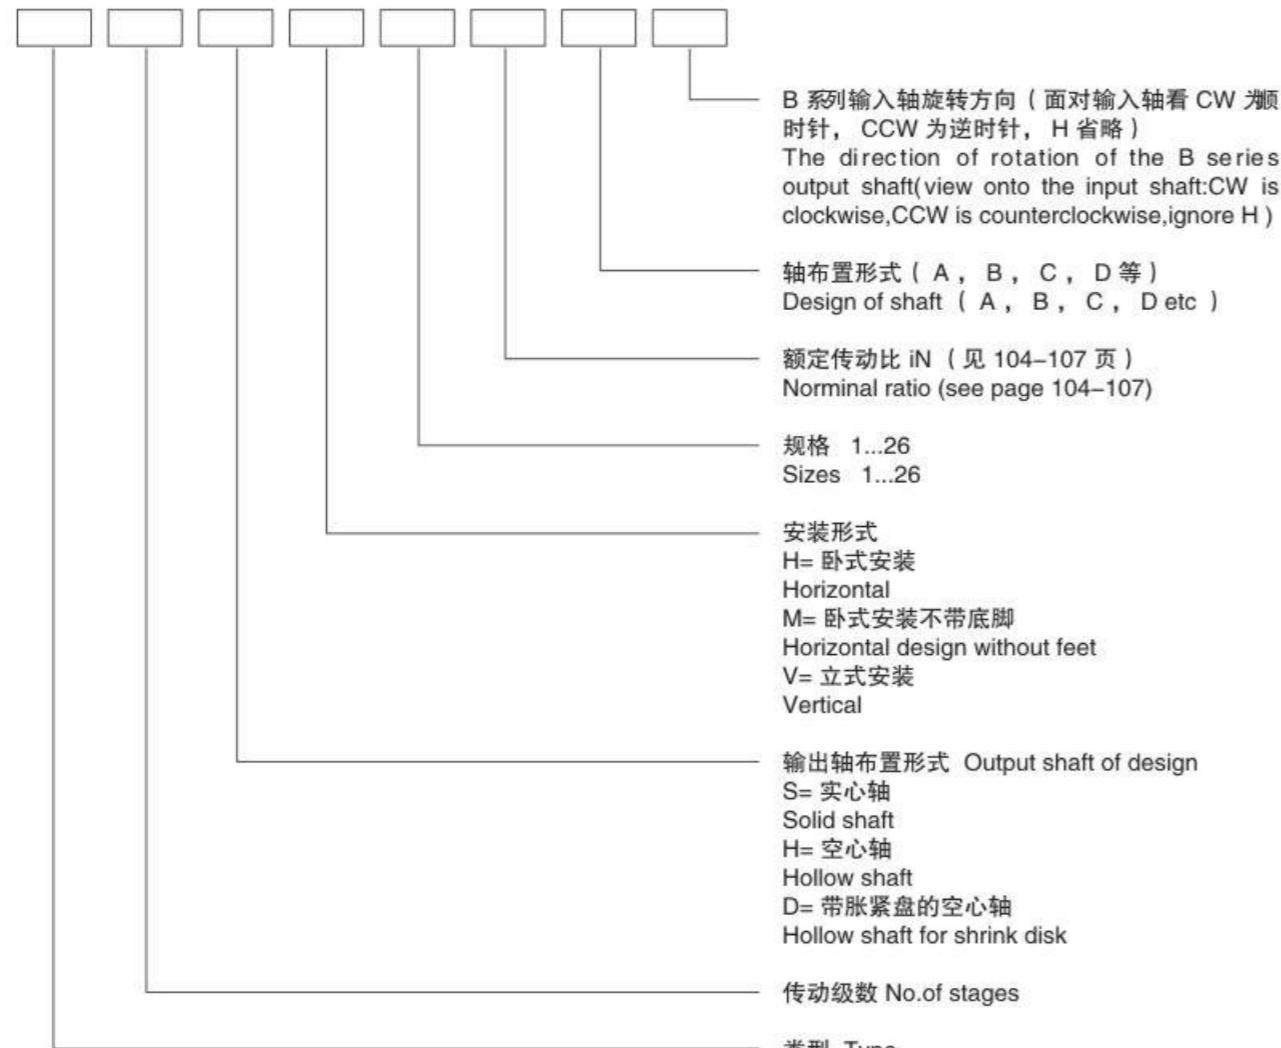

例:

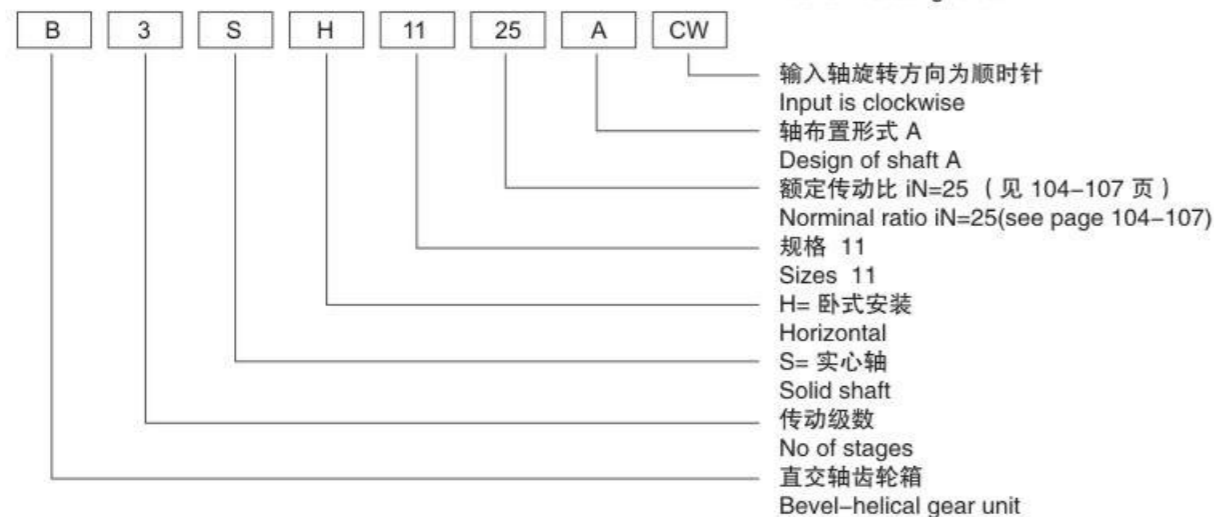

齿轮箱 Gear Units

选型指南 Guidelines for the selection

1. 确定齿轮箱的类型及规格 1. Determination of gear unit type and size	1.1 计算传动比 Find the transmission ratio $i_s = \frac{n_1}{n_2}$	
	1.2 确定齿轮箱的额定功率 Determine nominal power rating of the gear unit $P_N \geq P_2 \times f_1 \times f_2 \times S_A$ 如果不满足下列条件, 请向我们咨询 It is not necessary to consult us, if: $3.33 \times P_2 \geq P_N$	
2. 确定润滑方式 2. Lubrication method to determine	1.3 校核最大扭矩, 如峰值工作扭矩、起动扭矩或制动扭矩, 看其是否满足要求 1.3 Check for maximum torque, e.g. peak operating-, starting -or braking torque $P_n \geq \frac{T_A \times n_1}{9550} \times f_3$ 齿轮箱的规格和传动级数在额定功率选型表中, 可根据 iN 和 PN 确定。 Gear unit sizes and number of reduction stages are given in rating tables depending on in and PN	
	1.4 检查输出轴上是否允许有附加载荷: 见 36-37 页 1.4 Check whether additional forces on the output shaft are permissible; see pages 36-37	
3. 确定冷却方式 3. Sure cooling way	1.5 根据 104-107 页上的表检查实际传动比是否满足要求 1.5 Check whether the actual ratio i as per table on pages 104-107 is acceptable	
	安装方式 Mounting position	
	卧式安装 Horizontal	立式安装 Vertical
	所有需要润滑的零部件均浸在润滑油中, 或采用飞溅润滑方式, 也可按用户要求提供强制润滑方式。 All parts to be lubricated are lying in the oil or are splash lubricated Forced lubricated on request	可选润滑油供给方式: - 浸油润滑 - 通过法兰联接泵或电动泵进行强制润滑。 有关合适的供油方式和选择标准, 参见 84-121 页。 Possible oil supply variations: - Dip lubrication - Forced lubrication by means of flange donpump or motor pump. For preferred variants and critena fo selection, page 84-121
	3.1 如满足以下条件, 则齿轮箱可不带辅助冷却装置: 3.1 Adequate for gear unit without auxiliary cooling, if: $P_2 \leq P_G = P_{G1} \times f_4 \times f_5 \times f_6 \times f_8$	3.2 如满足以下条件, 则齿轮箱带冷却风扇可满足要求: 3.2 Adequate for gear unit with fan cooling, if: $P_2 \leq P_G = P_{G2} \times f_4 \times f_5 \times f_6 \times f_{10}$
	3.2 如满足以下条件, 则齿轮箱带冷却盘管可满足要求: 3.2 Adequate for gear unit with fitted cooling coil, if : $P_2 \leq P_G = P_{G3} \times f_5 \times f_7 \times f_8 \times f_{11}$	3.3 如满足以下条件, 则齿轮箱带冷却盘管和风扇可满足要求: 3.3 Adequate for gear unit with cooling coil and fan, if: $P_2 \leq P_G = P_{G5} \times f_7 \times f_8 \times f_{12}$
	3.5 如需要较高的热容量, 则可按用户要求提供外部润滑油冷却装置进行冷却。 3.5 For higher thermal capacities, cooling by external oil, coolre on request	

齿轮箱 Gear Units 符号说明 Key to Symbols

E_D	= 每小时工作周期, 以百分比表示, 如 $E_D=80\%/h$ Operating cycle per hour in %, e.g. $E_D=80\%/h$
f_1	= 工作机系数 (表1), 20页 Factor for driven machine (table 1), pages 20
f_2	= 原动机系数 (表2), 21页 Factor for prime mover (table 2), page 21
f_3	= 峰值扭矩系数 (表3), 21页 Peak torque factor (table 3), page 21
f_4, f_5	= 环境温度系数 (表4+表5), 21页 Thermal factors (tables 4 + 5), page 21
f_6, f_7	= 海拔高度系数 (表6+表7), 21页 Factors for altitude (tables 6 + 7), page 21
f_8	= 立式安装齿轮箱供油系数 (表8), 22页 对于卧式安装齿轮箱: $f_8=1$ Oil supply factor for vertical gear units (Table 8), page 22 For horizontal gear units: $f_8=1$
f_9, f_{10} f_{11}, f_{12}	= 热容量系数 (表9...14), 22-23页 Thermal capacity factors (tables 9... 14), pages 22-23
a_1	= 规格系数 Size factor
a_2	= 传动比系数 Transmission ratio factor
i	= 实际传动比 Actual ratio
i_N	= 额定传动比 Nominal ratio
i_s	= 要求传动比 Required ratio
n_1	= 输入转速 (r/min) Input speed (r/min)
n_2	= 输出转速 (r/min) Output speed (r/min)
P_G	= 要求的热容量 Required thermal capacity
P_{G1}	= 齿轮箱的热容量, 不带辅助冷却装置, 25-33页 Thermal capacity for gear units without auxiliary cooling, pages 25-33
P_{G2}	= 齿轮箱的热容量, 带冷却风扇, 25-33页 Thermal capacity for gear units with fan cooling, pages 25-33
P_{G3}	= 齿轮箱的热容量, 带内置冷却盘管, 25-33页 Thermal capacity for gear units with built-in cooling coil, pages 25-33
P_{G4}	= 齿轮箱的热容量, 带内置冷却盘管和风扇, 25-33页 Thermal capacity for gear units with built-in cooling coil and fan, pages 25-33
P_N	= 齿轮箱的额定功率(kW), 见选型表, 24-32页 Nominal power rating of gear units(kW), see tables, pages 24-32
P_2	= 工作机的额定功率(kW) Power rating of driven machine (kW)
t	= 环境温度(°C) Ambient temperature (°C)
T_A	= 输入轴最大扭矩, 如峰值工作扭矩、起动扭矩或制动扭矩(N.m) Max. torque occurring on input shaft, e.g. peak operating-, starting- or braking torque (N.m)
T_{2N}	= 额定输出扭矩 (kN.m), 34-35页 Nominal output torque (kN.m), pages 34-35
S_A	= 减速机安全系数 (表15) 21页 Safety coefficient of speed reducer (table 15) Page 21

齿轮箱 Gear Units 选型示例 Selection Example

已知参数:

原动机
电机功率: $P_1=75kW$
电机转速: $n_1=1500rpm$
最大起动扭矩: $T_A=720N.m$

工作机

皮带输送机功率: $P_2=66kW$
转速: $n_2=26rpm$
工作制: 12小时/天
每小时起动次数: 7
每小时工作周期: $E_D=100\%$
环境温度: $30^\circ C$
室外安装(风速): ($w \geq 4m/s$)
海拔高度: 海平面
重要性与安全要求: 一般

齿轮箱设计

直交轴齿轮箱
安装方式: 卧式安装
输出轴 d_2 : 位于齿轮箱右侧(面对输入轴), 布置型式C
输出轴 d_2 的转动方向: ccw

KNOWN CRITERIA:

PRIME MOVER
Electric motor: $P_1=75 kW$
Motor speed: $n_1=1500 rpm$
Max. starting torque: $T_A=720 N.m$

DRIVEN MACHINE

Belt conveyor: $P_2=66 kW$
Speed: $n_2=26 rpm$
Duty: 12 h/day
Starts per hour: 7
Operating cycle per hour: $E_D=100\%$
Ambient temperature: $30^\circ C$
Outdoor installation: ($w \geq 4m/s$)
Altitude: sea level
Reliability: normal

GEAR UNIT DESIGN

Bevel-helical reducers
Mounting position: horizontal
Output shaft d_2 : on right hand side design C
Direction of rotation of output shaft d_2 : ccw

要求: 齿轮箱的类型及规格 Required: Type and size of gear units

- 选择齿轮箱的类型及规格: Selection of gear unit type and size
- 1.1 传动比计算: Calculation of transmission ratio

$$i_s = \frac{n_1}{n_2} = \frac{1500}{26} = 57.7 \quad i_N = 56$$

- 1.2 确定额定功率 Determination of the gear unit nominal power rating

$$P_N \geq P_2 \times f_1 \times f_2 \times S_A = 66 \times 1.3 \times 1 \times 1.4 = 120kW$$

从额定功率表中选择: 类型B3, 规格10, 对应的 $P_N=122kW$
Selected from power rating table: type B3, gear unit size 10, with $P_N=122kW$

$$3.33 \times P_2 \geq P_N \quad 3.33 \times 66 = 219.8kW > P_N$$

- 1.3 检查起动扭矩 Checking the starting torque

$$P_G \geq \frac{T_A \times n_1}{9550} \times f_3 = \frac{720 \times 1500}{9550} \times 0.65 = 73.5kW \quad P_N = 122kW > 73.5kW$$

2. 确定热容量 Determination of thermal capacity

根据表中给出的B3型齿轮箱参数, 计算不带辅助冷却装置的齿轮箱热容量

Thermal capacity for gear units without auxiliary cooling, acc. to table for type B3

$$P_G = P_{G1} \times f_4 \times f_5 \times f_6 \times f_7 \quad P_G = 78.9kW \times 0.88 \times 1 \times 1 \times (1.23-2.80 \times 0.095 \times 0.15) \quad P_G = 82.6kW$$

$$P_2 = 66kW < P_G = 82.6kW$$

结论: 齿轮箱不带辅助冷却装置, 可满足要求!

Conclusion: A gear units without auxiliary cooling is sufficient!

齿轮箱 Gear Units
服务系数 Service Factors

表 1 Table 1		工作机工况系数 f_1 Working machine working condition coefficient f_1								
工作机 Working Machine		工作机最低工况系数 f_1 Minimum working machine working condition coefficient f_1			工作机 Working Machine			工作机最低工况系数 f_1		
		≤ 0.5h	0.5-10h	>10h				≤ 0.5h	0.5-10h	>10h
污水 Sewage 处理 treatment	浓缩器 (中心传动) Concentrator(central transmission)	-	-	1.2	起重 Hoisting 机械 machinery	回转机构 Rotary mechanism	1.00	1.40	1.80	
	压滤器 Filter press	1.00	1.30	1.5		俯仰机构 Elevation mechanism	1.00	1.10	1.40	
	絮凝器 Flocculato	0.80	1.00	1.3		行走机构 Walking mechanism	1.10	1.60	2.00	
	曝气机 Aerator	-	1.80	2		提升机构 Hoisting mechanism	1.00	1.40	1.80	
	接集设备 Raking device	1.00	1.20	1.3		转臂式起重机 Rotary arm crane	1.00	1.20	1.60	
	纵向、回转组合接集装置 Vertical and rotary combination raking device	1.00	1.30	1.5		挤压机 Extrusion press	-	-	1.60	
	预浓缩器 Pre-concentrator	-	1.10	1.3		调浆机 Size mixer	-	1.80	2.00	
	螺杆泵 Screw pump	-	1.30	1.5		橡胶研光机 Rubber calender	-	1.50	1.75	
	水轮机 Hydraulic turbine	-	-	2		冷却圆筒 cooling calender	-	1.30	1.50	
	离心泵 Centrifugal pump	1.00	1.20	1.3		混料机, 用于均匀介质 Mixer, for homogeneous medium	1.00	1.30	1.50	
钢铁 Steel 工业 industry	1个活塞容积试泵 1 piston volume test pump	1.30	1.40	1.8	混料机, 用于非均匀介质 Mixer, For inhomogeneous medium	1.40	1.60	1.80		
	>1个活塞容积试泵, >1 piston volume test pump	1.20	1.40	1.5	搅拌机, 用于密度均匀介质 Blender, for homogenous density	1.00	1.30	1.50		
	拉线机 Wire drawing machine	1.25	1.50	1.75	搅拌机, 用于密度非均匀介质 Blender, for inhomogenous density medium	1.20	1.50	1.75		
	绕线机 Reeling machine	1.00	1.25	1.5	烘炉 Baking oven	1.00	1.30	1.20		
	集中驱动轨道 (无反转) Centralized driving rail (without reverserotation)	1.25	1.50	1.75	离心机 Centrifugal machine	1.00	1.25	7.00		
	单独驱动轨道 (无反转) Individual driving rail (without reverserotation)	1.50	1.75	2	冷却塔风扇 Cooling tower fan	-	-	2.00		
	集中驱动轨道 (有反转) Centralized driving rail (with reverse rotation)	1.50	1.75	2	风机 (轴流和离心式) Fan (axial flow and centrifugal type)	-	1.40	1.50		
	单独驱动轨道 (有反转) Individual driving rail (with reverse rotation)	1.6	1.80	2	甘蔗切碎机 Sugarcane chopper	-	-	1.70		
	可逆式中厚板轧机 Reversible middle thickness platerolling machine	-	1.80	2	甘蔗碾磨机 Sugarcane mil	-	-	1.70		
	纺织 Textile 工业 industry	织机 Weaving machine	1.25	1.50	1.75	甜菜切碎机 Beet mince	-	-	1.70	
纺纱机 Spinning machine		1.00	1.25	1.5	榨取机, 机械制冷机, 蒸煮机 Squeezer, mechanical refrigerator, cooking machine	-	-	1.20		
洗涤机 Washing machine		1.00	1.25	1.5	甜菜清洗机 Beet cleaner	-	-	1.40		
输送 Conveying 机械 machinery	斗式输送机 Bucket conveyor	-	1.20	1.5	甜菜切碎机 Beet choppe	-	-	1.50		
	绞车 Winding engine	1.40	1.60	1.8	运货索道 Cargo ropeway	-	1.30	1.40		
	卷扬机 Winding machine	-	1.50	1.8	往返系统空中索道 Reciprocating system aerial ropeway	-	1.60	1.80		
	货用电梯 Goods lift	-	1.20	1.5	T型杆升降器 T-shaped rod lifter	-	1.30	1.40		
	客用电梯 Passenger lift	-	1.50	1.8	连续索道 Continuous ropeway	-	1.40	1.60		
	刮板式输送机 Scraper conveyor	-	1.20	1.5	混凝土搅拌机 Concrete blender	-	1.50	1.50		
	自动扶梯 Escalator	-	1.20	1.4	破碎机 Cracking machine	-	1.20	1.40		
	轨道行走机构 Rail walking mechanism	-	1.50	-	回转窑 Rotary kiln	-	-	2.00		
	造纸 Papermaking 机械 machinery	各种类型 Various types	-	1.80	2	管式磨机 Pipe type grinding machine	-	-	2.00	
		碎浆机驱动装置 Drive device of pulp shredder	2.00	2.00	2	选粉机 Powder choosing machine	-	1.60	1.60	
往复压缩机 Reciprocating compressor		-	1.80	1.9	辊压机 Roller press	-	-	2.00		

齿轮箱 Gear Units
服务系数 Service Factors

表 2 Table 2		原动机系数 Factor for prime mover f_2				
电机, 液压马达, 汽轮机 Electric motors, hydraulic motors tubines		1.0				
4-6缸, 活塞发动机周期变化 1: 100 至 1: 200 Piston engines 4-6 cylinders cyclic variation 1:100 to 1:200		1.25				
1-3缸, 活塞发动机周期变化 最高达 1: 100 Piston engines 1-3 cylinders cyclic variation up to 1:100		1.5				

表 3 Table 3		峰值扭矩系数 Peak torque factor f_3				
		每小时峰值负荷次数 load peaks per hour				
		1-5	6-30	31-100	>100	
f_3 单向载荷 steady direction of load	0.5	0.65	0.7	0.85		
f_3 口 交变载荷 Alternating direction of load	0.7	0.95	1.10	1.25		

表 4 Table 4		环境温度系数 Thermal factor f_4				
		不带辅助冷却装置或仅带冷却风扇 Without auxiliary cooling or with fan cooling				
		每小时工作周期 (ED) 百分比 % Oprating cycle per hour (ED) in %				
环境温度 Ambient temperature	100	80	60	40	20	
10 °C	1.14	1.20	1.32	1.54	2.04	
20 °C	1.00	1.06	1.16	1.35	1.79	
30 °C	0.87	0.93	1.00	1.18	1.56	
40 °C	0.71	0.75	0.82	0.96	1.27	
50 °C	0.55	0.58	0.64	0.74	0.98	

表 5 Table 5		环境温度系数 Thermal factor f_5				
		带冷却盘管或带冷却盘管和风扇 For cooling with cooling coil, or with fan and cooling coil				
		每小时工作周期 (ED) 百分比 % Oprating cycle per hour (ED) in %				
环境温度 Ambient temperature	100	80	60	40	20	
10 °C	1.04	1.10	1.21	1.40	1.86	
20 °C	1.00	1.06	1.16	1.35	1.79	
30 °C	0.93	0.99	1.08	1.26	1.66	
40 °C	0.88	0.93	1.02	1.19	1.58	
50 °C	0.81	0.86	0.94	1.09	1.45	

表 6 Table 6		海拔高度系数 Factor for altitude f_6				
		不带辅助冷却装置或仅带冷却风扇 Without auxiliary cooling or with fan cooling				
		海拔高度 (m, 高于海平面) Altitude (metres above MSL)				
系数 Factor	高达 Up to	高达 Up to	高达 Up to	高达 Up to	高达 Up to	
	1000	2000	3000	4000	5000	
f_6	1.0	0.95	0.90	0.85	0.80	

表 7 Table 7		海拔高度系数 Factor for altitude f_7				
		带冷却盘管或带冷却盘管和风扇 For cooling with cooling coil, or with fan and cooling coil				
		海拔高度 (m, 高于海平面) Altitude (metres above MSL)				
系数 Factor	高达 Up to	高达 Up to	高达 Up to	高达 Up to	高达 Up to	
	1000	2000	3000	4000	5000	
f_7	1.0	0.98	0.96	0.94	0.92	

表 15 Table 15		减速机安全系数 Factor safety S_A		
重要性 与 安全要求 Importance and safety requirements	一般设备, 减速机失效仅引起单 机停产且更换 备件 The failure of ordinary equipment and speed reducer can only result in production halts of single machine and repla cement of spare parts.	一般设备, 减速机失效仅引起机 组、生产线或全 厂停产 The failure of ordinary equipment and speed reducer can only result in production halts or machines, production lines or the whole factory.	高度安全要求, 减速机 失效引 起设备、人身 事故 Higher safety requirements, the failure of speed reducer can cause the incident of equipment and human body.	
			S_A	1.1-1.3

齿轮箱 Gear Units 服务系数 Service Factors

齿轮箱类型 Gear unit type	供油方式 Oil supply	规格 1...12 Sizes 1...12				规格 13...18 Sizes 13...18			
		不带辅助冷却装置 Without auxiliary cooling	带冷却风扇 With Fan	带冷却盘管 Cooling coil	带风扇和冷却盘管 With fan and cooling coil	不带辅助冷却装置 Without auxiliary cooling	带冷却风扇 With Fan	带冷却盘管 Cooling coil	带风扇和冷却盘管 With fan and cooling coil
H2.V H3.V H4.V	浸油润滑 Dip lubrication	0.95	*	0.95	*	*	*	*	*
	强制润滑 Forced lubrication	1.15	*	1.05	*	1.15	*	1.05	*
B2.V B3.V B4.V	浸油润滑 Dip lubrication	0.95	0.95	0.95	0.95	*	*	*	*
	强制润滑 Forced lubrication	1.15	1.10	1.10	1.10	1.15	1.10	1.10	1.10

齿轮箱类型 Gear unit type	n r/min	安装位置 Place of installation				H4	B2	B3	B4
		狭小空间安装规格 风速 ≥ 0.5m/s Small confined spaces wind velocity ≥ 0.5m/s	室内大厅, 大车间安装 风速 ≥ 1.4m/s Large halls workshops Wind velocity ≥ 1.4m/s	室外安装 风速 ≥ 4.0m/s In the open Wind velocity ≥ 4.0m/s					
H1	750	0.68-0.26Xa1Xa2	0.79-0.27Xa1Xa2	1.00	750	0.78	0.83	1.00	
	1000	0.70-0.79Xa1Xa2	0.84-0.85Xa1Xa2	1.14-0.81Xa1Xa2	1000	0.85	0.91-1.60Xa1Xa2	1.10-2.40Xa1Xa2	
	1500	0.72-2.50Xa1Xa2	0.89-2.60Xa1Xa2	1.25-2.60Xa1Xa2	1500	0.97-10.0Xa1Xa2	1.03-12.5Xa1Xa2	1.27-14.0Xa1Xa2	
	1800	0.71-3.60Xa1Xa2	0.92-4.40Xa1Xa2	1.30-4.20Xa1Xa2	1800	1.02-18.4Xa1Xa2	1.09-21.2Xa1Xa2	1.34-23Xa1Xa2	
H2	750	0.76-0.08Xa1Xa2	0.79-0.21Xa1Xa2	1.00	750	0.66-0.09Xa1Xa2	0.77-0.14Xa1Xa2	1.00	
	1000	0.76-1.00Xa1Xa2	0.87-1.40Xa1Xa2	1.12-1.30Xa1Xa2	1000	0.69-0.70Xa1Xa2	0.81-0.77Xa1Xa2	1.08-0.64Xa1Xa2	
	1500	0.83-4.10Xa1Xa2	0.96-4.60Xa1Xa2	1.25-4.20Xa1Xa2	1500	0.74-3.20Xa1Xa2	0.88-3.30Xa1Xa2	1.20-2.90Xa1Xa2	
	1800	0.85-6.80Xa1Xa2	0.98-7.10Xa1Xa2	1.31-6.80Xa1Xa2	1800	0.75-5.60Xa1Xa2	0.90-5.50Xa1Xa2	1.25-4.90Xa1Xa2	
H3	750	0.76	0.81-0.06Xa1Xa2	1.0	750	0.73	0.80-0.05Xa1Xa2	1.00	
	1000	0.83-1.20Xa1Xa2	0.90-1.36Xa1Xa2	1.11-1.30Xa1Xa2	1000	0.79-0.63Xa1Xa2	0.87-0.81Xa1Xa2	1.10-0.73Xa1Xa2	
	1500	0.93-4.70Xa1Xa2	1.00-4.80Xa1Xa2	1.27-5.10Xa1Xa2	1500	0.86-2.40Xa1Xa2	0.95-2.60Xa1Xa2	1.23-2.80Xa1Xa2	
	1800	0.96-7.50Xa1Xa2	1.05-7.60Xa1Xa2	1.32-7.40Xa1Xa2	1800	0.88-4.00Xa1Xa2	0.99-4.30Xa1Xa2	1.28-4.30Xa1Xa2	

齿轮箱类型 Gear unit type	n r/min	安装位置 Place of installation				H4	B2	B3
		狭小空间安装规格 风速 ≥ 0.5m/s Small confined spaces wind velocity ≥ 0.5m/s	室内大厅, 大车间安装 风速 ≥ 1.4m/s Large halls workshops Wind velocity ≥ 1.4m/s	室外安装 风速 ≥ 4.0m/s In the open Wind velocity ≥ 4.0m/s				
H1	750	0.97-0.05Xa1Xa2	0.97-0.04Xa1Xa2	1.00	750	0.89-0.29Xa1Xa2	0.91-0.25Xa1Xa2	1.00
	1000	1.18-0.33Xa1Xa2	1.20-0.33Xa1Xa2	1.23-0.32Xa1Xa2	1000	1.06-1.30Xa1Xa2	1.08-1.20Xa1Xa2	1.17-0.93Xa1Xa2
	1500	1.53-1.00Xa1Xa2	1.53-0.95Xa1Xa2	1.56-0.94Xa1Xa2	1500	1.38-4.20Xa1Xa2	1.40-4.10Xa1Xa2	1.48-3.70Xa1Xa2
	1800	1.69-1.50Xa1Xa2	1.70-1.50Xa1Xa2	1.73-1.50Xa1Xa2	1800	1.54-6.40Xa1Xa2	1.56-6.40Xa1Xa2	1.64-5.80Xa1Xa2
H2	750	0.95-0.07Xa1Xa2	0.96-0.06Xa1Xa2	1.00	750	0.95	0.96	1.00
	1000	1.16-0.65Xa1Xa2	1.17-0.63Xa1Xa2	1.21-0.55Xa1Xa2	1000	1.13-0.15Xa1Xa2	1.14-0.16Xa1Xa2	1.19-0.19Xa1Xa2
	1500	1.54-2.40Xa1Xa2	1.55-2.40Xa1Xa2	1.58-2.20Xa1Xa2	1500	1.47-0.92Xa1Xa2	1.48-0.92Xa1Xa2	1.52-0.95Xa1Xa2
	1800	1.74-3.80Xa1Xa2	1.75-3.80Xa1Xa2	1.78-3.60Xa1Xa2	1800	1.65-1.70Xa1Xa2	1.66-1.70Xa1Xa2	1.69-1.70Xa1Xa2

齿轮箱类型 Gear unit type	n r/min	安装位置 Place of installation				H4	B2	B3
		狭小空间安装规格 风速 ≥ 0.5m/s Small confined spaces wind velocity ≥ 0.5m/s	室内大厅, 大车间安装 风速 ≥ 1.4m/s Large halls workshops Wind velocity ≥ 1.4m/s	室外安装 风速 ≥ 4.0m/s In the open Wind velocity ≥ 4.0m/s				
H1	750	0.87	0.91	1.00	750	0.89	0.91	1.00
	1000	0.97-0.02Xa1Xa2	1.03-0.05Xa1Xa2	1.16-0.10Xa1Xa2	1000	1.04	1.07	1.18-0.38Xa1Xa2
	1500	1.15-0.19Xa1Xa2	1.22-0.23Xa1Xa2	1.39-0.33Xa1Xa2	1500	1.30-0.78Xa1Xa2	1.34-1.10Xa1Xa2	1.47-1.60Xa1Xa2
	1800	1.25-0.42Xa1Xa2	1.32-0.47Xa1Xa2	1.50-0.57Xa1Xa2	1800	1.44-1.70Xa1Xa2	1.48-2.00Xa1Xa2	1.62-2.60Xa1Xa2
H2	750	0.88	0.91	1.00	750	0.86	0.90	1.00
	1000	1.01	1.06-0.08Xa1Xa2	1.17-0.24Xa1Xa2	1000	0.98	1.02	1.15-0.09Xa1Xa2
	1500	1.27-0.79Xa1Xa2	1.33-0.88Xa1Xa2	1.47-1.10Xa1Xa2	1500	1.14	1.19-0.05Xa1Xa2	1.38-0.37Xa1Xa2
	1800	1.40-1.40Xa1Xa2	1.46-1.50Xa1Xa2	1.61-1.70Xa1Xa2	1800	1.21-0.13Xa1Xa2	1.29-0.29Xa1Xa2	1.49-0.64Xa1Xa2

对于系数 f₈, f₉和 f₁₀, f₁₁ < 0.5, 请与我们联系! For factors f₈, f₉ and f₁₀, f₁₁ < 0.5, please refer to us! (*根据客户要求*) On request

齿轮箱 Gear Units 服务系数 Service Factor

齿轮箱类型 Gear unit type	n r/min	安装地点 Place of installation			H3	B2	B3
		狭小空间安装规格 风速 ≥ 0.5m/s Small confined spaces wind velocity ≥ 0.5m/s	室内大厅, 大车间安装 风速 ≥ 1.4m/s Large halls, workshops Wind velocity ≥ 1.4m/s	室外安装 风速 ≥ 4.0m/s In the open Wind velocity ≥ 4.0m/s			
H1	750	0.98	0.98	1.00	750	0.97	1.00
	1000	1.19-0.09Xa1Xa2	1.20-0.09Xa1Xa2	1.22-0.09Xa1Xa2	1000	1.17-0.08Xa1Xa2	1.18-0.08Xa1Xa2
	1500	1.56-0.31Xa1Xa2	1.56-0.30Xa1Xa2	1.57-0.29Xa1Xa2	1500	1.55-0.47Xa1Xa2	1.55-0.47Xa1Xa2
	1800	1.75-0.52Xa1Xa2	1.76-0.52Xa1Xa2	1.77-0.52Xa1Xa2	1800	1.74-0.81Xa1Xa2	1.75-0.82Xa1Xa2
H2	750	0.97	0.98	1.00	750	0.97	1.00
	1000	1.19-0.25Xa1Xa2	1.20-0.25Xa1Xa2	1.22-0.25Xa1Xa2	1000	1.17-0.08Xa1Xa2	1.18-0.10Xa1Xa2
	1500	1.59-1.06Xa1Xa2	1.59-1.00Xa1Xa2	1.61-1.00Xa1Xa2	1500	1.56-0.84Xa1Xa2	1.57-0.85Xa1Xa2
	1800	1.82-1.80Xa1Xa2	1.82-1.80Xa1Xa2	1.84-1.80Xa1Xa2	1800	1.78-1.50Xa1Xa2	1.78-1.50Xa1Xa2

对于系数 f₁₂ < 0.5, 请与我们联系! For factors f₁₂ < 0.5, please refer to us!

Size	3	4	5	6	7	8	9	10	11	12	13	14
a1	0.024	0.030	0.050	0.055	0.065	0.075	0.085	0.095	0.135	0.160	0.190	0.200
Size	15	16	17	18	19	20	21	22	23	24	25	26
a1	0.027	0.290	0.320	0.345	0.370	0.390	0.530	0.610				

*) 对于这些尺寸, 请与我们联系! *) for these sizes, please refer to us!

i	H1SH	i	H2SH	i	H3SH	i	H4SH	i	B2SH	i	B3SH	i	B4SH
1.25	13.000	6.3	1.800	22.4	0.320	100	0.020	5	3.500	12.5	0.950	80	0.110
1.4	12.000	7.1	1.600	25	0.310	112	0.015	5.6	2.800	14	0.850	90	0.100
1.6	10.000	8	1.400	28	0.270	125	0.012	6.3	2.400	16	0.800	100	0.090
1.8	8.500	9	1.100	31.5	0.230	140	0.009	7.1	1.900	18	0.750	112	0.080
2	8.000	10	0.890	35.5	0.190	160	0.007	8	1.600	20	0.700	125	0.070
2.24	7.000	11.2	0.740	40	0.170	180	0.004	9	1.350	22.4	0.650	140	0.060
2.5	6.500	12.5	0.630	45	0.160	200	0.002	10	1.200	25	0.550	160	0.050
2.8	6.000	14	0.530	50	0.110	224	0.000	11.2	1.100	28	0.450	180	0.040
3.15	3.500	16	0.450	56	0.080	250	0.000	12.5	0.950	31.5	0.380	200	0.030
3.55	3.300	18	0.370	63	0.050	280	0.000	14	0.850	35.5	0.330	224	0.020
4	2.900	20	0.330	71	0.045	315	0.000	16	0.800	40	0.300	250	0.010
4.5	2.100	22.4	0.320	80	0.040	355	0.000	18	0.750	45	0.270	280	0.000
5	1.600	25	0.310	90	0.035	400	0.000			50	0.200	315	0.000
5.6	1.600	28	0.270	100	0.020	450	0.000			56	0.150	355	0.000
				112	0.015					63	0.130	400	0.000
										71	0.120		
										80	0.110		
										90	0.100		

H/B工业齿轮箱 GEAR UNITS

平行轴齿轮箱 Helical Gear Units 额定功率 Nominal Power Ratings
 类型 Types H2.., H3.. 规格 Sizes 3...26

iN		额定功率 Nominal Power Ratings																									
		齿轮箱规格 Gear unit sizes																									
		n1	n2	3	4	5	6	7	8	9	10	11	12	13	14	15	16	17	18	19	20	21	22	23	24	25	26
		r/min	额定功率 PN.KW Nominal power ratings PN in kW																								
6.3	1500	238	87	157	262		474		785		1383		2143		3564		4860										

采用强制润滑 Forced lubrication required

H/B工业齿轮箱 GEAR UNITS

平行轴齿轮箱 Helical Gear Units 热容量 Thermal Capacities
 类型 Types H2.., H3.. 规格 Sizes 3...26

iN		热容量 PG, KW Thermal Capacities																								
		齿轮箱规格 Gear unit sizes																								
		3	4	5	6	7	8	9	10	11	12	13	14	15	16	17	18	19	20	21	22	23	24	25	26	
		热容量 PG (单位为 KW) 取决于冷却方式: PG1: 无辅助冷却装置; PG2: 带冷却风扇; PG3: 带冷却盘管; PG4: 带风扇和冷却盘管。 Thermal capacity PG(in KW) depends on kind of cooling: PG1: without auxiliary cooling, PG2: fan cooling, PG3: cooling coil, PG4: fan and cooling coil.																								
6.3	PG1	53.2	68.2	89.4		128		177		253		333		325		230		291								

H/B工业齿轮箱 GEAR UNITS

H/B工业齿轮箱 GEAR UNITS

平行轴齿轮箱 Helical Gear Units 额定功率 Nominal Power Ratings
类型 Types H3., H4.. 规格 Sizes 5...26

平行轴齿轮箱 Helical Gear Units 热容量 Thermal Capacities
类型 Types H3., H4.. 规格 Sizes 5...26

额定功率 Nominal Power Ratings																										
iN	n1	n2	齿轮箱规格 Gear unit sizes																							
			5	6	7	8	9	10	11	12	13	14	15	16	17	18	19	20	21	22	23	24	25	26		
			额定功率 PN.KW Nominal power ratings PN in kW																							
r/min																										
40	1500	38	44	58	82	101	135	171	239	298	350	434	609	688	796	955	1194	1373	1671	1870	2228	2547	3183	3581		
	1000	25	29	38	54	67	89	113	157	196	230	285	401	453	524	628	785	903	1099	1230	1466	1675	2094	2356		
	750	18.8	22	29	40	50	67	85	118	148	173	215	301	341	394	472	591	679	827	925	1102	1260	1575	1772		
45	1500	33	38	50	71	88	117	149	207	259	304	377	529	598	691	829	1037	1192	1451	1624	1935	2212	2764	3110		
	1000	22	25	33	47	59	78	99	138	173	203	251	352	399	461	553	691	795	968	1083	1290	1474	1843	2073		
	750	16.7	19	25	36	45	59	75	105	131	154	191	268	303	350	420	525	603	734	822	979	1119	1399	1574		
50	1500	30	35	46	64	80	107	135	188	236	276	342	481	543	628	754	942	1084	1319	1476	1759	2010	2513	2827		
	1000	20	23	30	43	53	71	90	126	157	184	228	320	362	419	503	628	723	880	984	1173	1340	1675	1885		
	750	15	17	23	32	40	53	68	94	118	138	171	240	272	314	377	471	542	660	738	880	1005	1257	1414		
56	1500	27	31	41	58	72	96	122	170	212	249	308	433	489	565	679	848	975	1187	1329	1583	1809	2262	2545		
	1000	17.9	21	27	38	48	64	81	112	141	165	204	287	324	375	450	562	647	787	881	1050	1200	1499	1687		
	750	13.4	15	20	29	36	48	60	84	105	123	153	215	243	281	337	421	484	589	659	786	898	1123	1263		
63	1500	24	28	36	52	64	85	108	151	188	221	274	385	435	503	603	754	867	1055	1181	1407	1608	2010	2262		
	1000	15.9	18	24	34	42	57	72	100	125	147	181	255	288	333	400	499	574	699	783	932	1066	1332	1498		
	750	11.9	14	18	26	32	42	54	75	93	110	136	191	216	249	299	374	430	523	586	698	797	997	1121		
71	1500	21	24	32	45	56	75	95	132	165	194	240	336	380	440	528	660	759	924	1034	1231	1407	1759	1979		
	1000	14.1	16	21	30	38	50	63	89	111	130	161	226	255	295	354	443	509	620	694	827	945	1181	1329		
	750	10.6	12	16	23	28	38	48	67	83	98	121	170	192	222	266	333	383	466	522	622	710	888	999		
80	1500	18.8	22	29	40	50	67	85	118	148	173	215	301	341	394	472	591	679	827	925	1102	1260	1575	1772		
	1000	12.5	14	19	27	33	45	56	79	98	115	143	200	226	262	314	393	452	550	615	733	838	1047	1178		
	750	9.4	11	14	20	25	33	42	59	74	87	107	151	170	197	236	295	340	413	463	551	630	787	886		
90	1500	16.7	19	25	35	45	59	75	105	131	154	191	268	303	350	420	507	603	717	822	979	1119	1399	1574		
	1000	11.1	13	17	23	30	39	50	70	87	102	127	178	201	232	279	337	401	477	546	651	744	930	1046		
	750	8.3	10	13	17	22	29	37	52	65	76	95	133	150	174	209	252	300	356	408	487	556	695	782		
100	1500	15	18	23	32	40	53	68	94	118	138	171	240	272	314	355	471	526	660	730	880	1005	1257	1414		
	1000	10	12	15	21	27	36	45	63	79	92	114	160	181	209	237	314	351	440	487	586	670	838	942		
	750	7.5	9	11	16	20	27	34	47	59	69	86	120	136	157	177	236	263	330	365	440	503	628	707		
112	1500	13.4	16	20	29	35	48	59	84	105	123	153	215	243	281	337	421	484	589	659	786	898	1123	1263		
	1000	8.9	10	13	19	23	32	39	56	70	82	102	143	161	186	224	280	322	391	438	522	596	746	839		
	750	6.7	8	10	14	18	24	29	42	53	62	76	107	121	140	168	210	242	295	330	393	449	561	631		
125	1500	12	15	19	26	32	43	54	75	94	111	137	192	217	251	302	377	434	528	591	704	804	1005	1131		
	1000	8	10	13	18	21	28	36	50	63	74	91	128	145	168	201	251	289	352	394	469	536	670	754		
	750	6	8	10	13	16	21	27	38	47	55	68	96	109	126	151	188	217	264	295	352	402	503	565		
140	1500	10.7	13	16	21	28	38	47	64	81	99	122	171	194	224	269	336	387	471	527	627	717	896	1008		
	1000	7.1	9	11	15	19	25	32	45	56	65	81	114	129	149	178	223	256	312	349	416	476	595	669		
	750	5.4	7	9	12	14	19	24	34	42	50	62	87	98	113	136	170	195	237	266	317	362	452	509		
160	1500	9.4	11	14	20	25	33	42	59	74	87	107	151	170	197	236	295	340	413	463	551	630	787	886		
	1000	6.3	8	10	14	17	22	28	40	49	58	72	101	114	132	158	198	228	277	310	369	422	528	594		
	750	4.7	6	8	10	13	17	21	30	37	43	54	75	85	98	118	148	170	207	231	276	315	394	443		
180	1500	8.3	10	13	18	22	30	37	52	65	76	95	133	150	174	209	261	300	365	408	487	556	695	782		
	1000	5.6	7	9	12	15	20	25	35	44	52	64	90	101	117	141	176	202	246	276	328	375	469	528		
	750	4.2	5	7	9	11	15	19	26	33	39	48	67	76	88	106	132	152	185	207	264	281	352	396		
200	1500	7.5	9	11	16	20	27	34	47	59	69	86	120	136	157	188	236	271	330	369	440	503	628	707		
	1000	5	6	8	11	13	18	23	31	39	46	57	80	91	105	126	157	181	220	246	293	335	419	471		
	750	3.8	5	7	9	11	14	17	24	30	35	43	61	69	80	95	119	137	167	187	223	255	318	358		
224	1500	6.7	8	10	14	18	24	30	42	53	62	76	107	121	140	168	210	242	295	330	393	449	561	631		
	1000	4.5	6	8	10	12	16	20	28	35	41	51	72	82	94	113	141	163	198	221	264	302	377	424		
	750	3.3	4	5	7	9	11	15	21	26	30	38	53	60	69	83	104	119	145	162	194	221	276	311		
250	1500	6	8	10	14	18	24	30	42	53	62	76	107	121	140	168	210	242	295	330	393	449	561	631		
	1000	4	5	7	9	11	14	18	25	31	37	46	64	72	84	101	126	145	176	197	235	268	335	377		
	750	3	4	5	7	8	10	11	14	19	24	28	34	48	54	63	75	94	108	132	148	176	201	251	283	
280	1500	5.4	7	9	12	14	19	24	34	42	50	62	87	98	113	136	170	195	237	266	317	362	452	509		
	1000	3.6	4	5	7	9	13	16	23	28	33	41	58	65	75	90	113	130	158	177	211	241	302	339		
	750	2.7	3	4	5	7	10	12	17	21	25	31	43	49	57	68	85	98	119	133	158	181	226	254		
315	1500	4.8	6	8	10	13	17	22	30	38	44	55	77	87	101	121	151	173	211	236	281	322	402	452		
	1000	3.2	4	5	7	8.5	11	14	20	25	29	37	51	58	67	80	101	116	141	157	188	214	268	302		
	750	2.4	3	4	5	7	9	11	15	19	22	27	38	43	50	60	75	87	106	118	141	161	201	226		
355	1500	4.2	5	7	8.5	11	15	19	26	33	39	48	62	76	84	106	128	152	180	207	246	281	352	396		
	1000	2.8	3	4	5.7	7.5	9.7	13	17	22	26	32	41	51	56	70	85	101	120	138	164	188	235	264		
	750	2.1	2.5	3	4.3	5.6	7.3	9.5	13	16	19	24	31	38	42	53	64	76	90	103	123	141	176	198		
400	1500	3.8	5	7	9	11	15	19	26	33	39	48	62	76	84	106	128	152	180	207	246	281	352	396		
	1000	2.5	3	4	5	7	9	11	15	19	22	27	38	43												

H/B工业齿轮箱 GEAR UNITS

直交轴齿轮箱 Bevel-helical Gear Units 额定功率 Nominal Power Ratings
 类型 Types B2.., B3.. 规格 Sizes 1...26

额定功率 Nominal Power Ratings																												
iN	n1 r/min	齿轮箱规格 Gear unit sizes																										
		1	2	3	4	5	6	7	8	9	10	11	12	13	14	15	16	17	18	19	20	21	22	23	24	25	26	
		额定功率 PN.KW Nominal power ratings PN in kW																										
5	1500	300	36	63	97	182	295		559		880		1351		2073													
	1000	200	24	42	65	121	197		373		586		901		1382		2555											
	750	150	18	31	49	91	148		280		440		675		1037		1916											
5.6	1500	268	32	56	87	163	264		500		786		1263		1880													
	1000	179	22	37	58	109	176		334		525		843		1256		2287											
	750	134	16	28	43	81	132		250		393		631		940		1712	1894	2736									
6.3	1500	238	29	50	77	145	234	299	444	556	698	887	1171	1371	1769	2044												
	1000	159	19	33	52	97	157	200	296	371	466	593	783	916	1182	1365	2164	2348										
	750	119	14	25	39	72	117	150	222	278	349	444	586	685	885	1022	1620	1757	2430									
7.1	1500	211	25	44	68	128	208	265	393	493	619	787	1083	1259	1613	1856												
	1000	141	17	30	46	86	139	177	263	329	413	526	723	842	1078	1240	1949	2141	2879									
	750	106	13	22	34	64	104	133	198	248	311	395	544	633	810	932	1465	1609	2164	2553								
8	1500	188	23	39	61	114	185	236	350	439	551	701	984	1161	1516	1732	2598											
	1000	125	15	26	41	76	123	157	233	292	366	466	661	772	1008	1152	1728	1937	2552									
	750	94	11	20	31	57	93	118	175	219	276	350	497	581	758	866	1299	1457	1919	2264								
9	1500	167	20	35	54	101	164	210	311	390	490	623	883	1067	1364	1591	2309	2588										
	1000	111	13	23	36	67	109	139	207	259	325	414	587	709	907	1058	1534	1720	2266	2673								
	750	83	10	17	27	50	82	104	155	194	243	309	439	530	678	791	1147	1286	1695	1999								
10	1500	150	18	31	49	91	148	188	280	350	440	559	793	974	1225	1492	2073	2325										
	1000	100	12	21	32	61	98	126	186	234	293	373	529	649	817	995	1382	1550	2042	2408								
	750	75	9	16	24	46	74	94	140	175	220	280	397	487	613	746	1037	1162	1531	1806								
11.2	1500	134	16	28	43	81	132	168	250	313	393	500	709	870	1094	1368	1852	2077										
	1000	89	11	19	29	54	88	112	166	208	261	332	471	578	727	909	1230	1379	1817	2143								
	750	67	8.1	14	22	41	66	84	125	156	196	250	354	435	547	684	926	1038	1368	1614								
12.5	1500	120	14	25	39	69	118	151	214	280	352	447	635	779	980	1225	1659	1860	2450									
	1000	80	10	17	26	46	79	101	142	187	235	298	423	519	653	817	1106	1240	1634	1927	2094	2848						
	750	60	7.2	13	19	35	59	75	107	140	176	224	317	390	490	613	829	930	1225	1445	1571	2136						
14	1500	107	13	22	35	67	110	134	204	250	331	399	594	695	896	1092	1535	1658	2185	2577								
	1000	71	8.5	15	23	45	73	89	135	166	219	265	394	461	595	725	1019	1100	1450	1710	1948	2193	2676					
	750	54	6.5	11	18	34	55	68	103	126	167	201	300	351	452	551	775	837	1103	1301	1481	1668	2036	2290				
16	1500	94	11	19	31	61	100	118	188	212	305	350	551	610	817	960	1398	1516	1969	2264								
	1000	63	7.3	13	20	41	67	79	126	142	205	235	369	409	548	643	937	1016	1319	1517	1814	2032	2507	2784				
	750	47	5.4	9.6	15	31	50	59	94	106	153	175	276	305	408	480	699	758	984	1132	1353	1516	1870	2077				
18	1500	83	9	16	26	56	92	110	172	201	282	326	504	565	739	869	1286	1391	1738	2086								
	1000	56	6	11	18	38	62	74	116	135	191	220	340	381	498	586	868	938	1173	1407	1689	1876	2346	2568				
	750	42	4.5	7.9	13	28	47	55	87	102	143	165	255	286	374	440	651	704	880	1055	1267	1407	1759	1926				
20	1500	75			28	52	86	104	161	188	267	309	471	534	691	809	1202	1312	1571	1885								
	1000	50			19	35	58	69	107	125	178	206	314	356	461	539	801	874	1047	1257	1571	1738	2199	2382	2932			
	750	38			14	26	44	53	82	95	135	156	239	271	350	410	609	665	796	955	1194	1321	1671	1810	2228			
22.4	1500	67			25	46	77	97	144	174	239	288	421	505	617	744	1073	1214	1403	1684	2105	2420						
	1000	45			17	31	52	65	97	117	160	193	283	339	415	499	721	815	942	1131	1414	1626	1979	2215	2639	3015		
	750	33			12	23	38	48	71	86	117	142	207	249	304	366	529	598	691	829	1037	1192	1451	1624	1935	2212	2764	
25	1500	60			23	41	69	91	129	160	214	270	377	471	553	685	961	1087	1257	1508	1885	2168						
	1000	40			15	28	46	61	86	107	142	180	251	314	369	457	641	725	838	1005	1257	1445	1759	1969	2346	2681		
	750	30			11	21	35	46	64	80	107	135	188	236	276	342	481	543	628	754	942	1084	1319	1476	1759	2010	2513	2827
28	1500	54			20	37	62	82	116	144	192	243	339	424	498	616	865	978	1131	1357	1696	1950	2375					
	1000	36			14	25	41	55	77	96	128	162	226	283	332	411	577	652	754	905	1131	1301	1583	1772	2111	2413	3016	
	750	27			10.2	19	31	41	58	72	96	122	170	212	249	308	433	489	565	679	848	975	1187	1329	1583	1809	2262	2545

采用强制润滑 Forced lubrication required

H/B工业齿轮箱 GEAR UNITS

直交轴齿轮箱 Bevel-helical Gear Units 热容量 Thermal Capacities
 类型 Types B2.., B3.. 规格 Sizes 1...26

热容量 PG, kW Thermal Capacities PG in kW																											
iN	r/min	齿轮箱规格 Gear unit sizes																									
		1	2	3	4	5	6	7	8	9	10	11	12	13	14	15	16	17	18	19	20	21	22	23	24	25	26
		热容量 PG (单位为 KW) 取决于冷却方式: PG1: 无辅助冷却装置; PG2: 带冷却风扇; PG3: 带冷却盘管; PG4: 带风扇和冷却盘管。 Thermal capacity PG(in kW) depends on kind of cooling: PG1: without auxiliary cooling; PG2: fan cooling; PG3: cooling coil; PG4: fan and cooling coil.																									
5	PG1	34.9	45.6	59.7	66.3	86.9						122		150		233		286		330							
	PG2	38.1	50.6	73.1	101	140						223		272		458		662		797							
	PG3	41.1	59.2	109	135	202						313		391		664		1318		1786							
	PG4	45.0	67.5	118	166	250						403		500		862		1632		2158							
5.6	PG1	33.4	44.0	57.6	64.1	85.2						117		144		233		295		349							
	PG2	36.0	48.5	70.4	96.9	137						209		256		446		653		789			862				
	PG3	41.6	58.4	104	130	196						288		360		631		1264		1729			2015				
	PG4	45.0	64.8	112	160	242						371		461		821		1573		2084			2427				
6.3	PG1	32.0	39.7	52.2	62.4	81.9	96.5	110	134	137	155	218	277	282	337	351	374	353									
	PG2	34.7	43.7	63.5	93.8	130	152	194	235	240	272	406	516	597	726	752	815	836									
	PG3	38.1	51.2	91.8	124	182	259	261	381	327	451	555	957	1110	1384	1596	1748	1872									
	PG4	41.0	57.3	99.0	153	225	307	371	471	421	554	723	1166	1377	1712	1922	2105	2262									

H/B工业齿轮箱 GEAR UNITS

直交轴齿轮箱 Bevel-helical Gear Units 额定功率 Nominal Power Ratings
 类型 Types B3., B4.. 规格 Sizes 3...26

额定功率 Nominal Power Ratings																										
iN	n1 1/min	n2	齿轮箱规格 Gear unit sizes																							
			3	4	5	6	7	8	9	10	11	12	13	14	15	16	17	18	19	20	21	22	23	24	25	26
			额定功率 PN, KW												Nominal power ratings PN in kW											
31.5	1500	48	18	33	55	73	103	128	171	216	302	377	442	548	769	870	1005	1206	1508	1734	2111					
	1000	32	12.1	22	37	49	69	85	114	144	201	251	295	365	513	580	670	804	1005	1156	1407	1575	1876	2145	2681	3016
	750	24	9.0	17	28	36	52	64	85	108	151	188	221	274	385	435	503	603	754	867	1055	1181	1407	1608	2010	2262

采用强制润滑 Forced lubrication required

H/B工业齿轮箱 GEAR UNITS

直交轴齿轮箱 Bevel-helical Gear Units 热容量 Thermal Capacities
 类型 Types B3., B4.. 规格 Sizes 3...26

热容量 PG, kW Thermal Capacities PG in kW																										
iN	n1 1/min	n2	齿轮箱规格 Gear unit sizes																							
			3	4	5	6	7	8	9	10	11	12	13	14	15	16	17	18	19	20	21	22	23	24	25	26
			热容量 PG (单位为 KW) 取决于冷却方式: PG1: 无辅助冷却装置; PG2: 带冷却风扇; PG3: 带冷却盘管; PG4: 带风扇和冷却盘管。 Thermal capacity PG(in KW) depends on kind of cooling: PG1: without auxiliary cooling. PG2: fan cooling. PG3: cooling coil. PG4: fan and cooling coil.																							
31.5	PG1	28.2	32.0	45.2	53.4	69.7	83.1	95.6	106	131	163	172	205	250	276	301	328	370	403	423	458	742	772	888	932	
	PG2	31.7	41.2	60.5	71.0	93.6	111	132	146	199	245	263	311	378	418	499	545	618	673	688	748	927	965	1110	1165	
	PG3	48.0	49.6	82.7	96.7	138	165	208	240	275	394	428	513	675	752	846	927									
	PG4	50.2	58.2	96.5	113	160	189	240	276	337	467	508	606	784	873	1014	1111									

H/B工业齿轮箱 GEAR UNITS

平行齿轮箱 Helical Gear Units 额定输出扭矩 Nominal Output Torques
 类型 Types H1.., H2.., H3.., H4.. 规格 Sizes 1...26

iN	传动比 iN, 额定输出扭矩 T _{2N} Transmission ratios iN, nominal output torques T _{2N}																										
	齿轮箱规格 Gear unit sizes																										
	1	3	4	5	6	7	8	9	10	11	12	13	14	15	16	17	18	19	20	21	22	23	24	25	26		
1.25	0.79	2.6			7			13.3		21.5																	
1.4	0.83	2.7			7.2			13.9		22.3																	
1.6	0.87	2.9			7.5			14.2		23.6				40		63											
1.8	0.91	2.4			7.7			15.2		24.4				41.4		66.3											
2	0.93	2.5			8.2			15.5		25				42.7		68.2		121									
2.24	0.96	2.5			8.4			15.5		25				44		70.3		122									
2.5	1	2.6			8.4			15.5		25				44		72		110									
2.8	1	2.7			8.4			14.9		23.7				44		72		113		171							
3.15	1	2.7			8.4			15.2		24.5				41.9		68.4		116		173							
3.55	1	2.8			8.3			15.5		24.9				43.7		69.6		118		173							
4	1	2.8			8.4			15.5		25				44		70.8		122		173		245					
4.5	0.82	2.2			6.7			13.8		21.4				40		57.6		102		146		216					
5	0.78	2.1			6.3			12		20.5				33.7		54.5		88.8		124		174					
5.6	0.62	2			6			11.4		17.5				31.8		51.8		84.5		118		150					
6.3		3.5	6.3		10.5			19		31.5				55.5		86		143		195		292					
7.1		3.5	6.3		10.5			19		31.5				55.5		86		143		160	195	230	292	335	410		
8		3.5	6.3		10.5	13.5	19	24		31.5	39.5	55.5	69	86	107	143	160	195	230	292	335	410	458				
9		3.5	6.3		10.5	13.5	19	24		31.5	39.5	55.5	69	86	107	143	160	195	230	292	335	410	458	540			
10		3.5	6.3		10.5	13.5	19	24		31.5	39.5	55.5	69	86	107	143	160	195	230	292	335	410	458	540	620		
11.2		3.5	6.3		10.5	13.5	19	24		31.5	39.5	55.5	69	86	107	143	160	195	230	292	335	410	458	540	620	780	
12.5		3.5	6.3		10.5	13.5	19	24		31.5	39.5	55.5	69	86	107	143	160	195	230	292	335	410	458	540	620	780	880
14		3.5	6.3		10.5	13.5	19	24		31.5	39.5	55.5	69	86	107	143	160	195	230	292	335	410	458	540	620	780	880
16		3.5	6.3		10.5	13.5	19	24		31.5	39.5	55.5	69	86	107	143	160	195	230	292	335	410	458	540	620	780	880
18		3.5	6.3		10.5	13.5	19	24		31.5	39.5	55.5	69	86	107	143	160	195	230	292	335	410	458	540	620	780	880
20		3.5	6.3		10.5	13.5	19	24		31.5	39.5	55.5	69	86	107	143	160	195	230	292	335	410	458	540	620	780	880
22.4		3.5	6.2		10.2	13.5	18.6	24		31	39.5	54.5	69	88	107	153	160	200	230	300	335	420	458	560	620	800	880
25					11	13.5	20.5	24		34	39.5	60	69	88	107	153	173	200	240	300	345	420	470	560	640	800	900
28					11	13	20.5	23.5		34	38.9	60	67.8	88	109	153	173	200	240	300	345	420	470	560	640	800	900
31.5					11	14.5	20.5	25.5		34	43	60	75	88	109	153	173	200	240	300	345	420	470	560	640	800	900
35.5					11	14.5	20.5	25.5		34	43	60	75	88	109	153	173	200	240	300	345	420	470	560	640	800	900
40					11	14.5	20.5	25.5		34	43	60	75	88	109	153	173	200	240	300	345	420	470	560	640	800	900
45					11	14.5	20.5	25.5		34	43	60	75	88	109	153	173	200	240	300	345	420	470	560	640	800	900
50					11	14.5	20.5	25.5		34	43	60	75	88	109	153	173	200	240	300	345	420	470	560	640	800	900
56					11	14.5	20.5	25.5		34	43	60	75	88	109	153	173	200	240	300	345	420	470	560	640	800	900
63					11	14.5	20.5	25.5		34	43	60	75	88	109	153	173	200	240	300	345	420	470	560	640	800	900
71					11	14.5	20.5	25.5		34	43	60	75	88	109	153	173	200	240	300	345	420	470	560	640	800	900
80					11	14.5	20.5	25.5		34	43	60	75	88	109	153	173	200	240	300	345	420	470	560	640	800	900
90					11	14.5	20.5	25.5		34	43	60	75	88	109	153	173	200	240	300	345	420	470	560	640	800	900
100					11	14.5	20.5	25.5		34	43	60	75	88	109	153	173	200	240	300	345	420	470	560	640	800	900
112					11	14.5	20.5	25.5		34	43	60	75	88	109	153	173	200	240	300	345	420	470	560	640	800	900
125						14.5	20.5	25.5		34	43	60	75	88	109	153	173	200	240	300	335	420	465	560	640	800	900
140						14.1	20.5	25.2		34	42	60	75	88	109	153	173	200	240	300	345	420	470	560	640	800	900
160							20.5	25.5		34	43	60	75	88	109	153	173	200	240	300	345	420	470	560	640	800	900
180							20.5	25.5		34	43	60	75	88	109	153	173	200	240	300	345	420	470	560	640	800	900
200							20.5	25.5		34	43	60	75	88	109	153	173	200	240	300	345	420	470	560	640	800	900
224							20.5	25.5		34	43	60	75	88	109	153	173	200	240	300	345	420	470	560	640	800	900
250							20.5	25.5		34	43	60	75	88	109	153	173	200	240	300	345	420	470	560	640	800	900
280							20.5	25.5		34	43	60	75	88	109	153	173	200	240	300	345	420	470	560	640	800	900
315							20.5	25.5		34	43	60	75	88	109	153	173	200	240	300	345	420	470	560	640	800	900
355							19.6	25.5		33	43	59	75	88	109	140	173	192	240	290	345	410	470	560	640	900	
400								25.5		43		75	109		158		223		335		465		640		900		
450								24.8		41.6		74	109													900	

H/B工业齿轮箱 GEAR UNITS

直交轴齿轮箱 Bevel-helical Gear Units 额定输出扭矩 Nominal Output Torques
 类型 Types B2.., B3.., B4.. 规格 Sizes 1...26

iN	传动比 iN, 额定输出扭矩 T _{2N} Transmission ratios iN, nominal output torques T _{2N}																									
	齿轮箱规格 Gear unit sizes																									
	1	2	3	4	5	6	7	8	9	10	11	12	13	14	15	16	17	18	19	20	21	22	23	24	25	26
5	1.15	2	3.1	5.8	9.4			17.8		28				43		66		122								
5.6	1.15	2	3.1	5.8	9.4			17.8		28				45		67		122		135		195				
6.3	1.15	2	3.1	5.8	9.4	12	17.8	22.3	28	35.6	47	55	71	82	130	141	195									
7.1	1.15	2	3.1	5.8	9.4	12	17.8	22.3	28	35.6	49	57	73	84	132	145	195	230								
8	1.15	2	3.1	5.8	9.4	12	17.8	22.3	28	35.6	50.5	59	77	88	132	148	195	230								
9	1.15	2	3.1	5.8	9.4	12	17.8	22.3	28	35.6	50.5	61	78	91	132	148	195	230								
10	1.15	2	3.1	5.8	9.4	12	17.8	22.3	28	35.6	50.5	62	78	95	132	148	195	230								
11.2	1.15	2	3.1	5.8	9.4	12	17.8	22.3	28	35.6	50.5	62	78	97.5	132	148	195	230								
12.5	1.15	2	3.1	5.5	9.4	12	17.0	22.3	28	35.6	50.5	62	78	97.5	132	148	195									



齿轮箱 Gear Units

输出轴 d2 上允许的附加径向力 1)

Permissible Additional Radial Forces on Output Shaft d2 1)

类型 H1S., H2S., H3S., H4S., B2S., B3S., B4S
Types H1S., H2S., H3S., H4S., B2S., B3S., B4S

作用力在轴端中部
Application of force on centre of shaft end

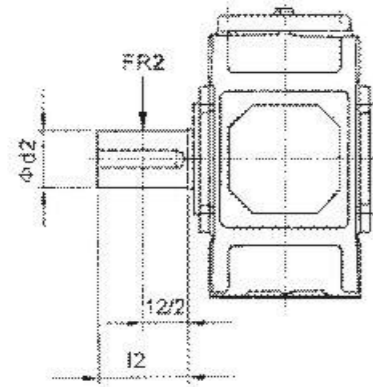

允许的作用力方向
Permissible direction of force

允许的附加径向力 FR2 (KN), 作用于输出轴端中部 3)

Permissible additional radial forces FR2 in kN with application of force on center of shaft end

类型 Type	布置形式 Design	齿轮箱规格 1), 4) Gear unit sizes 1), 4																	
		1	2	3	4	5	6	7	8	9	10	11	12	13	14	15	16	17	18
H1SH	A/B	2)	-	2)	-	2)	-	2)	-	2)	-	2)	-	2)	-	2)	-	2)	-
H2S.	A/B/G/H	-	-	8	10	22	22	30	30	30	45	64	64	150	150	140	205	205	205
	C/D	-	-	8	10	13	13	18	18	10	28	35	35	112	112	85	135	135	135
H3S.	A/B/G/H	-	-	-	-	29	29	40	40	40	60	85	85	190	190	185	265	265	265
	C/D	-	-	-	-	18	18	26	26	18	40	50	50	150	150	120	185	185	190
H4S.	A/B	-	-	-	-	-	-	26	26	18	40	50	50	150	150	120	185	185	190
	C/D	-	-	-	-	-	-	40	40	40	60	85	85	190	190	185	265	265	265
B2S.	A/C	7	10	10	13	27	27	37	37	38	55	78	78	160	160	150	210	210	210
	B/D	4	7	9	12	15	15	17	17	10	30	38	38	110	110	75	145	100	100
B3S.	A/C	-	-	9	14	29	29	40	40	40	60	85	85	190	190	185	265	265	265
	B/D	-	-	7	9	18	18	26	26	18	40	50	50	150	150	120	185	185	190
B4S.	A/C	-	-	-	-	29	29	40	40	40	60	85	85	190	190	185	265	265	265
	B/D	-	-	-	-	18	18	26	26	18	40	50	50	150	150	120	185	185	190

- 表中数据为最小值。如果给定了力的作用角和旋转方向, 通常情况下, 可允许承受较大的附加力。请与我们联系。
Values in tables are minimum values. If the angle of application of force and the direction of rotation are given, significantly higher additional forces can mostly be allowed. Please consult us.
- 根据用户要求供货。On request.
- 当作用力不在轴端中部时, 请参见第36页。For application of force outside the center of the shaft end, see page 36.
- 基础螺栓的最低性能等级为8.8级。基础必须干燥, 不得有油脂。如用户要求, 允许输入轴d1上附加径向力。
Use foundation bolts of min. Property class 8.8. Foundation must be dry and grease-free, Permissible additional radial forces on input shaft d1 on request.


齿轮箱 Gear Units

输出轴 d2 上允许的附加径向力

Permissible Additional Radial Forces on Output Shaft d2

类型 H1S., H2S., H3S., H4S., B2S., B3S., B4S
Types H1S., H2S., H3S., H4S., B2S., B3S., B4S

作用力不在轴端中部
Application of force outside the centre of the shaft end

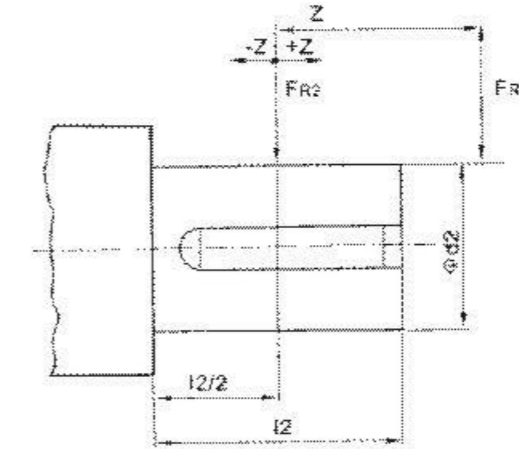

$$F_{RZ2} = F_{R2} \times K$$

FRZ2 允许的轴端外部径向力
FRZ2 Permissible external radial force


FR2 允许的附加径向力根据 81 页上的表确定
FR2 Permissible additional radial force acc.to table page 81

K 作用力系数根据下表确定
K Factor of application of force acc.to table

作用力系数 K Factor of application of force K																
规格 Size	距离 Z (mm) Distance Z in mm															
	-200	-150	-100	-75	-50	-25	0	25	50	75	100	105	200	250	300	
1						1.11	1.00	0.81	0.68	0.58	0.51					
2						1.11	1.00	0.83	0.71	0.63	0.56					
3					1.21	1.09	1.00	0.85	0.74	0.65	0.58	0.48				
4					1.17	1.08	1.00	0.86	0.76	0.68	0.62	0.52	0.44			
5+6				1.22	1.14	1.06	1.00	0.88	0.79	0.72	0.66	0.56	0.49	0.43		
7+8				1.19	1.12	1.06	1.00	0.89	0.81	0.74	0.68	0.58	0.51	0.46	0.41	
9+10			1.22	1.15	1.10	1.05	1.00	0.90	0.82	0.76	0.70	0.61	0.54	0.48	0.44	
11+12			1.18	1.13	1.08	1.04	1.00	0.91	0.84	0.78	0.73	0.64	0.57	0.51	0.47	
13+14		1.24	1.15	1.11	1.07	1.03	1.00	0.92	0.86	0.80	0.75	0.67	0.60	0.55	0.50	
15+16		1.20	1.12	1.09	1.06	1.03	1.00	0.93	0.87	0.82	0.77	0.69	0.63	0.58	0.53	
17+18	1.25	1.17	1.11	1.08	1.05	1.03	1.00	0.94	0.88	0.84	0.79	0.72	0.66	0.60	0.56	

H/B工业齿轮箱 GEAR UNITS

平行轴齿轮箱 Helical Gear Units 单级传动 Single Stage 卧式安装 Horizontal
 类型 Types H1SH 规格 Sizes 1...19

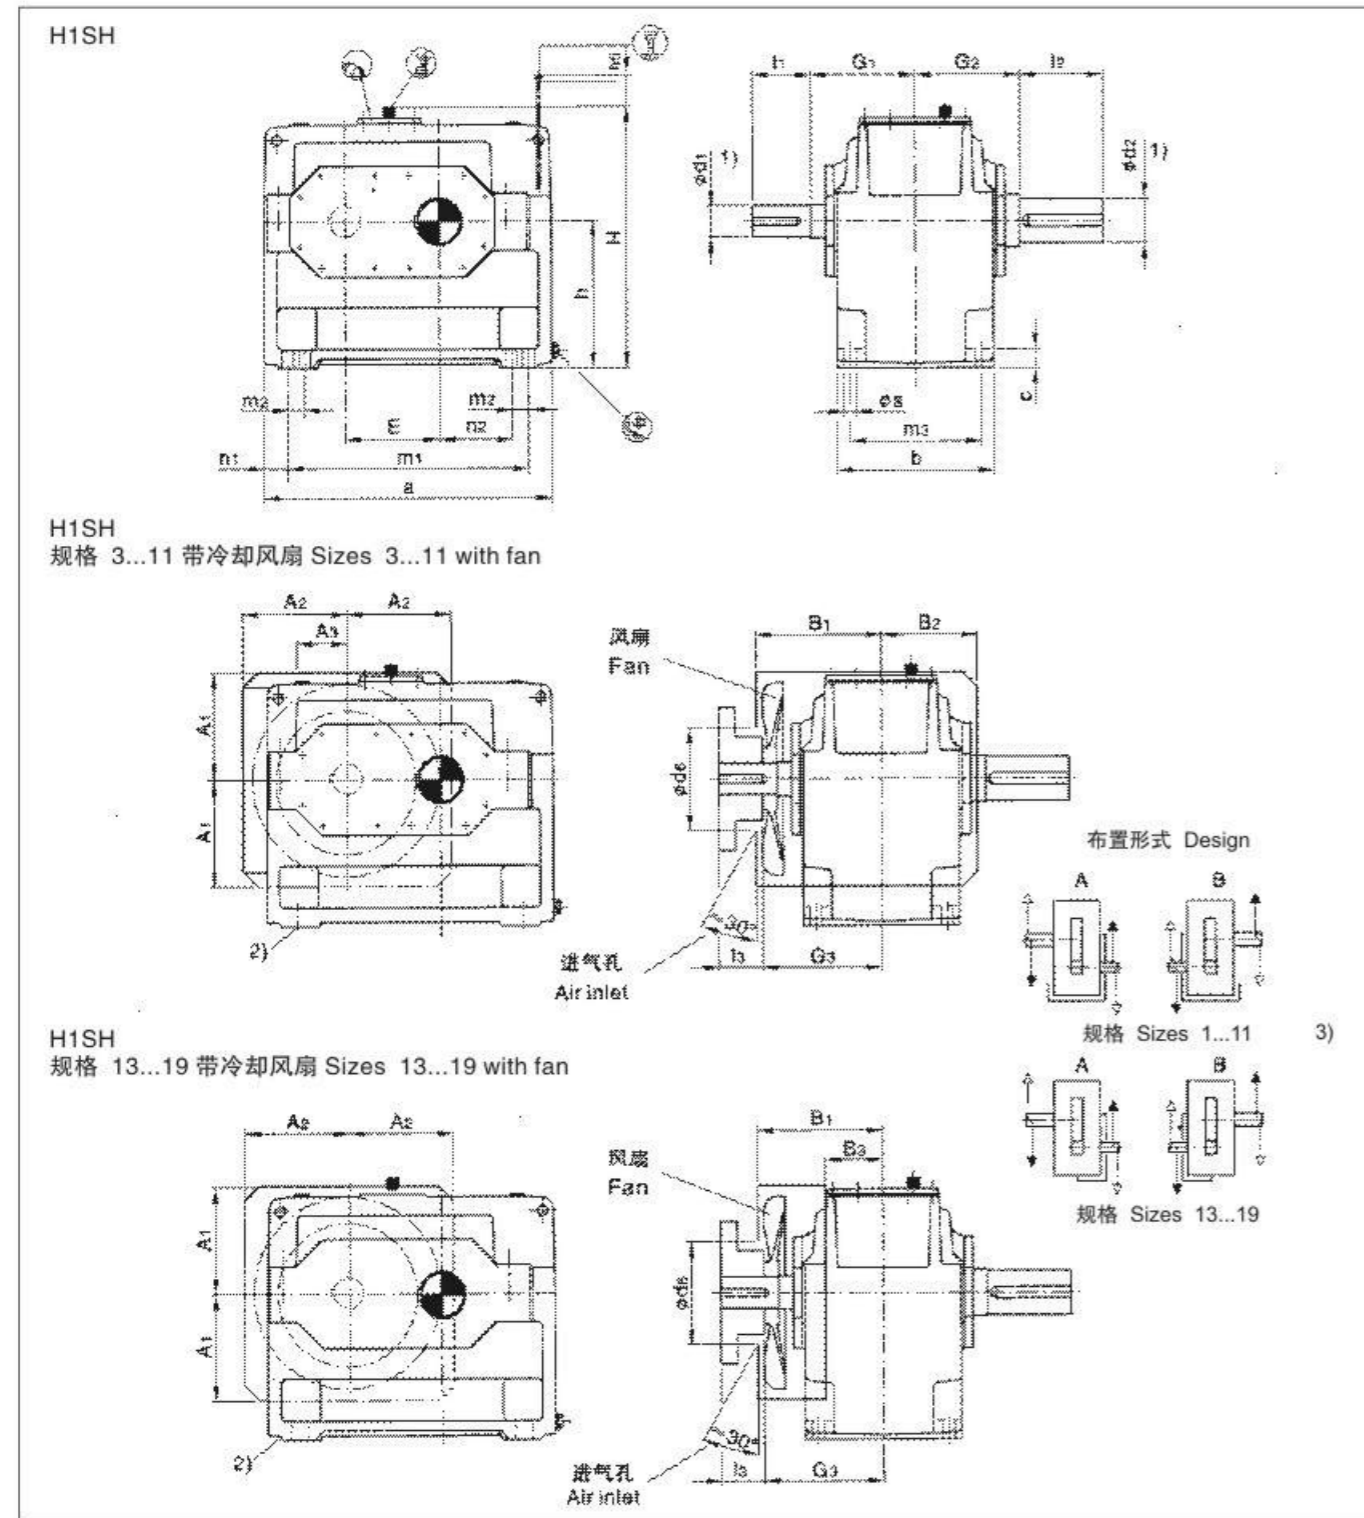

- 1) $k_s \leq \phi 50$ $m_s > \phi 50$
 有关平键GB/T1095-1979型和中心孔, 参见第98-99页。For parallel key GB/T1095-1979 and for centre hole, see page 98-99.
- 2) 在安装基础螺栓前, 应拆下风扇罩。Remove air guide cover before fitting the foundation bolts.
- 3) 规格1号不带风扇。Sizes 1 without fan.

H/B工业齿轮箱 GEAR UNITS

平行轴齿轮箱 Helical Gear Units 单级传动 Single Stage 卧式安装 Horizontal
 类型 Types H1SH 规格 Sizes 1...19

规格 Size	尺寸 mm Dimensions in mm																
	输入轴 Input															G1	G3
	iN=1.25-2.8			iN=1.6-2.8			iN=2-2.8			iN=3.15-4			iN=4.5-5.6				
d1 ¹⁾	l1	l3	d1 ¹⁾	l1	l3	d1 ¹⁾	l1	l3	d1 ¹⁾	l1	l3	d1 ¹⁾	l1	l3			
1	40	70	-							30	50		24	40	-	110	
3	60	125	105							45	100	80	32	80	60	170	190
5	85	160	130							60	135	105	50	110	80	210	240
7	100	200	165							75	140	105	60	140	105	250	285
9	110	200	165							90	165	130	75	140	105	280	315
11				130	240	205				110	205	170	90	170	135	325	360
13				150	245	200				130	245	200	100	210	165	365	410
15							180	290	240	150	250	200	125	250	200	360	410
17							200	330	280	170	290	240	140	250	200	400	450
19							220	340	290	190	340	290	160	300	250	440	490

规格 Size	尺寸 mm Dimensions in mm																			
	齿轮箱 Gear units																			
a	A1	A2	A3	b	B1	B2	B3	c	d6	E	h	h5	H	m1	m2	m3	n1	n2	s	
1	295	-	-	-	150	-	-	-	18	-	90	140	55	275	220	-	120	37.5	80	12
3	420	150	145	80	200	205	130	-	28	130	130	200	82	375	310	-	160	55	110	19
5	580	225	215	115	285	255	185	-	35	190	185	290	100	525	440	-	240	70	160	24
7	690	255	250	120	375	300	230	-	45	245	225	350	75	625	540	-	315	75	195	28
9	805	300	265	140	425	330	265	-	50	280	265	420	50	735	625	-	350	90	225	35
11	960	360	330	190	515	375	320	-	60	350	320	500	40	875	770	-	440	95	280	35
13	1100	415	350	-	580	430	-	150	70	350	370	580	40	1020	870	-	490	115	315	42
15	1295	500	430	-	545	430	-	120	80	450	442	600	10	1115	1025	-	450	135	370	48
17	1410	550	430	-	615	470	-	150	80	445	490	670	-	1235	1170	130	530	120	425	42
19	1590	630	475	-	690	510	-	190	90	445	555	760	-	1395	1290	150	590	150	465	48

规格 Size	尺寸 mm Dimensions in mm			润滑油 Lubrication (L)	重量 Weight (kg)
	输出轴 Output				
	d2 ¹⁾	G2	l ₂		
1	45	110	80	2.5	55
3	60	170	125	7	128
5	85	210	160	22	302
7	105	250	200	42	547
9	125	270	210	68	862
11	150	320	240	120	1515
13	180	360	310	175	2395
15	220	360	350	190	3200
17	240	400	400	270	4250
19	270	440	450	390	5800

H/B工业齿轮箱 GEAR UNITS

平行轴齿轮箱 Helical Gear Units 两级传动 Two Stage 卧式安装 Horizontal
 类型 Types H2.H 规格 Sizes 3...12

H2SH H2HH H2DH

★ 输出轴 Output

布置形式 Design

H2SH 实心轴 Solid shaft

H2HH 空心轴 Hollow shaft

H2DH 带胀紧盘的空心轴 Hollow shaft for shrink disk

1) $k_s \leq \Phi 50$ $m_s > \Phi 50$
 有关键GB/T1095-1979型和中心孔, 参见第98-99页。For parallel key GB/T1095-1979 and for centre hole, see page 98-99.

2) 键槽GB/T1095-1979。Keyway GB/T1095-1979.

3) 扭力支撑位于工作机侧。Torque support on driven machine side.

4) 在安装螺栓前, 应先拆下风扇罩。Remove air guide cover before fitting the foundation bolts.

H/B工业齿轮箱 GEAR UNITS

平行轴齿轮箱 Helical Gear Units 两级传动 Two Stage 卧式安装 Horizontal
 类型 Types H2.H 规格 Sizes 3...12

规格 Size	尺寸 mm Dimensions in mm												G1	G3
	输入轴 Input													
	iN=6.3-11.2			iN=8-14			iN=12.5-22.4			iN=16-28				
	d1 ¹⁾	l1	l3	d1 ¹⁾	l1	l3	d1 ¹⁾	l1	l3	d1 ¹⁾	l1	l3		
3	35	60	-				28	50					135	-
4	45	100	80				32	80	60				170	190
5	50	100	80				38	80	60				195	215
6				50	100	80				38	80	60	195	215
7	60	135	105				50	110	80				210	240
8				60	135	105				50	110	80	210	240
9	75	140	110				60	140	110				240	270
10				75	140	110				60	140	110	240	270
11	90	165	130				70	140	105				275	310
12				90	165	130				70	140	105	275	310

规格 Size	尺寸 mm Dimensions in mm											
	齿轮箱 Gear units											
	a	A1	A2	A3	A4	b	B1	B2	c	C1	D5	d6
3	450	-	-	-	-	190	-	-	22	24 ± 1	18	-
4	565	195	225	150	30	215	205	158	28	30 ± 1	24	136
5	640	225	260	175	55	255	230	177.5	28	30 ± 1	24	150
6	720	225	260	175	55	255	230	177.5	28	30 ± 1	24	150
7	785	272	305	210	70	300	255	210	35	36 ± 1	28	200
8	890	272	305	210	70	300	255	210	35	36 ± 1	28	200
9	925	312	355	240	100	370	285	245	40	45 ± 1.5	36	200
10	1025	312	355	240	100	370	285	245	40	45 ± 1.5	36	200
11	1105	372	420	285	135	430	325	285	50	54 ± 1.5	40	210
12	1260	372	420	285	135	430	325	285	50	54 ± 1.5	40	210

规格 Size	尺寸 mm Dimensions in mm											
	齿轮箱 Gear units											
	E	g	h	h5	H	m1	m3	n1	n2	n3	n4	s
3	220	71	175	110	360	290	160	80	65	285	132.5	15
4	270	77.5	200	110	415	355	180	105	85	345	150	19
5	315	97.5	230	150	482	430	220	105	100	405	180	19
6	350	97.5	230	150	482	510	220	105	145	440	180	19
7	385	114	280	190	572	545	260	120	130	500	215	24
8	430	114	280	190	582	650	260	120	190	545	215	24
9	450	140	320	205	662	635	320	145	155	585	245	28
10	500	140	320	215	662	735	320	145	205	635	245	28
11	545	161	380	250	782	775	370	165	180	710	300	35
12	615	161	380	250	790	930	370	165	265	780	300	35

规格 Size	尺寸 mm Dimensions in mm									润滑油 Lubrication (L)	重量 Weight (kg)
	输出轴 Output										
	H2SH			H2HH			H2DH				
	d2 ¹⁾	G2	l2	D2 ²⁾	G4	D3	D4	G4	G5		
3	65	125	140	65	125	70	70	125	180	6	115
4	80	140	170	80	140	85	85	140	205	10	190
5	100	165	210	95	165	100	100	165	240	15	300
6	110	165	210	105	165	110	110	165	240	16	355
7	120	195	210	115	195	120	120	195	280	27	505
8	130	195	250	125	195	130	130	195	285	30	590
9	140	235	250	135	235	140	145	235	330	42	830
10	160	235	300	150	235	150	155	235	350	45	960
11	170	270	300	165	270	165	170	270	400	71	1335
12	180	270	300	180	270	180	185	270	405	76	1615

平行轴齿轮箱 Helical Gear Units 两级传动 Two Stage 卧式安装 Horizontal
 类型 Types H2.H, H2.M 规格 Sizes 13...22

H2SH H2HH H2DH

H2HM H2DM

★ 输出轴 Output

布置形式 Design

- 1) $k_6 \leq \Phi 50$ $m_2 > \Phi 50$
 有关平键GB/T1095-1979型和中心孔, 参见第98-99页。For parallel key GB/T1095-1979 and for centre hole, see page 98-99.
- 2) 键槽GB/T1095-1979。Keyway GB/T1095-1979.
- 3) 扭力支撑位于工作机侧。Torque support on driven machine side.
- 4) 在安装螺栓前, 应拆下风扇罩。Remove air guide cover before fitting the foundation bolts.
- 5) 规格13和15: 速比只有*i*N=6.3-18; 规格17号和19号: 速比只有*i*N=6.3-16
 Size 13 and 15: only *i*N=6.3-18; Size 17 and 19: only *i*N=6.3-16.

平行轴齿轮箱 Helical Gear Units 两级传动 Two Stage 卧式安装 Horizontal
 类型 Types H2.H, H2.M 规格 Sizes 13... 22


规格 Size	尺寸 mm Dimensions in mm																			
	输入轴 Input																			
	<i>i</i> N=6.3-11.2			<i>i</i> N=7.1-12.5			<i>i</i> N=8-14			<i>i</i> N=12.5-20			<i>i</i> N=14-22.4			<i>i</i> N=16-25			G1	G3
	d1 ¹⁾	l1	l3	d1 ¹⁾	l1	l3	d1 ¹⁾	l1	l3	d1 ¹⁾	l1	l3	d1 ¹⁾	l1	l3	d1 ¹⁾	l1	l3		
13	100	205	170							85	170	135							330	365
14							100	205	170							85	170	135	330	365
15	120	210	165							100	210	165							365	410
16				120	210	165							100	210	165				365	410
17	125	245	200							110	210	165							420	465
18				125	245	200							110	210	165				420	465
19	150	245	200							120	210	165							475	520
20				150	245	200							120	210	165				475	520
21	170	290	240							140	250	200							495	545
22				170	290	240							140	250	200				495	545

规格 Size	尺寸 mm Dimensions in mm															
	齿轮箱 Gear units															
	a	A1	A2	A3	A4	b	B1	B2	c	c1	d6	D5	e2	E		
13	1290	430	460	330	365	550	385	135	60	61 ± 2	250	48	405	635		
14	1430	430	460	330	365	550	385	135	60	61 ± 2	250	48	475	705		
15	1550	490	500	370	440	625	430	155	70	72 ± 2	280	55	485	762		
16	1640	490	500	370	440	625	430	155	70	72 ± 2	280	55	530	808		
17	1740	540	565	435	505	690	485	140	80	81 ± 2	280	55	525	860		
18	1860	540	565	435	505	690	485	140	80	81 ± 2	280	55	585	920		
19	2010	600	600	500	450	790	540	190	90	91 ± 2	310	65	590	997		
20	2130	600	600	500	450	790	540	190	90	91 ± 2	310	65	650	1057		
21	2140	680	680	500	610	830	565	200	100	100 ± 2	450	75	655	1067		
22	2250	680	680	500	610	830	565	200	100	100 ± 2	450	75	710	1122		

规格 Size	尺寸 mm Dimensions in mm													
	齿轮箱 Gear units													
	g	h	h1	h2	H	m1	m2	m3	n1	n2	n3	n4	s	
13	211.5	440	450	460	900	545	545	475	100	305	835	340	35	
14	211.5	440	450	460	900	545	685	475	100	375	905	340	35	
15	238	500	490	500	1000	655	655	535	120	365	1005	375	42	
16	238	500	490	500	1000	655	745	535	120	410	1050	375	42	
17	259	550	555	560	1110	735	735	600	135	390	1145	425	42	
18	259	550	555	560	1110	735	855	600	135	450	1205	425	42	
19	299	620	615	620	1240	850	850	690	155	435	1345	475	48	
20	299	620	615	620	1240	850	970	690	155	495	1405	475	48	
21	310	700	685	690	1390	900	900	720	170	485	1400	520	56	
22	310	700	685	690	1390	900	1010	720	170	540	1455	520	56	

规格 Size	尺寸 mm Dimensions in mm										润滑油 Lubrication		重量 Weight	
	输出轴 Output										H2.H	H2.M		
	H2SH		H2HH ²⁾ H2HM ²⁾		H2DH ²⁾ H2DM ²⁾						(L)		H2.H	H2.M
	d2 ¹⁾	G2	L2	D2 ²⁾	G4	D3	D4	G4	G5			(kg)	(kg)	
13	200	335	350	190	335	190	195	335	480	135	110	2000	1880	
14	210	335	350	210	335	210	215	335	480	140	115	2570	2430	
15	230	380	410	230	380	230	235	380	550	210	160	3430	3240	
16	240	380	410	240	380	240	245	380	550	215	165	3655	3465	
17	250	415	410	250	415	250	260	415	600	290	230	4650	4420	
18	270	415	470	275	415	280	285	415	600	300	240	5125	4870	
19	290	465	470	-	-	285	295	465	670	320	300	6600	6300	
20	300	465	500	-	-	310	315	465	670	340	320	7500	7200	
21	320	490	500	-	-	330	335	490	715	320	350	8900	8400	
22	340	490	550	-	-	340	345	490	725	340	370	9600	9200	

平行轴齿轮箱 Helical Gear Units 两级传动 Two Stage 卧式安装 Horizontal
 类型 Types H2.H, H2.M 规格 Sizes 23...26

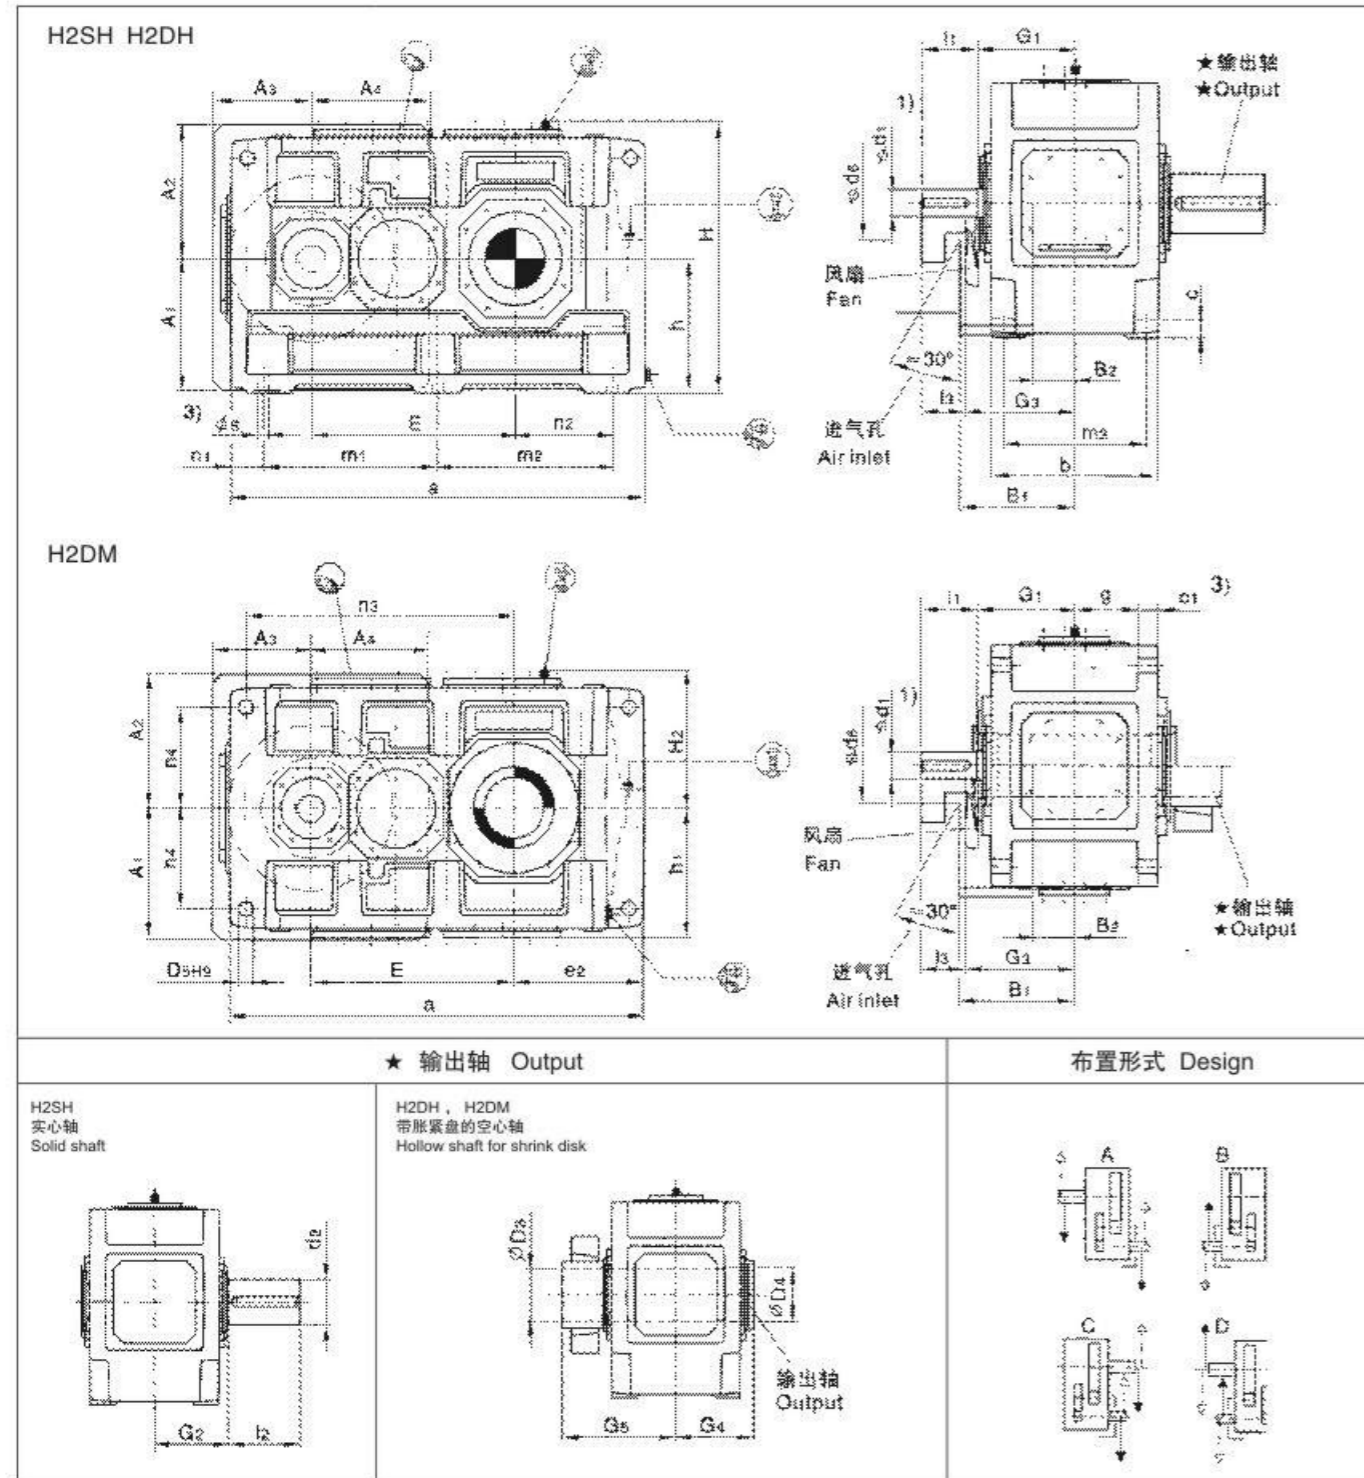

- 1) $k_s \leq \Phi 50$, $m_s > \Phi 50$
 有关平键GB/T1095-1979型和中心孔, 参见第98-99页。For parallel key GB/T1095-1979 and for centre hole, see page 98-99.
- 2) 键槽GB/T1095-1979。Keyway GB/T1095-1979.
- 3) 扭力支撑位于工作机侧。Torque support on driven machine side.

平行轴齿轮箱 Helical Gear Units 两级传动 Two Stage 卧式安装 Horizontal
 类型 Types H2.H, H2.M 规格 Sizes 23...26


规格 Size	尺寸 mm Dimensions in mm												G1	G3
	输入轴 Input													
	iN=6.3-11.2			iN=7.1-11.5			iN=12.5-20			iN=14-22.4				
	d1 ¹⁾	l1	l3	d1 ¹⁾	l1	l3	d1 ¹⁾	l1	l3	d1 ¹⁾	l1	l3		
23	190	330	280				150	250	200				560	610
24				190	330	280				150	250	200	560	610
25	200	340	290				170	300	250				600	650
26				200	340	290				170	300	250	600	650

规格 Size	尺寸 mm Dimensions in mm													
	齿轮箱 Gear units													
	a	A1	A2	A3	A4	b	B1	B2	c	c1	d6	D5	e2	E
23	2380	770	770	550	550	930	630	220	115	120 ± 2	450	80	730	1185
24	2510	770	770	550	550	930	630	220	115	120 ± 2	450	80	795	1250
25	2580	845	865	550	550	1045	670	240	130	120 ± 2	450	90	790	1325
26	2760	845	865	550	550	1045	670	240	130	120 ± 2	450	90	880	1415

规格 Size	尺寸 mm Dimensions in mm												
	齿轮箱 Gear units												
	g	h	h1	h2	H	m1	m2	m3	n1	n2	n3	n4	s
23	342	780	770	770	1550	1010	1010	810	180	550	1560	580	56
24	342	780	770	770	1550	1010	1140	810	180	615	1625	580	56
25	400	860	860	860	1720	1090	1090	910	200	590	1685	660	66
26	400	860	860	860	1720	1090	1270	910	200	680	1775	660	66

规格 Size	尺寸 mm Dimensions in mm							润滑油 Lubrication		重量 Weight	
	输出轴 Output							H2.H (L)	H2.M (L)	H2.H (kg)	H2.M (kg)
	H2SH			H2DH H2DM							
	d2 ¹⁾	G2	I2	D3	D4	G4	G5				
23	360	540	590	360	365	540	785	430	470	11600	11000
24	380	540	590	380	385	540	805	450	500	13000	12300
25	400	605	650	400	405	605	875	600	660	15500	14700
26	420	605	650	430	435	605	900	640	700	17200	16200

平行轴齿轮箱 Helical Gear Units 三级传动 Three Stage 卧式安装 Horizontal
 类型 Types H3.H 规格 Sizes 5...12

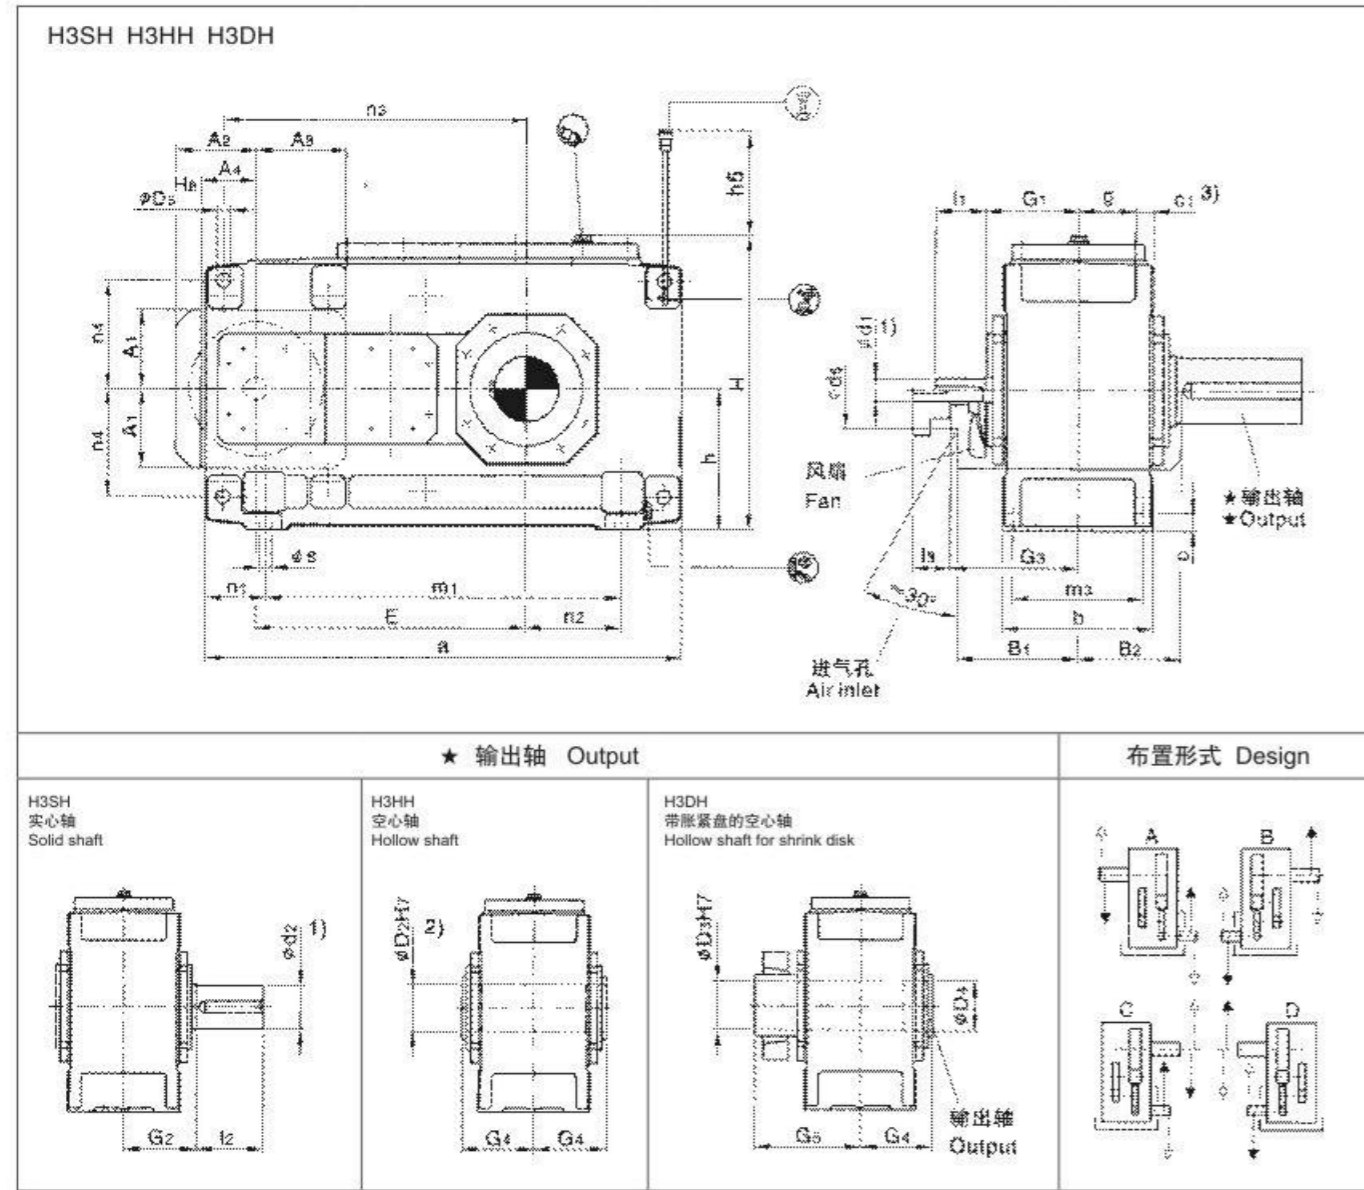

- 1) $k_s \leq \Phi 50$ $m_s > \Phi 50$
 有关平键GB/T1095-1979型和中心孔, 参见第98-99页。For parallel key GB/T1095-1979 and for centre hole, see page 98-99.
- 2) 键槽GB/T1095-1979。Keyway GB/T1095-1979.
- 3) 扭力支撑位于工作机侧。Torque support on driven machine side.

平行轴齿轮箱 Helical Gear Units 三级传动 Three Stage 卧式安装 Horizontal
 类型 Types H3.H 规格 Sizes 5...12

规格 Size	尺寸 mm Dimensions in mm																			
	输入轴 Input																			
	iN=24-45			iN=31.5-56			iN=50-63			iN=63-80			iN=71-90			iN=90-112			G1	G3
d1 ¹⁾	l1	l3	d1 ¹⁾	l1	l3	d1 ¹⁾	l1	l3	d1 ¹⁾	l1	l3	d1 ¹⁾	l1	l3	d1 ¹⁾	l1	l3			
5	40	70	70				30	50	50				24	40	40				160	220
6				40	70	70				30	50	50				24	40	40	160	220
7	45	80	80				35	60	60				28	50	50				185	250
8				45	80	80				35	60	60				28	50	50	185	250
9	60	125	105				45	100	80				32	80	60				230	300
10				60	125	105				45	100	80				32	80	60	230	300
11	70	120	120				50	80	80				42	70	70				255	330
12				70	120	120				50	80	80				42	70	70	255	330

规格 Size	尺寸 mm Dimensions in mm											
	齿轮箱 Gear units											
	a	A1	A2	A3	A4	b	B1	B2	c	c1	d6	D5
5	690	137	135	140	80	255	215	175	28	30 ± 1	60	24
6	770	137	135	140	80	255	215	175	28	30 ± 1	60	24
7	845	157	160	180	100	300	245	205	35	36 ± 1	75	28
8	950	157	160	180	100	300	245	205	35	36 ± 1	75	28
9	1000	182	190	205	120	370	295	240	40	45 ± 1.5	90	36
10	1100	182	190	205	120	370	295	240	40	45 ± 1.5	90	36
11	1200	218	220	255	150	430	325	280	50	54 ± 1.5	100	40
12	1355	218	220	255	150	430	325	280	50	54 ± 1.5	100	40

规格 Size	尺寸 mm Dimensions in mm											
	齿轮箱 Gear units											
	E	g	h	h5	H	m1	m3	n1	n2	n3	n4	s
5	405	97.5	230	130	482	480	220	105	100	455	180	19
6	440	97.5	230	130	482	560	220	105	145	490	180	19
7	495	114	280	170	572	605	260	120	130	560	215	24
8	540	114	280	160	582	710	260	120	190	605	215	24
9	580	140	320	185	662	710	320	145	155	660	245	28
10	630	140	320	185	662	810	320	145	205	710	245	28
11	705	161	380	180	782	870	370	165	180	805	300	35
12	775	161	380	170	790	1025	370	165	265	875	300	35

规格 Size	尺寸 mm Dimensions in mm										润滑油 Lubrication (L)	重量 Weight (kg)
	输出轴 Output											
	H3SH		H3HH		H3DH							
d2 ¹⁾	G2	l2	D2 ²⁾	G4	D3	D4	G4	G5				
5	100	165	210	95	165	100	100	165	240	15	320	
6	110	165	210	105	165	110	110	165	240	17	365	
7	120	195	210	115	195	120	120	195	280	28	540	
8	130	195	250	125	195	130	130	195	285	30	625	
9	140	235	250	135	235	140	145	235	330	45	875	
10	160	235	300	150	235	150	155	235	350	46	1020	
11	170	270	300	165	270	165	170	270	400	85	1400	
12	180	270	300	180	270	180	185	270	405	90	1675	

平行轴齿轮箱 Helical Gear Units 三级传动 Three Stage 卧式安装 Horizontal
 类型 Types H3.H, H3.M 规格 Sizes 13...22

H3SH H3HH H3DH

规格19号以上, 带两个检查孔
From size 19 up 2 covers

★输出轴
★Output

风扇 Fan

进气孔 Air inlet

H3HM H3DM

规格19号以上, 带两个检查孔
From size 19 up 2 covers

★输出轴
★Output

风扇 Fan

进气孔 Air inlet

★ 输出轴 Output

布置形式 Design

H3SH 实心轴
Solid shaft

H3HH, H3HM 带胀紧套的空心轴
Hollow shaft

H3DH, H3DM 带胀紧套的空心轴
Hollow shaft for shrink disk

- 1) $k_s \leq \Phi 50$ $m_s > \Phi 50$
有关平键GB/T1095-1979型和中心孔, 参见第98-99页。For parallel key GB/T1095-1979 and for centre hole, see page 98-99.
- 2) 键槽GB/T1095-1979。Keyway GB/T1095-1979.
- 3) 扭力支撑位于工作机侧。Torque support on driven machine side.

平行轴齿轮箱 Helical Gear Units 三级传动 Three Stage 卧式安装 Horizontal
 类型 Types H3.H, H3.M 规格 Sizes 13... 22

规格 Size	尺寸 mm Dimensions in mm																			
	输入轴 Input																			
	iN=22.4-45			iN=25-50 iN=28-56 *)			iN=50-63			iN=56-71 iN=63-80 *)			iN=71-90			iN=80-100 iN=90-112 *)			G1	G3
	d1 ¹⁾	I1	I3	d1 ¹⁾	I1	I3	d1 ¹⁾	I1	I3	d1 ¹⁾	I1	I3	d1 ¹⁾	I1	I3	d1 ¹⁾	I1	I3		
13	85	160	130				60	135	105				50	110	80				310	385
14				85	160	130				60	135	105				50	110	80	310	385
15	100	200	165				75	140	105				60	140	105				350	420
16				100	200	165				75	140	105				60	140	105	350	420
17	100	200	165				75	140	105				60	140	105				380	450
18				100	200	165				75	140	105				60	140	105	380	450
19	110	200	4)				90	165	4)				75	140	4)				430	4)
20				110	200	4)				90	165	4)				75	140	4)	430	4)
21	130	240	4)				110	205	4)				90	170	4)				470	4)
22				130	240	4)				110	205	4)				90	170	4)	470	4)


* 仅指规格 14 号齿轮箱 Only size 14

规格 Size	尺寸 mm Dimensions in mm													
	齿轮箱 Gear units													
	a	A1	A2	A3	b	B1	B2	c	c1	d6	D5	e2	E	
13	1395	225	225	212	550	380	195	60	61 ± 2	120	48	405	820	
14	1535	225	225	212	550	380	195	60	61 ± 2	120	48	475	890	
15	1680	270	265	252	625	415	205	70	72 ± 2	150	55	485	987	
16	1770	270	265	252	625	415	205	70	72 ± 2	150	55	530	1033	
17	1770	270	265	252	690	445	235	80	81 ± 2	150	55	525	1035	
18	1890	270	265	252	690	445	235	80	81 ± 2	150	55	585	1095	
19	2030				790			90	91 ± 2			65	590	1190
20	2150				790			90	91 ± 2			65	650	1250
21	2340	4)	4)	4)	830	4)	4)	100	100 ± 2	4)		75	655	1387
22	2450				830			100	100 ± 2			75	710	1442

规格 Size	尺寸 mm Dimensions in mm													
	齿轮箱 Gear units													
	g	h	h1	h2	H	m1	m2	m3	n1	n2	n3	n4	s	
13	211.5	440	450	460	900	597.5	597.5	475	100	305	940	340	35	
14	211.5	440	450	460	900	597.5	737.5	475	100	375	1010	340	35	
15	238	500	490	500	1000	720	720	535	120	365	1135	375	42	
16	238	500	490	500	1000	720	810	535	120	410	1180	375	42	
17	259	550	555	560	1110	750	750	600	135	390	1175	425	42	
18	259	550	555	560	1110	750	870	600	135	450	1235	425	42	
19	299	620	615	620	1240	860	860	690	155	435	1365	475	48	
20	299	620	615	620	1240	860	980	690	155	495	1425	475	48	
21	310	700	685	690	1390	1000	1000	720	170	485	1615	520	56	
22	310	700	685	690	1390	1000	1110	720	170	540	1670	520	56	

规格 Size	尺寸 mm Dimensions in mm									润滑油 Lubrication		重量 Weight	
	输出轴 Output									H3.H (L)	H3.M (L)	H3.H (kg)	H3.M (kg)
	H3SH	H3HH	H3HM	H3DH	H3DM								
d2 ¹⁾	G2	I2	D2 ²⁾	G4	D3	D4	G4	G5					
13	200	335	350	190	335	190	195	335	480	160	125	2295	2155
14	210	335	350	210	335	210	215	335	480	165	130	2625	2490
15	230	380	410	230	380	230	235	380	550	235	190	3475	3260
16	240	380	410	240	380	240	245	380	550	245	195	3875	3625
17	250	415	410	250	415	250	260	415	600	305	240	4560	4250
18	270	415	470	275	415	280	285	415	600	315	250	5030	4740
19	290	465	470	-	-	285	295	465	670	420	390	6700	6200
20	300	465	500	-	-	310	315	465	670	450	415	8100	7600
21	320	490	500	-	-	330	335	490	715	470	515	9100	8500
22	340	490	550	-	-	340	345	490	725	490	540	9800	9300

平行轴齿轮箱 Helical Gear Units 三级传动 Three Stage 卧式安装 Horizontal
 类型 Types H3.H, H3.M 规格 Sizes 23...26

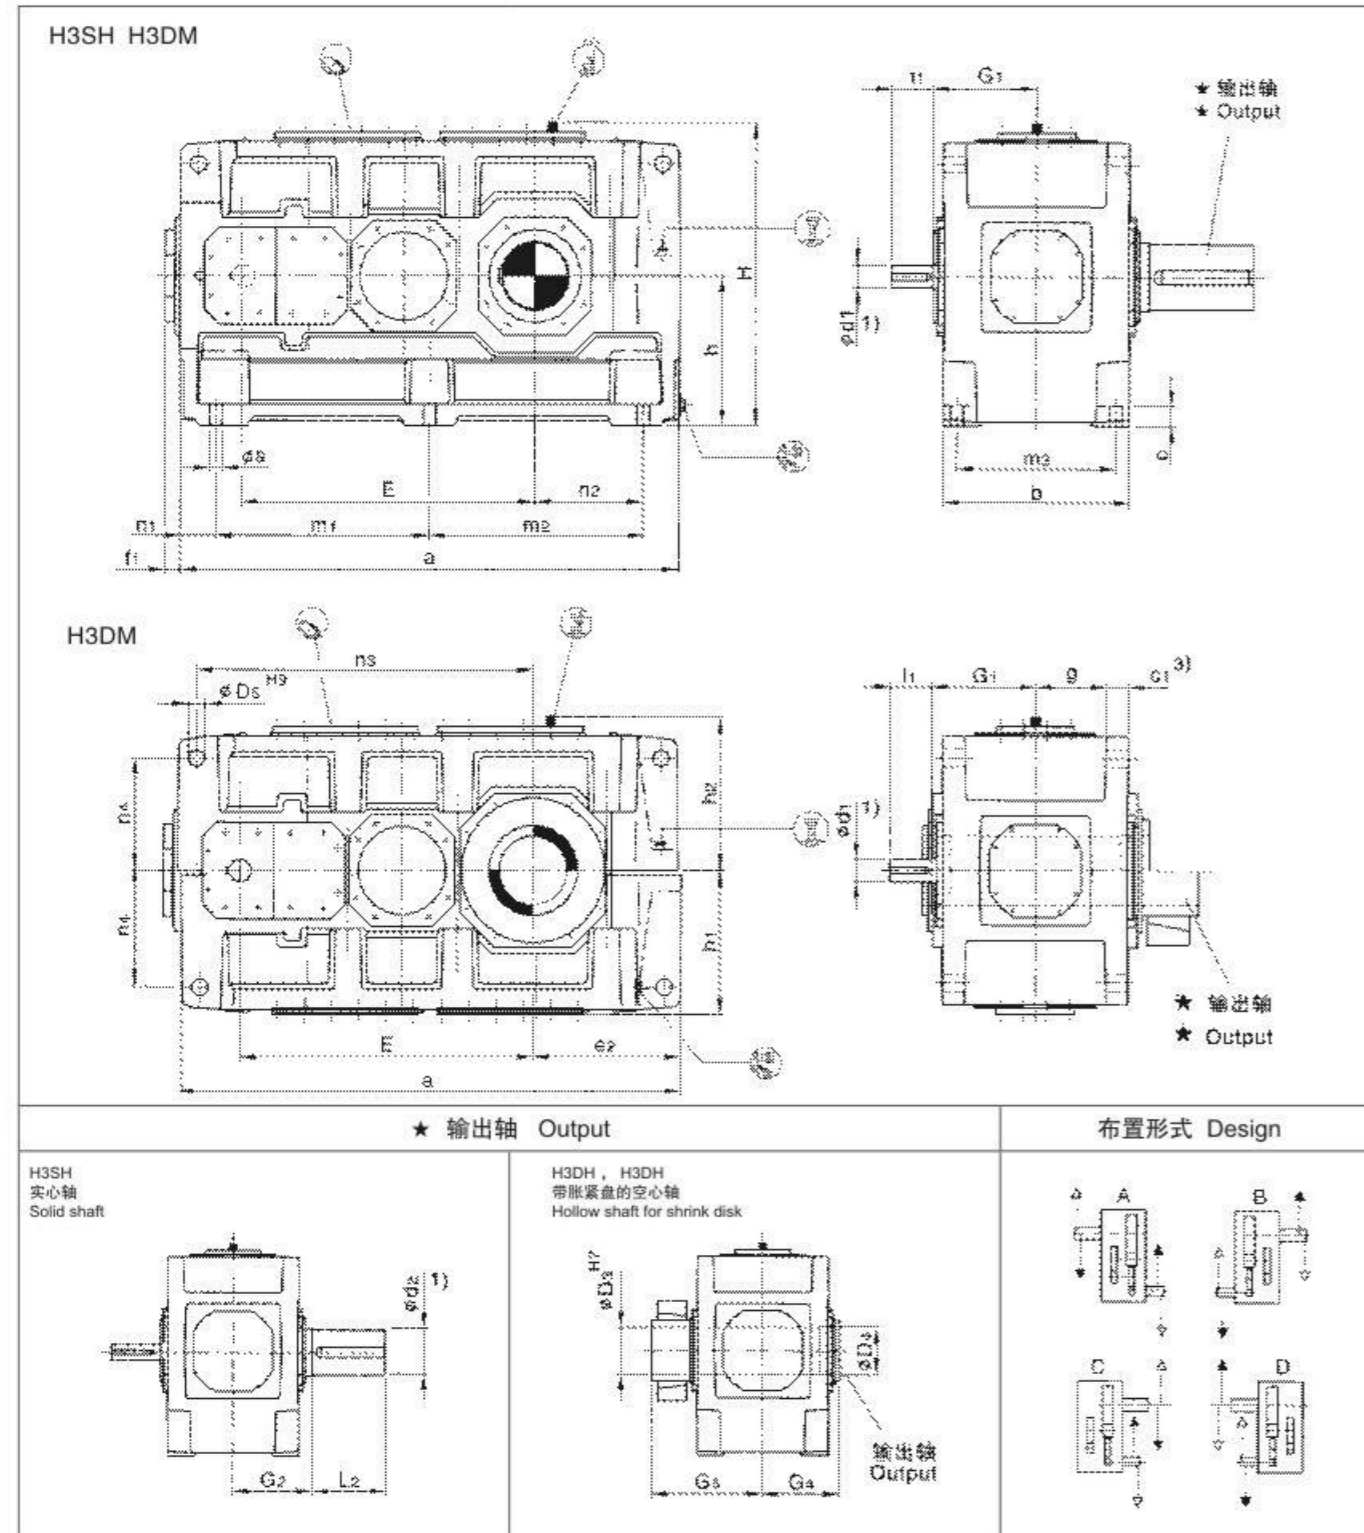

1) $k_s \leq \Phi 50$ $m_s > \Phi 50$
 有关平键GB/T1095-1979型和中心孔, 参见第98-99页。For parallel key GB/T1095-1979 and for centre hole, see page 98-99.
 2) 键槽GB/T1095-1979。Keyway GB/T1095-1979。
 3) 扭力支撑位于工作机侧。Torque support on driven machine side.

平行轴齿轮箱 Helical Gear Units 三级传动 Three Stage 卧式安装 Horizontal
 类型 Types TH3.H, TH3.M 规格 Sizes 23...26


规格 Size	尺寸 mm Dimensions in mm												
	输入轴 Input												
	iN=22-45		iN=25-50		iN=50-63		iN=56-71		iN=71-90		iN=80-100		G1
d1 ¹⁾	l1	d1 ¹⁾	l1	d1 ¹⁾	l1	d1 ¹⁾	l1	d1 ¹⁾	l1	d1 ¹⁾	l1		
23	130	240			110	205			90	170			510
24			130	240			110	205			90	170	510
25	150	245			130	245			100	210			570
26			150	245			130	245			100	210	570

规格 Size	尺寸 mm Dimensions in mm											
	齿轮箱 Gear units											
	a	b	c	c1	D5	e2	E	f1	g	h	h1	
23	2530	930	115	120 ± 2	80	730	1505	35	342	780	770	
24	2660	930	115	120 ± 2	80	795	1570	35	342	780	770	
25	2830	1045	130	120 ± 2	90	790	1695	65	400	860	860	
26	3010	1045	130	120 ± 2	90	880	1785	65	400	860	860	

规格 Size	尺寸 mm Dimensions in mm										
	齿轮箱 Gear units										
	h2	H	m1	m2	m3	n1	n2	n3	n4	s	
23	790	1570	1085	1085	810	180	550	1725	580	56	
24	790	1570	1085	1215	810	180	615	1790	580	56	
25	860	1720	1215	1215	910	200	590	1965	660	66	
26	860	1720	1215	1395	910	200	680	2055	660	66	

规格 Size	尺寸 mm Dimensions in mm								润滑油 Lubrication		重量 Weight	
	输出轴 Output								H3.H (L)	H3.M (L)	H3.H (kg)	H3.M (kg)
	H2SH			H3SH H3SM								
	D2 ¹⁾	G2	L2	D3	D4	G4	G5					
23	360	540	590	360	365	540	785	620	690	11500	10600	
24	380	540	590	380	365	540	805	650	725	13400	12500	
25	400	605	650	400	405	605	875	880	970	16100	15200	
26	420	605	650	430	435	605	900	935	1030	17600	16500	

平行轴齿轮箱 Helical Gear Units 四级传动 Four Stage 卧式安装 Horizontal
 类型 Types H4.H 规格 Sizes 7...12

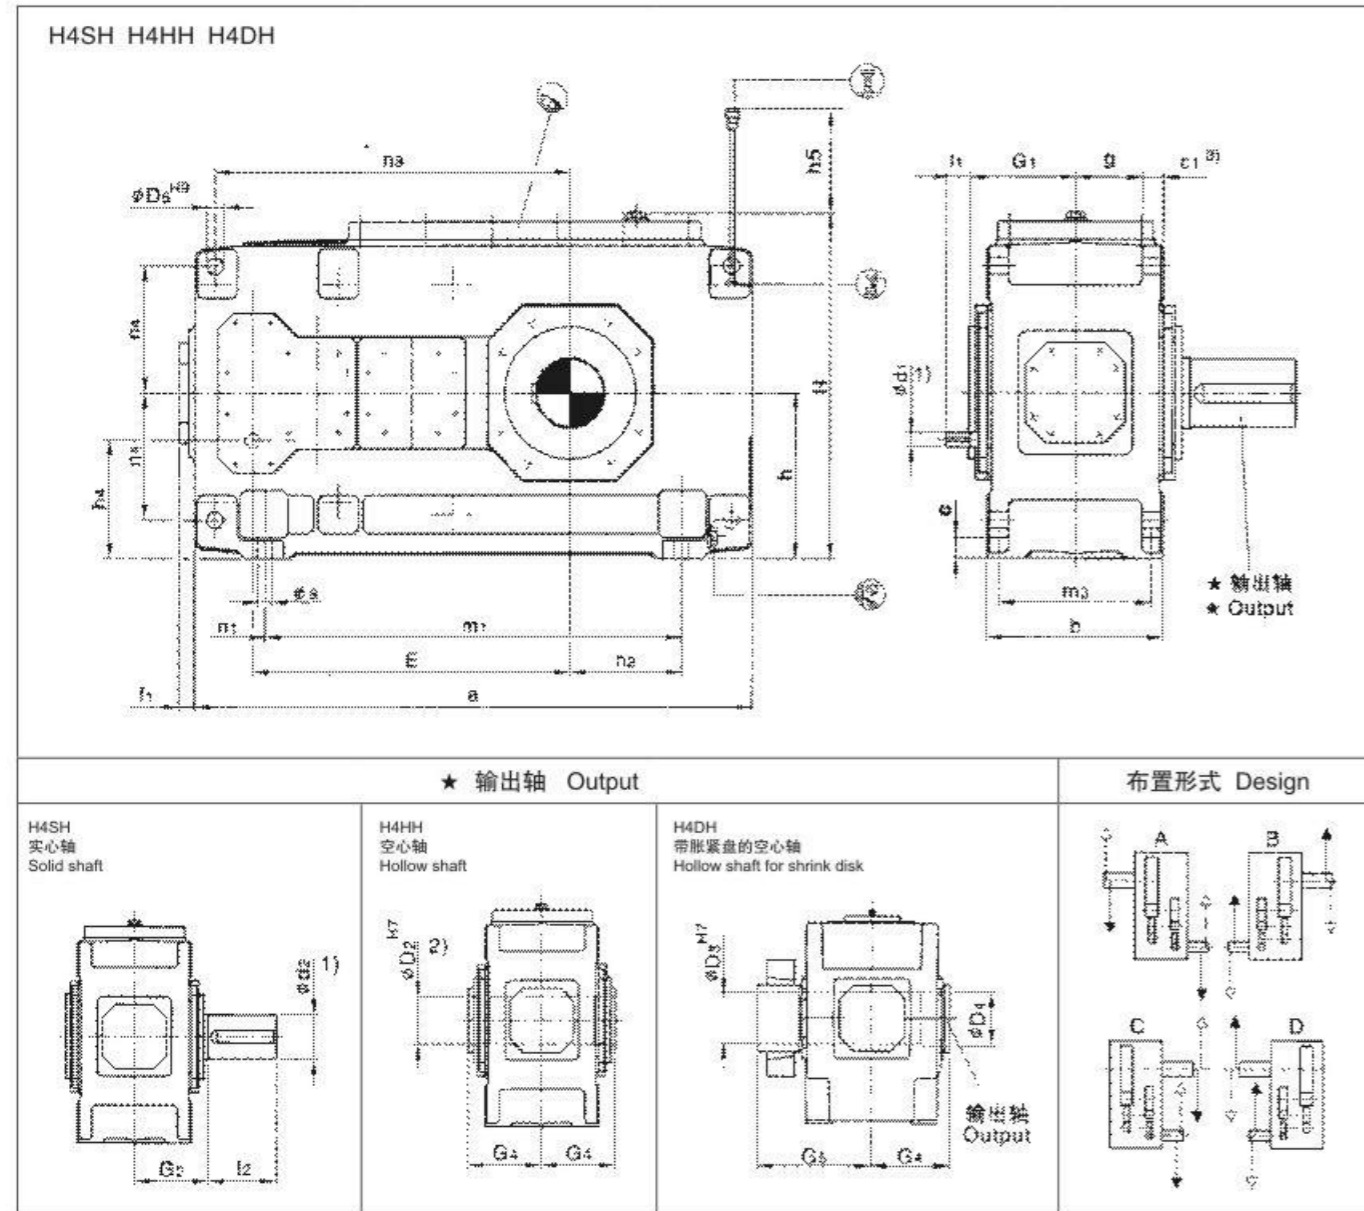

- 1) $k_s \leq \Phi 50$ $m_s > \Phi 50$
 有关平键GB/T1095-1979型和中心孔, 参见第98-99页。For parallel key GB/T1095-1979 and for centre hole, see page 98-99.
 2) 键槽GB/T1095-1979。Keyway GB/T1095-1979。
 3) 扭力支撑位于工作机侧。Torque support on driven machine side.

平行轴齿轮箱 Helical Gear Units 四级传动 Four Stage 卧式安装 Horizontal
 类型 Types H4.H 规格 Sizes 7...12

规格 Size	尺寸 mm Dimensions in mm								G1
	输入轴 Input								
	iN=100-180		iN=125-224		iN=200-355		iN=250-450		
	d1 ¹⁾	l1	d1 ¹⁾	l1	d1 ¹⁾	l1	d1 ¹⁾	l1	
7	30	50			24	40			180
8			30	50			24	40	180
9	35	60			28	50			215
10			35	60			28	50	215
11	45	100			32	80			250
12			45	100			32	80	250

规格 Size	尺寸 mm Dimensions in mm																	s	
	齿轮箱 Gear units																		
	a	b	c	c1	D5	E	f1	g	h	h4	h5	H	m1	m3	n1	n2	n3	n4	
7	845	300	35	36 ± 1	28	495	37	114	280	200	140	572	605	260	120	130	560	215	24
8	950	300	35	36 ± 1	28	540	37	114	280	200	140	582	710	260	120	190	605	215	24
9	1000	370	40	45 ± 1.5	36	580	43	140	320	230	150	662	710	320	145	155	660	245	28
10	1100	370	40	45 ± 1.5	36	630	43	140	320	230	150	662	810	320	145	205	710	245	28
11	1200	430	50	54 ± 1.5	40	705	47	161	380	270	165	782	870	370	165	180	805	300	35
12	1355	430	50	54 ± 1.5	40	775	47	161	380	270	165	790	1025	370	165	265	875	300	35

规格 Size	尺寸 mm Dimensions in mm										润滑油 Lubrication (L)	重量 Weight (kg)
	输出轴 Output											
	H4SH		H4HH		H4DH							
	d2 ¹⁾	G2	l2	D2 ²⁾	G4	D3	D4	G4	G5			
7	120	195	210	115	195	120	120	195	280	25	550	
8	130	195	250	125	195	130	130	195	285	27	645	
9	140	235	250	135	235	140	145	235	330	48	875	
10	160	235	300	150	235	150	155	235	350	50	1010	
11	170	270	300	165	270	165	170	270	400	80	1460	
12	180	270	300	180	270	180	185	270	405	87	1725	

平行轴齿轮箱 Helical Gear Units 四级传动 Four Stage 卧式安装 Horizontal
 类型 Types H4.H, H4.M 规格 Sizes 13...22

H4SH H4HH H4DH

规格19号以上带两个检查孔
From size 19 up 2 covers

输出轴 Output

H4HM H4DM

规格19号以上带两个检查孔
From size 19 up 2 covers

输出轴 Output

★ 输出轴 Output

H4SH
实心轴
Solid shaft

H4HH, H4HM
空心轴
Hollow shaft

H4DH, H4DM
带胀紧套的空心轴
Hollow shaft for shrink disk

布置形式 Design

- 1) $k_s \leq \Phi 50$ $m_s > \Phi 50$ $m_s \leq 100$ $U_s > 100$
 有关平键GB/T1095-1979型和中心孔, 参见第98-99页。For parallel key GB/T1095-1979 and for centre hole, see page 98-99.
- 2) 键槽GB/T1095-1979。Keyway GB/T1095-1979.
- 3) 扭力支撑位于工作机侧。Torque support on driven machine side.

平行轴齿轮箱 Helical Gear Units 四级传动 Four Stage 卧式安装 Horizontal
 类型 Types H4.H, H4.M 规格 Sizes 13...22

规格 Size	尺寸 mm Dimensions in mm												
	输入轴 Input												
	iN=100-180		iN=112-200		iN=125-224		iN=200-355		iN=224-400		iN=250-450		G1
d1 ¹⁾	l1	d1 ¹⁾	l1	d1 ¹⁾	l1	d1 ¹⁾	l1	d1 ¹⁾	l1	d1 ¹⁾	l1		
13	50	100					38	80					305
14					50	100					38	80	305
15	60	135					50	110					345
16			60	135					50	110			345
17	60	105					50	80					380
18			60	105					50	80			380
19	75	105					60	105			60	105	440
20			75	105					60	105			440
21	90	165					70	140					460
22			90	165					70	140			460

规格 Size	尺寸 mm Dimensions in mm											
	齿轮箱 Gear units											
	a	b	c	c1	D5	e2	E	E1	f1	g	h	
13	1395	550	60	61 ± 2	48	405	820	130	47	211.5	440	
14	1535	550	60	61 ± 2	48	475	890	130	47	211.5	440	
15	1680	625	70	72 ± 2	55	485	987	160	56	238	500	
16	1770	625	70	72 ± 2	55	530	1033	160	56	238	500	
17	1770	690	80	81 ± 2	55	525	1035	160	53	259	550	
18	1890	690	80	81 ± 2	55	585	1095	160	53	259	550	
19	2030	790	90	91 ± 2	65	590	1190	185	53	299	620	
20	2150	790	90	91 ± 2	65	650	1250	185	53	299	620	
21	2340	830	100	100 ± 2	75	655	1387	225	62	310	700	
22	2450	830	100	100 ± 2	75	710	1442	225	62	310	700	

规格 Size	尺寸 mm Dimensions in mm											
	齿轮箱 Gear units											
	h1	h2	h4	H	m1	m2	m3	n1	n2	n3	n4	s
13	450	460	310	900	597.5	597.5	475	100	305	940	340	35
14	450	460	310	900	597.5	737.5	475	100	375	1010	340	35
15	490	500	340	1000	720	720	535	120	365	1135	375	42
16	490	500	340	1000	720	810	535	120	410	1180	375	42
17	555	560	390	1110	750	750	600	135	390	1175	425	42
18	555	560	390	1110	750	870	600	135	450	1235	425	42
19	615	620	435	1240	860	860	690	155	435	1365	475	48
20	615	620	435	1240	860	980	690	155	495	1425	475	48
21	685	690	475	1390	1000	1000	720	170	485	1615	520	56
22	685	690	475	1390	1000	1110	720	170	540	1670	520	56

规格 Size	尺寸 mm Dimensions in mm									润滑油 Lubrication		重量 Weight	
	输出轴 Output									H4.H (L)	H4.M (L)	H4.H (kg)	H4.M (kg)
	H4SH	H4HH	H4HM	H3DH	H3DM	G2	G4	G4	G5				
d2 ¹⁾	G2	l2	D2 ²⁾	G4	D3	D4	G4	G5					
13	200	335	350	190	335	190	195	335	480	130	120	2390	2270
14	210	335	350	210	335	210	215	335	480	140	125	2730	2600
15	230	380	410	230	380	230	235	380	550	230	170	3635	3440
16	240	380	410	240	380	240	245	380	550	235	175	3965	3740
17	250	415	410	250	415	250	260	415	600	290	225	4680	4445
18	270	415	470	275	415	280	285	415	600	305	230	5685	4915
19	290	465	470	-	-	285	295	465	670	360	310	6800	6300
20	300	465	500	-	-	310	315	465	670	380	330	8200	7700
21	320	490	500	-	-	330	335	490	715	395	430	9200	8600
22	340	490	550	-	-	340	345	490	725	420	450	9900	9400

平行轴齿轮箱 Helical Gear Units 四级传动 Four Stage 卧式安装 Horizontal
 类型 Types H4.H, H4.M 规格 Sizes 23...26

H4SH H4DH

H4DM

★ 输出轴 Output

H4SH
实心轴
Solid shaft

H4DH, H4DM
带胀紧套的空心轴
Hollow shaft for shrink disk

布置形式 Design

- 1) $k_s \leq \Phi 50$ $m_s > \Phi 50$
 有关平键GB/T1095-1979型和中心孔, 参见第98-99页。For parallel key GB/T1095-1979 and for centre hole, see page 98-99.
- 2) 键槽GB/T1095-1979。Keyway GB/T1095-1979.
- 3) 扭力支撑位于工作机侧。Torque support on driven machine side.

平行轴齿轮箱 Helical Gear Units 四级传动 Four Stage 卧式安装 Horizontal
 类型 Types H4.H, H4.M 规格 Sizes 23...26

规格 Size	尺寸 mm Dimensions in mm								
	输入轴 Input								
	IN=100-180		IN=112-200		IN=200-355		IN=224-400		G1
d1 ¹⁾	l1	d1 ¹⁾	l1	d1 ¹⁾	l1	d1 ¹⁾	l1		
23	90	130			70	105			505
24			90	130			70	105	505
25	100	205			85	170			565
26			100	205			85	170	565


规格 Size	尺寸 mm Dimensions in mm										
	齿轮箱 Gear units										
a	b	c	c1	D5	e2	E	E1	f1	g	h	
23	2530	930	115	120 ± 2	80	730	1505	225	35	342	780
24	2660	930	115	120 ± 2	80	795	1570	225	35	342	780
25	2830	1045	130	120 ± 2	90	790	1695	265	65	400	860
26	3010	1045	130	120 ± 2	90	880	1785	265	65	400	860

规格 Size	尺寸 mm Dimensions in mm											
	齿轮箱 Gear units											
h1	h2	h4	H	m1	m2	m3	n1	n2	n3	n4	s	
23	770	790	555	1570	1085	1085	810	180	550	1725	580	56
24	770	790	555	1570	1085	1215	810	180	615	1790	580	56
25	860	860	595	1720	1215	1215	910	200	590	1965	660	66
26	860	860	595	1720	1215	1395	910	200	680	2055	660	66

规格 Size	尺寸 mm Dimensions in mm								润滑油 Lubrication		重量 Weight	
	输出轴 Output								H4.H (L)	H4.M (L)	H4.H (kg)	H4.M (kg)
	H4SH		H4DH H4DM									
d2 ¹⁾	G2	l2	D3	D4	G4	G5						
23	360	540	590	360	365	540	785	520	500	11600	10700	
24	380	540	590	380	385	540	805	550	600	13500	12600	
25	400	605	650	400	405	605	875	735	800	16100	15200	
26	420	605	650	430	435	605	900	780	850	17600	16500	

H/B工业齿轮箱 GEAR UNITS

直交轴齿轮箱 Bevel-helical Gear Units 二级传动 Two Stage 卧式安装 Horizontal
 类型 Types B2.H 规格 Sizes 1...12

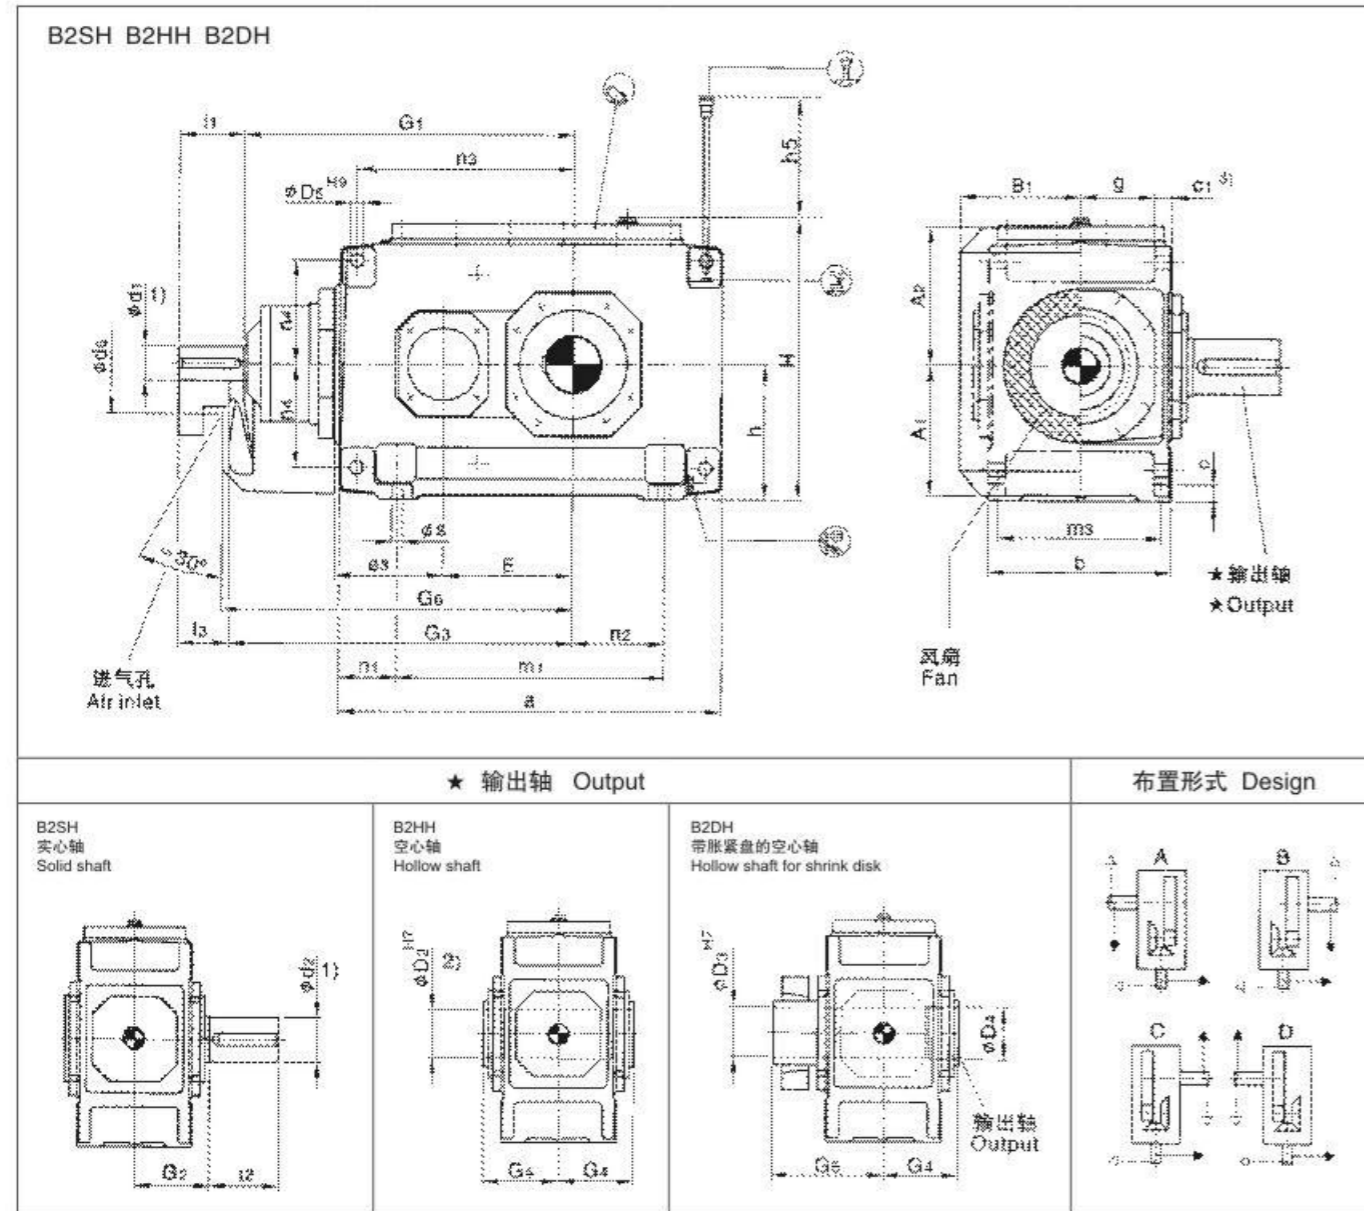

- $k_s \leq \phi 50$ $m_s > \phi 50$
 有关平键GB/T1095-1979型和中心孔, 参见第98-99页。For parallel key GB/T1095-1979 and for centre hole, see page 98-99.
- 键槽GB/T1095-1979。Keyway GB/T1095-1979.
- 扭力支撑位于工作机侧。Torque support on driven machine side.

H/B工业齿轮箱 GEAR UNITS

直交轴齿轮箱 Bevel-helical Gear Unit 二级传动 Two Stage 卧式安装 Horizontal
 类型 Types B2.H 规格 Sizes 1...12


规格 Size	尺寸 mm Dimensions in mm										
	输入轴 Input									G1	G3
	iN=5-11.2			iN=6.3-14			iN=12.5-18				
d1 ¹⁾	l1	l3	d1 ¹⁾	l1	l3	d1 ¹⁾	l1	l3			
1	28	55	40				20	50	35	300	315
2	30	70	50				25	60	40	340	360
3	35	80	60				28	60	40	390	410
4	45	100	80							465	485
5	55	110	80							535	565
6				55	110	80				570	600
7	70	135	105							640	670
8				70	135	105				685	715
9	80	165	130							755	790
10				80	165	130				805	840
11	90	165	130							925	960
12				90	165	130				995	1030

规格 Size	尺寸 mm Dimensions in mm											
	齿轮箱 Gear units											
a	A1	A2	b	B1	c	c1	D5	d6	e3	E	g	
1	305	125	130	180	128	18	16 ± 1	12	110	90	90	74
2	355	140	145	205	143	18	20 ± 1	14	110	110	110	82.5
3	405	170	170	225	163	22	24 ± 1	18	120	130	130	88.5
4	505	195	200	270	188	28	30 ± 1	24	150	160	160	105
5	565	220	235	320	215	28	30 ± 1	24	160	185	185	130
6	645	220	235	320	215	28	30 ± 1	24	160	185	220	130
7	690	270	285	380	250	35	36 ± 1	28	210	225	225	154
8	795	270	285	380	250	35	36 ± 1	28	210	225	270	154
9	820	310	325	440	270	40	48 ± 1.5	36	195	265	265	172
10	920	310	325	440	270	40	48 ± 1.5	36	195	265	315	172
11	975	370	385	530	328	50	54 ± 1.5	40	210	320	320	211
12	1130	370	385	530	328	50	54 ± 1.5	40	210	320	390	211

规格 Size	尺寸 mm Dimensions in mm											
	齿轮箱 Gear units											
G6	h	h5	H	m1	m3	n1	n2	n3	n4	s		
1	325	130	80	275	185	155	60	70	160	105	12	
2	370	145	80	305	225	180	65	75	195	115	12	
3	420	175	90	360	245	195	80	85	235	132.5	15	
4	495	200	80	415	295	235	105	85	285	150	19	
5	575	230	150	482	355	285	105	100	330	180	19	
6	610	230	150	482	435	285	105	145	365	180	19	
7	685	280	180	582	450	340	120	130	405	215	24	
8	730	280	190	582	555	340	120	190	450	215	24	
9	805	320	205	662	530	390	145	155	480	245	28	
10	855	320	215	662	630	390	145	205	530	245	28	
11	980	380	240	790	645	470	165	180	580	300	35	
12	1050	380	250	790	800	470	165	265	650	300	35	

规格 Size	尺寸 mm Dimensions in mm									润滑油 Lubrication (L)	重量 Weight (kg)
	输出轴 Output										
	B2SH			B2HH		B2DH					
d2 ¹⁾	G2	l2	D2 ²⁾	G4	D3	D4	G4	G5			
1	45	120	80	-	-	-	-	-	-	2	65
2	55	135	110	55	135	60	60	135	180	4	90
3	65	145	140	65	145	70	70	145	200	6	140
4	80	170	170	80	170	85	85	170	235	10	235
5	100	200	210	95	200	100	100	200	275	16	360
6	110	200	210	105	200	110	110	200	275	19	410
7	120	235	210	115	235	120	120	235	320	31	615
8	130	235	250	125	235	130	130	235	325	34	700
9	140	270	250	135	270	140	145	270	365	48	1000
10	160	270	300	150	270	150	155	270	385	50	1155
11	170	320	300	165	320	165	170	320	450	80	1640
12	180	320	300	180	320	180	185	320	455	95	1910

直交轴齿轮箱 Bevel-helical Gear Units 二级传动 Two Stage 卧式安装 Horizontal
 类型 Types B2.H, B2.M 规格 Sizes 13...18

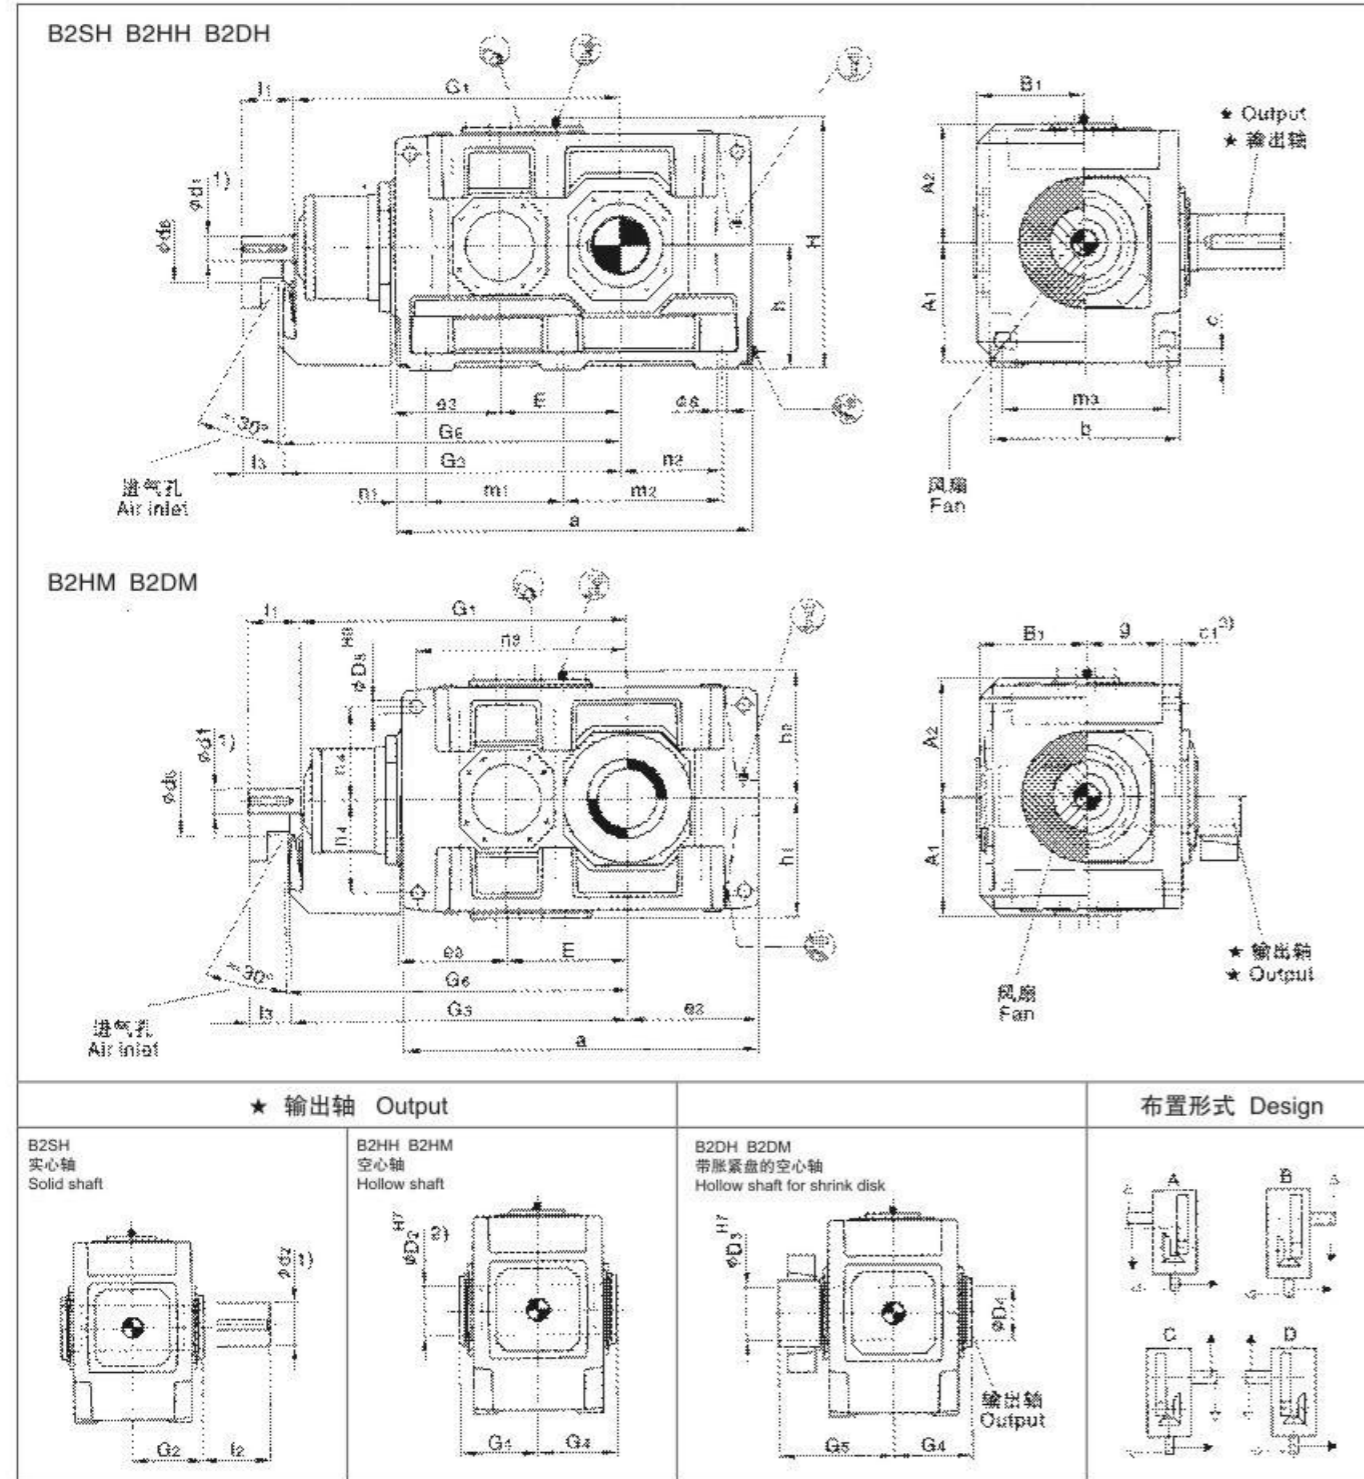

- 1) $k_s \leq \Phi 50$ $m_s > \Phi 50$
 有关平键GB/T1095-1979型和中心孔, 参见第98-99页。For parallel key GB/T1095-1979 and for centre hole, see page 98-99.
- 2) 键槽GB/T1095-1979。Keyway GB/T1095-1979.
- 3) 扭力支撑位于工作机侧。Torque support on driven machine side.

直交轴齿轮箱 Bevel-helical Gear Units 二级传动 Two Stage 卧式安装 Horizontal
 类型 Types B2.H, B2.M 规格 Sizes 13...18

规格 Size	尺寸 mm Dimensions in mm														G1	G3	
	输入轴 Input																
	iN=5-11.2			iN=5.6-11.2			iN=5.6-12.5			iN=6.3-14			iN=7.1-12.5				
d1 ¹⁾	l1	l3	d1 ¹⁾	l1	l3	d1 ¹⁾	l1	l3	d1 ¹⁾	l1	l3	d1 ¹⁾	l1	l3			
13	110	205	165													1070	1110
14									110	205	165					1140	1180
15	130	245	200													1277	1322
16							130	245	200							1323	1368
17				150	245	200										1435	1480
18												150	245	200		1495	1540

规格 Size	尺寸 mm Dimensions in mm													
	齿轮箱 Gear units													
	a	A1	A2	b	B1	c	c1	d6	D5	e2	e3	E	g	
13	1130	430	450	655	375	60	61 ± 2	245	48	405	380	370	264	
14	1270	430	450	655	375	60	61 ± 2	245	48	475	380	440	264	
15	1350	490	495	765	435	70	72 ± 2	280	55	485	450	442	308	
16	1440	490	495	765	435	70	72 ± 2	280	55	530	450	488	308	
17	1490	540	555	885	505	80	81 ± 2	380	65	525	510	490	356	
18	1610	540	555	885	505	80	81 ± 2	380	65	585	510	550	356	


规格 Size	尺寸 mm Dimensions in mm													
	齿轮箱 Gear units													
	G6	h	h1	h2	H	m1	m2	m3	n1	n2	n3	n4	s	
13	1130	440	450	460	900	465	465	580	100	305	675	340	35	
14	1200	440	450	460	900	465	605	580	100	375	745	340	35	
15	1340	500	490	500	1000	555	555	670	120	365	805	375	42	
16	1385	500	490	500	1000	555	645	670	120	410	850	375	42	
17	1500	550	555	560	1110	610	610	780	135	390	895	420	48	
18	1560	550	555	560	1110	610	730	780	135	450	955	420	48	

规格 Size	尺寸 mm Dimensions in mm										润滑油 Lubrication		重量 Weight (kg)	
	输出轴 Output										B2.H	B2.M		
	B2SH		B2HH B2HM		B2DH B2DM		轴封 (L) Shaft seal							
	d2 ¹⁾	G2	l2	D2 ²⁾	G4	D3	D4	G4	G5					
13	200	390	350	-	-	-	-	-	-	140	120	2450	2350	
14	210	390	350	210	390	210	215	390	535	155	130	2825	2725	
15	230	460	410	-	-	-	-	-	-	220	180	3990	3795	
16	240	460	410	240	450	240	245	450	620	230	190	4345	4160	
17	250	540	410	-	-	-	-	-	-	320	260	5620	5320	
18	270	540	470	275	510	280	285	510	700	335	275	6150	5860	

H/B工业齿轮箱 GEAR UNITS

直交轴齿轮箱 Bevel-helical Gear Units
类型 Types B3.H 规格 Sizes 3...12

三级传动 Three Stage 卧式安装 Horizontal

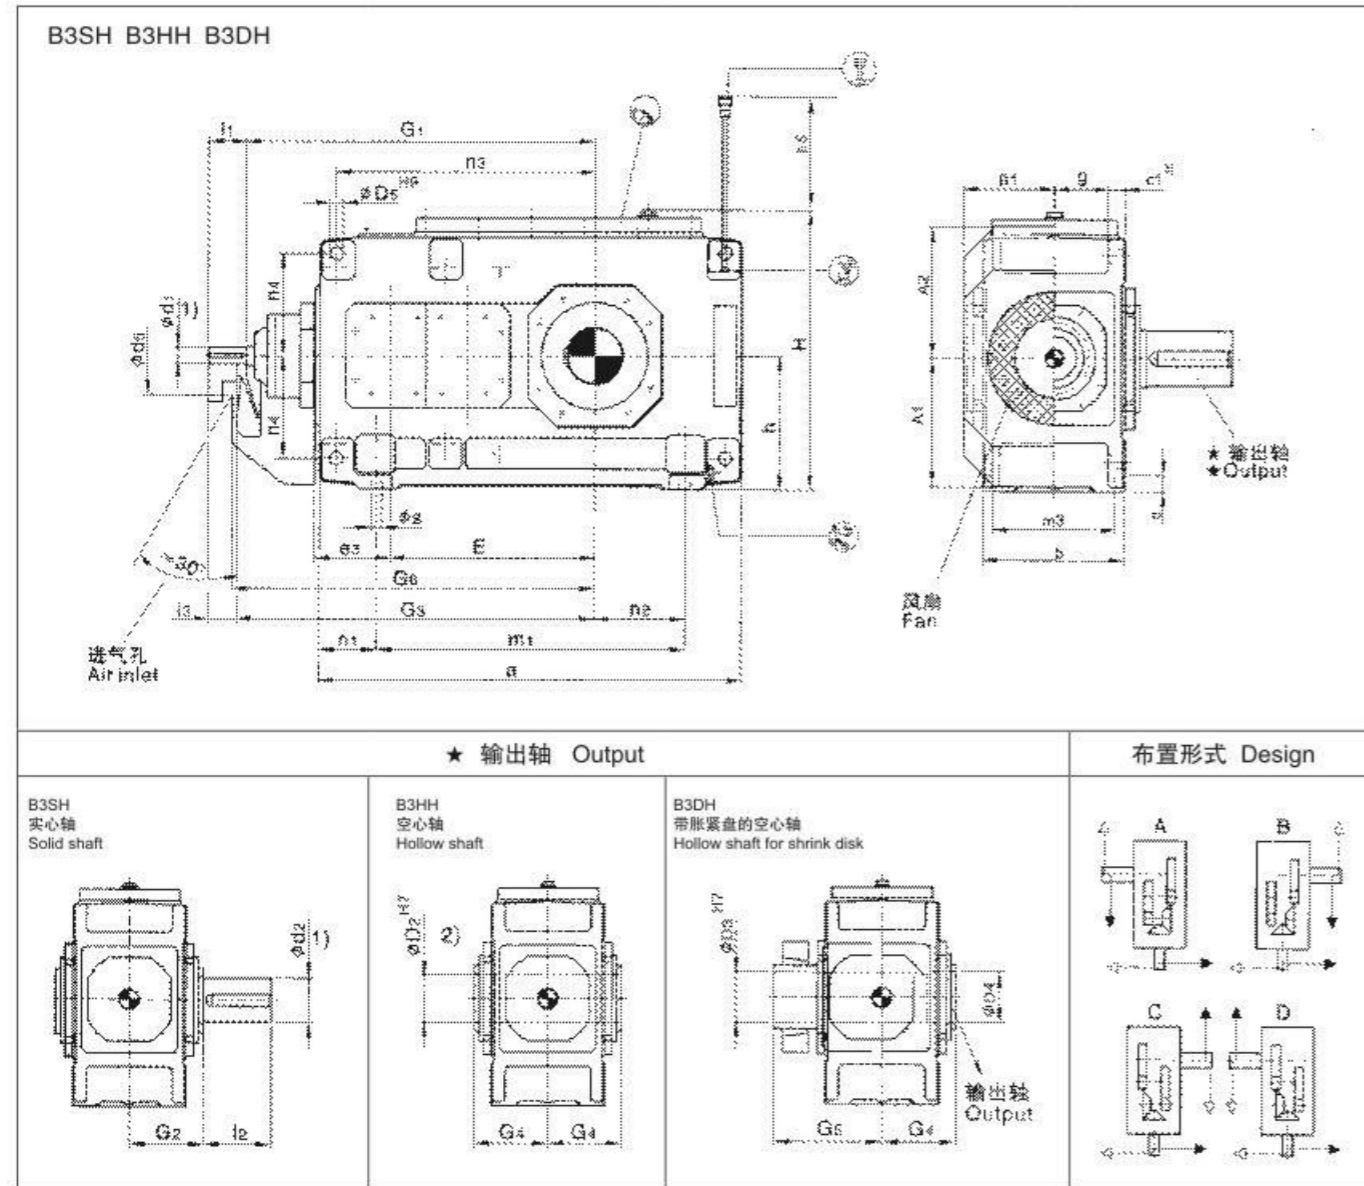

- 1) $k_s \leq \phi 50$ $m_s > \phi 50$
有关平键GB/T1095-1979型和中心孔, 参见第98-99页。For parallel key GB/T1095-1979 and for centre hole, see page 98-99.
- 2) 键槽GB/T1095-1979。Keyway GB/T1095-1979.
- 3) 扭力支撑位于工作机侧。Torque support on driven machine side.

H/B工业齿轮箱 GEAR UNITS

直交轴齿轮箱 Bevel-helical Gear Units
类型 Types B3.H 规格 Sizes 3...12

三级传动 Three Stage 卧式安装 Horizontal

规格 Size	尺寸 mm Dimensions in mm														G1	G3
	输入轴 Input															
	iN=12.5-45			iN=16-56			iN=20-45			iN=50-71			iN=63-90			
d1 ¹⁾	l1	l3	d1 ¹⁾	l1	l3	d1 ¹⁾	l1	l3	d1 ¹⁾	l1	l3	d1 ¹⁾	l1	l3		
3						28	55	40	20	50	35				430	445
4	30	70	50						25	60	40				500	520
5	35	80	60						28	60	40				575	595
6				35	80	60						28	60	40	610	630
7	45	100	80						35	80	60				690	710
8				45	100	80						35	80	60	735	755
9	55	110	80						40	100	70				800	830
10				55	110	80						40	100	70	850	880
11	70	135	105						50	110	80				960	990
12				70	135	105						50	110	80	1030	1060

规格 Size	尺寸 mm Dimensions in mm											
	齿轮箱 Gear units											
	a	A1	A2	b	B1	c	c1	d6	D5	e3	E	g
3	450	170	170	190	128	22	24 ± 1	90	18	90	220	71
4	565	195	200	215	143	28	30 ± 1	110	24	110	270	77.5
5	640	220	235	255	168	28	30 ± 1	130	24	130	315	97.5
6	720	220	235	255	168	28	30 ± 1	130	24	130	350	97.5
7	785	275	275	300	193	35	36 ± 1	165	28	160	385	114
8	890	275	275	300	193	35	36 ± 1	165	28	160	430	114
9	925	315	325	370	231	40	45 ± 1.5	175	36	185	450	140
10	1025	315	325	370	231	40	45 ± 1.5	175	36	185	500	140
11	1105	370	385	430	263	50	54 ± 1.5	190	40	225	545	161
12	1260	370	385	430	263	50	54 ± 1.5	190	40	225	615	161

规格 Size	尺寸 mm Dimensions in mm											
	齿轮箱 Gear units											
	G6	h	h5	H	m1	m3	n1	n2	n3	n4	s	
3	455	175	100	360	290	160	80	65	285	132.5	15	
4	530	200	100	415	355	180	105	85	345	150	19	
5	605	230	130	482	430	220	105	100	405	180	19	
6	640	230	130	482	510	220	105	145	440	180	19	
7	720	280	170	572	545	260	120	130	500	215	24	
8	765	280	160	582	650	260	120	190	545	215	24	
9	845	320	175	662	635	320	145	155	585	245	28	
10	895	320	175	662	735	320	145	205	635	245	28	
11	1010	380	220	782	775	370	165	180	710	300	35	
12	1080	380	210	790	930	370	165	265	780	300	35	

规格 Size	尺寸 mm Dimensions in mm									润滑油 Lubrication (L)	重量 Weight (kg)
	输出轴 Output										
	B3SH			B3HH			B3DH				
d2 ¹⁾	G2	l2	D2 ²⁾	G4	D3	D4	G4	G5			
3	65	125	140	65	125	70	70	125	180	6	130
4	80	140	170	80	140	85	85	140	205	9	210
5	100	165	210	95	165	100	100	165	240	14	325
6	110	165	210	105	165	110	110	165	240	15	380
7	120	195	210	115	195	120	120	195	280	25	550
8	130	195	250	125	195	130	130	195	285	28	635
9	140	235	250	135	235	140	145	235	330	40	890
10	160	235	300	150	235	150	155	235	350	42	1020
11	170	270	300	165	270	165	170	270	400	66	1455
12	180	270	300	185	270	180	185	270	405	72	1730

直交轴齿轮箱 Bevel-helical Gear Units 三级传动 Three Stage 卧式安装 Horizontal
 类型 Types B3.H B3.M 规格 Sizes 13...22

B3SH B3HH B3DH

规格19号以上带两个检查孔
From size 19 up 2 covers

B3HM B3DM

规格19号以上带两个检查孔
From size 19 up 2 covers

★ 输出轴 Output

B3SH
实心轴
Solid shaft

B3HH, B3HM
空心轴
Hollow shaft

B3DH, B3DM
带膜盖的空心轴
Hollow shaft for shrink disk

布置形式 Design

- 1) $k_2 \leq \Phi 50$ $m_2 > \Phi 50$
有关平键GB/T1095-1979型和中心孔, 参见第98-99页。For parallel key GB/T1095-1979 and for centre hole, see page 98-99.
- 2) 键槽GB/T1095-1979。Keyway GB/T1095-1979.
- 3) 扭力支撑位于工作机侧。Torque support on driven machine side.

直交轴齿轮箱 Bevel-helical Gear Units 三级传动 Three Stage 卧式安装 Horizontal
 类型 Types B3.H B3.M 规格 Sizes 13...22


规格 Size	尺寸 mm Dimensions in mm																			
	输入轴 Input																			
	iN=12.5-45			iN=14-50			iN=16-56			iN=50-71			iN=56-80			iN=63-90			G1	G3
	d1 ¹⁾	I1	I3	d1 ¹⁾	I1	I3	d1 ¹⁾	I1	I3	d1 ¹⁾	I1	I3	d1 ¹⁾	I1	I3	d1 ¹⁾	I1	I3		
13	80	165	130							60	140	105							1125	1160
14							80	165	130							60	140	105	1195	1203
15	90	165	130							70	140	105							1367	1402
16				90	165	130							70	140	105				1413	1448
17	110	205	165							80	170	130							1560	1600
18				110	205	165							80	170	130				1620	1660
19	130	245	200							100	210	165							1832	1877
20				130	245	200							100	210	165				1892	1937
21	130	245	200							100	210	165							1902	1947
22				130	245	200							100	210	165				1957	2002

规格 Size	尺寸 mm Dimensions in mm													
	齿轮箱 Gear units													
	a	A1	A2	b	B1	c	c1	d6	D5	e2	e3	E	g	
13	1290	425	435	550	325	60	61 ± 2	210	48	405	265	635	211.5	
14	1430	425	435	550	325	60	61 ± 2	210	48	475	265	705	211.5	
15	1550	485	520	625	365	70	72 ± 2	210	55	485	320	762	238	
16	1640	485	520	625	365	70	72 ± 2	210	55	530	320	808	238	
17	1740	535	570	690	395	80	81 ± 2	230	55	525	370	860	259	
18	1860	535	570	690	395	80	81 ± 2	230	55	585	370	920	259	
19	2010	610	630	790	448	90	91 ± 2	245	65	590	420	997	299	
20	2130	610	630	790	448	90	91 ± 2	245	65	650	420	1057	299	
21	2140	690	690	830	473	100	100 ± 2	280	75	655	450	1067	310	
22	2250	690	690	830	473	100	100 ± 2	280	75	710	450	1122	310	

规格 Size	尺寸 mm Dimensions in mm													
	齿轮箱 Gear units													
	G6	h	h1	h2	H	m1	m2	m3	n1	n2	n3	n4	s	
13	1180	440	450	460	900	545	545	475	100	305	835	340	35	
14	1250	440	450	460	900	545	685	475	100	375	905	340	35	
15	1420	500	490	500	1000	655	655	535	120	365	1005	375	42	
16	1470	500	490	500	1000	655	745	535	120	410	1050	375	42	
17	1620	550	555	560	1110	735	735	600	135	390	1145	425	42	
18	1680	550	555	560	1110	735	855	600	135	450	1205	425	42	
19	1900	620	615	620	1240	850	850	690	155	435	1345	475	48	
20	1960	620	615	620	1240	850	970	690	155	495	1405	475	48	
21	1970	700	685	690	1390	900	900	720	170	485	1400	520	56	
22	2025	700	685	690	1390	900	1010	720	170	540	1455	520	56	

规格 Size	尺寸 mm Dimensions in mm										润滑油 Lubrication		重量 Weight	
	输出轴 Output										B3.H (L)	B3.M (L)	B3.H (kg)	B3.M (kg)
	d2 ¹⁾	B3SH G2	I2	B3HH B3HM D2 ²⁾	G4	D3	B3DH B3DM D4	G4	G5					
13	200	335	350	190	335	190	195	335	480	130	10	2380	2260	
14	210	335	350	210	335	210	215	335	480	140	115	2750	2615	
15	230	380	410	230	380	230	235	380	550	210	160	3730	3540	
16	240	380	410	240	380	240	245	380	550	220	165	3955	3765	
17	250	415	410	250	415	250	260	415	600	290	230	4990	4760	
18	270	415	470	275	415	280	285	415	600	300	235	5495	5240	
19	290	465	470			285	295	465	670	380	360	7000	6500	
20	300	465	500			310	315	465	670	440	420	8100	7600	
21	320	490	500			330	335	490	715	370	420	9200	8600	
22	340	490	550			340	345	490	725	430	490	9900	9400	

直交轴齿轮箱 Bevel-helical Gear Units 三级传动 Three Stage 卧式安装 Horizontal
 类型 Types B3.H B3.M 规格 Sizes 23...26

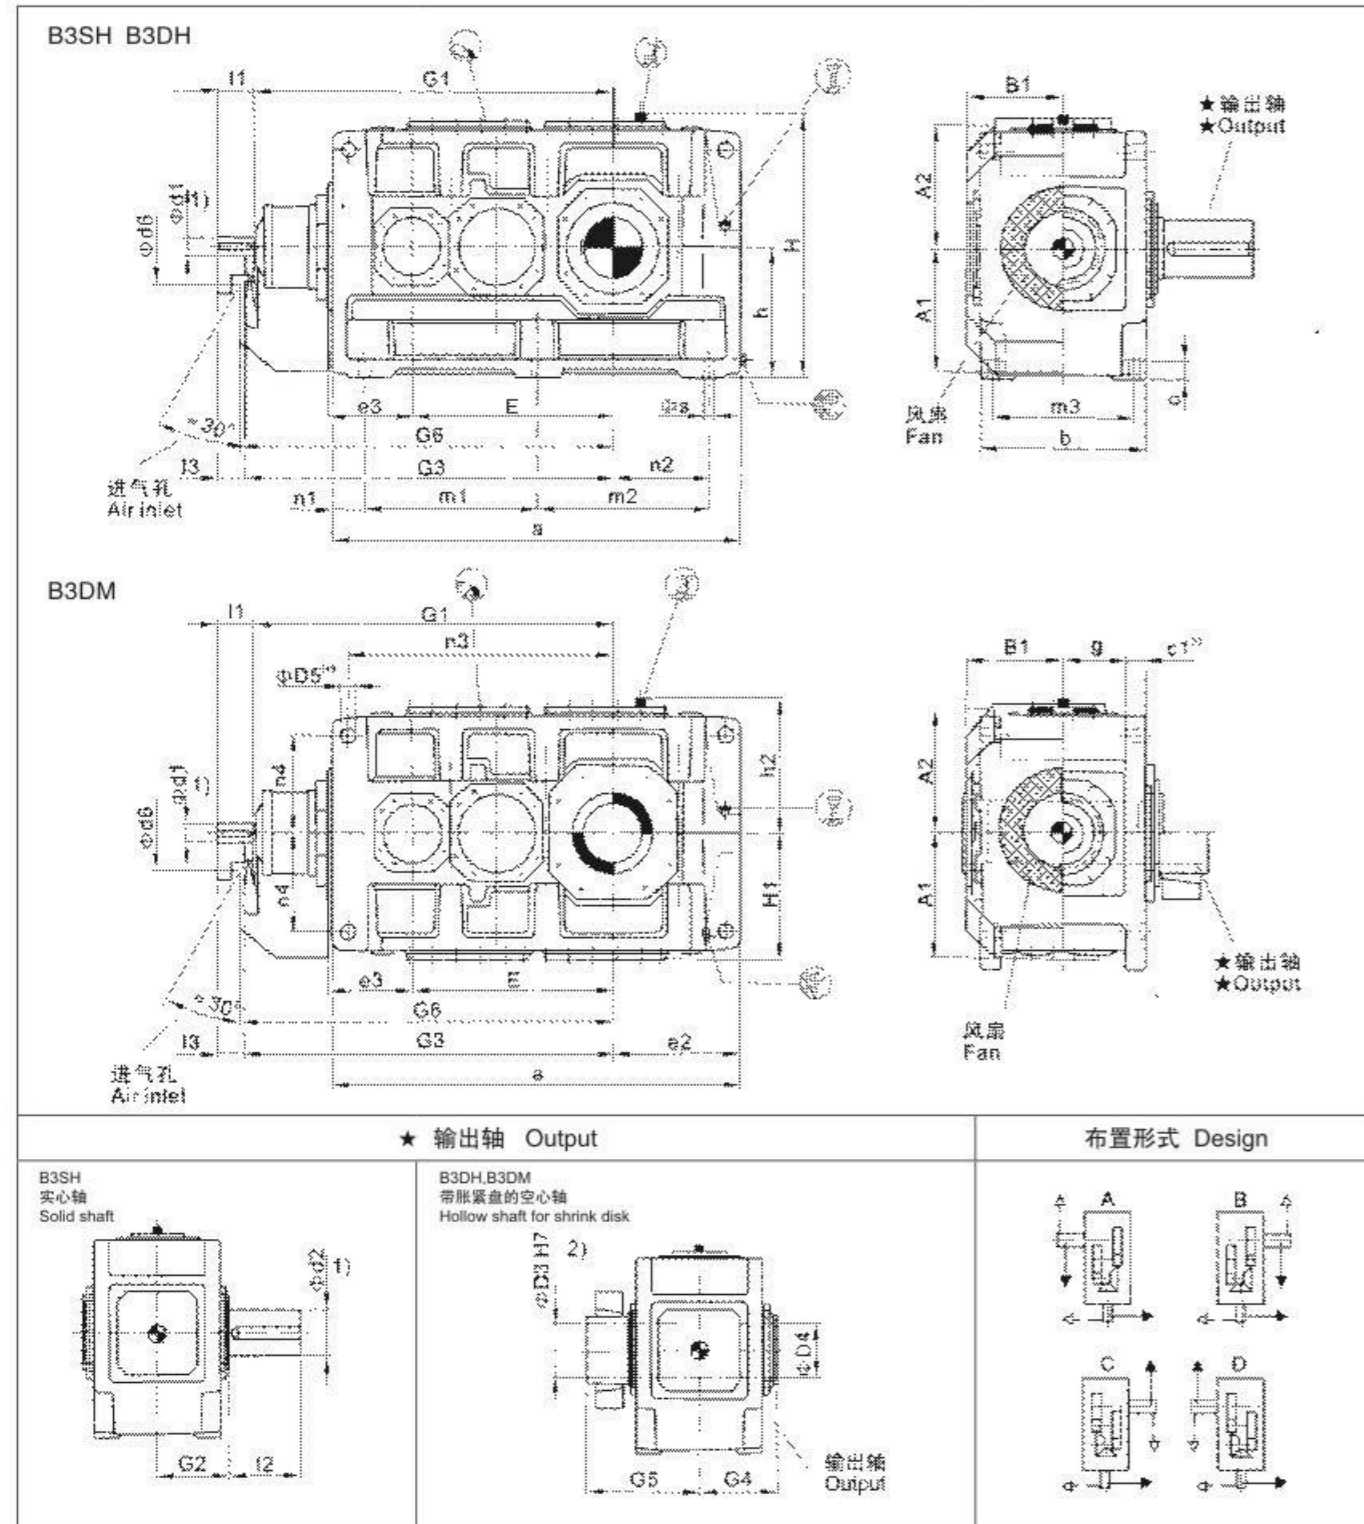

- 1) $k_s \leq \Phi 50$ $m_s > \Phi 50$
 有关平键GB/T1095-1979型和中心孔，参见第98-99页。For parallel key GB/T1095-1979 and for centre hole, see page 98-99.
- 2) 键槽GB/T1095-1979。Keyway GB/T1095-1979.
- 3) 扭力支撑位于工作机侧。Torque support on driven machine side.

直交轴齿轮箱 Bevel-helical Gear Units 三级传动 Three Stage 卧式安装 Horizontal
 类型 Types B3.H B3.M 规格 Sizes 23...26

规格 Size	尺寸 mm Dimensions in mm												G1	G3
	输入轴 Input													
	iN=20-45			iN=22.4-50			iN=50-71			iN=56-80				
	d1 ¹⁾	I1	I3	d1 ¹⁾	I1	I3	d1 ¹⁾	I1	I3	d1 ¹⁾	I1	I3		
23	150	245	200				110	210	165				2130	2175
24				150	245	200				110	210	165	2195	2240
25	150	245	200				110	210	165				2270	2315
26				150	245	200				110	210	165	2360	2405

规格 Size	尺寸 mm Dimensions in mm												
	齿轮箱 Gear units												
	a	A1	A2	b	B1	c	c1	d6	D5	e2	e3	E	g
23	2380	770	770	930	528	115	120 ± 2	350	80	730	490	1185	342
24	2510	770	770	930	528	115	120 ± 2	350	80	795	490	1250	342
25	2580	845	865	1045	585	130	120 ± 2	380	90	790	490	1325	400
26	2760	845	865	1045	585	130	120 ± 2	380	90	880	490	1415	400

规格 Size	尺寸 mm Dimensions in mm												
	齿轮箱 Gear units												
	G6	h	h1	h2	H	m1	m2	m3	n1	n2	n3	n4	s
23	2200	780	770	790	1570	1010	1010	810	180	550	1560	580	56
24	2265	780	770	790	1570	1010	1140	810	180	615	1625	580	56
25	2315	860	860	860	1720	1090	1090	910	200	590	1685	660	66
26	2430	860	860	860	1720	1090	1270	910	200	680	1775	660	66

规格 Size	尺寸 mm Dimensions in mm								润滑油 Lubrication		重量 Weight	
	输出轴 Output								B3.H (L)	B3.M (L)	B3.H (kg)	B3.M (kg)
	B3SH				B3DH B3DM							
	d2 ¹⁾	G2	I2	D3	D4	G4	G5					
23	360	540	590	360	365	540	785	520	560	11500	10600	
24	380	540	590	380	385	540	805	600	650	13400	12500	
25	400	605	650	400	405	605	875	720	790	16000	15100	
26	420	605	650	430	435	605	900	840	920	17500	16400	

直交轴齿轮箱 Bevel-helical Gear Units
类型 Types B4.H 规格 Sizes 5...12

四级传动 Four Stage

卧式安装 Horizontal

B4SH B4HH B4DH

★ 输出轴 Output

B4SH
实心轴
Solid shaft

B4HH
空心轴
Hollow shaft

B4DH
带胀紧套的空心轴
Hollow shaft for shrink disk

布置形式 Design

- 1) $k_s \leq \Phi 50$ $m_s > \Phi 50$
有关平键GB/T1095-1979型和中心孔, 参见第98-99页。For parallel key GB/T1095-1979 and for centre hole, see page 98-99.
- 2) 键槽GB/T1095-1979。Keyway GB/T1095-1979.
- 3) 扭力支撑位于工作机侧。Torque support on driven machine side.

直交轴齿轮箱 Bevel-helical Gear Units
类型 Types B4.H 规格 Sizes 5...12

四级传动 Four Stage


卧式安装 Horizontal

规格 Size	尺寸 mm Dimensions in mm								G1
	输入轴 Input								
	IN=80-180		IN=100-224		IN=200-315		IN=250-400		
	d1 ¹⁾	l1	d1 ¹⁾	l1	d1 ¹⁾	l1	d1 ¹⁾	l1	
5	28	55			20	50			615
6			28	55			20	50	650
7	30	70			25	60			725
8			30	70			25	60	770
9	35	80			28	60			840
10			35	80			28	60	890
11	45	100			35	80			1010
12			45	100			35	80	1080

规格 Size	尺寸 mm Dimensions in mm																
	齿轮箱 Gear units																
	a	b	c	c1	D5	E	g	h	h5	H	m1	m3	n1	n2	n3	n4	s
5	690	255	28	30 ± 1	24	405	97.5	230	100	482	480	220	105	100	455	180	19
6	770	255	28	30 ± 1	24	440	97.5	230	100	482	560	220	105	145	490	180	19
7	845	300	35	36 ± 1	28	495	114	280	140	572	605	260	120	130	560	215	24
8	950	300	35	36 ± 1	28	540	114	280	130	582	710	260	120	190	605	215	24
9	1000	370	40	45 ± 1.5	36	580	140	320	135	662	710	320	145	155	660	245	28
10	1100	370	40	45 ± 1.5	36	630	140	320	135	662	810	320	145	205	710	245	28
11	1200	430	50	54 ± 1.5	40	705	161	380	170	782	870	370	165	180	805	300	35
12	1355	430	50	54 ± 1.5	40	775	161	380	160	790	1025	370	165	265	875	300	35

规格 Size	尺寸 mm Dimensions in mm									润滑油 Lubrication (L)	重量 Weight (kg)
	输出轴 Output										
	B4SH			B4HH		B4DH					
	d2 ¹⁾	G2	l2	D2 ²⁾	G4	D3	D4	G4	G5		
5	100	165	210	95	165	100	100	165	240	16	335
6	110	165	210	105	165	110	110	165	240	18	385
7	120	195	210	115	195	120	120	195	280	30	555
8	130	195	250	125	195	130	130	195	285	33	655
9	140	235	250	135	235	140	145	235	330	48	890
10	160	235	300	150	235	150	155	235	350	50	1025
11	170	270	300	165	270	165	170	270	400	80	1485
12	180	270	300	180	270	180	185	270	405	90	1750

直交轴齿轮箱 Bevel-helical Gear Units 四级传动 Four Stage 卧式安装 Horizontal
 类型 Types B4.H B4.M 规格 Sizes 13...22

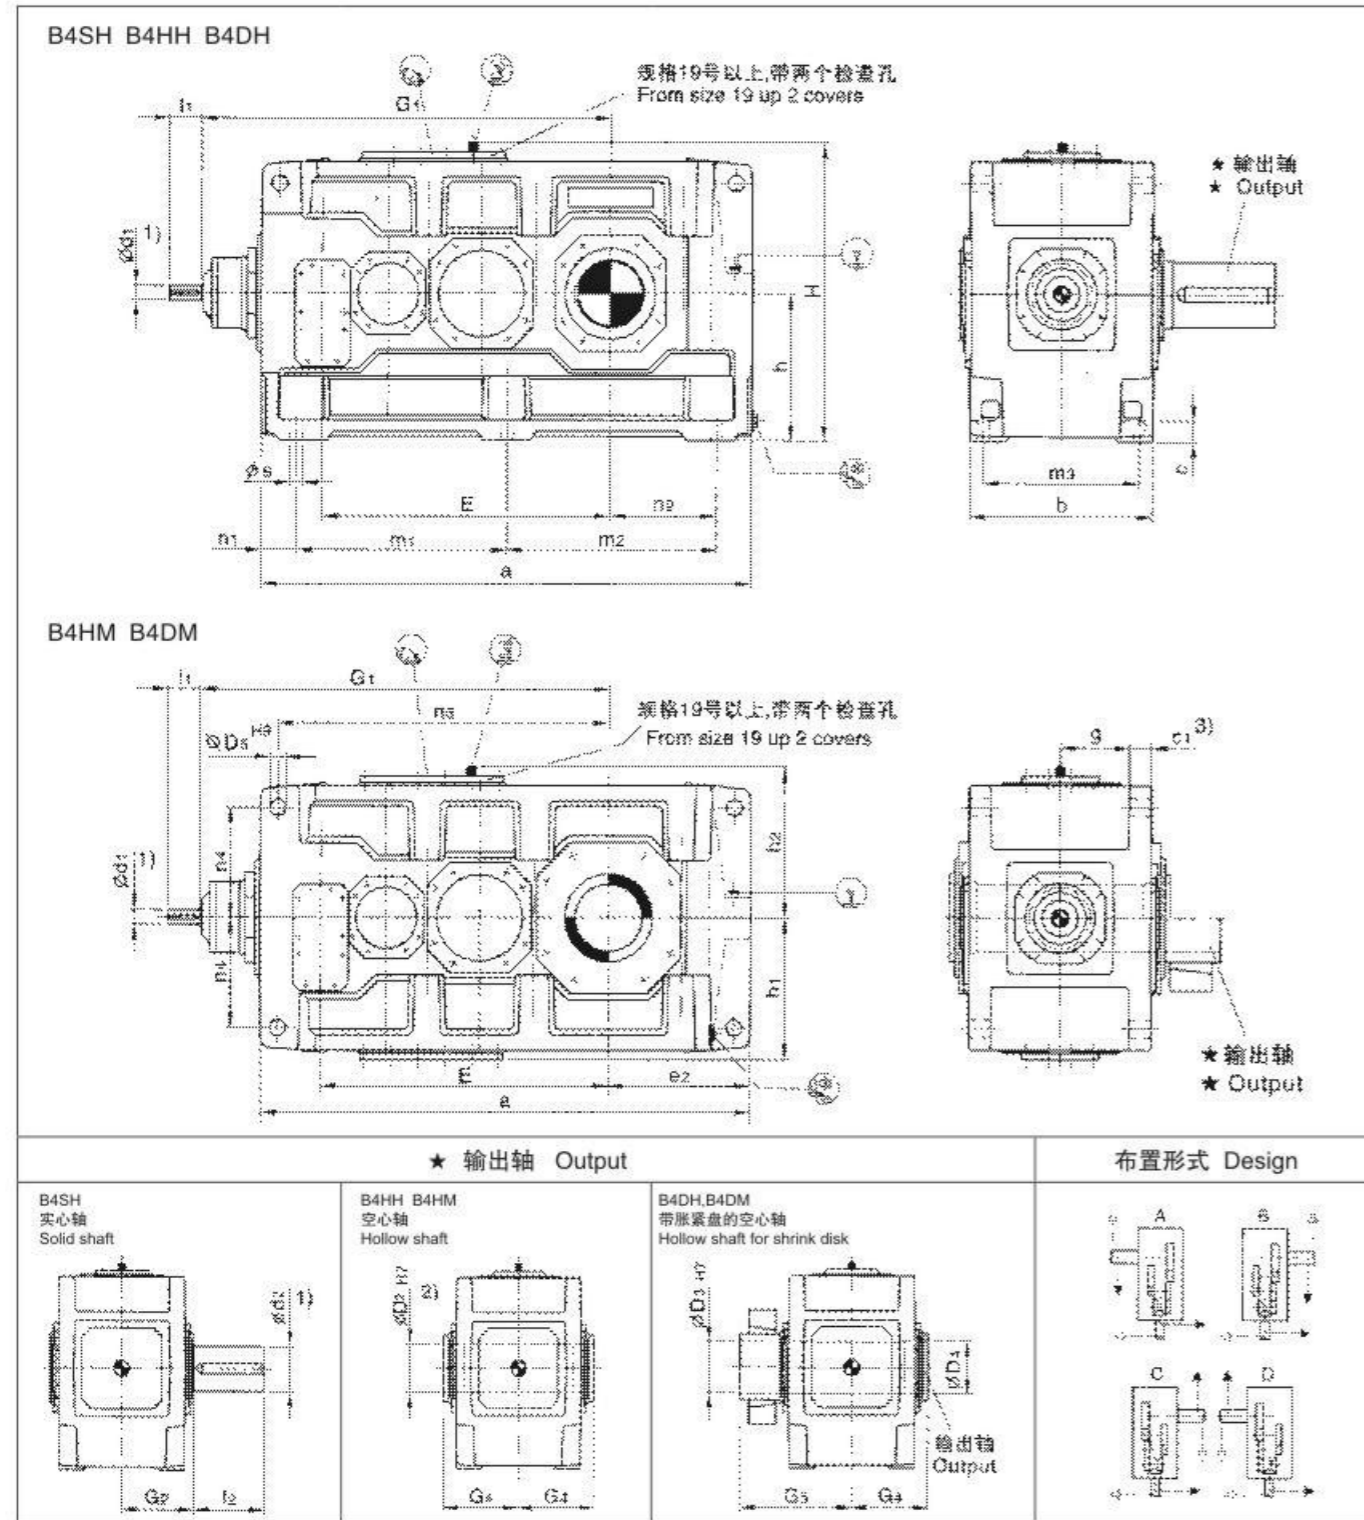

- 1) $k_s \leq \phi 50$ $m_s > \phi 50$
有关平键GB/T1095-1979型和中心孔, 参见第98-99页。For parallel key GB/T1095-1979 and for centre hole, see page 98-99.
- 2) 键槽GB/T1095-1979。Keyway GB/T1095-1979.
- 3) 扭力支撑位于工作机侧。Torque support on driven machine side.

直交轴齿轮箱 Bevel-helical Gear Units 四级传动 Four Stage 卧式安装 Horizontal
 类型 Types B4.H B4.M 规格 Sizes 13...22


规格 Size	尺寸 mm Dimensions in mm												
	输入轴 Input												
	iN=80-180		iN=90-200		iN=100-224		iN=200-315		iN=224-355		iN=250-400		G1
d1 ¹⁾	l1	d1 ¹⁾	l1	d1 ¹⁾	l1	d1 ¹⁾	l1	d1 ¹⁾	l1	d1 ¹⁾	l1		
13	55	110					40	100					1170
14					55	110					40	100	1240
15	70	135					50	110					1402
16			70	135					50	110			1448
17	70	135					50	110					1450
18			70	135					50	110			1510
19	80	165					60	140					1680
20			80	165					60	140			1740
21	90	165					70	140					1992
22			90	165					70	140			2047

规格 Size	尺寸 mm Dimensions in mm										
	齿轮箱 Gear units										
	a	b	c	c1	D5	e2	E	g	h	h1	
13	1395	550	60	61 ± 2	48	405	820	211.5	440	450	
14	1535	550	60	61 ± 2	48	475	890	211.5	440	450	
15	1680	625	70	72 ± 2	55	485	987	238	500	490	
16	1770	625	70	72 ± 2	55	530	1033	238	500	490	
17	1770	690	80	81 ± 2	55	525	1035	259	550	555	
18	1890	690	80	81 ± 2	55	585	1095	259	550	555	
19	2030	790	90	91 ± 2	65	590	1190	299	620	615	
20	2150	790	90	91 ± 2	65	650	1250	299	620	615	
21	2340	830	100	100 ± 2	75	655	1387	310	700	685	
22	2450	830	100	100 ± 2	75	710	1442	310	700	685	

规格 Size	尺寸 mm Dimensions in mm										
	齿轮箱 Gear units										
	h2	H	m1	m2	m3	n1	n2	n3	n4	s	
13	460	900	597.5	597.5	475	100	305	940	340	35	
14	460	900	597.5	737.5	475	100	375	1010	340	35	
15	500	1000	720	720	535	120	365	1135	375	42	
16	500	1000	720	810	535	120	410	1180	375	42	
17	560	1110	750	750	600	135	390	1175	425	42	
18	560	1110	750	870	600	135	450	1235	425	42	
19	620	1240	860	860	690	155	435	1365	475	48	
20	620	1240	860	980	690	155	495	1425	475	48	
21	690	1390	1000	1000	720	170	485	1615	520	56	
22	690	1390	1000	1110	720	170	540	1670	520	56	

规格 Size	尺寸 mm Dimensions in mm									润滑油 Lubrication		重量 Weight	
	输出轴 Output									B4.H (L)	B4.M (L)	B4.H (kg)	B4.M (kg)
	B4SH		B4HH B4HM		B4DH B4DM			G2					
d2 ¹⁾	G2	l2	D2 ²⁾	G4	D3	D4	G4	G5					
13	200	335	350	190	335	190	195	335	480	145	120	2395	2280
14	210	335	350	210	335	210	215	335	480	150	125	2735	2605
15	230	380	410	230	380	230	235	380	550	230	170	3630	3435
16	240	380	410	240	380	240	245	380	550	235	175	3985	3765
17	250	415	410	250	415	250	260	415	600	295	230	4695	4460
18	270	415	470	275	415	280	285	415	600	305	235	5200	4930
19	290	465	470	-	-	285	295	465	670	480	440	6800	6300
20	300	465	500	-	-	310	315	465	670	550	510	8200	7700
21	320	490	500	-	-	330	335	490	715	540	590	9200	8600
22	340	490	500	-	-	340	345	490	725	620	680	9900	9400

直交轴齿轮箱 Bevel-helical Gear Units 四级传动 Four Stage 卧式安装 Horizontal
 类型 Types B4.H B4.M 规格 Sizes 23...26

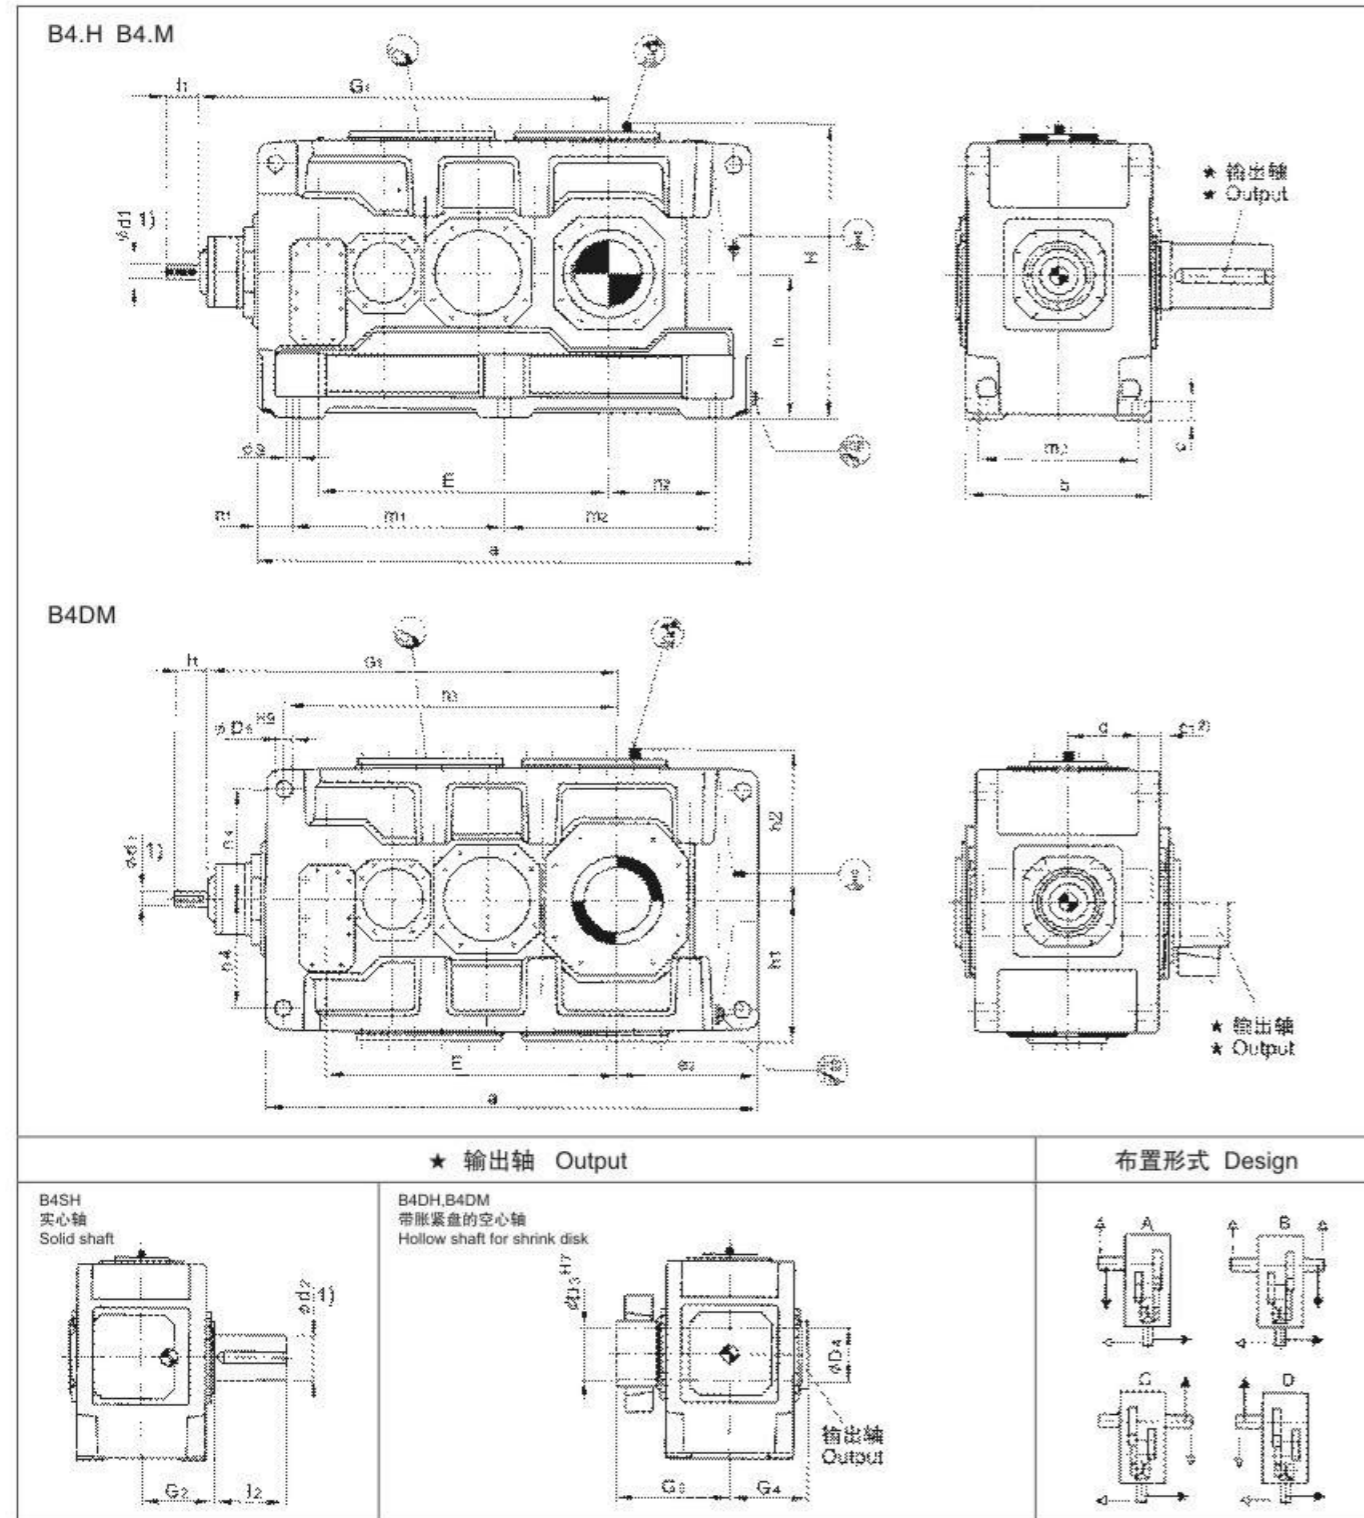

- 1) $k_s \leq \Phi 50$ $m_s > \Phi 50$
 有关平键GB/T1095-1979型和中心孔, 参见第98-99页。For parallel key GB/T1095-1979 and for centre hole, see page 98-99.
- 2) 键槽GB/T1095-1979。Keyway GB/T1095-1979.
- 3) 扭力支撑位于工作机侧。Torque support on driven machine side.

直交轴齿轮箱 Bevel-helical Gear Units 四级传动 Four Stage 卧式安装 Horizontal
 类型 Types B4.H B4.M 规格 Sizes 23...26

规格 Size	尺寸 mm Dimensions in mm								G1
	输入轴 Input								
	iN=80-180		iN=90-200		iN=100-224		iN=200-315		
d1 ¹⁾	l1	d1 ¹⁾	l1	d1 ¹⁾	l1	d1 ¹⁾	l1		
23	90	165			70	140			2110
24			90	165			70	140	2175
25	110	205			80	170			2395
26			110	205			80	170	2485

规格 Size	尺寸 mm Dimensions in mm									
	齿轮箱 Gear units									
	a	b	c	c1	D5	e2	E	g	h	h1
23	2530	930	115	120 ± 2	80	730	1505	342	780	770
24	2660	930	115	120 ± 2	80	795	1570	342	780	770
25	2830	1045	130	120 ± 2	90	790	1695	400	860	860
26	3010	1045	130	120 ± 2	90	880	1785	400	860	860

规格 Size	尺寸 mm Dimensions in mm									
	齿轮箱 Gear units									
	h2	H	m1	m2	m3	n1	n2	n3	n4	s
23	790	1570	1085	1085	810	180	550	1725	580	56
24	790	1570	1085	1215	810	180	615	1790	580	56
25	860	1720	1215	1215	910	200	590	1965	660	66
26	860	1720	1215	1395	910	200	680	2055	660	66

规格 Size	尺寸 mm Dimensions in mm								润滑油 Lubrication		重量 Weight	
	输出轴 Output								B4.H (L)	B4.M (L)	B4.H (kg)	B4.M (kg)
	B4SH		B4DH		B4DM		G5					
d2 ¹⁾	G2	D3	D4	G4	G5							
23	360	540	590	360	365	540	785	710	790	11600	10700	
24	380	540	590	380	385	540	805	810	910	13500	12600	
25	400	605	650	400	405	605	875	1000	1110	16100	15200	
26	420	605	650	430	435	605	900	1100	1200	17600	16500	

平行轴齿轮箱 Helical Gear Units 二级传动 Two Stage 立式安装 Vertical
 类型 Types H2.V 规格 Sizes 3...12

H2SV H2HV H2DV
采用浸油润滑 With dip lubrication

补强油箱
Oil compensating tank

H2SV H2HV H2DV
采用强制润滑 With forced lubrication

油泵
Pump

★ 输出轴 Output

H2SV
实心轴
Solid shaft

H2HV
空心轴
Hollow shaft

H2DV
带胀紧套的空心轴
Hollow shaft for shrink disk

布置形式 A+D 根据用户要求供货
Design A+D on request

布置形式 Design

- 1) $k_s \leq \Phi 50$ $m_s > \Phi 50$
有关键GB/T1095-1979型和中心孔, 参见第98-99页。For parallel key GB/T1095-1979 and for centre hole, see page 98-99.
- 2) 键槽GB/T1095-1979。Keyway GB/T1095-1979.
- 3) 扭力支撑位于工作机侧。Torque support on driven machine side.
- 4) 有关油泵, 油管和护盖的安装空间及确切尺寸, 请与我们联系。
Space for pump, pipes and cover, for exact dimension, please refer to us.

平行轴齿轮箱 Helical Gear Units 二级传动 Two Stage 立式安装 Vertical
 类型 Types H2.V 规格 Sizes 3...12


规格 Size	尺寸 mm Dimensions in mm								G1
	输入轴 Input								
	IN=6.3-11.2		IN=8-14		IN=12.5-22.4		IN=16-28		
	d1 ¹⁾	l1	d1 ¹⁾	l1	d1 ¹⁾	l1	d1 ¹⁾	l1	
3	35	60			28	50			135
4	45	100			32	80			170
5	50	100			38	80			195
6			50	100			38	80	195
7	60	135			50	110			210
8			60	135			50	110	210
9	75	140			60	140			240
10			75	140			60	140	240
11	90	165			70	140			275
12			90	165			70	140	275

规格 Size	尺寸 mm Dimensions in mm									
	齿轮箱 Gear units									
	a	b1	c	e4	e5	e6	E	f1	f2	f3
3	450	150	24 ± 1	175	185	290	220	28	20	-
4	565	150	30 ± 1	200	215	320	270	28	22	-
5	640	240	30 ± 1	230	252	385	315	38	28	150
6	720	240	30 ± 1	230	252	425	350	38	28	150
7	785	240	36 ± 1	280	292	425	385	42	30	145
8	890	240	36 ± 1	280	302	485	430	42	32	145
9	925	330	45 ± 1.5	320	342	560	450	42	32	135
10	1025	330	45 ± 1.5	320	342	610	500	42	32	135
11	1105	330	54 ± 1.5	380	402	595	545	48	35	145
12	1260	330	54 ± 1.5	380	410	680	615	48	35	145

规格 Size	尺寸 mm Dimensions in mm										
	齿轮箱 Gear units										
	h	h1	h2	h3	m1	m2	n1	n2	p1 ¹⁾	p2 ²⁾	s
3	95	165	-	180	410	265	20	125	35	210	18
4	107.5	165	-	180	505	300	30	160	35	220	24
5	127.5	205	190	240	580	360	30	175	35	270	24
6	127.5	205	190	240	660	360	30	220	35	270	24
7	150	205	165	250	715	430	35	215	35	330	28
8	150	205	165	250	820	430	35	275	35	330	28
9	185	275	205	330	845	490	40	260	40	370	36
10	185	275	205	330	945	490	40	310	40	370	36
11	215	275	240	340	1005	600	50	295	50	440	40
12	215	275	240	340	1160	600	50	380	50	440	40

规格 Size	尺寸 mm Dimensions in mm									润滑油 Lubrication		重量 Weight (kg)
	输出轴 Output									浸油润滑 Dip lubrication (L)	强制润滑 Forced lubrication (L)	
	H2SV			H2HV			H2DV					
	d2 ¹⁾	G2	l2	D2 ²⁾	G4	D3	D4	G4	G5			
3	65	125	140	65	125	70	70	125	180	14	-	115
4	80	140	170	80	140	85	85	140	205	25	-	190
5	100	165	210	95	165	100	100	165	240	23	10	300
6	110	165	210	105	165	110	110	165	240	27	11	355
7	120	195	210	115	195	120	120	195	280	58	22	505
8	130	195	250	125	195	130	130	195	285	62	25	590
9	140	235	250	135	235	140	145	235	330	100	42	830
10	160	235	300	150	235	150	155	235	350	110	46	960
11	170	270	300	165	270	165	170	270	400	160	60	1335
12	180	270	300	180	270	180	185	270	405	180	70	1615

平行轴齿轮箱 Helical Gear Units 二级传动 Two Stage 立式安装 Vertical
 类型 Types H2.V 规格 Sizes 13...18

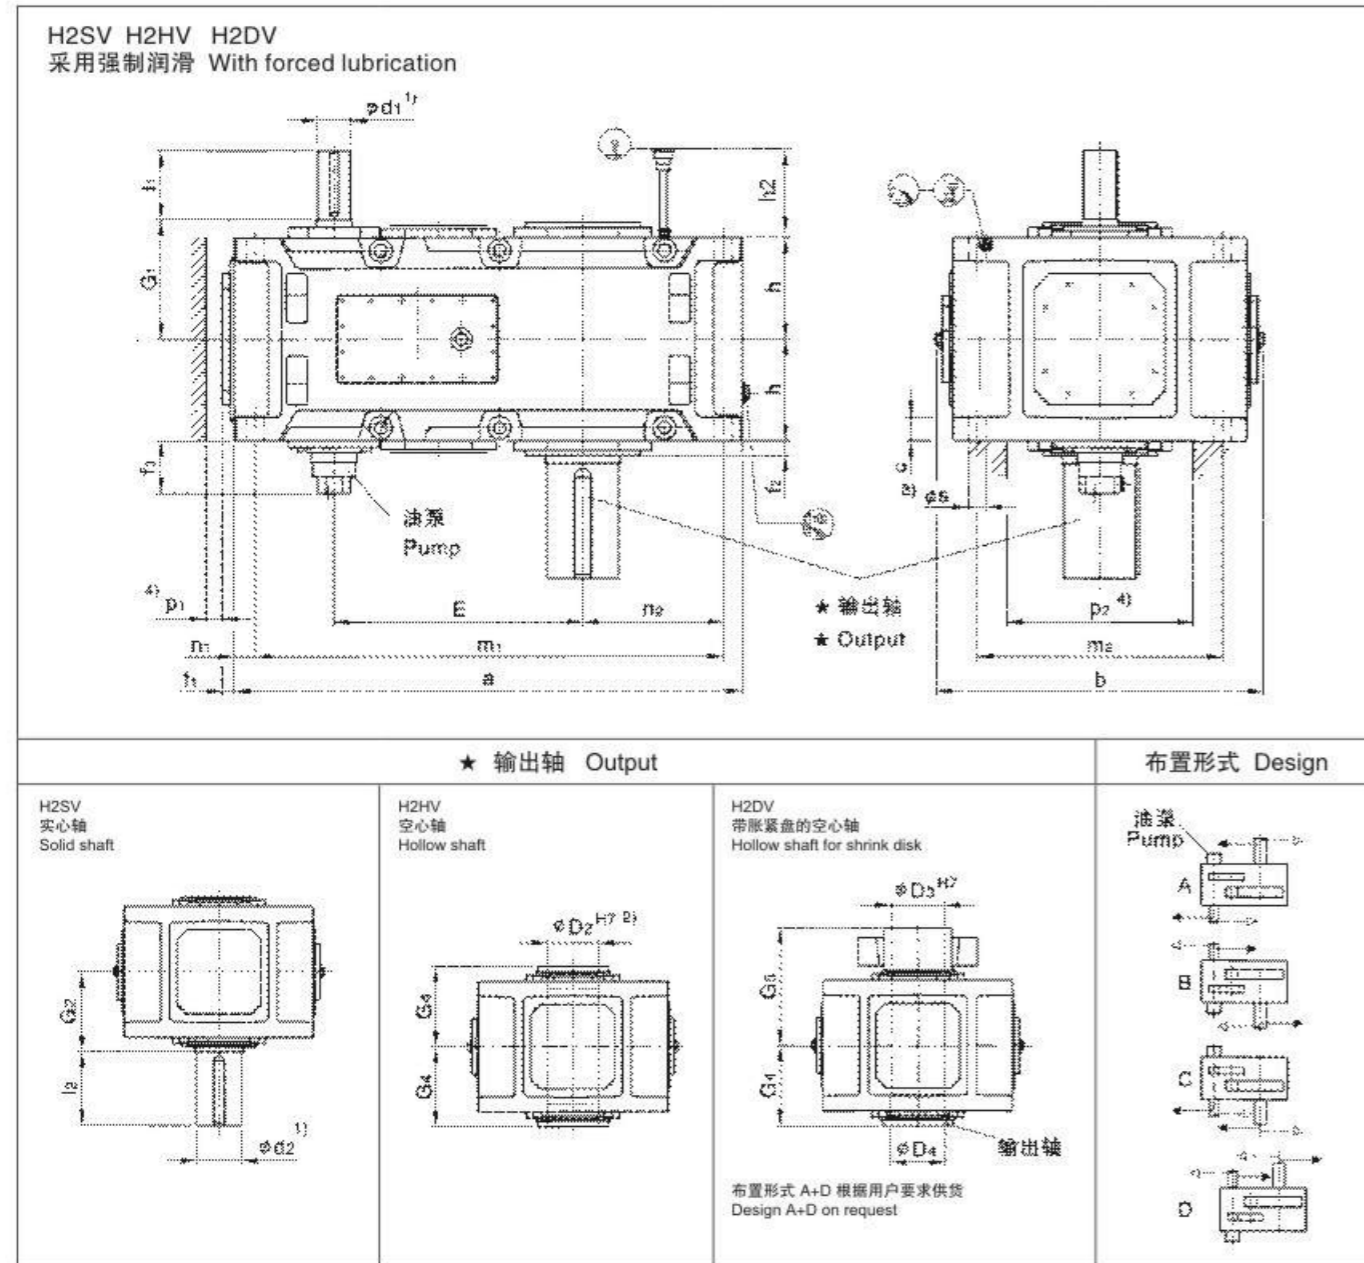

平行轴齿轮箱 Helical Gear Units 二级传动 Two Stage 立式安装 Vertical
 类型 Types H2.V 规格 Sizes 13...18

规格 Size	尺寸 mm Dimensions in mm												G1
	输入轴 Input												
	iN=6.3-11.2		iN=7.1-12.5		iN=8-14		iN=12.5-20		iN=14-22.4		iN=16-25		
	d1 ¹⁾	l1	d1 ¹⁾	l1	d1 ¹⁾	l1	d1 ¹⁾	l1	d1 ¹⁾	l1	d1 ¹⁾	l1	
13	100	205					85	170					330
14					100	205					85	170	330
15	120	210					100	210					365
16			120	210					100	210			365
17	125	245					110	210					420
18			125	245					110	210			420
19													
20													
21													
22													

规格 Size	尺寸 mm Dimensions in mm																
	齿轮箱 Gear units																
	a	b	c	E	f1	f2	f3	h	h2	m1	m2	n1	n2	p1 ⁴⁾	p2 ⁴⁾	s	
13	1290	900	61 ± 2	635	53	35	130	272.5	300	1195	680	50	360	50	500	48	
14	1430	900	61 ± 2	705	53	35	130	272.5	300	1335	680	50	430	50	500	48	
15	1550	980	72 ± 2	762	63	42	130	310	340	1435	750	60	430	50	570	55	
16	1640	980	72 ± 2	808	63	42	130	310	340	1525	750	60	475	50	570	55	
17	1740	1110	81 ± 2	860	60	42	170	340	374	1610	850	70	465	70	630	55	
18	1860	1110	81 ± 2	920	60	42	170	340	374	1730	850	70	525	70	630	55	
19																	
20																	
21																	
22																	

规格 Size	尺寸 mm Dimensions in mm										润滑油 Lubrication (L)	重量 Weight (kg)
	输出轴 Output											
	H2SV		H2HV ⁵⁾		H2DV ⁵⁾							
	d2 ¹⁾	G2	l2	D2 ²⁾	G4	D3	D4	G4	G5			
13	200	335	350	190	335	190	195	335	480	80	1880	
14	210	335	350	210	335	210	215	335	480	90	2430	
15	230	380	410	230	380	230	235	380	550	140	3240	
16	240	380	410	240	380	240	245	380	550	150	3465	
17	250	415	410	250	415	250	260	415	600	175	4420	
18	270	415	470	275	415	280	285	415	600	185	4870	
19												
20												
21												
22												

平行轴齿轮箱 Helical Gear Units 三级传动 Three Stage 立式安装 Vertical
 类型 Types H3.V 规格 Sizes 5...12

H3SV H3HV H3DV
采用浸油润滑 With dip lubrication

H3SV H3HV H3DV
采用强制润滑 With forced lubrication

★ 输出轴 Output		布置形式 Design	
<p>H3SV 实心轴 Solid shaft</p>	<p>H3HV 空心轴 Hollow shaft</p>	<p>H3DV 带胀紧盘的空心轴 Hollow shaft for shrink disk</p>	

- 1) $k_s \leq \Phi 50$ $m_s > \Phi 50$
有关平键GB/T1095-1979型和中心孔, 参见第98-99页。For parallel key GB/T1095-1979 and for centre hole, see page 98-99.
- 2) 键槽GB/T1095-1979。Keyway GB/T1095-1979.
- 3) 扭力支撑位于工作机侧。Torque support on driven machine side.
- 4) 有关油泵, 油管和护盖的安装空间及确切尺寸, 请与我们联系。Space for pump, pipes and cover, for exact dimension, please refer to us.

平行轴齿轮箱 Helical Gear Units 三级传动 Three Stage 立式安装 Vertical
 类型 Types H3.V 规格 Sizes 5...12

规格 Size	尺寸 mm Dimensions in mm												
	输入轴 Input												
	IN=24-45		IN=31.5-56		IN=50-63		IN=63-80		IN=71-90		IN=90-112		G1
d1 ¹⁾	l1	d1 ¹⁾	l1	d1 ¹⁾	l1	d1 ¹⁾	l1	d1 ¹⁾	l1	d1 ¹⁾	l1		
5	40	70			30	50			24	40			160
6			40	70			30	50			24	40	160
7	45	80			35	60			28	50			185
8			45	80			35	60			28	50	185
9	60	125			45	100			32	80			230
10			60	125			45	100			32	80	230
11	70	120			50	80			42	70			255
12			70	120			50	80			42	70	255


规格 Size	尺寸 mm Dimensions in mm									
	齿轮箱 Gear units									
	a	b1	c	e4	e5	e6	E	f2	f3	h
5	690	240	30 ± 1	230	252	385	405	28	190	127.5
6	770	240	30 ± 1	230	252	425	440	28	190	127.5
7	845	240	36 ± 1	280	292	425	495	30	185	150
8	950	240	36 ± 1	280	312	485	540	32	185	150
9	1000	330	45 ± 1.5	320	342	560	580	32	170	185
10	1100	330	45 ± 1.5	320	342	610	630	32	170	185
11	1200	330	54 ± 1.5	380	402	595	705	35	170	215
12	1355	330	54 ± 1.5	380	410	680	775	35	170	215

规格 Size	尺寸 mm Dimensions in mm									
	齿轮箱 Gear units									
	h1	h2	h3	m1	m2	n1	n2	p1 ¹⁾	p2 ¹⁾	s
5	205	190	240	630	360	30	175	35	270	24
6	205	190	240	710	360	30	220	35	270	24
7	205	165	250	775	430	35	215	35	330	28
8	205	165	250	880	430	35	275	35	330	28
9	275	205	330	920	490	40	260	40	370	36
10	275	205	330	1020	490	40	310	40	370	36
11	275	240	340	1100	600	50	295	50	440	40
12	275	240	340	1255	600	50	380	50	440	40

规格 Size	尺寸 mm Dimensions in mm									润滑油 Lubrication		重量 Weight (kg)
	输出轴 Output									浸油润滑 Dip lubrication (L)	强制润滑 Forced lubrication (L)	
	H3SV			H3HV			H3DV					
	d2 ¹⁾	G2	I2	D2 ¹⁾	G4	D3	D4	G4	G5			
5	100	165	210	95	165	100	100	165	240	35	13	320
6	110	165	210	105	165	110	110	165	240	37	15	365
7	120	195	210	115	195	120	120	195	280	60	25	540
8	130	195	250	125	195	130	130	195	285	72	30	625
9	140	235	250	135	235	140	145	235	330	100	40	875
10	160	235	300	150	235	150	155	235	350	110	45	1020
11	170	270	300	165	270	165	170	270	400	170	66	1400
12	180	270	300	180	270	180	185	270	405	190	75	1675

H/B工业齿轮箱 GEAR UNITS

平行轴齿轮箱 Helical Gear Units 三级传动 Three Stage 立式安装 Vertical
 类型 Types H3.V 规格 Sizes 13...18

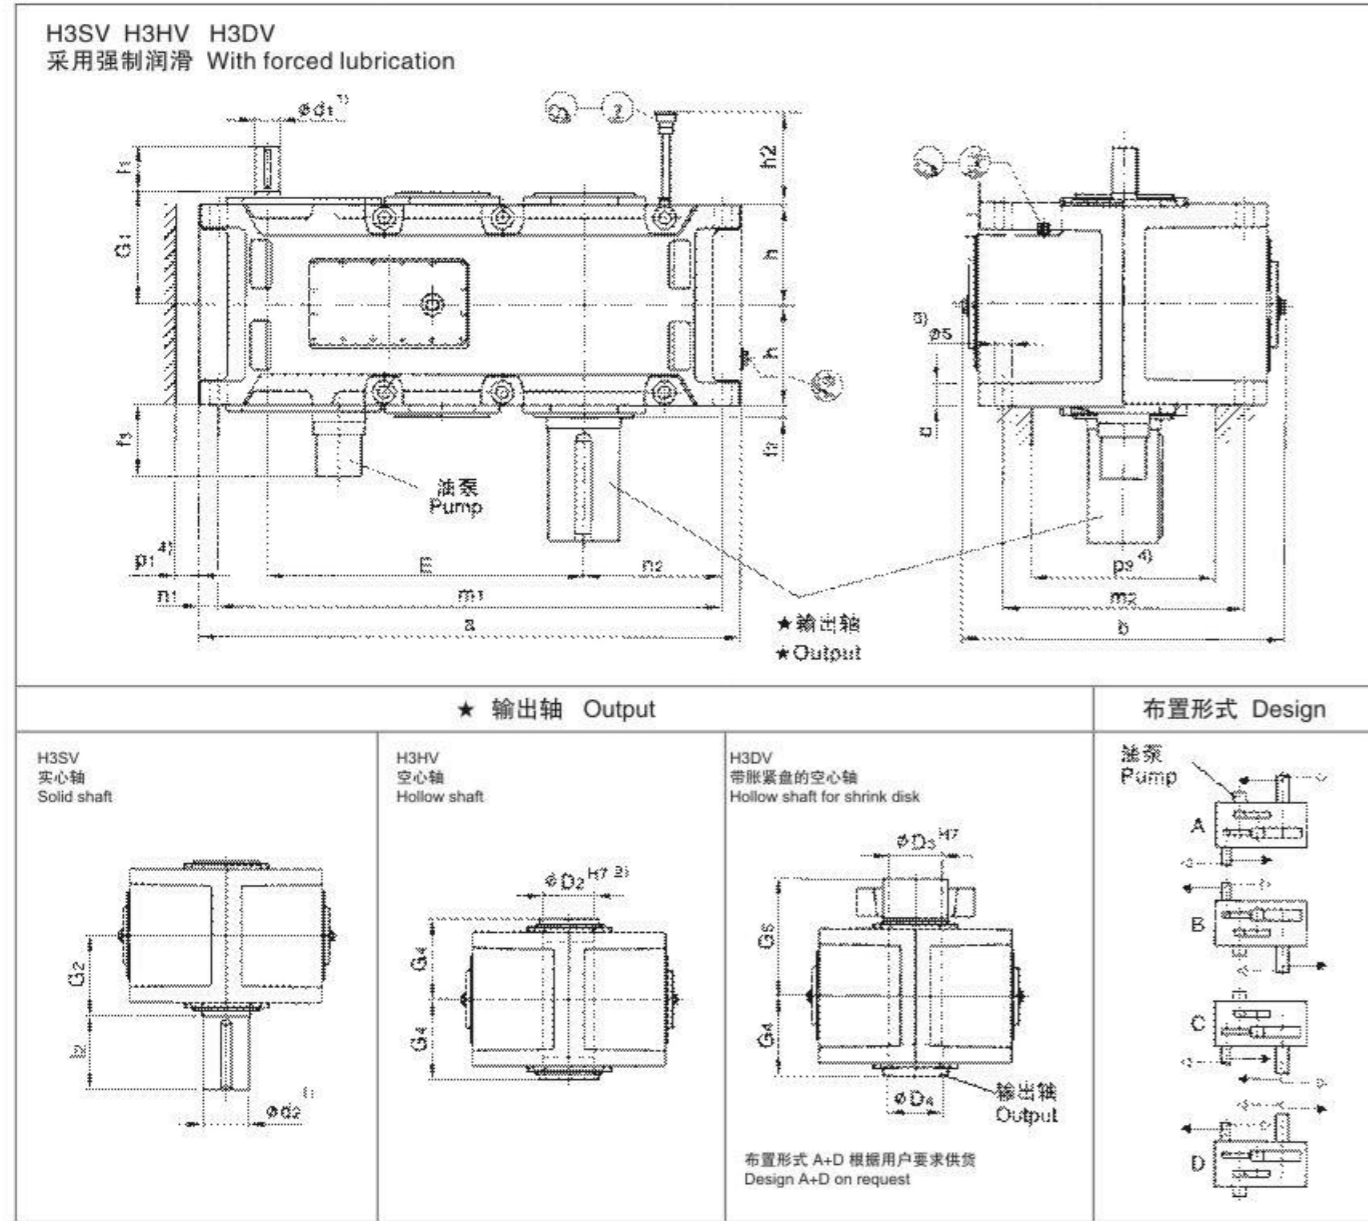

1) $k_s \leq \Phi 50$ $m_s > \Phi 50$

有关平键GB/T1095-1979型和中心孔, 参见第98-99页。For parallel key GB/T1095-1979 and for centre hole, see page 98-99.

2) 键槽GB/T1095-1979。Keyway GB/T1095-1979.

3) 扭力支撑位于工作机侧。Torque support on driven machine side.

4) 有关油泵, 油管和护盖的安装空间及确切尺寸, 请与我们联系。Space for pump, pipes and cover, for exact dimension, please refer to us.

H/B工业齿轮箱 GEAR UNITS

平行轴齿轮箱 Helical Gear Units 三级传动 Three Stage 立式安装 Vertical
 类型 Types H3.V 规格 Sizes 13...18

规格 Size	尺寸 mm Dimensions in mm																			
	输入轴 Input																			
	IN=22.4-45		IN=25-50		IN=28-56		IN=50-63		IN=56-71		IN=63-80		IN=71-90		IN=80-100		IN=90-112		G1	
d1 ¹⁾	l1	d1 ¹⁾	l1	d1 ¹⁾	l1	d1 ¹⁾	l1	d1 ¹⁾	l1	d1 ¹⁾	l1	d1 ¹⁾	l1	d1 ¹⁾	l1	d1 ¹⁾	l1			
13	85	160					60	135					50	110					310	
14					85	160					60	135						50	110	310
15	100	200					75	140					60	140					350	
16			100	200					75	140					60	140			350	
17	100	200					75	140					60	140					380	
18			100	200					75	140				60	140				380	
19																				
20																				
21																				
22																				

规格 Size	尺寸 mm Dimensions in mm															
	齿轮箱 Gear units															
	a	b	c	E	f2	f3	h	h2	m1	m2	n1	n2	p1 ⁴⁾	p2 ⁴⁾	s	
13	1395	900	61 ± 2	820	35	170	272.5	300	1300	680	50	360	50	500	48	
14	1535	900	61 ± 2	890	35	170	272.5	300	1440	680	50	430	50	500	48	
15	1680	980	72 ± 2	987	42	170	310	340	1565	750	60	430	50	570	55	
16	1770	980	72 ± 2	1033	42	170	310	340	1655	750	60	475	50	570	55	
17	1770	1110	81 ± 2	1035	42	210	340	374	1640	850	70	465	70	630	55	
18	1890	1110	81 ± 2	1095	42	210	340	374	1760	850	70	525	70	630	55	
19																
20																
21																
22																

规格 Size	尺寸 mm Dimensions in mm										润滑油 Lubrication (L)	重量 Weight (kg)
	输出轴 Output											
	H3SV		H3HV		H3DV							
d2 ¹⁾	G2	l2	D2 ²⁾	G4	D3	D4	G4	G5				
13	200	335	350	190	335	190	195	335	480	115	2155	
14	210	335	350	210	335	210	215	335	480	126	2490	
15	230	380	410	230	380	230	235	380	550	180	3260	
16	240	380	410	240	380	240	245	380	550	190	3625	
17	250	415	410	250	415	250	260	415	600	190	4250	
18	270	415	470	275	415	280	285	415	600	200	4740	
19												
20												
21												
22												

平行轴齿轮箱 Helical Gear Units 四级传动 Four Stage 立式安装 Vertical
 类型 Types H4.V 规格 Sizes 7...12

H4SV H4HV H4DV
采用浸油润滑 With dip lubrication

★ 输出轴
★ Output

补偿油箱
Oil compensating tank

H4SV H4HV H4DV
采用强制润滑 With forced lubrication

★ 输出轴
★ Output

★ 输出轴 Output

布置形式 Design

H4SV
实心轴
Solid shaft

H4HV
空心轴
Hollow shaft

H4DV
带胀紧盘的空心轴
Hollow shaft for shrink disk

布置形式 A+D 根据用户要求供货
Design A+D on request

油泵
Pump

- 1) $k_s \leq \Phi 50$ $m_s > \Phi 50$
有关平键GB/T1095-1979型和中心孔, 参见第98-99页。For parallel key GB/T1095-1979 and for centre hole, see page 98-99.
- 2) 键槽GB/T1095-1979。Keyway GB/T1095-1979.
- 3) 扭力支撑位于工作机侧。Torque support on driven machine side.
- 4) 有关油泵, 油管和护盖的安装空间及确切尺寸, 请与我们联系。Space for pump, pipes and cover, for exact dimension, please refer to us.

平行轴齿轮箱 Helical Gear Units 四级传动 Four Stage 立式安装 Vertical
 类型 Types H4.V 规格 Sizes 7...12


规格 Size	尺寸 mm Dimensions in mm								G1
	输入轴 Input								
	iN=100-180		iN=125-224		iN=200-355		iN=250-450		
	d1 ¹⁾	l1	d1 ¹⁾	l1	d1 ¹⁾	l1	d1 ¹⁾	l1	
7	30	50			24	40			180
8			30	50			24	40	180
9	35	60			28	50			215
10			35	60			28	50	215
11	45	100			32	80			250
12			45	100			32	80	250

规格 Size	尺寸 mm Dimensions in mm										
	齿轮箱 Gear units										
	a	b1	c	e4	e5	e6	E	E1	l1	f2	f3
7	845	240	36 ± 1	280	292	425	495	80	37	30	160
8	950	240	36 ± 1	280	302	485	540	80	37	32	160
9	1000	330	45 ± 1.5	320	342	560	580	90	43	32	170
10	1100	330	45 ± 1.5	320	342	610	630	90	43	32	170
11	1200	330	54 ± 1.5	380	402	595	705	110	47	35	170
12	1355	330	54 ± 1.5	380	410	680	775	110	47	35	170

规格 Size	尺寸 mm Dimensions in mm										
	齿轮箱 Gear units										
	h	h1	h2	h3	m1	m2	n1	n2	p1 ¹⁾	p2 ¹⁾	s
7	150	205	165	250	775	430	35	215	35	330	28
8	150	205	165	250	880	430	35	275	35	330	28
9	185	275	205	330	920	490	40	260	40	370	36
10	185	275	205	330	1020	490	40	310	40	370	36
11	215	275	240	340	1100	600	50	295	50	440	40
12	215	275	240	340	1255	600	50	380	50	440	40

规格 Size	尺寸 mm Dimensions in mm									润滑油 Lubrication		重量 Weight (kg)
	输出轴 Output									浸油润滑 Dip lubrication (L)	强制润滑 Forced lubrication (L)	
	H4SV			H4HV		H4DV						
	d2 ¹⁾	G2	l2	D2 ²⁾	G4	D3	D4	G4	G5			
7	120	195	210	115	195	120	120	195	280	50	20	550
8	130	195	250	125	195	130	130	195	285	60	25	645
9	140	235	250	135	235	140	145	235	330	95	38	875
10	160	235	300	150	235	150	155	235	350	110	45	1010
11	170	270	300	165	270	165	170	270	400	165	65	1460
12	180	270	300	180	270	180	185	270	405	180	75	1725

平行轴齿轮箱 Helical Gear Units 四级传动 Four Stage 立式安装 Vertical
 类型 Types H4.V 规格 Sizes 13...18

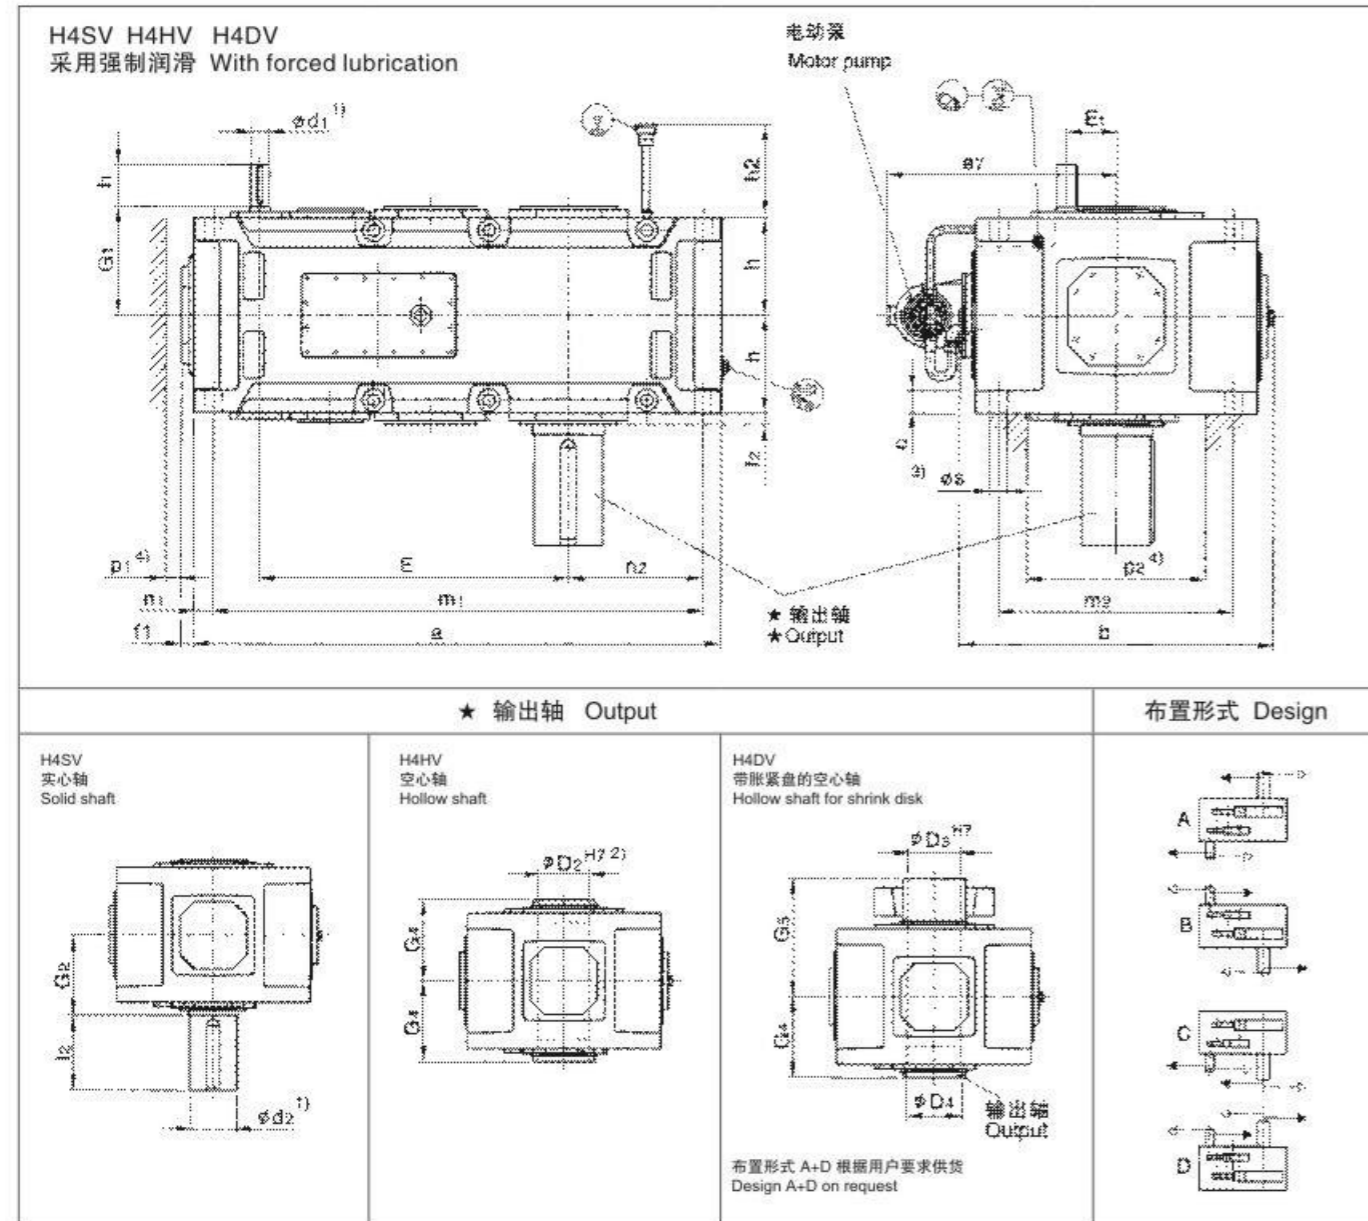

- 1) $k_s \leq \Phi 50$ $m_s > \Phi 50$
 有关平键GB/T1095-1979型和中心孔, 参见第98-99页。For parallel key GB/T1095-1979 and for centre hole, see page 98-99.
- 2) 键槽GB/T1095-1979。Keyway GB/T1095-1979.
- 3) 扭力支撑位于工作机侧。Torque support on driven machine side.
- 4) 有关油泵, 油管和护盖的安装空间及确切尺寸, 请与我们联系。Space for pump, pipes and cover, for exact dimension, please refer to us.

平行轴齿轮箱 Helical Gear Units 四级传动 Four Stage 立式安装 Vertical
 类型 Types H4.V 规格 Sizes 13...18

规格 Size	尺寸 mm Dimensions in mm												G1
	输入轴 Input												
	iN=100-180		iN=112-200		iN=125-224		iN=200-355		iN=224-400		iN=250-450		
	d1 ¹⁾	l1	d1 ¹⁾	l1	d1 ¹⁾	l1	d1 ¹⁾	l1	d1 ¹⁾	l1	d1 ¹⁾	l1	
13	50	100					38	80					305
14					50	100					38	80	305
15	60	135					50	110					345
16			60	135					50	110			345
17	60	105					50	80					380
18			60	105					50	80			380
19													
20													
21													
22													

规格 Size	尺寸 mm Dimensions in mm																
	齿轮箱 Gear units																
	a	b	c	e7	E	E1	f1	f2	h	h2	m1	m2	n1	n2	p1 ¹⁾	p2 ¹⁾	s
13	1395	900	61 ± 2	695	820	130	47	35	272.5	300	1300	680	50	360	50	500	48
14	1535	900	61 ± 2	695	890	130	47	35	272.5	300	1440	680	50	430	50	500	48
15	1680	980	72 ± 2	735	987	160	56	42	310	340	1565	750	60	430	50	570	55
16	1770	980	72 ± 2	735	1033	160	56	42	310	340	1655	750	60	475	50	570	55
17	1770	1110	81 ± 2	795	1035	160	53	42	340	374	1640	850	70	465	70	630	55
18	1890	1110	81 ± 2	795	1095	160	53	42	340	374	1760	850	70	525	70	630	55
19																	
20																	
21																	
22																	

规格 Size	尺寸 mm Dimensions in mm										润滑油 Lubrication (L)	重量 Weight (kg)
	输出轴 Output											
	H4SV		H4HV		H4DV							
	d2 ¹⁾	G2	l2	D2 ¹⁾	G4	D3	D4	G4	G5			
13	200	335	350	190	335	190	195	335	480	95	2270	
14	210	335	350	210	335	210	215	335	480	105	2600	
15	230	380	410	230	380	230	235	380	550	150	3440	
16	240	380	410	240	380	240	245	380	550	160	3740	
17	250	415	410	250	415	250	260	415	600	190	4445	
18	270	415	470	275	415	280	285	415	600	200	4915	
19												
20												
21												
22												

H/B工业齿轮箱 GEAR UNITS

直交轴齿轮箱 Bevel-helical Gear Units
类型 Types B2.V 规格 Sizes 1...12

二级传动 Two Stage 立式安装 Vertical

B2SV B2HV B2DV
采用浸油润滑 With dip lubrication

B2SV B2HV B2DV
采用强制润滑 With forced lubrication

★ 输出轴 Output

B2SV
实心轴
Solid shaft

B2HV
空心轴
Hollow shaft

B2DV
带胀紧盘的空心轴
Hollow shaft for shrink disk

布置形式 A+D 根据用户要求供货
Design A+D on request

布置形式 Design

- 1) $k_s \leq \Phi 50$ $m_s > \Phi 50$
有关平键GB/T1095-1979型和中心孔, 参见第98-99页。For parallel key GB/T1095-1979 and for centre hole, see page 98-99.
- 2) 键槽GB/T1095-1979。Keyway GB/T1095-1979.
- 3) 扭力支撑位于工作机侧。Torque support on driven machine side.
- 4) 有关油泵, 油管和护盖的安装空间及确切尺寸, 请与我们联系。Space for pump, pipes and cover, for exact dimension, please refer to us.

H/B工业齿轮箱 GEAR UNITS

直交轴齿轮箱 Bevel-helical Gear Units
类型 Types B2.V 规格 Sizes 1...12

二级传动 Two Stage 立式安装 Vertical


规格 Size	尺寸 mm Dimensions in mm										
	输入轴 Input										
	iN=5-11.2			iN=6.3-14			iN=12.5-18			G1	G3
	d1 ¹⁾	l1	l3	d1 ¹⁾	l1	l3	d1 ¹⁾	l1	l3		
1	28	55	40				20	50	35	300	315
2	30	70	50				25	60	40	340	360
3	35	80	60				28	60	40	390	410
4	45	100	80							465	485
5	55	110	80							535	565
6				55	110	80				570	600
7	70	135	105							640	670
8				70	135	105				685	715
9	80	165	130							755	790
10				80	165	130				805	840
11	90	165	130							925	960
12				90	165	130				995	1030

规格 Size	尺寸 mm Dimensions in mm											
	齿轮箱 Gear units											
	a	A1	b1	B1	c	d6	e3	e4	e5	e6	E	f2
1	305	128	150	130	16 ± 1	100	90	130	145	280	90	22
2	355	143	150	145	20 ± 1	110	110	145	160	285	110	22
3	405	163	150	170	24 ± 1	120	130	175	185	290	130	24
4	505	188	150	200	30 ± 1	150	160	200	215	320	160	26
5	565	215	240	235	30 ± 1	160	185	230	252	385	185	30
6	645	215	240	235	30 ± 1	160	185	230	252	425	220	30
7	690	250	240	285	36 ± 1	210	225	280	302	425	225	32
8	795	250	240	285	36 ± 1	210	225	280	302	485	270	32
9	820	270	330	325	48 ± 1.5	195	265	320	342	560	265	45
10	920	270	330	325	48 ± 1.5	195	265	320	342	610	315	45
11	975	328	330	385	54 ± 1.5	210	320	380	410	595	320	47
12	1130	328	330	385	54 ± 1.5	210	320	380	410	680	390	47

规格 Size	尺寸 mm Dimensions in mm												
	齿轮箱 Gear units												
	f3	G6	h	h1	h2	h3	m1	m2	n1	n2	p2 ¹⁾	s	
1	-	325	90	165	-	170	275	210	15	115	150	12	
2	-	370	102.5	165	-	170	315	315	20	120	170	14	
3	-	420	112.5	165	-	180	365	365	20	130	200	18	
4	-	495	135	165	-	180	445	300	30	160	220	24	
5	190	575	160	205	245	240	505	360	30	175	270	24	
6	190	610	160	205	245	240	585	360	30	220	270	24	
7	200	685	190	205	220	250	620	430	35	215	330	28	
8	200	730	190	205	220	250	725	430	35	275	330	28	
9	200	805	220	275	250	330	740	490	40	260	370	36	
10	200	855	220	275	250	330	840	490	40	310	370	36	
11	200	980	265	275	300	340	875	600	50	295	440	40	
12	200	1050	265	275	300	340	1030	600	50	380	440	40	

规格 Size	尺寸 mm Dimensions in mm									润滑油 Lubrication		重量 Weight (kg)
	输出轴 Output									浸油润滑 Dip lubrication (L)	强制润滑 Forced lubrication (L)	
	B2SV			B2HV			B2DV					
	d2 ¹⁾	G2	l2	D2 ²⁾	G4	D3	D4	G4	G5			
1	45	120	80	-	-	-	-	-	-	7	-	65
2	55	135	110	55	135	60	60	135	180	11	-	90
3	65	145	140	65	145	70	70	145	200	16	-	140
4	80	170	170	80	170	85	85	170	235	28	-	235
5	100	200	210	95	200	100	100	200	275	41	20	360
6	110	200	210	105	200	110	110	200	275	50	23	410
7	120	235	210	115	235	120	120	235	320	75	35	615
8	130	235	250	125	235	130	130	235	325	90	38	700
9	140	270	250	135	270	140	145	270	360	115	53	1000
10	160	270	300	150	270	150	155	270	385	135	60	1155
11	170	320	300	165	320	165	170	320	450	190	86	1640
12	180	320	300	180	320	180	185	320	455	215	95	1910

直交轴齿轮箱 Bevel-helical Gear Units 二级传动 Two Stage 立式安装 Vertical
 类型 Types B2.V 规格 Sizes 13...18

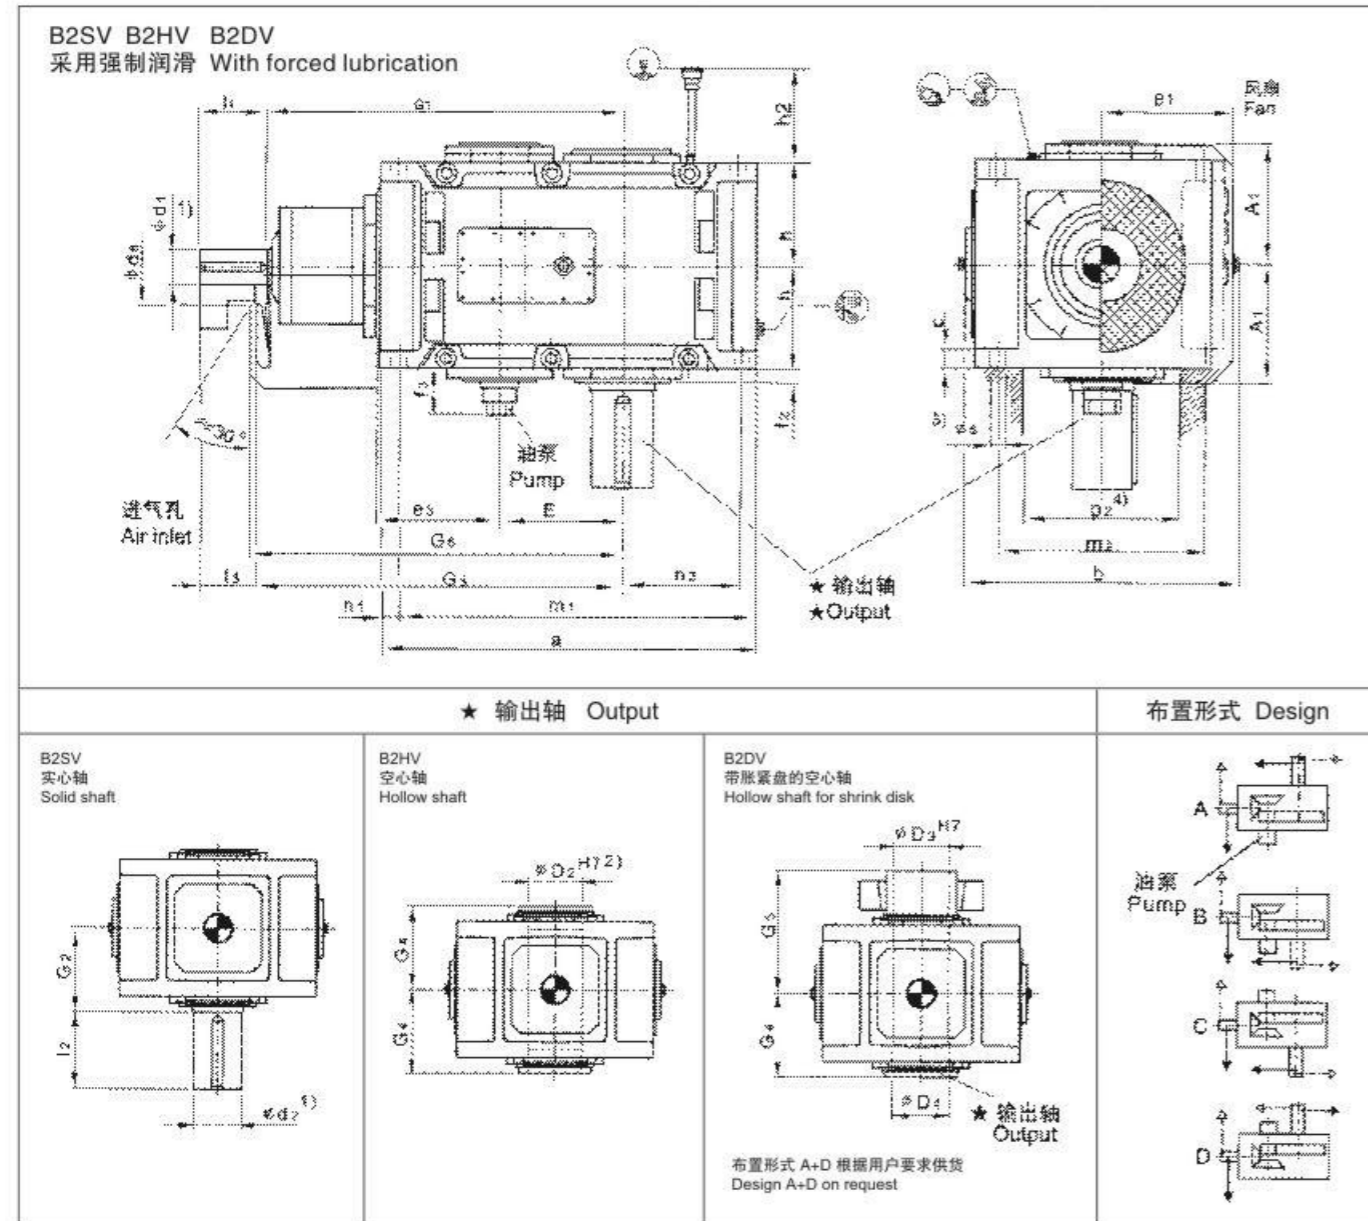

- 1) $k_s \leq \Phi 50$ $m_s > \Phi 50$
 有关平键GB/T1095-1979型和中心孔, 参见第98-99页。For parallel key GB/T1095-1979 and for centre hole, see page 98-99.
- 2) 键槽GB/T1095-1979。Keyway GB/T1095-1979.
- 3) 扭力支撑位于工作机侧。Torque support on driven machine side.
- 4) 有关油泵, 油管和护盖的安装空间及确切尺寸, 请与我们联系。Space for pump, pipes and cover, for exact dimension, please refer to us.

直交轴齿轮箱 Bevel-helical Gear Units 二级传动 Two Stage 立式安装 Vertical
 类型 Types B2.V 规格 Sizes 13...18

规格 Size	尺寸 mm Dimensions in mm														G1	G3	
	输入轴 Input																
	iN=5-11.2			iN=5.6-11.2			iN=5.6-12.5			iN=6.3-14			iN=7.1-12.5				
	d1 ¹⁾	I1	I3	d1 ¹⁾	I1	I3	d1 ¹⁾	I1	I3	d1 ¹⁾	I1	I3	d1 ¹⁾	I1	I3		
13	110	205	165													1070	1110
14										110	205	165				1140	1180
15	130	245	200													1277	1322
16							130	245	200							1323	1368
17				150	245	200										1435	1480
18													150	245	200	1495	1540

规格 Size	尺寸 mm Dimensions in mm									
	齿轮箱 Gear units									
	a	A1	b	B1	c	d6	e3	E	f2	f3
13	1130	375	900	450	61 ± 2	245	380	370	38	200
14	1270	375	900	450	61 ± 2	245	380	440	45	200
15	1350	435	980	495	72 ± 2	280	450	442	75	200
16	1440	435	980	495	72 ± 2	280	450	488	75	200
17	1490	505	1110	555	81 ± 2	380	510	490	98	200
18	1610	505	1110	555	81 ± 2	380	510	550	98	200

规格 Size	尺寸 mm Dimensions in mm								
	齿轮箱 Gear units								
	G6	h	h2	m1	m2	n1	n2	p2 ¹⁾	s
13	1130	325	350	1035	680	50	360	500	48
14	1200	325	350	1175	680	50	430	500	48
15	1340	380	430	1235	750	60	430	570	55
16	1385	380	430	1325	750	60	475	570	55
17	1500	437.5	480	1360	840	70	465	630	65
18	1560	437.5	480	1480	840	70	525	630	65

规格 Size	尺寸 mm Dimensions in mm									润滑油 Lubrication (L)	重量 Weight (kg)
	输出轴 Output										
	B2SV			B2HV		B2DV					
	d2 ¹⁾	G2	I2	D2 ²⁾	G4	D3	D4	G4	G5		
13	200	390	350	-	-	-	-	-	-	100	2350
14	210	390	350	210	390	210	215	390	535	110	2725
15	230	460	410	-	-	-	-	-	-	145	3795
16	240	460	410	240	450	240	245	450	620	160	4160
17	250	540	410	-	-	-	-	-	-	210	5320
18	270	540	470	275	510	280	285	510	700	220	5860

H/B工业齿轮箱 GEAR UNITS

直交轴齿轮箱 Bevel-helical Gear Units 三级传动 Three Stage 立式安装 Vertical
 类型 Types B3.V 规格 Sizes 3...12

B3SV B3HV B3DV
 采用浸油润滑 With dip lubrication

B3SV B3HV B3DV
 采用强制润滑 With forced lubrication

★ 输出轴 Output

布置形式 Design

<p>B3SV 实心轴 Solid shaft</p>	<p>B3HV 空心轴 Hollow shaft</p>	<p>B3DV 带胀紧盘的空心轴 Hollow shaft for shrink disk</p> <p>布置形式 A+D 根据用户要求供货 Design A+D on request</p>	
--	---	--	--

- 1) $k_s \leq \Phi 50$ $m_s > \Phi 50$
 有关键GB/T1095-1979型和中心孔, 参见第98-99页。For parallel key GB/T1095-1979 and for centre hole, see page 98-99.
- 2) 键槽GB/T1095-1979。Keyway GB/T1095-1979.
- 3) 扭力支撑位于工作机侧。Torque support on driven machine side.
- 4) 有关油泵, 油管和护盖的安装空间及确切尺寸, 请与我们联系。Space for pump, pipes and cover, for exact dimension, please refer to us.

H/B工业齿轮箱 GEAR UNITS

直交轴齿轮箱 Bevel-helical Gear Units 三级传动 shree Stage 立式安装 sVertical
 类型 Types B3.V 规格 Sizes 3...12


规格 Size	尺寸 mm Dimensions in mm																		
	输入轴 Input															G1	G3		
	iN=12.5-45			iN=16-56			iN=20-45			iN=50-71			iN=63-90						
d1 ¹⁾	l1	l3	d1 ¹⁾	l1	l3	d1 ¹⁾	l1	l3	d1 ¹⁾	l1	l3	d1 ¹⁾	l1	l3	d1 ¹⁾	l1	l3		
3									28	55	40	20	50	35				430	445
4	30	70	50									25	60	40				500	520
5	35	80	60									28	60	40				575	595
06				35	80	60									28	60	40	610	630
7	45	100	80									35	80	60				690	710
8				45	100	80									35	80	60	735	755
9	55	110	80									40	100	70				800	830
10				55	110	80									40	100	70	850	880
11	70	135	105									50	110	80				960	990
12				70	135	105									50	110	80	1030	1060

规格 Size	尺寸 mm Dimensions in mm												
	齿轮箱 Gear units												f2
	a	A1	b1	B1	c	d6	e3	e4	e5	e6	E		
3	450	128	150	170	24 ± 1	90	90	175	185	290	220	20	
4	565	143	150	200	30 ± 1	110	110	200	215	320	270	22	
5	640	168	240	235	30 ± 1	130	130	230	252	385	315	28	
6	720	168	240	235	30 ± 1	130	130	230	252	425	350	28	
7	785	193	240	275	36 ± 1	165	160	280	292	425	385	30	
8	890	193	240	275	36 ± 1	165	160	280	302	485	430	32	
9	925	231	330	325	45 ± 1.5	175	185	320	342	560	450	32	
10	1025	231	330	325	45 ± 1.5	175	185	320	342	610	500	32	
11	1105	263	330	385	54 ± 1.5	190	225	380	402	595	545	35	
12	1260	263	330	385	54 ± 1.5	190	225	380	410	680	615	35	

规格 Size	尺寸 mm Dimensions in mm											
	齿轮箱 Gear units											s
	f3	G6	h	h1	h2	h3	m1	m2	n1	n2	p2 ⁴⁾	
3	-	455	95	165	-	180	410	265	20	125	210	18
4	-	530	107.5	165	-	180	505	300	30	160	220	24
5	190	605	127.5	205	180	240	580	360	30	175	270	24
6	190	640	127.5	205	180	240	660	360	30	220	270	24
7	190	720	150	205	165	250	715	430	35	215	330	28
8	190	765	150	205	165	250	820	430	35	275	330	28
9	180	845	185	275	205	330	845	490	40	260	370	36
10	180	895	185	275	205	330	945	490	40	310	370	36
11	180	1010	215	275	240	340	1005	600	50	295	440	40
12	180	1080	215	275	240	340	1160	600	50	380	440	40

规格 Size	尺寸 mm Dimensions in mm									润滑油 Lubrication		重量 Weight (kg)
	输出轴 Output									浸油润滑 Dip lubrication (L)	强制润滑 Forced lubrication (L)	
	B3SV			B3HV			B3DV					
d2 ¹⁾	G2	l2	D2 ²⁾	G4	D3	D4	G4	G5				
3	65	125	140	65	125	70	70	125	180	15	-	130
4	80	140	170	80	140	85	85	140	205	28	-	210
5	100	165	210	95	165	100	100	165	240	32	12	325
6	110	165	210	105	165	110	110	165	240	35	13	380
7	120	195	210	115	195	120	120	195	280	52	22	550
8	130	195	250	125	195	130	130	195	285	67	28	635
9	140	235	250	135	235	140	145	235	330	115	48	890
10	160	235	300	150	235	150	155	235	350	125	52	1020
11	170	270	300	165	270	165	170	270	400	180	75	1455
12	180	270	300	180	270	180	185	270	405	200	85	1730

直交轴齿轮箱 Bevel-helical Gear Units 三级传动 Three Stage 立式安装 Vertical
 类型 Types B3.V 规格 Sizes 13...18

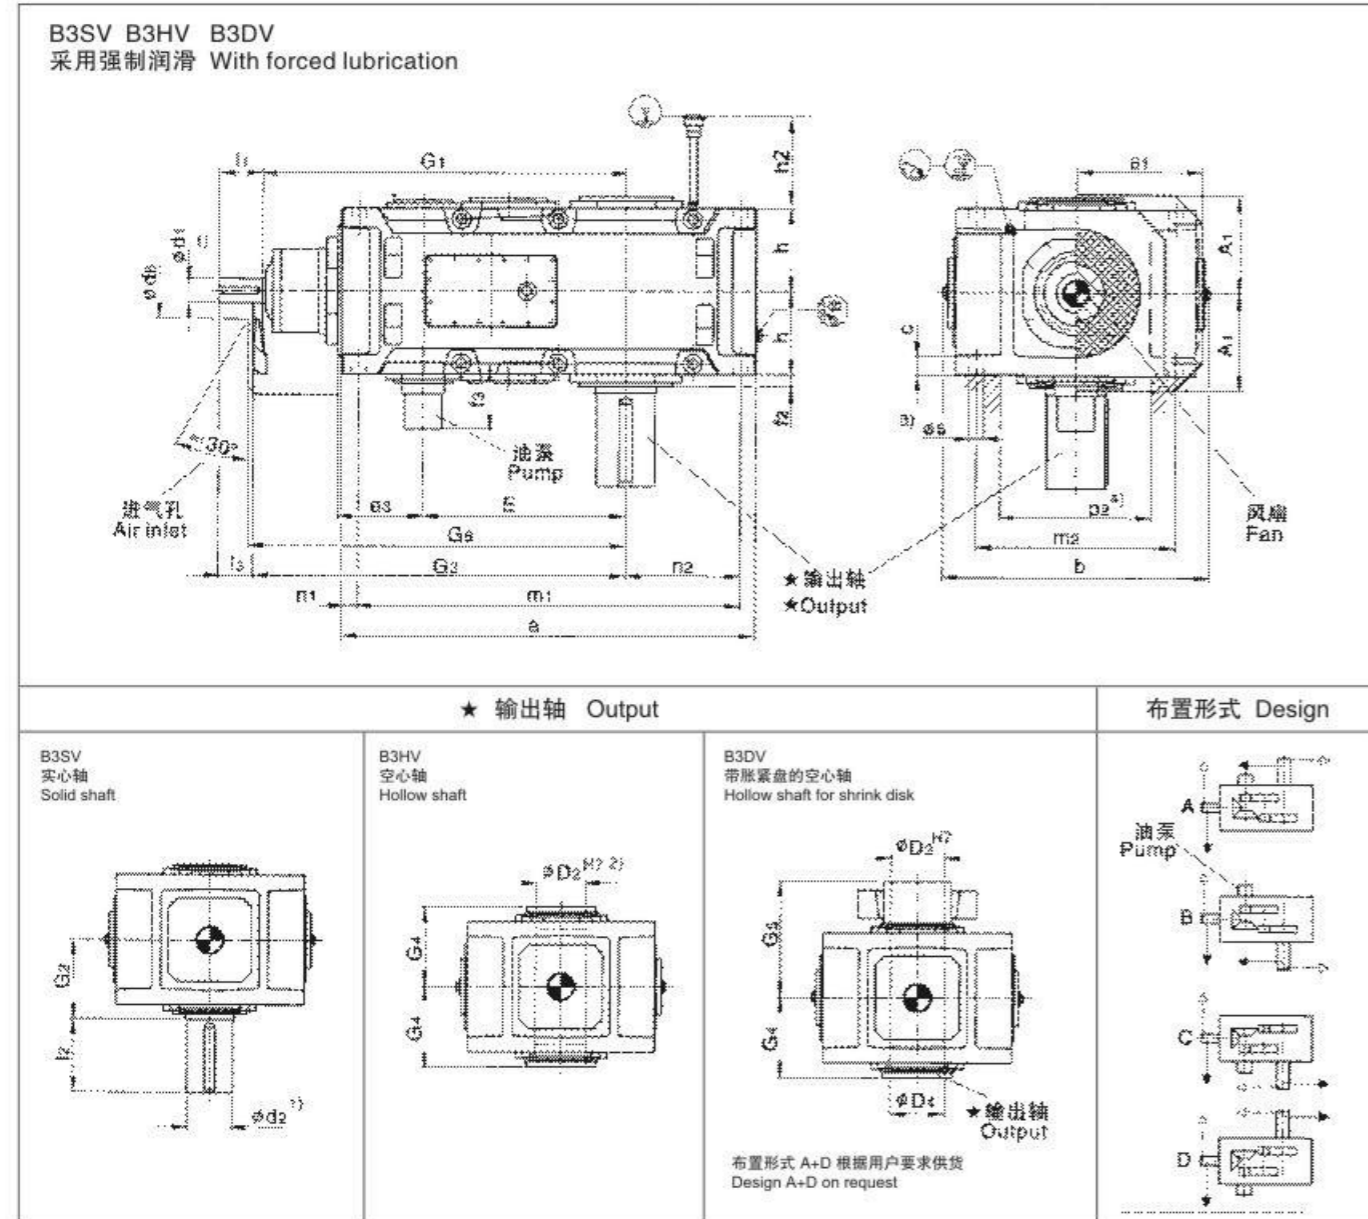

- 1) $k_s \leq \Phi 50$ $m_s > \Phi 50$
 有关平键GB/T1095-1979型和中心孔，参见第98-99页。For parallel key GB/T1095-1979 and for centre hole, see page 98-99.
- 2) 键槽GB/T1095-1979。Keyway GB/T1095-1979.
- 3) 扭力支撑位于工作机侧。Torque support on driven machine side.
- 4) 有关油泵，油管和护盖的安装空间及确切尺寸，请与我们联系。Space for pump, pipes and cover, for exact dimension, please refer to us.

直交轴齿轮箱 Bevel-helical Gear Units 三级传动 Three Stage 立式安装 Vertical
 类型 Types B3.V 规格 Sizes 13...18

规格 Size	尺寸 mm Dimensions in mm															G1	G3					
	输入轴 Input																					
	iN=12.5-45			iN=14-50			iN=16-56			iN=50-71			iN=56-80					iN=63-90				
d1 ¹⁾	l1	l3	d1 ¹⁾	l1	l3	d1 ¹⁾	l1	l3	d1 ¹⁾	l1	l3	d1 ¹⁾	l1	l3	d1 ¹⁾	l1	l3	d1 ¹⁾	l1	l3		
13	80	165	130						60	140	105										1125	1160
14							80	165	130						60	140	105				1195	1230
15	90	165	130						70	140	105										1367	1402
16				90	165	130									70	140	105				1413	1448
17	110	205	165						80	170	130										1560	1600
18				110	205	165									80	170	130				1620	1660
19																						
20																						
21																						
22																						

规格 Size	尺寸 mm Dimensions in mm									
	齿轮箱 Gear units									
a	A1	b	B1	c	d6	e3	E	f2	f3	
13	1290	325	900	475	61 ± 2	210	265	635	35	170
14	1430	325	900	475	61 ± 2	210	265	705	35	170
15	1550	365	980	520	72 ± 2	210	320	762	42	170
16	1640	365	980	520	72 ± 2	210	320	808	42	170
17	1740	395	1110	570	81 ± 2	230	370	860	42	170
18	1860	395	1110	570	81 ± 2	230	370	920	42	170
19										
20										
21										
22										

规格 Size	尺寸 mm Dimensions in mm								
	齿轮箱 Gear units								
G6	h	h2	m1	m2	n1	n2	p2 ¹⁾	s	
13	1180	272.5	300	1195	680	50	360	500	48
14	1250	272.5	300	1335	680	50	430	500	48
15	1420	310	340	1435	750	60	430	570	55
16	1470	310	340	1525	750	60	475	570	55
17	1620	340	380	1610	850	70	465	630	55
18	1680	340	380	1730	850	70	525	630	55
19									
20									
21									
22									

规格 Size	尺寸 mm Dimensions in mm										润滑油 Lubrication (L)	重量 Weight (kg)
	输出轴 Output											
	B3SV		B3HV		B3DV							
d2 ¹⁾	G2	l2	D2 ¹⁾	G4	D3	D4	G4	G5				
13	200	335	350	190	335	190	195	335	480	95	2260	
14	210	335	350	210	335	210	215	335	480	110	2615	
15	230	380	410	230	380	230	235	380	550	165	3540	
16	240	380	410	240	380	240	245	380	550	190	3765	
17	250	415	410	250	415	250	260	415	600	210	4760	
18	270	415	470	275	415	280	285	415	600	240	5240	
19												
20												
21												
22												

直交轴齿轮箱 Bevel-helical Gear Units 四级传动 Four Stage 立式安装 Vertical
 类型 Types B4.V 规格 Sizes 5...12

B4SV B4HV B4DV
采用浸油润滑 With dip lubrication

B4SV B4HV B4DV
采用强制润滑 With forced lubrication

★ 输出轴 Output

B4SV
实心轴
Solid shaft

B4HV
空心轴
Hollow shaft

B4DV
带胀紧盘的空心轴
Hollow shaft for shrink disk

布置形式 A+D 根据用户要求供货
Design A+D on request

布置形式 Design

- 1) $k_2 \leq \Phi 50$ $m_2 > \Phi 50$
有关平键GB/T1095-1979型和中心孔, 参见第98-99页。For parallel key GB/T1095-1979 and for centre hole, see page 98-99.
- 2) 键槽GB/T1095-1979。Keyway GB/T1095-1979.
- 3) 扭力支撑位于工作机侧。Torque support on driven machine side.
- 4) 有关油泵, 油管和护盖的安装空间及确切尺寸, 请与我们联系。Space for pump, pipes and cover, for exact dimension, please refer to us.

直交轴齿轮箱 Bevel-helical Gear Units 四级传动 Four Stage 立式安装 Vertical
 类型 Types B4.V 规格 Sizes 5...12

规格 Size	尺寸 mm Dimensions in mm								G1
	输入轴 Input								
	iN=80-180		iN=100-224		iN=200-315		iN=250-400		
	d1 ¹⁾	l1	d1 ¹⁾	l1	d1 ¹⁾	l1	d1 ¹⁾	l1	
5	28	55			20	50			615
6			28	55			20	50	650
7	30	70			25	60			725
8			30	70			25	60	770
9	35	80			28	60			840
10			35	80			28	60	890
11	45	100			35	80			1010
12			45	100			35	80	1080


规格 Size	尺寸 mm Dimensions in mm								
	齿轮箱 Gear units								
	a	b1	c	e4	e5	e6	E	f2	f3
5	690	240	30 ± 1	230	252	385	405	28	200
6	770	240	30 ± 1	230	252	425	440	28	200
7	845	240	36 ± 1	280	292	425	495	30	120
8	950	240	36 ± 1	280	302	485	540	32	120
9	1000	330	45 ± 1.5	320	342	560	580	32	120
10	1100	330	45 ± 1.5	320	342	610	630	32	120
11	1200	330	54 ± 1.5	380	402	595	705	35	130
12	1355	330	54 ± 1.5	380	410	680	775	35	130

规格 Size	尺寸 mm Dimensions in mm									
	齿轮箱 Gear units									
	h	h1	h2	h3	m1	m2	n1	n2	p2	s
5	127.5	205	190	240	630	360	30	175	270	24
6	127.5	205	190	240	710	360	30	220	270	24
7	150	205	165	250	775	430	35	215	330	28
8	150	205	165	250	880	430	35	275	330	28
9	185	275	205	330	920	490	40	260	370	36
10	185	275	205	330	1020	490	40	310	370	36
11	215	275	240	340	1100	600	50	295	440	40
12	215	275	240	340	1255	600	50	380	440	40

规格 Size	尺寸 mm Dimensions in mm									润滑油 Lubrication		重量 Weight (kg)
	输出轴 Output									浸油润滑 Dip lubrication (L)	强制润滑 Forced lubrication (L)	
	B4SV			B4HV			B4DV					
	d2 ¹⁾	G2	l2	D2 ¹⁾	G4	D3	D4	G4	G5			
5	100	165	210	95	165	100	100	165	240	36	15	335
6	110	165	210	105	165	110	110	165	240	40	16	385
7	120	195	210	115	195	120	120	195	280	60	30	555
8	130	195	250	125	195	130	130	195	285	70	35	655
9	140	235	250	135	235	140	145	235	330	110	60	890
10	160	235	300	150	235	150	155	235	350	130	67	1025
11	170	270	300	165	270	165	170	270	400	180	75	1485
12	180	270	300	180	270	180	185	270	405	195	85	1750

H/B工业齿轮箱 GEAR UNITS

直交轴齿轮箱 Bevel-helical Gear Units 四级传动 Four Stage 立式安装 Vertical
 类型 Types B4.V 规格 Sizes 13...18

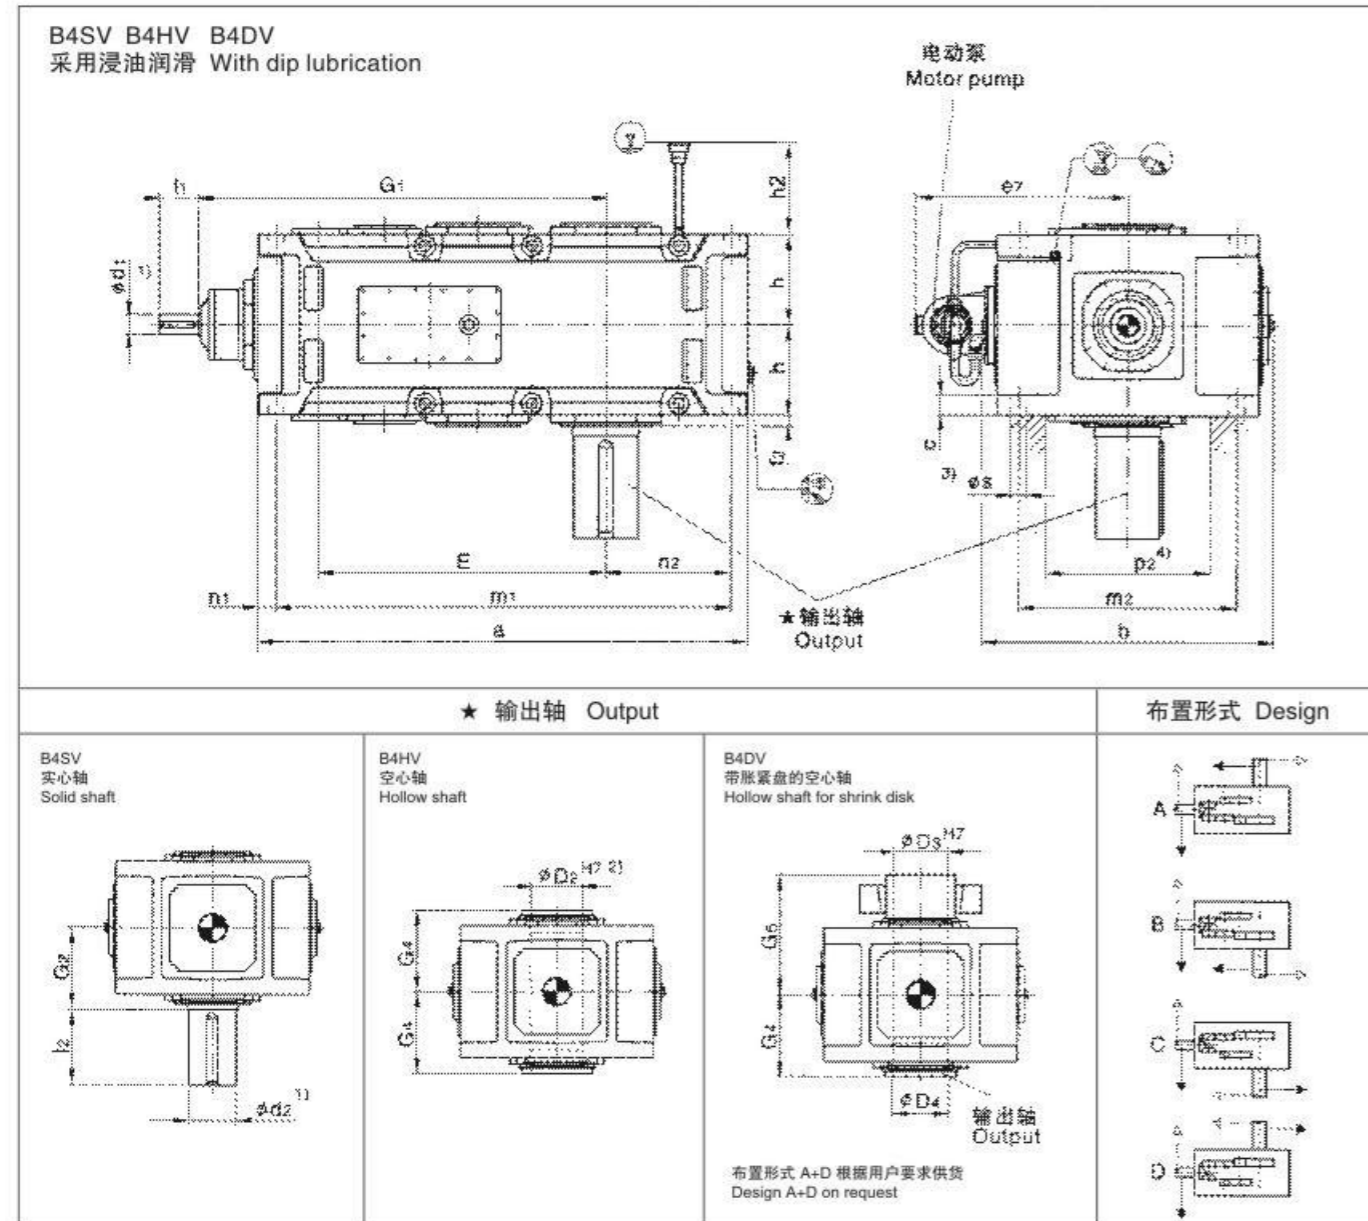

- 1) $k_s \leq \Phi 50$ $m_s > \Phi 50$
 有关平键GB/T1095-1979型和中心孔, 参见第98-99页。For parallel key GB/T1095-1979 and for centre hole, see page 98-99.
- 2) 键槽GB/T1095-1979。Keyway GB/T1095-1979.
- 3) 扭力支撑位于工作机侧。Torque support on driven machine side.
- 4) 有关油泵, 油管和护盖的安装空间及确切尺寸, 请与我们联系。Space for pump, pipes and cover, for exact dimension, please refer to us.

H/B工业齿轮箱 GEAR UNITS

直交轴齿轮箱 Bevel-helical Gear Units 四级传动 Four Stage 立式安装 Vertical
 类型 Types B4.V 规格 Sizes 13...18


规格 Size	尺寸 mm Dimensions in mm												G1
	输入轴 Input												
	iN=80-180		iN=90-200		iN=100-224		iN=200-315		iN=224-355		iN=250-400		
	d1 ¹⁾	l1	d1 ¹⁾	l1	d1 ¹⁾	l1	d1 ¹⁾	l1	d1 ¹⁾	l1	d1 ¹⁾	l1	
13	55	110					40	100					1170
14					55	110					40	100	1240
15	70	135					50	110					1402
16			70	135					50	110			1448
17	70	135					50	110					1450
18			70	135					50	110			1510
19													
20													
21													
22													

规格 Size	尺寸 mm Dimensions in mm														
	齿轮箱 Gear units														
	a	b	c	e7	E	f2	h	h2	m1	m2	n1	n2	p2	s	
13	1395	900	61 ± 2	695	820	35	272.5	300	1300	680	50	360	500	48	
14	1535	900	61 ± 2	695	890	35	272.5	300	1440	680	50	430	500	48	
15	1680	980	72 ± 2	735	987	42	310	340	1565	750	60	430	570	55	
16	1770	980	72 ± 2	735	1033	42	310	340	1655	750	60	475	570	55	
17	1770	1110	81 ± 2	795	1035	42	340	374	1640	850	70	465	630	55	
18	1890	1110	81 ± 2	795	1095	42	340	374	1760	850	70	525	630	55	
19															
20															
21															
22															

规格 Size	尺寸 mm Dimensions in mm										润滑油 Lubrication (L)	重量 Weight (kg)
	输出轴 Output											
	d2 ¹⁾	B4SV		B4HV		B4DV						
	G2	l2	D2 ²⁾	G4	D3	D4	G4	G5				
13	200	335	350	190	335	190	195	335	480	130	2280	
14	210	335	350	210	335	210	215	335	480	150	2605	
15	230	380	410	230	380	230	235	380	550	200	3435	
16	240	380	410	240	380	240	245	380	550	235	3765	
17	250	415	410	250	415	250	260	415	600	215	4460	
18	270	415	470	275	415	280	285	415	600	250	4930	
19												
20												
21												
22												

齿轮箱 Gear Units

C 型轴端中心孔, 符合 GB145-1985 标准 Centre Holes, Form C in Shaft Ends GB145-1985

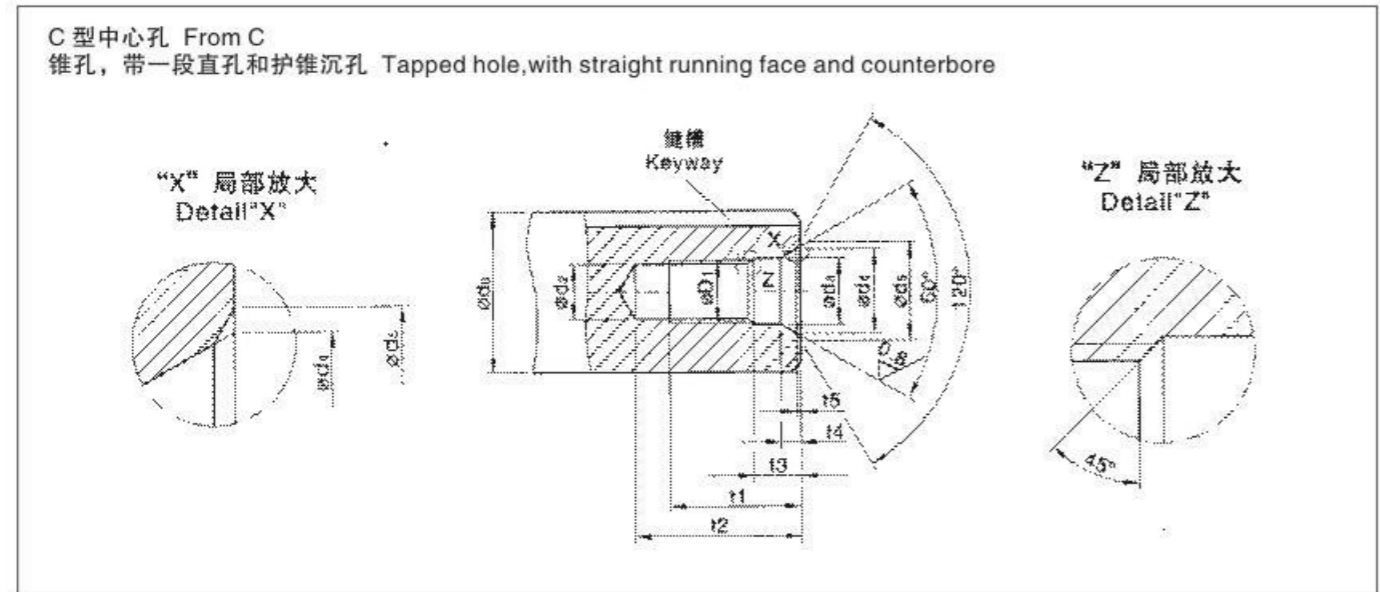

推荐尺寸 Recommended diameters		C 型 Form C												
d6 ¹⁾		C 中心孔 C Centering	d1	d2	d3	d4	d5	t1 +2	t2		t3 +1	t4 =	t5 =	
大于 above	至 to								mm	min.				max.
16	21	C 6	M6	5	6.4	9.6	10.5	16	20	22	5	2.8	0.4	
21	24	C 8	M8	6.8	8.4	12.2	13.2	19	25	28	6	3.3	0.4	
24	30	C 10	M10	8.5	10.5	14.9	16.3	22	30	34	7.5	3.8	0.6	
30	38	C 12	M12	10.2	13	18.1	19.8	28	37	42	9.5	4.4	0.7	
38	50	C 16	M16	14	17	23	25.3	36	45	50	12	5.2	1.0	
50	85	C 20	M20	17.5	21	28.4	31.3	42	53	59	15	6.4	1.3	
85	130	C 24	M24	21	25	34.2	38	50	63	68	18	8	1.6	
130*	225*	C 30	M30*	26.5	31	44	48	60	77	83	17	11	1.9	
225*	320*	C 36	M36*	32	37	55	60	74	93	99	22	15	2.3	
220*	500*	C 42	M42*	37.5	43	65	71	84	105	111	26	19	2.7	

1) 工件加工后最终尺寸 1) Diameter of the finished work piece

*) 不是根据 GB145-1985 确定的尺寸 *) Dimensions not acc. to GB145-1985

齿轮箱 Gear Units

选择 ISO 配合精度 Selection of ISO fits

平键和键槽 Parallel keys keyways

选择 ISO 配合精度 Selection of ISO fits			
选择 ISO 配合精度 Selection of ISO fits	轴 Shaft d		轴公差 Shaft tolerance
	大于 Above mm	至 To mm	
轴公差根据 OMITER 标准确定 acc. To OMITER standard		50	k6
	50		m6
			孔公差 Bore tolerance H7

对于重载工件条件, 如带载反向回转, 建议采用比较紧密的配合, 轮毂键槽宽度亦应选择 ISO P9 公差级别。
For heavy-duty operating conditions, e.g. reversing under load, it is recommended that a tighter fit and for the hub keyway width the ISO P9 tolerance is selected.


平键 parallel keys					
直径 Diameter d		宽度 1) Width 1) b 1) mm	高度 Height h mm	轴键槽深度 Depth of key- way in shaft t1 mm	轮毂槽深度 Depth of key- way in hub d+t2 GB/T1095-1979 mm
大于 Above mm	至 To mm				
17	22	6	6	3.5	d+2.8
22	30	8	7	4	d+3.3
30	38	10	8	5	d+3.3
38	44	12	8	5	d+3.3
44	50	14	9	5.5	d+3.8
50	58	16	10	6	d+4.3
58	65	18	11	7	d+4.4
65	75	20	12	7.5	d+4.9
75	85	22	14	9	d+5.4
85	95	25	14	9	d+5.4
95	110	28	16	10	d+6.4
110	130	32	18	11	d+7.4
130	150	36	20	12	d+8.4
150	170	40	22	13	d+9.4
170	200	45	25	15	d+10.4
200	230	50	28	17	d+11.4
230	260	56	32	20	d+12.4
260	290	63	32	20	d+12.4
290	330	70	36	22	d+14.4
330	380	80	40	25	d+15.4
380	440	90	45	28	d+17.4

平键紧固方式, 采用无锥度联接。
Drive type fastening without taper action

平键和键槽根据 GB / T1095-1979 标准确定
Parallel key and keyway acc. to GB/T1095-1979

1) 重载工作条件下轮毂平键键槽宽度 b 的公差带应按 ISO JS9 或 ISO P9 确定。
1) The tolerance zone for the hub keyway width b for parallel keys is ISO JS9, or ISO P9 for heavy-duty operating conditions.


齿轮箱 Gear Units 带胀紧盘的空心轴 Hollow Shaft For Shrink Disk
 类型 Types H2, H3, H4, B3, B4 规格 Sizes 3...26

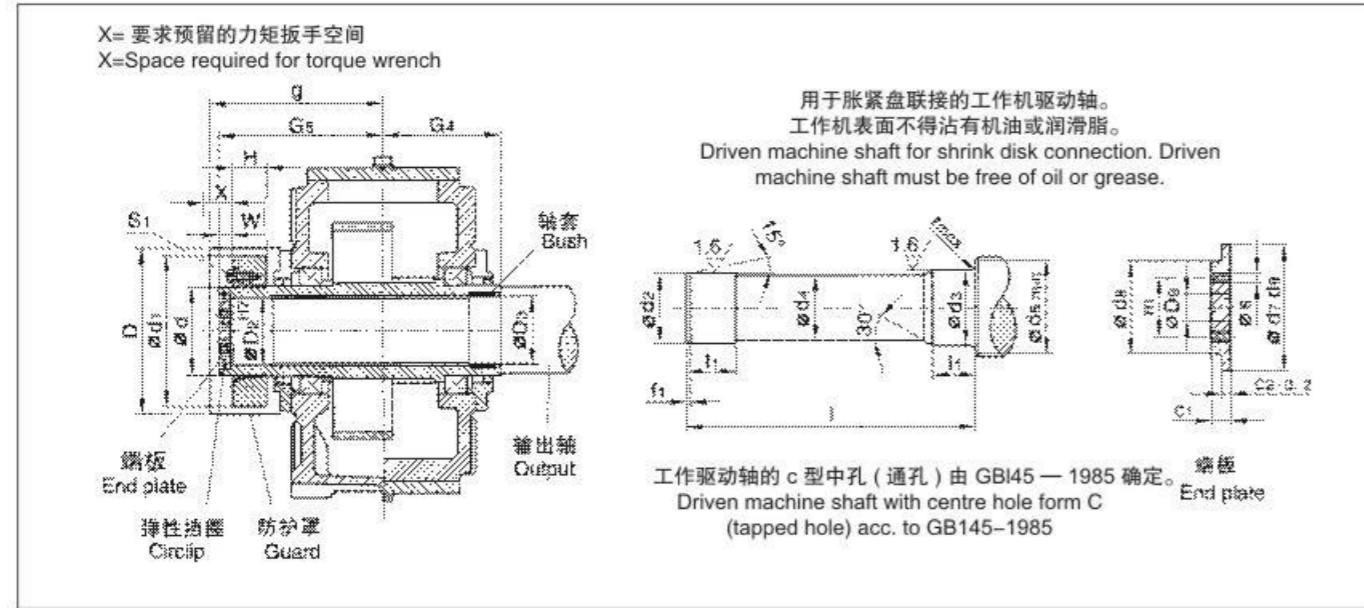

齿轮箱规格 Gear units size	类型 H2, H3, H4, B3, B4 Type H2, H3, H4, B3, B4																												
	工作机驱动轴 ²⁾ Driven machine shaft										端板 End plate				弹性挡圈 Ring Circclip		空心轴 Hollow shaft				胀紧盘 ¹⁾ Shrink disk				螺钉 Screw				
	d ₂	d ₃	d ₄	d ₅	f ₁	l	r	c ₁	c ₂	d ₄	d ₅	D ₂	m	s	数量 Qty.	GB89/3.2-86	D2	D3	G4	G5	类型 Type	d	d1	H	W	s1	D	g	
3	70 g ₆	70 g ₆	69.5	80	4	286	38	2	17	7	75	55	22	40	M8	2	75 × 2.5	70	70	125	180	90-32	90	155	38	20	M10		
4	85 g ₆	85 h ₆	84.5	95	4	326	48	2	17	7	90	70	22	50	M8	2	90 × 3	85	85	140	205	110-32	110	185	49	20	M12		
5	100 g ₆	100 h ₆	99.5	114	4	383	53	2	20	8	105	80	26	55	M10	2	105 × 4	100	100	165	240	125-32	125	215	53	20	M12		
6	110 g ₆	110 h ₆	109.5	124	5	383	58	3	20	8	115	85	26	60	M10	2	115 × 4	110	110	165	240	140-32	140	230	58	20	M14		
7	120 g ₆	120 h ₆	119.5	134	5	453	68	3	20	8	125	90	26	65	M12	2	125 × 4	120	120	195	280	155-32	155	263	62	23	M14		
8	130 g ₆	130 h ₆	129.5	145	5	458	73	3	20	8	135	100	26	70	M12	2	135 × 4	130	130	195	285	165-32	165	290	68	23	M16		
9	140 g ₆	145 m ₆	139.5	160	6	539	82	4	23	10	150	110	33	80	M12	2	150 × 4	140	145	235	330	175-32	175	300	68	28	M16		
10	150 g ₆	155 m ₆	149.5	170	6	559	92	4	23	10	160	120	33	90	M12	2	160 × 4	150	155	235	350	200-32	200	340	85	28	M16		
11	165 f ₆	170 m ₆	164.5	185	7	644	112	4	23	10	175	130	33	90	M12	2	175 × 4	165	170	270	400	220-32	220	370	103	30	M20		
12	180 f ₆	185 m ₆	179.5	200	7	649	122	4	23	10	190	140	33	100	M16	2	190 × 4	180	185	270	405	240-32	240	405	107	30	M20		
13	190 f ₆	195 m ₆	189.5	213	7	789	137	5	23	10	200	150	33	110	M16	2	200 × 4	190	195	335	480	260-32	260	430	119	30	M20		
14	210 f ₆	215 m ₆	209.5	233	8	784	147	5	28	14	220	170	33	130	M16	2	220 × 5	210	215	335	480	280-32	280	460	132	30	M20		
15	230 f ₆	235 m ₆	229.5	253	8	899	157	5	28	14	240	180	39	140	M16	2	240 × 5	230	235	380	550	300-32	300	485	140	35	M24		
16	240 f ₆	245 m ₆	239.5	263	8	899	157	5	28	14	250	190	39	150	M20	2	250 × 5	240	245	380	550	320-32	320	520	140	35	M24		
17	250 f ₆	260 m ₆	249.5	278	8	982	177	5	30	14	265	200	39	150	M20	2	265 × 5	250	260	415	600	340-32	340	570	155	35	M24		
18	280 f ₆	285 m ₆	279.5	306	9	982	177	5	30	14	290	210	39	160	M20	2	290 × 5	280	285	415	600	360-32	360	590	162	35	M24		
19	285 f ₆	295 m ₆	284.5	316	9	1100	187	5	32	15	300	220	39	170	M24	2	300 × 5	285	295	465	670	380-32	380	640	166	40	M27		
20	310 f ₆	315 m ₆	309.5	336	9	1100	187	5	32	15	320	230	39	180	M24	2	320 × 6	310	315	465	670	390-32	390	650	166	40	M27		
21	330 f ₆	335 m ₆	329	358	9	1160	205	5	40	20	340	250	45	190	M24	2	340 × 6	330	335	490	715	420-32	420	670	186	45	M27		
22	340 f ₆	345 m ₆	339	368	9	1170	215	5	40	20	350	260	45	200	M24	2	350 × 6	340	345	490	725	440-32	440	720	194	45	M27		
23																													
24																													
25																													
26																													

- 1) 胀紧盘不在我们的供货范围之内。如有需要的话，请另行订货。
Shrink disk does not belong to our scope of supply. Please order separately, if required.
- 2) 工作机驱动轴材质：60或强度更高的钢。根据用户要求，胀紧盘可布置在工作机侧。工作机驱动轴尺寸函索即复。
Material of driver machine shaft: 60 or higher strength. Shrink disk on machine side on request. Shrink disk is supplied as loose item. Dimensions of machine shaft on request.


齿轮箱 Gear Units 带胀紧盘联接的空心轴 Hollow Shaft For Shrink Disk
 类型 Types B2D 规格 Sizes 2...18

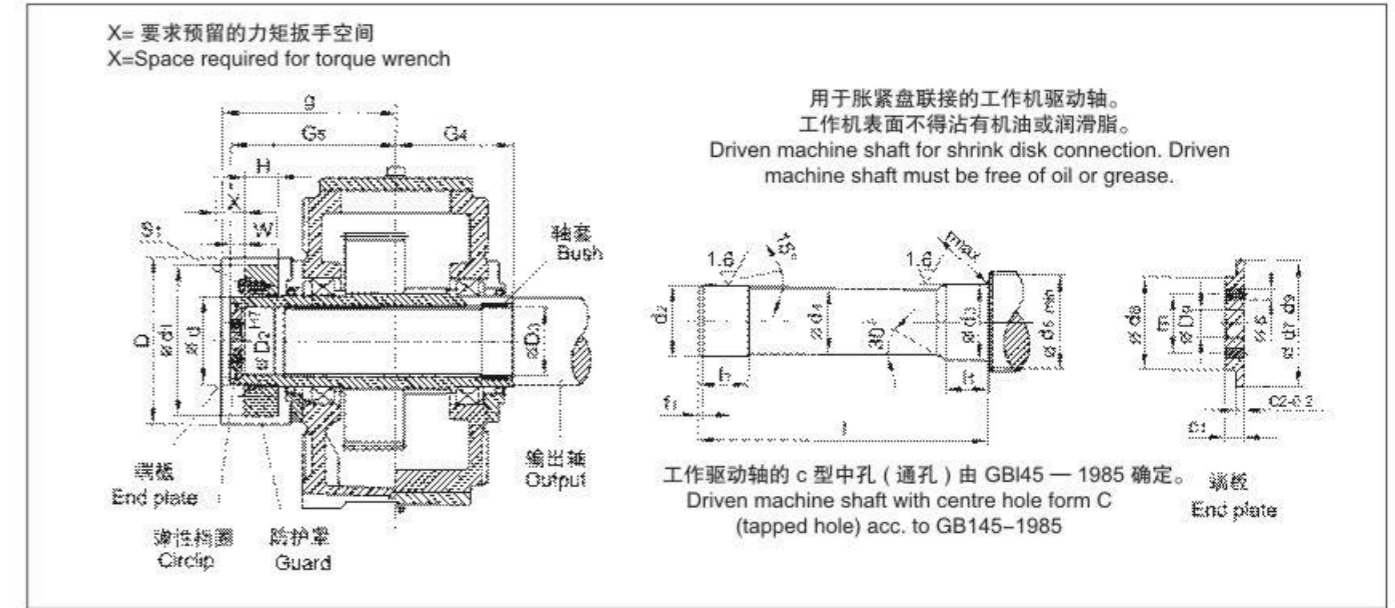

齿轮箱规格 Gear units size	类型 B2D Type B2D																												
	工作机驱动轴 ²⁾ Driven machine shaft										端板 End plate				弹性挡圈 Ring Circclip		空心轴 Hollow shaft				胀紧盘 ¹⁾ Shrink disk				螺钉 Screw		防护罩 Guard		
	d ₂	d ₃	d ₄	d ₅	f ₁	l	r	c ₁	c ₂	d ₄	d ₅	D ₂	m	s	数量 Qty.	GB89/3.2-86	D2	D3	G4	G5	类型 Type	d	d1	H	W	s1	D	g	
2	60 g ₆	60 g ₆	59.5	70	3	300	36	2	13	6	65	47	22	35	M6	2	65 × 2.5	60	60	135	180	80-32	80	141	31	16	M10	180	200
3	70 g ₆	70 h ₆	69.5	80	4	326	38	2	17	7	75	55	22	40	M8	2	75 × 2.5	70	70	145	200	90-32	90	155	38	20	M10	200	220
4	85 g ₆	85 h ₆	84.5	95	4	386	48	2	17	7	90	70	22	50	M8	2	90 × 3	85	85	170	235	110-32	110	185	49	20	M12	235	250
5	100 g ₆	100 h ₆	99.5	114	5	453	53	2	20	8	105	80	26	55	M10	2	105 × 4	100	100	200	275	125-32	125	215	53	20	M12	275	285
6	110 g ₆	110 h ₆	109.5	124	5	453	58	3	20	8	115	85	26	60	M10	2	115 × 4	110	110	200	275	140-32	140	230	58	20	M14	285	285
7	120 g ₆	120 h ₆	119.5	134	5	533	68	3	20	8	125	90	26	65	M12	2	125 × 4	120	120	235	320	155-32	155	263	62	23	M14	330	335
8	130 g ₆	130 h ₆	129.5	145	6	538	73	3	20	8	135	100	26	70	M12	2	135 × 4	130	130	235	325	165-32	165	290	68	23	M16	340	340
9	140 g ₆	145 m ₆	139.5	160	6	609	82	4	23	10	150	110	33	80	M12	2	150 × 4	140	145	270	365	175-32	175	300	68	28	M16	360	380
10	150 g ₆	155 m ₆	149.5	170	6	629	92	4	23	10	160	120	33	90	M12	2	160 × 4	150	155	270	385	200-32	200	340	85	28	M16	395	400
11	165 f ₆	170 m ₆	164.5	185	7	744	112	4	23	10	175	130	33	90	M12	2	175 × 4	165	170	320	450	220-32	220	370	103	30	M20	435	470
12	180 f ₆	185 m ₆	179.5	200	7	749	122	4	23	10	190	140	33	100	M16	2	190 × 4	180	185	320	455	240-32	240	405	107	30	M20	450	470
14	210 f ₆	215 m ₆	209.5	233	8	894	147	5	28	14	220	170	33	130	M16	2	220 × 5	210	215	390	535	280-32	280	460	132	30	M20	525	555
16	240 f ₆	245 m ₆	239.5	263	8	1039	157	5	28	14	250	190	39	150	M20	2	250 × 5	240	245	450	620	320-32	320	520	140	35	M24	595	645
18	280 f ₆	285 m ₆	279.5	306	9	1177	177	5	30	14	290	210	39	160	M20	2	290 × 5	280	285	510	700	360-32	360	590	162	35	M24	635	725

- 1) 胀紧盘不在我们的供货范围之内。如有需要的话，请另行订货。
Shrink disk does not belong to our scope of supply. Please order separately, if required.
- 2) 工作机驱动轴材质：60或强度更高的钢。根据用户要求，胀紧盘可布置在工作机侧。工作机驱动轴尺寸函索即复。
Material of driver machine shaft: 60 or higher strength. Shrink disk on machine side on request. Shrink disk is supplied as loose item. Dimensions of machine shaft on request.


齿轮箱 Gear Units 带平键联接的空心轴 Hollow Shafts for Parallel Key Connections
 类型 Types H2, H3, H4, B3, B4 规格 Sizes 2...18

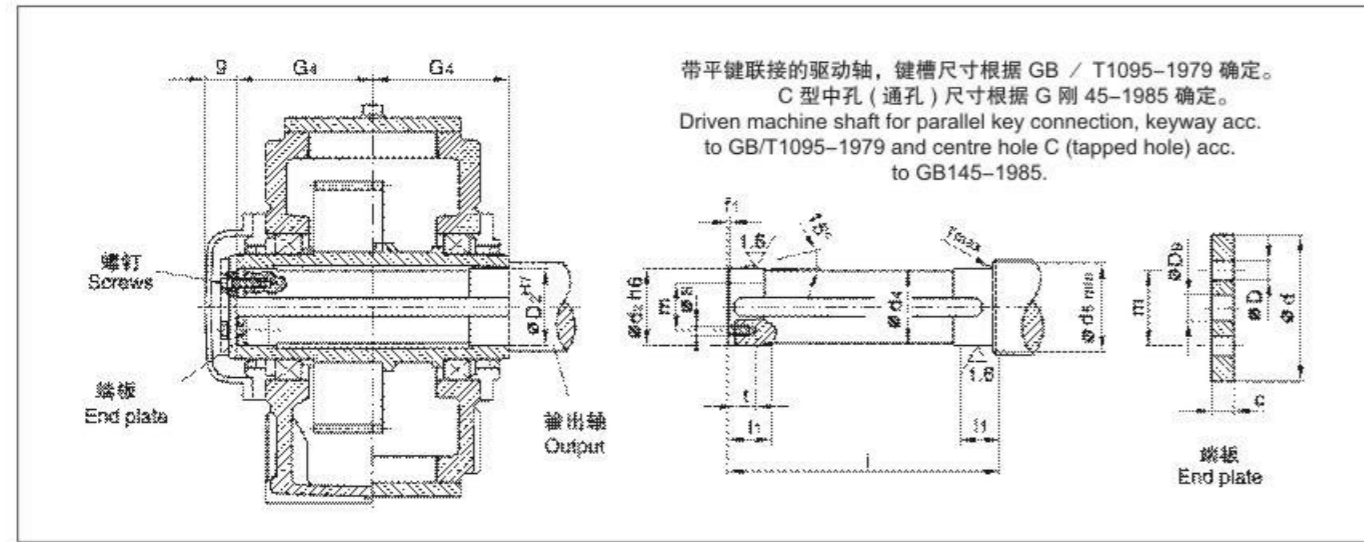

齿轮箱规格 Gear units size	类型 H2, H3, H4, B3, B4 Type H2, H3, H4, B3, B4																		
	工作机驱动轴 1) Driven machine shaft										端板 End plate				螺钉 Screw		空心轴 Hollow shaft		
	d ₂	d ₄	d ₅	f ₁	l ₁	l ₂	r	s	t	c	D	D ₂	d	m	规格 Size	数量 Qty.	D2	G4	g
	mm																		
3	65	64.5	73	4	248	30	1.2	M10	18	8	11	18	78	45	M10 × 25	2	65	125	35
4	80	79.5	88	4	278	35	1.2	M10	18	10	11	22	100	60	M10 × 25	2	80	140	35
5	95	94.5	105	5	328	40	1.6	M10	18	10	11	26	120	70	M10 × 25	2	95	165	40
6	105	104.5	116	5	328	45	1.6	M10	18	10	11	26	120	70	M10 × 25	2	105	165	40
7	115	114.5	126	5	388	50	1.6	M12	20	12	13.5	26	140	80	M12 × 30	2	115	195	40
8	125	124.5	136	6	388	55	2.5	M12	20	12	13.5	26	150	85	M12 × 30	2	125	195	40
9	135	134.5	147	6	467	60	2.5	M12	20	12	13.5	33	160	90	M12 × 30	2	135	235	45
10	150	149.5	162	6	467	65	2.5	M12	20	12	13.5	33	185	110	M12 × 30	2	150	235	45
11	165	164.5	177	7	537	70	2.5	M16	28	15	17.5	33	195	120	M16 × 40	2	165	270	45
12	180	179.5	192	7	537	75	2.5	M16	28	15	17.5	33	220	130	M16 × 40	2	180	270	45
13	190	189.5	206	7	667	80	3	M16	28	18	17.5	33	230	140	M16 × 40	2	190	335	45
14	210	209.5	226	8	667	85	3	M16	28	18	17.5	33	250	160	M16 × 40	2	210	335	45
15	230	229.5	248	8	756	100	3	M20	38	25	22	39	270	180	M20 × 55	4	230	380	60
16	240	239.5	258	8	756	100	3	M20	38	25	22	39	280	180	M20 × 55	4	240	380	60
17	250	249.5	270	8	826	110	4	M20	38	25	22	39	300	190	M20 × 55	4	250	415	60
18	275	274.5	295	9	826	120	4	M20	38	25	22	39	330	210	M20 × 55	4	275	415	60

1) 工作机驱动轴材质: 60或强度更高的钢。平键不在我们的供货范围之内。如果需要的话, 请另行订货。
 Material of driven machine shaft: 60 or higher strength. Parallel key does not belong to our scope of supply.
 Please order separately, if required.

齿轮箱 Gear Units 带胀平键联接的空心轴 Hollow Shafts for Parallel Key Connections
 类型 Types B2H 规格 Sizes 2...18

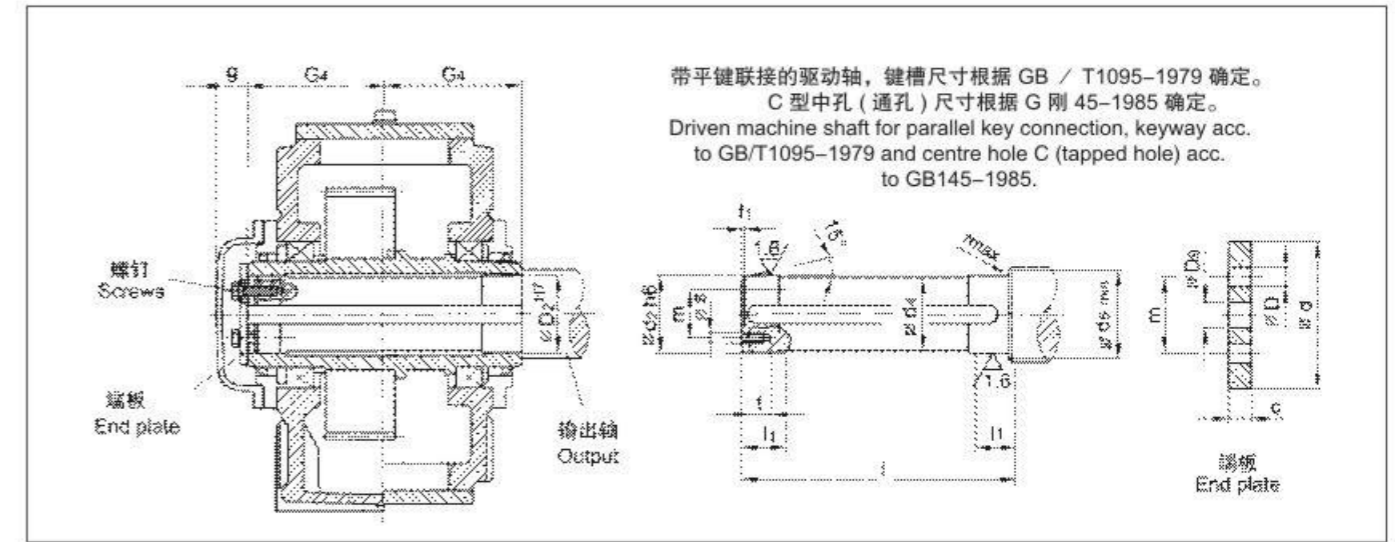

齿轮箱规格 Gear units size	类型 B2H Type B2H																		
	工作机驱动轴 1) Driven machine shaft										端板 End plate				螺钉 Screw		空心轴 Hollow shaft		
	d ₂	d ₄	d ₅	f ₁	l ₁	l ₂	r	s	t	c	D	D ₂	d	m	规格 Size	数量 Qty.	D2	G4	g
	mm																		
2	55	54.5	63	3	268	30	1.2	M8	15	8	9	18	70	40	M8 × 20	2	55	135	35
3	65	64.5	73	4	288	30	1.2	M10	18	8	11	18	78	45	M10 × 25	2	65	145	35
4	80	79.5	88	4	338	35	1.2	M10	18	10	11	22	100	60	M10 × 25	2	80	170	35
5	95	94.5	105	5	398	40	1.6	M10	18	10	11	26	120	70	M10 × 25	2	95	200	40
6	105	104.5	116	5	398	45	1.6	M10	18	10	11	26	120	70	M10 × 25	2	105	200	40
7	115	114.5	126	5	468	50	1.6	M12	20	12	13.5	26	140	80	M12 × 30	2	115	235	40
8	125	124.5	136	6	468	55	2.5	M12	20	12	13.5	26	150	85	M12 × 30	2	125	235	40
9	135	134.5	147	6	537	60	2.5	M12	20	12	13.5	33	160	90	M12 × 30	2	135	270	45
10	150	149.5	162	6	537	65	2.5	M12	20	12	13.5	33	185	110	M12 × 30	2	150	270	45
11	165	164.5	177	7	637	70	2.5	M16	28	15	17.5	33	195	120	M16 × 40	2	165	320	45
12	180	179.5	192	7	637	75	2.5	M16	28	15	17.5	33	220	130	M16 × 40	2	180	320	45
14	210	209.5	226	8	777	85	3	M16	28	18	17.5	33	250	160	M16 × 40	2	210	390	45
16	240	239.5	258	8	896	100	3	M20	38	25	22	39	280	180	M20 × 55	4	240	450	60
18	275	274.5	295	9	1016	120	4	M20	38	25	22	39	330	210	M20 × 55	4	275	510	60

1) 工作机驱动轴材质: 60或强度更高的钢。平键不在我们的供货范围之内。如果需要的话, 请另行订货。
 Material of driven machine shaft: 60 or higher strength. Parallel key does not belong to our scope of supply.
 Please order separately, if required.

H/B工业齿轮箱 GEAR UNITS

平行轴齿轮箱 Helical Gear Units 实际速比 Actual Ratios
 类型 Types H1..., H2..., H3..., H4.. 规格 Sizes 1...13

IN	实际速比 Actual Ratios 齿轮箱规格 Gear unit size												
	1	2	3	4	5	6	7	8	9	10	11	12	13
1.25	1.250		1.243		1.256		1.263		1.270				
1.4	1.415		1.371		1.378		1.389		1.400				
1.6	1.605		1.594		1.588		1.606		1.625		1.636		1.588
1.8	1.829		1.829		1.839		1.774		1.800		1.806		1.839
2.0	2.000		2.000		2.034		1.966		2.000		2.000		2.034
2.24	2.194		2.194		2.259		2.308		2.231		2.222		2.259
2.5	2.536		2.536		2.520		2.583		2.500		2.480		2.520
2.8	2.808		2.808		2.826		2.800		2.741		2.783		2.826
3.15	3.125		3.125		3.190		3.130		3.208		3.080		3.208
3.55	3.500		3.500		3.591		3.524		3.591		3.478		3.591
4.0	3.950		3.950		4.050		4.000		4.050		3.905		4.050
4.5	4.476		4.435		4.619		4.400		4.381		4.421		4.619
5.0	5.053		4.952		4.900		4.905		4.947		5.150		4.900
5.6	5.571		5.579		5.556		5.526		5.684		5.474		5.556
6.3			6.232	6.319	6.286		6.088		6.260		6.246		6.410
7.1			7.099	6.857	7.213		7.048		7.247		6.900		7.100
8.0			7.765	7.778	7.889	7.792	7.799	7.676	8.018	7.848	7.644	7.941	7.889
9.0			8.516	8.485	8.652	8.940	8.660	8.887	8.904	9.085	8.974	8.772	8.799
10			9.845	9.722	10.002	9.778	9.660	9.833	9.932	10.053	10.046	9.718	9.861
11.2			10.900	10.694	11.075	10.724	10.648	10.920	11.138	11.163	10.889	11.410	10.811
12.5			12.132	12.444	12.326	12.397	11.807	12.180	12.574	12.452	12.174	12.773	12.655
14			13.588	13.865	13.806	13.726	13.939	13.426	14.152	13.964	13.704	13.844	14.164
16			15.335	15.556	15.581	15.278	15.717	14.887	15.962	15.765	15.556	15.478	15.975
18			17.378	17.602	17.493	17.111	17.598	17.576	18.204	17.743	17.111	17.423	17.280
20			19.616	19.444	19.534	19.311	19.742	19.817	19.312	20.012	19.074	19.778	19.515
22.4			21.630	22.037	22.006	21.681	20.982	22.189	21.895	22.824	21.491	21.756	22.020
25					25.011	24.212	25.540	24.892	25.439	24.212	24.706	24.251	25.372
28					28.490	27.275	27.711	26.456	29.187	27.451	28.602	27.325	29.373
31.5					31.161	30.999	31.433	32.202	31.924	31.894	31.648	31.412	32.501
35.5					34.177	35.312	34.291	34.940	35.013	36.593	35.144	36.366	36.092
40					39.508	38.622	39.292	39.633	40.474	40.024	39.200	40.238	40.257
45					43.745	42.360	43.221	43.236	44.816	43.897	43.210	44.683	45.147
50					48.689	48.967	50.293	49.542	49.881	50.744	47.911	49.840	50.968
56					54.532	54.220	56.033	54.496	55.866	56.187	56.566	54.938	57.365
63					61.543	60.347	62.867	63.413	63.049	62.537	63.778	60.916	64.699
71					69.742	67.589	71.139	70.651	70.787	70.041	71.414	71.919	73.789
80					78.723	76.279	78.583	79.267	79.049	79.046	80.111	81.089	78.278
90					86.806	86.440	89.061	89.696	89.050	88.748	85.146	90.798	88.750
100						97.572	101.554	99.083	101.210	99.106	103.639	101.856	103.114
112						107.590	115.256	112.294	115.290	111.645	112.450	108.257	118.306
125							125.733	128.046	126.098	126.890	127.556	131.769	129.398
140							143.985	145.322	138.301	144.542	139.152	142.973	141.920
160							158.251	158.533	159.874	158.093	159.444	162.178	164.058
180							174.630	181.546	177.022	173.392	175.389	176.921	181.654
200							193.629	199.533	197.028	200.439	204.089	202.722	202.184
224							228.606	220.185	220.671	221.938	227.382	222.994	226.446
250							257.753	244.141	249.043	247.020	255.111	259.484	255.560
280							288.615	288.242	282.219	276.663	288.678	289.100	286.925
315							305.352	324.993	318.563	312.234	318.889	324.356	320.413
355							344.112	363.906	351.273	353.827	361.407	367.034	360.951
400								385.010		399.393		405.444	
450								433.881		440.402		459.504	

H/B工业齿轮箱 GEAR UNITS

平行轴齿轮箱 Helical Gear Units 实际速比 Actual Ratios
 类型 Types H1..., H2..., H3..., H4.. 规格 Sizes 14...26

IN	实际速比 Actual Ratios i 齿轮箱规格 Gear unit size													
	14	15	16	17	18	19	20	21	22	23	24	25	26	
														1.25
														1.4
														1.6
														1.8
		2.000		2.000		1.967								2.0
		2.231		2.250		2.296								2.24
		2.481		2.481		2.560								2.5
		2.760		2.760		2.870								2.8
		3.087		3.087		3.238								3.15
		3.476		3.476		3.450								3.55
		3.947		3.947		3.944								4.0
		4.579		4.526		4.400								4.5
		5.100		4.900		4.950								5.0
		5.778		4.556		5.700								5.6
		6.449		6.154		6.410		6.500		6.306		6.280		6.3
		7.120	7.316	7.125	7.147	7.100	7.312	7.200	7.265	7.038	7.059	6.915	7.232	7.1
	7.944	7.882	8.076	7.884	8.274	7.889	8.100	8.000	8.047	7.882	7.878	7.635	7.963	8.0
	8.800	8.758	8.941	8.755	9.155	8.799	9.000	8.923	8.941	8.868	8.824	8.915	8.792	9.0
	9.778	9.774	9.935	9.765	10.167	9.788	10.038	9.926	9.973	9.780	9.926	9.939	10.266	10
	10.906	10.967	11.087	10.951	11.340	10.887	11.167	11.040	11.094	10.878	10.948	11.141	11.445	11.2
	12.222	12.139	12.440	12.432	12.717	12.176	12.420	12.348	12.339	12.166	12.176	12.571	12.829	12.5
	13.399	13.708	13.769	13.915	14.438	13.712	13.891	13.905	133.801	13.700	13.619	13.394	14.476	14
	15.685	15.389	15.550	15.694	16.159	15.570	15.643	15.789	15.541	15.557	15.336	15.314	15.424	16
	17.556	17.424	17.457	17.899	18.225	18.061	17.763	18.316	17.647	17.839	17.415	17.082	17.634	18
	19.800	20.297	19.765	18.988	20.786	20.117	20.605	20.400	20.471	19.312	19.969	19.218	19.671	20
	21.418	21.374	23.024	20.930	22.050	21.782	22.950	22.368	22.800	22.039	21.618	21.108	22.129	22.4
	24.187	24.716	24.245	24.202	24.306	25.283	24.850	25.837	25.000	25.457	24.671	24.322	24.306	25
	27.292	27.304	28.036	26.736	28.106	28.006	28.844	28.523	28.877	28.103	28.497	28.157	28.007	28
	31.447	30.248	30.971	29.619	31.048	31.117	31.950	31.579	31.879	31.115	31.459	31.156	32.404	31.5
	36.406	35.514	34.311	34.776	34.397	34.708	35.500	35.088	35.294	34.572	34.830	34.598	35.876	35.5
	40.283	39.756	40.284	38.929	40.385	38.897	39.596	39.158	39.216	38.582	38.700	38.591	39.840	40
	44.733	43.090	45.096	42.194	45.208	42.642	44.375	43.936	43.765	43.290	43.189	43.278	44.438	45
	49.896	48.175	48.878	47.174	49.000	49.917	48.648	48.632	49.105	47.916	48.459	49.132	49.835	50
	55.957	54.229	54.647	53.102	54.783	55.870	56.948	54.920	54.353	54.112	53.638	54.990	56.576	56
	63.171	61.557	61.514	60.278	61.667	63.013	63.739	61.654	61.381	60.747	60.573	62.021	63.322	63
	71.100	67.713	69.826	66.306	70.000	68.162	71.888	69.806	68.908	68.780	68.001	70.735	71.418	71
	80.190	75.481	76.809	73.912	77.000	76.974	77.762	81.316	78.019	80.120	76.992	75.037	81.452	80
	91.457	85.046	85.620	83.279	85.833	88.439	87.816	86.427	90.882	85.156	89.687	85.076	86.407	90
	97.020	97.768	96.471	95.735	96.711	100.079	100.895	99.020	96.594	97.564	95.323	100.783	97.967	100
	110.00	113.186	110.901	110.833	111.176	115.862	114.174	109.386	110.670	107.778	109.214	111.637	116.054	112
	127.803	125.238	128.390	122.634	128.710	128.198	132.180	121.182	122.255	119.400	120.647	124.041	128.552	125
	146.633	139.074	142.060	136.183	142.414	142.362	146.							

H/B工业齿轮箱 GEAR UNITS

直交轴齿轮箱 Bevel-helical Gear Units 实际速比 Actual Ratios
 类型 Types B2., B3., B4.. 规格 Sizes 1...13

IN	实际速比 i Actual Ratios i												
	齿轮箱规格 Gear unit size												
	1	2	3	4	5	6	7	8	9	10	11	12	13
5.0	4.980	5.043	4.895	4.936	5.006		4.865		5.002		4.897		4.967
5.6	5.566	5.636	5.471	5.480	5.488		5.333		5.483		5.534		5.613
6.3	6.455	6.526	6.334	6.296	6.386	6.205	6.206	6.135	6.381	6.271	6.296	6.226	6.386
7.1	7.068	7.158	6.947	6.959	7.058	6.802	6.860	6.725	7.053	6.875	7.037	7.036	7.138
8.0	7.668	7.865	7.536	7.549	7.657	7.915	7.880	7.825	8.101	8.000	7.994	8.005	8.108
9.0	8.829	8.941	8.678	8.693	8.817	8.749	8.569	8.649	8.810	8.842	8.693	8.947	8.817
10	10.027	10.154	9.855	9.872	10.108	9.490	9.823	9.935	10.099	10.157	9.965	10.164	10.108
11.2	10.938	11.077	10.751	10.769	10.923	10.928	10.615	10.804	10.914	11.045	10.769	11.052	10.923
12.5	12.458	12.615	10.244	12.034	12.703	12.528	12.433	12.385	12.554	12.662	12.334	12.670	12.482
14	14.005	14.182	13.765	13.484	13.964	13.538	13.515	13.385	14.137	13.683	13.821	13.692	13.721
16	15.441	15.36	15.176	15.601	15.835	15.826	16.275	15.773	15.952	15.693	15.522	15.888	16.354
18	17.595	17.818	17.294	17.482	17.407	17.307	17.692	17.041	17.963	17.724	17.393	17.570	17.978
20			19.336	19.614	19.645	19.729	19.948	20.648	20.259	19.940	19.744	19.995	20.276
22.4			21.609	21.919	21.654	21.575	22.146	22.308	22.208	22.520	21.643	22.114	22.226
25			25.021	25.380	25.421	24.349	25.446	25.152	25.843	25.400	25.185	25.103	25.864
28			27.442	27.836	27.881	27.211	28.125	27.923	28.563	27.842	27.836	27.517	28.587
31.5			29.769	30.196	30.245	31.508	30.509	32.084	30.985	32.400	31.975	32.021	32.838
35.5			34.279	34.771	34.827	34.557	35.131	35.461	35.679	35.811	34.771	35.392	35.709
40			38.928	39.487	39.551	37.486	39.896	38.468	40.902	38.846	39.861	40.654	40.936
45			42.467	43.077	43.146	43.166	43.523	44.296	44.202	44.732	43.077	44.209	44.238
50			48.365	49.060	49.139	49.021	49.568	50.304	50.341	51.280	49.060	50.681	50.383
56			54.371	55.152	55.240	53.477	55.723	54.877	56.592	55.417	55.152	54.769	56.639
63			59.947	60.808	60.906	60.904	61.438	62.499	62.396	63.114	60.808	62.376	62.448
71			68.312	69.293	69.404	68.467	70.011	70.259	71.102	70.951	69.293	70.121	71.161
80					77.598	75.489	79.267	77.465	79.497	78.228	80.949	77.313	82.118
90					86.720	86.022	88.585	88.274	88.842	89.143	89.869	88.101	90.016
100					100.413	96.178	102.572	99.945	102.869	99.667	103.259	102.921	104.750
112					110.130	107.484	112.498	111.694	112.824	111.384	114.129	114.262	115.777
125					119.466	124.455	122.035	129.330	122.389	128.971	123.804	131.287	125.592
140					137.567	136.499	140.525	141.846	140.933	141.452	142.562	145.106	144.621
160					156.225	148.071	159.585	153.871	160.047	153.443	161.897	157.408	165.791
180					170.427	170.506	174.092	177.184	174.597	176.692	176.615	181.258	179.166
200					194.098	193.631	198.272	201.215	198.847	200.656	201.145	205.841	204.050
224					218.199	211.234	222.891	219.508	223.537	218.898	226.121	224.554	229.386
250					240.578	240.572	245.752	249.995	246.464	249.300	249.313	255.742	252.913
280					274.147	270.443	280.042	281.036	280.855	280.256	284.101	287.497	288.204
315					302.121	298.181	308.618	309.861	309.513	309.000	313.091	316.984	317.612
355						339.788		353.097		352.116		361.214	
400						374.460		389.127		388.046		398.073	
450													

H/B工业齿轮箱 GEAR UNITS

直交轴齿轮箱 Bevel-helical Gear Units 实际速比 Actual Ratios
 类型 Types B2., B3., B4.. 规格 Sizes 14...26

IN	实际速比 i Actual Ratios i													
	齿轮箱规格 Gear unit size													
	14	15	16	17	18	19	20	21	22	23	24	25	26	
5.0		4.963												5.0
5.6		5.609	5.630	5.514										5.6
6.3	6.156	6.340	6.362	6.234										6.3
7.1	6.957	7.132	7.192	7.012	7.239									7.1
8.0	7.915	8.101	8.090	7.965	8.143									8.0
9.0	8.847	8.810	9.190	8.662	9.250									9.0
10	10.049	10.099	9.993	9.930	10.059									10
11.2	10.928	10.914	11.456	10.731	11.531									11.2
12.5	12.528	12.172	12.380	12.770	12.462	12.062		12.256						12.5
14	13.538	13.810	13.382	13.790	14.654	13.709	13.698	13.902	13.719					14
16	15.552	15.215	15.665	16.226	16.014	15.192	15.640	15.436	15.538					16
18	17.007	17.262	17.290	17.522	18.620	17.267	17.252	17.510	17.279					18
20	20.376	19.379	19.581	19.762	20.348	19.607	19.698	19.883	19.570	19.591		19.284		20
22.4	22.282	21.900	21.982	22.333	22.950	22.158	22.368	22.470	22.222	22.139	21.930	21.793	22.206	22.4
25	25.131	24.916	24.842	25.409	25.936	25.048	25.278	25.400	25.113	25.027	24.783	24.635	25.095	25
28	27.548	27.847	28.263	28.398	29.507	28.175	28.576	28.571	28.389	28.151	28.015	27.711	28.368	28
31.5	32.057	31.634	31.588	32.259	32.979	32.005	32.143	32.456	31.933	31.979	31.513	31.478	31.909	31.5
35.5	35.432	34.400	35.883	35.080	37.463	34.804	36.513	35.294	36.275	34.775	35.797	34.231	36.248	35.5
40	40.700	39.435	39.021	40.215	40.738	39.899	39.706	40.461	39.446	39.866	38.927	39.241	39.417	40
45	44.259	42.617	44.732	43.460	46.702	43.117	45.518	43.725	45.221	43.082	44.626	42.407	45.187	45
50	50.737	48.536	48.341	49.496	50.469	49.106	49.190	49.798	48.869	49.065	48.226	48.297	48.833	50
56	54.831	54.562	55.055	55.641	57.479	55.203	56.022	55.981	55.656	55.158	54.624	54.294	55.615	56
63	62.446	60.158	61.892	61.348	64.616	60.865	62.978	61.722	62.567	60.815	61.744	59.863	62.520	63
71	70.200	68.553	68.239	69.909	71.243	69.358	69.438	70.335	68.984	69.301	68.076	68.216	68.933	71
80	77.400	78.131	77.761	76.506	81.184	79.977	79.127	77.639	78.610	76.497	77.575	78.100	78.551	80
90	88.200	85.645	88.626	83.865	88.846	87.670	91.242	87.739	86.772	86.448	85.631	88.260	89.933	90
100	101.780	99.664	97.150	97.593	97.391	102.020	100.017	99.821	98.061	98.353	96.770	100.414	101.633	100
112	111.569	110.155	113.052	107.865	113.333	112.759	116.389	111.565	111.565	109.924	110.097	112.228	115.629	112
125	129.831	126.535	124.952	123.904	125.263	129.526	128.641	126.733	124.690	124.870	123.049	127.487	129.232	125
140	143.498	137.599	143.532	134.739	143.889	140.851	147.769	137.815	141.643	135.788	139.780	138.634	146.803	140
160	155.663	157.741	156.082	154.462	156.471	161.470	160.690	157.989	154.029	155.665	152.002	158.928	159.639	160
180	179.284	170.467	178.930	166.923	179.375	174.496	184.212	170.735	176.576	168.224	174.252	171.749	183.008	180
200	205.487	194.143	193.365	190.107	193.846	198.732	199.073	194.448	190.821	191.588	188.310	195.603	197.772	200
224	222.065	218.249	220.222	213.712	220.769	223.408	226.722	218.592	217.324	215.377	214.464	219.891	225.240	224
250	252.907	240.634	247.566	235.631	248.182	246.322	254.874	241.012	244.309	237.467	241.094	242.444	253.208	250
280	284.310	274.210	272.957	268.510	273.636	280.692	281.015	274.641	269.366	270.602	265.822	276.274	279.178	280
315	313.470	302.191	311.045	295.909	311.818	309.334	320.226	302.666	306.952	298.215	302.913	304.465	318.133	315
355	357.210		342.784		343.636		352.902		338.273		333.823		350.596	355
400	393.660													400
450														450

H/B工业齿轮箱 GEAR UNITS

直交轴齿轮箱 Bevel-helical Gear Units 转动惯量 J1 Mass Moments of Inertia J1 类型 Types B2.., B3.., B4.. 规格 Sizes 1...13

转动惯量 J_2 (单位 kgm^2) 是指相对于齿轮箱输出轴 d_2 的转动惯量, 可按下式计算: $J_2=iN^2 \times J_1$ 。

转动惯量 J_1 (单位 kgm^2) 是指相对于齿轮箱输入轴 d_1 的转动惯量, 输入轴不带风扇。

如果输入轴 d_1 上带有风扇, 则应加上 J_{f1} 。

The mass moment of inertia J_2 in kgm^2 refers to the output shaft d_2 of a gear unit and is calculated with the following. formula: $J_2=iN^2 \times J_1$.

The mass moment of inertia J_1 in kgm^2 refers to the input shaft d_1 of a gear unit without fan.

For shaft d with fan, J_{f1} has to be added.

转动惯量 J1 (单位 kgm^2) 是指相对于减速机输出轴 d_1 的转动惯量 Mass moment of inertia J_1 in kgm^2 referring to shaft d_1													
IN	齿轮箱规格 Gear unit size												
	1	2	3	4	5	6	7	8	9	10	11	12	13
5.0	0.0021	0.0049	0.0314	0.0314	0.0707		0.1988		0.4403		1.2743		2.7700
5.6	0.0019	0.0043	0.0096	0.0262	0.0604		0.1691		0.3744		1.0697		2.3418
6.3	0.0016	0.0035	0.0076	0.0228	0.0495	0.0805	0.1365	0.2276	0.2988	0.4986	0.8428	1.4755	1.8526
7.1	0.0014	0.0033	0.0071	0.0197	0.0420	0.0687	0.1207	0.1931	0.2543	0.4229	0.7257	1.2273	1.6222
8.0	0.0012	0.0027	0.0057	0.0152	0.0321	0.0555	0.0875	0.1542	0.1874	0.3346	0.5250	0.9645	1.1744
9.0	0.0010	0.0023	0.0052	0.0129	0.0295	0.0470	0.0786	0.1352	0.1709	0.2837	0.4753	0.8231	1.0617
10	0.00084	0.0018	0.0039	0.0104	0.0250	0.0363	0.0681	0.0985	0.1456	0.2097	0.4072	0.6005	0.9214
11.2	0.00079	0.0017	0.0037	0.0093	0.0214	0.0327	0.0590	0.0879	0.1241	0.1897	0.3493	0.5392	0.7959
12.5	0.00054	0.0012	0.0028			0.0274		0.0752		0.1599		0.4557	
14	0.00043	0.00098	0.0023			0.0235		0.0650		0.1363		0.3909	
16	0.00040	0.00082	0.0019										
18	0.00031	0.00063	0.0015										
J_{f1}	0.005	0.006	0.010	0.020	0.045	0.045	0.100	0.100	0.100	0.100	0.290	0.290	0.690
12.5				0.0073	0.0159		0.0445		0.0995		0.2740		0.6152
14				0.0071	0.0156		0.0436		0.0967		0.2671		0.6026
16				0.0060	0.0136	0.0174	0.0368	0.0487	0.0842	0.1084	0.2344	0.3029	0.5141
18				0.0059	0.0133	0.0168	0.0363	0.0474	0.0825	0.1040	0.2300	0.2925	0.5068
20			0.0023	0.0055	0.0124	0.0145	0.0339	0.0393	0.0770	0.0897	0.2146	0.2527	0.4742
22.4			0.0021	0.0047	0.0105	0.0141	0.0282	0.0385	0.0657	0.0870	0.1822	0.2461	0.4026
25			0.0017	0.0039	0.0083	0.0130	0.0243	0.0356	0.0534	0.0805	0.1462	0.2270	0.3196
28			0.0015	0.0036	0.0077	0.0111	0.0209	0.0296	0.0452	0.0687	0.1286	0.1926	0.2714
31.5			0.0013	0.0029	0.0062	0.0087	0.0162	0.0253	0.0348	0.0555	0.0936	0.1539	0.2004
35.5			0.0011	0.0024	0.0055	0.0080	0.0137	0.0218	0.0315	0.0470	0.0837	0.1349	0.1819
40			0.00089	0.0019	0.0041	0.0065	0.0110	0.0169	0.0265	0.0363	0.0720	0.0983	0.1539
45			0.00083	0.0018	0.0039	0.0057	0.0098	0.0142	0.0227	0.0326	0.0626	0.0877	0.1312
50			0.00057	0.0013	0.0030	0.0043	0.0081	0.0114	0.0178	0.0274	0.0469	0.0751	0.1028
56			0.00046	0.0011	0.0025	0.0040	0.0068	0.0102	0.0146	0.0235	0.0384	0.0649	0.0853
63			0.00042	0.00087	0.0021	0.0031	0.0059	0.0084	0.0124	0.0184	0.0326	0.0489	0.0725
71			0.00033	0.00067	0.0016	0.0026	0.0047	0.0070	0.0100	0.0150	0.0262	0.0400	0.0585
80						0.0021		0.0061		0.0128		0.0339	
90						0.0016		0.0048		0.0102		0.0272	
J_{f1}			0.005	0.006	0.010	0.010	0.020	0.045	0.045	0.100	0.100	0.290	
80					0.0024		0.0057		0.0129		0.0350		0.0795
90					0.0021		0.0049		0.0110		0.0291		0.0678
100					0.0018	0.0024	0.0040	0.0058	0.0086	0.0131	0.0250	0.0358	0.0549
112					0.0016	0.0022	0.0037	0.0049	0.0079	0.0111	0.0215	0.0297	0.0465
125					0.0013	0.0018	0.0030	0.0040	0.0064	0.0087	0.0167	0.0254	0.0359
140					0.0011	0.0016	0.0025	0.0038	0.0057	0.0081	0.0141	0.0219	0.0323
160					0.00091	0.0013	0.0020	0.0031	0.0043	0.0065	0.0113	0.0170	0.0271
180					0.00085	0.0011	0.0018	0.0025	0.0040	0.0058	0.0101	0.0143	0.0233
200					0.00058	0.00092	0.0013	0.0020	0.0031	0.0043	0.0083	0.0114	0.0182
224					0.00047	0.00086	0.0011	0.0018	0.0025	0.0041	0.0070	0.0102	0.0149
250					0.00043	0.00059	0.00089	0.0014	0.0021	0.0031	0.0060	0.0084	0.0127
280					0.00033	0.00047	0.00069	0.0011	0.0016	0.0026	0.0048	0.0071	0.0102
315					0.00028	0.00043	0.00058	0.00091	0.0014	0.0021	0.0040	0.0061	0.0081
355						0.00034		0.00069		0.0016		0.0048	
400						0.00028		0.00059		0.0014		0.0041	

H/B工业齿轮箱 GEAR UNITS

直交轴齿轮箱 Bevel-helical Gear Units 转动惯量 J1 Mass Moments of Inertia J1 类型 Types B2.., B3.., B4.. 规格 Sizes 14...26

转动惯量 J_2 (单位 kgm^2) 是指相对于齿轮箱输出轴 d_2 的转动惯量, 可按下式计算: $J_2=iN^2 \times J_1$ 。

转动惯量 J_1 (单位 kgm^2) 是指相对于齿轮箱输入轴 d_1 的转动惯量, 输入轴不带风扇。

如果输入轴 d_1 上带有风扇, 则应加上 J_{f1} 。

The mass moment of inertia J_2 in kgm^2 refers to the output shaft d_2 of a gear unit and is calculated with the following. formula: $J_2=iN^2 \times J_1$.


The mass moment of inertia J_1 in kgm^2 refers to the input shaft d_1 of a gear unit without fan.

For shaft d with fan, J_{f1} has to be added.

转动惯量 J1 (单位 kgm^2) 是指相对于减速机输出轴 d_1 的转动惯量 Mass moment of inertia J_1 in kgm^2 referring to shaft d_1														
IN	齿轮箱规格 Gear unit size													
	14	15	16	17	18	19	20	21	22	23	24	25	26	
	6.1753													5.0
	5.3415	6.6007	10.3549											5.6
	3.0962	4.4466	5.6746	8.5744										6.3
	2.5972	3.7296	4.7073	7.1324	9.0369									7.1
	2.0500	2.7508	3.9356	5.0109	7.4979									8.0
	1.7802	2.5048	2.9105	4.5186	5.2942									9.0
	1.2968	2.1468	2.6398	3.8518	4.7581									10
	1.1653	1.7964	2.2495	3.3164	4.0340									11.2
	1.0001		1.8843		3.4725									12.5
	0.8634													14
														16
														18
	0.690	0.690	0.690	0.690	0.690									JL
	1.6952		3.4843		7.8696		8.3877							12.5
	1.6558	1.7505	3.4451	3.5988	7.7305	8.0659	8.2186	8.6052						14
	0.6638	1.4797	1.7023	3.0661	3.5397	6.9989	7.8400	7.4408	8.3643					16
	0.6456	1.4545	1.5152	3.0418	3.1370	6.8398	6.9560	7.2717	7.4142					18
	0.5424	1.3716	1.4843	2.8806	3.1004	6.3626	6.8399	6.7643	7.2972	12.93				20
	0.5318	1.1459	1.3952	2.4284	2.9267	5.4882	6.4527	5.8027	6.8842	10.90	13.15	13.51		22.4
	0.4938	0.9016	1.1644	1.9196	2.4645	4.5614	5.5587	4.8075	5.8965	8.99	11.07	11.03		25
	0.4189	0.7728	0.9159	1.6758	1.9474	3.8203	4.6166	4.0148	4.8809	7.45	9.12	9.06	11.34	28
	0.3317	0.5615	0.7842	1.2159	1.6981	2.8212	3.8639	2.9719	4.0729	5.24	7.55	6.49	9.30	31.5
	0.2812	0.5062	0.5703	1.0968	1.2332	2.5642	2.8550	2.6917	3.0169	4.70	5.32	5.76	6.68	35.5
	0.2079	0.4306	0.5137	0.9481	1.1114	2.1920	2.5928	2.2890	2.7297	3.98	4.77	4.78	5.92	40
	0.1882	0.3694	0.4363	0.8188	0.9592	1.8351	2.2138	-1.9182	2.3180	3.42	4.03	4.11	4.90	45
	0.1587	0.2765	0.3743	0.5713	0.8283	1.4000	1.8537	1.4641	1.9429	2.58	3.46	3.11	4.21	50
	0.1353	0.2284	0.2802	0.4692	0.5787	1.1439	1.4144	1.1946	1.4832	2.16	2.61	2.58	3.19	56
	0.1060	0.1956	0.2314	0.4054	0.4750	1.0429	1.1553	1.0845	1.2097	1.98	2.19	2.33	2.65	63
	0.0878	0.1587	0.1981	0.3333	0.4101	0.8730	1.0522	0.9051	1.0970	1.62	2.01	1.89	2.38	71
	0.0745		0.1605		0.3369		0.8802		0.9147		1.64		1.93	80
	0.0601													90
	0.290	0.290	0.290	0.690	0.690	0.690	0.690	0.690	0.690	0.690	0.690	0.690	0.690	JL
	0.2219		0.2276		0.4955		1.4120		1.519		3.158			80
	0.1883	0.2234	0.1931	0.2307	0.4203	0.5009	1.1776	1.4199	1.261	1.533	2.645	3.188		90
	0.0807	0.1507	0.1896	0.1542	0.1956	0.3327	0.4248	0.9261	1.1838	0.991	1.272	2.087	2.669	100
	0.0688	0.1323	0.1516	0.1352	0.1561	0.2821	0.3360	0.7924	0.9309	0.844	0.999	1.810	2.106	112
	0.0556	0.0964	0.1330	0.0985	0.1367	0.2085	0.2848	0.5767	0.79					

H/B工业齿轮箱 GEAR UNITS

齿轮箱 Gear Units 冷却盘管 Cooling Coils 卧式安装 Horizontal
 类型 Types H..H, H..M, B..H, B..M 规格 Sizes 1...26

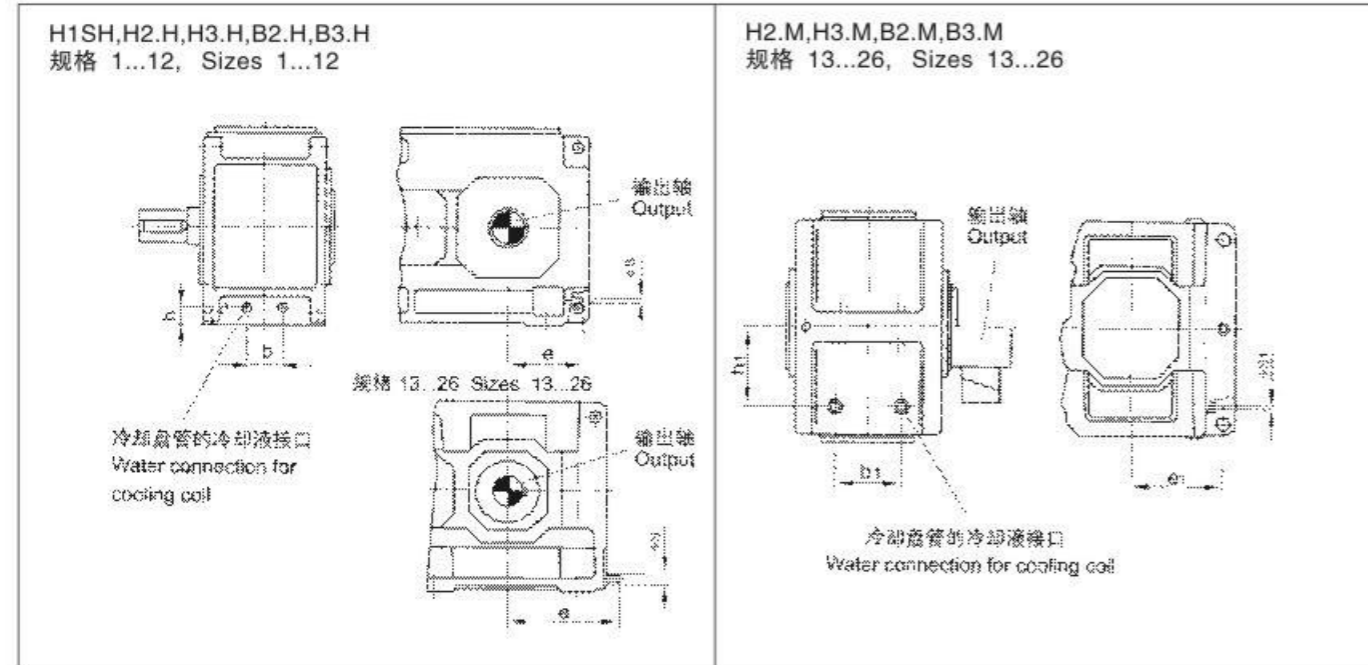

规格 Size	类型 H1SH Type H1SH					类型 H2.H/B3.H Type H2.H/B3.H					类型 H3.H Type H3.H					类型 B2.H Type B2.H										
	b mm	e mm	h mm	s	1)	b mm	e mm	h mm	s	1)	b mm	e mm	h mm	s	1)	b mm	e mm	h mm	s	1)	b mm	e mm	h mm	s	1)	
1	30	150	45	G1/4	4	-	-	-	-	-	-	-	-	-	-	64	125	40	G1/4	4	-	-	-	-	-	
2	-	-	-	-	-	-	-	-	-	-	-	-	-	-	-	78	130	40	G1/4	4	-	-	-	-	-	-
3	48	205	74	G1/2	4	34	130	55	G1/2	4	-	-	-	-	58	140	52	G1/4	4	-	-	-	-	-	-	
4	-	-	-	-	-	34	155	60	G1/2	4	-	-	-	-	74	160	54	G1/2	4	-	-	-	-	-	-	-
5	88	270	90	G1/2	4	68	170	64	G1/2	4	70	175	60	G1/2	4	130	175	62	G1/2	8	-	-	-	-	-	
6	-	-	-	-	-	70	215	68	G1/2	4	70	220	69	G1/2	4	120	220	68	G1/2	4	-	-	-	-	-	
7	124	310	135	G1/2	4	100	210	83	G1/2	4	80	210	83	G1/2	4	140	210	80	G1/2	8	-	-	-	-	-	
8	-	-	-	-	-	100	270	83	G1/2	4	80	270	83	G1/2	4	140	270	80	G1/2	4	-	-	-	-	-	
9	116	365	110	G1/2	8	140	245	110	G1/2	8	150	245	107	G1/2	4	232	245	110	G1/2	8	-	-	-	-	-	
10	-	-	-	-	-	100	295	95	G1/2	8	90	295	95	G1/2	4	150	295	90	G1/2	8	-	-	-	-	-	
11	146	425	130	G1/2	8	110	275	95	G1/2	8	200	275	115	G1/2	8	312	275	115	G1/2	8	-	-	-	-	-	
12	-	-	-	-	-	200	360	109	G1/2	8	200	360	115	G1/2	8	300	360	115	G1/2	8	-	-	-	-	-	
13	152	480	150	G1/2	8	252	455	116	G1/2	8	252	460	116	G1/2	8	324	460	116	G1/2	8	-	-	-	-	-	
14	-	-	-	-	-	252	525	116	G1/2	8	252	530	116	G1/2	8	324	530	116	G1/2	8	-	-	-	-	-	
15	172	560	130	G1/2	8	290	535	119	G1/2	8	290	540	119	G1/2	8	396	540	119	G1/2	8	-	-	-	-	-	
16	-	-	-	-	-	290	580	119	G1/2	8	290	585	119	G1/2	8	396	585	119	G1/2	8	-	-	-	-	-	
17	202	600	145	G1/2	8	340	575	134	G1/2	8	300	580	134	G1/2	8	468	580	134	G1/2	8	-	-	-	-	-	
18	-	-	-	-	-	340	635	134	G1/2	8	300	640	134	G1/2	8	468	640	134	G1/2	8	-	-	-	-	-	
19	根据用户要求供货 On request					根据用户要求供货 On request					根据用户要求供货 On request					-										
20-26	根据用户要求供货 On request					根据用户要求供货 On request					根据用户要求供货 On request					-										


规格 Size	类型 H2.M/B3 Type H2.M/B3					类型 H3.M Type H3.M					类型 B2.M Type B2.M				
	b1 mm	e1 mm	h1 mm	s1	1)	b1 mm	e1 mm	h1 mm	s1	1)	b1 mm	e1 mm	h1 mm	s1	1)
13	252	335	300	G1/2	8	252	335	300	G1/2	8	324	335	300	G1/2	8
14	252	405	300	G1/2	8	252	405	300	G1/2	8	324	405	300	G1/2	8
15	290	395	335	G1/2	8	290	395	340	G1/2	8	396	390	345	G1/2	8
16	290	440	335	G1/2	8	290	440	340	G1/2	8	396	435	345	G1/2	8
17	340	425	380	G1/2	8	300	425	380	G1/2	8	324	425	395	G1/2	8
18	340	485	380	G1/2	8	300	485	380	G1/2	8	324	485	395	G1/2	8
19-26	根据用户要求供货 On request					根据用户要求供货 On request					-				

1) 冷却液需要量 (L/min)
 Required cooling water quantity (L/min)

冷却盘管适用于淡水、海水和半咸水。
 Cooling coil suitable for fresh, sea and brackish.

H/B工业齿轮箱 GEAR UNITS

齿轮箱 Gear Units 冷却盘管 Cooling Coils 立式安装 Vertical
 类型 Types H..V, B..V 规格 Sizes 1...26

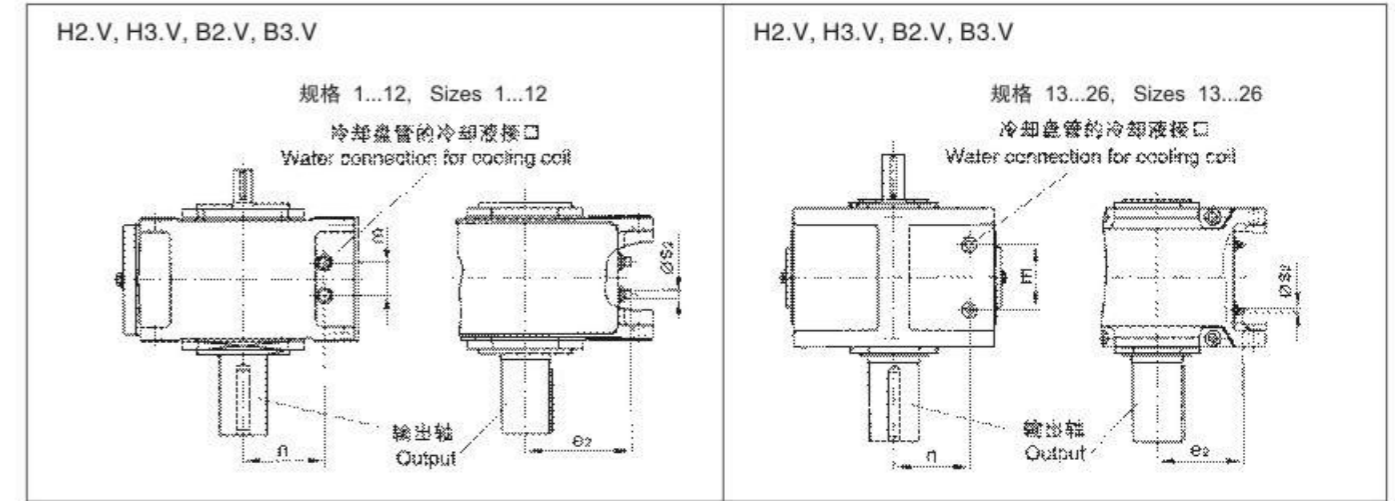

规格 Size	类型 H2.V/B.V Type H2.V/B3.V					类型 H3.V Type H3.V					类型 B2.V Type B2.V				
	m mm	n mm	e2 mm	s2	1)	m mm	n mm	e2 mm	s2	1)	m mm	n mm	e2 mm	s2	1)
1	-	-	-	-	-	-	-	-	-	-	64	90	125	G1/4	4
2	-	-	-	-	-	-	-	-	-	-	78	105	130	G1/4	4
3	34	120	130	G1/2	4	-	-	-	-	-	58	123	140	G1/2	4
4	34	140	155	G1/2	4	-	-	-	-	-	74	146	160	G1/2	4
5	68	166	170	G1/2	4	70	170	175	G1/2	4	130	168	175	G1/2	8
6	70	162	215	G1/2	4	70	161	220	G1/2	4	120	162	220	G1/2	4
7	100	197	210	G1/2	4	80	197	210	G1/2	4	140	200	210	G1/2	8
8	100	197	270	G1/2	4	80	197	270	G1/2	4	140	200	270	G1/2	4
9	140	210	245	G1/2	8	150	213	245	G1/2	4	232	210	245	G1/2	8
10	100	225	295	G1/2	8	90	225	295	G1/2	4	150	230	295	G1/2	8
11	110	285	275	G1/2	8	200	265	275	G1/2	8	312	265	275	G1/2	8
12	200	271	360	G1/2	8	200	265	360	G1/2	8	300	265	360	G1/2	8
13	252	300	335	G1/2	8	252	300	335	G1/2	8	324	300	335	G1/2	8
14	252	300	405	G1/2	8	252	300	405	G1/2	8	324	300	405	G1/2	8
15	290	335	395	G1/2	8	290	340	395	G1/2	8	396	345	390	G1/2	8
16	290	335	440	G1/2	8	290	340	440	G1/2	8	396	345	435	G1/2	8
17	340	380	425	G1/2	8	300	380	425	G1/2	8	324	395	425	G1/2	8
18	340	380	485	G1/2	8	300	380	485	G1/2	8	324	395	485	G1/2	8
19-26	根据用户要求供货 On request					根据用户要求供货 On request					-				

类型 Types	规格 Size	冷却盘管适用于 Cooling coil for											
		浸油润滑 Dip lubrication				法兰泵强制润滑 Forced lubrication with flanged on pump				电动机强制润滑 Forced lubrication with motor pump			
		适用布置形式 For design				适用布置形式 For design				适用布置形式 For design			
A	B	C	D	A	B	C	D	A	B	C	D		
H2.V	4	x	x	x	x	-	-	-	-	-	-	-	-
	5-12	x	x	x	x	-	x	-	x	-	-	-	-
H3.V	5-12	x	x	x	x	-	x	-	x	-	-	-	-
	13-18	-	-	-	-	-	x	-	x	-	-	-	-
B2.V	4	x	x	x	x	-	-	-	-	-	-	-	-
	5-12	x	x	x	x	x	x	-	-	-	-	-	-
B3.V	4	x	x	x	x	-	-	-	-	-	-	-	-
	5-12	x	x	x	x	-	-	-	x	x	-	-	-
13-18	-	-	-	-	-	-	-	-	x	x	-	-	-

X= 可供 X = Possible variants
 1) 冷却液需要量 (L / mm) Required cooling water quantity (L/min)
 冷却盘管适用于淡水、海水和半咸水。 Cooling coil suitable for fresh, sea and brackish.

齿轮箱 Gear Units 润滑油供给方式可选方案 Oil Supply for
 类型 Types H2...H4, B2...B4 规格 Sizes 1...18 立式安装 Vertical

各种润滑油供给方式 Oil supply variants
 立式安装齿轮箱所用的各种润滑油供给方式列于表 1
 Oil supply variants for vertical gear units can be derived from table 1.

类型 Types	规格 Size	浸油润滑 Dip lubrication	法兰泵强制润滑 Forced lubrication flanged on pump	电动机强制润滑 Forced lubrication motor pump
H2.V	4	x	-	-
	5...12	x	x	-
	13...18	-	x	-
H3.V	5...12	x	x	x
	13...18	-	x	x
H4.V	5...12	x	x	x
	13...18	-	-	x
B2.V	4	x	-	-
	5...12	x	x	x
	13...18	-	x	x
B3.V	4	x	-	-
	5...12	x	x	x
	13...18	-	x	x
B4.V	5...12	x	x	x
	13...18	-	-	x

X= 可供货 X = Possible variants

1) 采用实心轴、带储油管的齿轮箱所用的各种润滑油供给方式见 120 页表 14。
 1) For possible variants for gear units with solid shaft and oil retaining tube, see page 120, table 14.

推荐供油方式 Prefer redorder :
 规格 6 号 (含) 以下各型: 浸油润滑, 规格 7 号以上各型: 强制润滑
 Up to size 6- dip lubrication from size 7 up. forced lubrication

对各种润滑油供给方式的说明 Notes on the individual oil supply variants

浸油润滑 Dip lubrication
 当用浸油润滑时, 所用需要润滑的零部件均需浸在润滑油液中。
 附带的补偿油箱用于储藏涨溢的油液。
 选择依据参见 114 页。
 In case of dip lubrication, all parts to be lubricated are lying in the oil.
 An oil compensating tank has been fitted for oil ex-pansion.
 Criteria for selection, see page 114.

强制润滑 Forced lubrication:
 当采用强制润滑时, 所有未浸在润滑油液中的零部件均通过一个法兰联接油泵或单独的电动油泵进行飞溅润滑。
 选择依据参见 115-119 页。
 In case of forced lubrication, all parts which are not lying in oil are splash lubricated by means of a flanged-on pump or by a separate motor pump. Criteria for selection, see pages 115-119.

齿轮箱 Gear Units 浸油润滑方式 Dip Lubrication for
 类型 Types H2...H4, B2...B4 规格 Sizes 1...12 立式安装 Vertical

当选用浸油润滑方式时, 应满足下列要求: a) 最大输入转速 N1, 参见表 2; b) 允许油温参见表 3。
 For the design with dip lubrication the following criteria have to be observed:
 a) Maximum input speed n1, See table 2. b) Permissible oil temperatures, see table 3.

规格 Size	类型 Type											
	H2.V		H3.V		H4.V		B2.V		B3.V		B4.V	
	iN	n1 max	iN	n1 max	iN	n1 max	iN	n1 max	iN	n1 max	iN	n1 max
1	-	-	-	-	-	-	5-6.3 7.1-8 9-18	1200 1500 1800	-	-	-	-
2	-	-	-	-	-	-	5-5.6 6.3-8 9-10 11.2-18	1000 1200 1500 1800	-	-	-	-
3	6.3-7.1 8-10 11.2-22.4	1200 1500 1800	-	-	-	-	5-7.1 8-9 10-12.5 14-18	1000 1200 1500 1800	20-71	1800	-	-
4	6.3-10 11.2-12.5 14-22.4	1200 1500 1800	-	-	-	-	5-5.6 6.3-7.1 8-9 10-11.2	750 900 1000 1200	12.5-71	1800	-	-
5	6.3-9 10-12.5 14-16 18-22.4	1000 1200 1500 1800	25-90	1800	-	-	6.3-7.1 8-9 10-11.2	750 900 1000	12.5-71	1800	80-315	1800
6	8-11.2 12.5-16 18-20 22.4-28	1000 1200 1500 1800	31.5-112	1800	-	-	9 10-11.2 12.5-14	750 900 1000	16-90	1800	100-400	1800
7	6.3-7.1 8-9 10-11.2 12.5-16 18-22.4	750 900 1000 1200 1500	25-90	1800	100-355	1800	9-10 11.2	750 900	12.5-25 28-71	1500 1800	80-315	1800
8	8-9 10-11.2 12.5-14 16-20 22.4-28	750 900 1000 1200 1500	31.5-112	1800	125-450	1800	11.2-12.5 14	750 900	16-31.5 35.5-90	1500 1800	100-400	1800
9	6.3-7.1 8-10 11.2-22.4	1200 1500 1800	25-90	1800	100-355	1800	5-5.6 6.3-7.1 8-9 11.2	900 1000 1200 1500	12.5-71	1800	80-315	1800
10	8-9 10-12.5 14-28	1200 1500 1800	31.5-112	1800	125-450	1800	6.3-7.1 8-9 10-12.5 14	900 1000 1200 1500	16-90	1800	100-400	1800
11	6.3-7.1 8-10 11.2-12.5 14-22.4	1000 1200 1500 1800	25-90	1800	100-355	1800	5.6-6.3 7.1-8 9-10 11.2	750 900 1000 1200	12.5-22.4 25-71	1500 1800	80-315	1800
12	8-9 10-12.5 14-16 18-28	1000 1200 1500 1800	31.5-112	1800	125-450	1800	7.1-8 9-10 11.2-12.5 14	750 900 1000 1200	16-28 31.5-90	1500 1800	100-400	1800

n1 和 iN 值不在表 2 所列范围内的齿轮箱必须采用强制润滑方式。
 Gear units with n1 and iN which are not listed in table 2 must be designed for forced lubrication

40 °C 以下的 ISO - VG 粘度 mm ² /s (cst) Viscosity ISO - VG at 40 °C in mm ² /s(cst)	浸油允许极限温度, °C Permissible temperature limit in-°C for dip lubrication	
	矿物油 Mineral oil	合成油 Synthetic oil
VG 220	-15	-25
VG 320	-12	-25
VG 460	-9	-25

若油温低于表中数值, 则必须对润滑油进行加热。
 If the temperatures are below the values as listed in the table, the oil must be heated.
 当采用浸油润滑时, 油温不得低于所用润滑油的倾点。
 In case of dip lubrication, the oil temperature must not blow the pour point of the selected oil.

平行轴齿轮箱 Helical Gear Units 强制润滑方式 Forced Lubrication for
 类型 Types H2...H4 规格 Sizes 5...18 立式安装 Vertical

40 °C以下的 ISO — VG 粘度 mm ² /s (cst) Viscosity ISO – VG at 40 °C in mm ² /s(cst)	强制润滑允许极限温度 °C Permissible temperature limit in °C forced feed lubrication			
	矿物油 Mineral oil		合成油 Synthetic oil	
	最低 min	最高 max	最低 min	最高 max
VG 220	10	80	0	90
VG 320	15	90	5	100
VG 460	20	95	10	105

强制润滑：
 当使用强制润滑时，工作粘度不得超过 1800 cst。最低工作粘度不得小于 25 cst。当油温低于表 4 所列的数值时，必须提供浸油润滑方式，或者对润滑油进行加热。

Forced lubrication :
 In case of forced lubrication, the operating Viscosity 1800 cst must not be exceeded during starting. A minimum operating viscosity of 25cst must be ensured. If the temperatures are below the values as listed in table 4, dip Lubrication has to be provided or the oil must be heated.

立式安装平行轴齿轮箱采用法兰泵 Assignment of flanged-on pumps to vertical helical gear units								
类型 Types	n1 r/min	齿轮箱规格 Gear units size		法兰泵规格 Flanged-on pumps size	齿轮箱规格 Gear units size			法兰泵规格 Flanged-on pumps size
		5,7,9,11	6,8,10,12		13,15,17	14	16,18	
		速比 Ratio iN		速比 Ratio iN				
H2.V ¹⁾	750-1800	6.3-22.4	8-28	KSW1	6.3-22.4	8-28	7.1-25	KSW2
H3.V ¹⁾	1201-1800	25-35.5	31.5-45	KSW2	22.4-35.5	28-45	25-40	KSW3
		40-71	50-90	KSW3	40-71	50-90	45-80	KSW4
		80-90	100-112	*	80-90	100-112	90-100	*
	901-1200	25-50	31.5-63	KSW3	22.4-25	28-31.5	25-28	KSW3
		56-90	71-112	*	28-45	35.5-56	31.5-50	KSW4
					50-90	63-112	56-100	*
750-900	25-35.5	31.5-45	KSW3	22.4-35.5	28-45	25-40	KSW4	
	40-90	50-112	*	40-90	50-112	45-100	*	
H4.V ¹⁾	1201-1800	100-180	125-224	KSW3	100-355	125-450	112-400	*
		200-335	250-450	*				
	901-1200	100-125	125-160	KSW3				
		140-335	180-450	*				
	750-900	100-335	125-450	*				

*= 所需电动泵，参见表 7
 *= Motor pump require, see table 7.

1) 布置形式 B.D Design B.D

平行轴齿轮箱 Helical Gear Units 强制润滑方式 Forced Lubrication for
 类型 Types H2...H4 规格 Sizes 5...18 立式安装 Vertical

立式安装平行轴齿轮箱采用法兰泵 Assignment of flanged-on pumps to vertical helical gear units								
类型 Types	n1 r/min	齿轮箱规格 Gear units size		法兰泵规格 Flanged-on pumps size	齿轮箱规格 Gear units size			法兰泵规格 Flanged-on pumps size
		5,7,9,11	6,8,10,12		13,15,17	14	16,18	
		速比 Ratio iN		速比 Ratio iN				
H2.V ¹⁾	750-1800	6.3-22.4	8-28	KSW1	6.3-22.4	8-28	7.1-25	KSW2
H3.V ¹⁾	1201-1800	25-40	31.5-50	KSW2	22.4-50	28-63	25-56	KSW3
		45-90	56-112	KSW3	56-90	71-112	63-90	KSW4
							100	*
	901-1200	25-56	31.5-71	KSW3	22.4-31.5	28-40	25-35.5	KSW3
		63-90	80-112	*	35.5-56	45-71	40-63	KSW4
					63-90	80-112	71-100	*
750-900	25-45	31.5-56	KSW3	22.4-25	28-31.5	25-28	KSW3	
	50-90	63-112	*	28-45	35.5-56	31.5-50	KSW4	
				50-90	63-112	56-100	*	
H4.V ¹⁾	1201-1800	100-224	125-280	KSW3	100-355	125-450	112-400	*
		250-355	315-450	*				
	901-1200	100-140	125-180	KSW3				
		160-355	200-450	*				
	750-900	100-112	125-140	KSW3				
		125-335	160-450	*				

*= 所需电动泵，参见表 7
 *= Motor pump require, see table 7.

1) 布置形式 A.C Design A,C

立式安装平行轴齿轮箱采用法兰泵 Assignment of flanged-on pumps to vertical helical gear units			
类型 Types	规格 Sizes	布置方式 Design	油泵 Pump
H2.V	5...18	A/B/C/D	1)
H3.V	5...18	A/C	SF 2/8
	5...12	B/D	SF 2/8
	13...18		SF 2/13
H4.V	7...12	A/C	SF 2/8
	13...18		SF 2/13
	7...18	B/D	SF 2/13

1) 只提供法兰泵 Flanged-on pump only

直交轴齿轮箱 Bevel-helical Gear Units 强制润滑方式 Forced Lubrication for
 类型 Types B2...B4 规格 Sizes 5...18 立式安装 Vertical

40 °C 以下的 ISOVG- 粘度 mm ² /s (cSt) Viscosity ISO - Vgat 40 °C in mm ² /s(cSt)	强制润滑允许极限温度 °C Permissible temperature limit in °C forced feed lubrication			
	矿物油 Mineral oil		合成油 Synthetic oil	
	最低 min	最高 max	最低 min	最高 max
VG 220	10	80	0	90
VG 320	15	90	5	100
VG 460	20	95	10	105

强制润滑 Forced lubrication :
 当使用强制润滑时, 工作粘度不得超过 1800 cSt。
 最低工作粘度不得小于 25 cSt。
 当油温低于表 8 所列的数值时, 必须提供浸油润滑方式, 或者对润滑油进行加热。
 In case of forced lubrication, the operating Viscosity 1800 cst muSt not be exceeded during starting. A minimum operating viscosity of 25cst must be ensured. If the temperatures are below the values as listed in table 8, dip Lubrication has to be provided or the oil must be heated.

立式安装平行轴齿轮箱采用法兰泵 Assignment of flanged-on pumps to vertical helical gear units									
类型 Types	n1 1/min	齿轮箱规格 Gear units size		法兰泵规格 Flanged-on pump size	齿轮箱规格 Gear units size			法兰泵规格 Flanged-on pumps size	
		5,7,9,11	6,8,10,12		13,15,17	14	16,18		
		速比 Ratio iN			速比 Ratio iN				
B2.V ¹⁾	1201-1800	5-6.3	6.3-8	KSW1	5-8	6.3-10	5.6-9	KSW2	
		7.1-11.2	9-14	KSW2	9-11.2	11.2-14	10-12.5	KSW3	
	901-1200	5-8	6.3-10	KSW2	5	6.3	5.6	KSW2	
		9-11.2	11.2-14	KSW3	5.6-11.2	7.1-14	6.3-12.5	KSW3	
	750-900	5-6.3	6.3-8	KSW2	5-10	6.3-12.5	5.6-11.2	KSW3	
		7.1-10	9-12.5	KSW3	11.2	14	12.5	*	
B3.V ¹⁾	1201-1800	12.5-35.5	16-45	KSW2	12.5-35.5	16-45	14-40	KSW3	
		40-71	50-90	KSW3	40-71	50-90	45-80	KSW4	
	901-1200	12.5-25	16-31.5	KSW2	12.5-25	16-31.5	14-28	KSW3	
		28-50	35.5-63	KSW3	28-50	35.5-63	31.5-56	KSW4	
		56-71	71-90	*	56-71	71-90	63-80	*	
	750-900	12.5-35.5	16-45	KSW3	12.5-35.5	16-45	14-40	KSW4	
		40-71	50-90	*	40-71	50-90	45-80	*	
	B4.V ¹⁾	1201-1800	80-125	100-160	KSW2	80-315	100-400	90-355	*
			140-250	180-315	KSW3				
		280-315	355-400	*					
901-1200		80-180	100-224	KSW3					
		200-315	250-400	*					
750-900		80-125	100-160	KSW3					
	140-315	180-400	*						

*= 所需电动泵, 参见表 11 *= Motor pump require, see table 11.

1) 布置形式 A,B Design A,B
 2) 布置形式 C,D Design C,D

直交轴齿轮箱 Bevel-helical Gear Units 强制润滑方式 Forced Lubrication for
 类型 Types B2...B4 规格 Sizes 5...18 立式安装 Vertical

立式安装直交轴齿轮箱采用法兰泵 Assignment of flanged-on pumps to vertical bevel-helical gear units									
类型 Types	n1 r/min	齿轮箱规格 Gear units size		法兰泵规格 Flanged-on pump size	齿轮箱规格 Gear units size			法兰泵规格 Flanged-on pumps size	
		5,7,9,11	6,8,10,12		13,15,17	14	16,18		
		速比 Ratio			速比 Ratio				
		iN			iN				
B2.V ¹⁾	1201-1800	5.6-6.3	6.3-8	KSW1	5-6.3	6.3-8	5.6-7.1	KSW2	
		7.1-11.2	9-14	KSW2	7.1-11.2	9-14	8-12.5	KSW3	
	901-1200	5-8	6.3-10	KSW2	5-10	6.3-12.5	5.6-11.2	KSW3	
		9-11.2	11.2-14	KSW3	11.2	14	12.5	*	
	750-900	5-6.3	6.3-8	KSW2	5-7.1	6.3-9	5.6-8	KSW3	
		7.1-10	9-12.5	KSW3	8-11.2	10-14	9-12.5	*	
11.2	14	*							
B3.V ²⁾	1201-1800	12.5-35.5	16-45	KSW2	12.5-22.4	16-28	14-25	KSW2	
		40-71	50-90	KSW3	25-40	31.5-63	28-56	KSW3	
	901-1200	12.5-25	16-31.5	KSW2	12.5-35.5	16-45	14-40	KSW3	
		28-50	35.5-63	KSW3	40-56	50-71	45-63	KSW4	
		56-71	71-90	*	63-71	80-90	71-80	*	
	750-900	12.5-35.5	16-45	KSW3	12.5-25	16-31.5	14-28	KSW3	
		40-71	50-90	*	28-40	35.5-50	31.5-45	KSW4	
				45-71	56-90	50-80	*		
	B4.V ¹⁾	1201-1800	80-100	100-224	KSW3	80-315	100-400	90-355	*
			200-315	250-400					
901-1200		80-125	100-160	KSW3					
		140-315	180-400	*					
750-900	80-90	100-112	KSW3						
	100-315	125-400	*						

*= 所需电动泵, 参见表 11 *= Motor pump require, see table 11.

1) 布置形式 C,D Design C,D
 2) 布置形式 A,B Design A,B

立式安装直交轴齿轮箱采用法兰泵 Assignment of flanged-on pumps to vertical bevel-helical gear units			
类型 Types	规格 Size	布置方式 Design	油泵 Pump
B2.V	5...12	A/B	SF 2/5
	13...18		SF 2/8
	5...18	C/D	SF 2/8
B3.V	5...12	A/B	SF 2/8
	13...18		SF 2/13
	5...12	C/D	SF 2/8
13...18	SF 2/13		
B4.V	5...12	A/B	SF 2/8
	13...18		SF 2/13
	5...12	C/D	SF 2/8
13...18	SF 2/13		

齿轮箱 Gear Units 电动泵强制润滑方式 Mounted Motor Pumps
 类型 Types H3, H4, B2, B3, B4 规格 5...18 Sizes 5...18 立式安装 Vertical

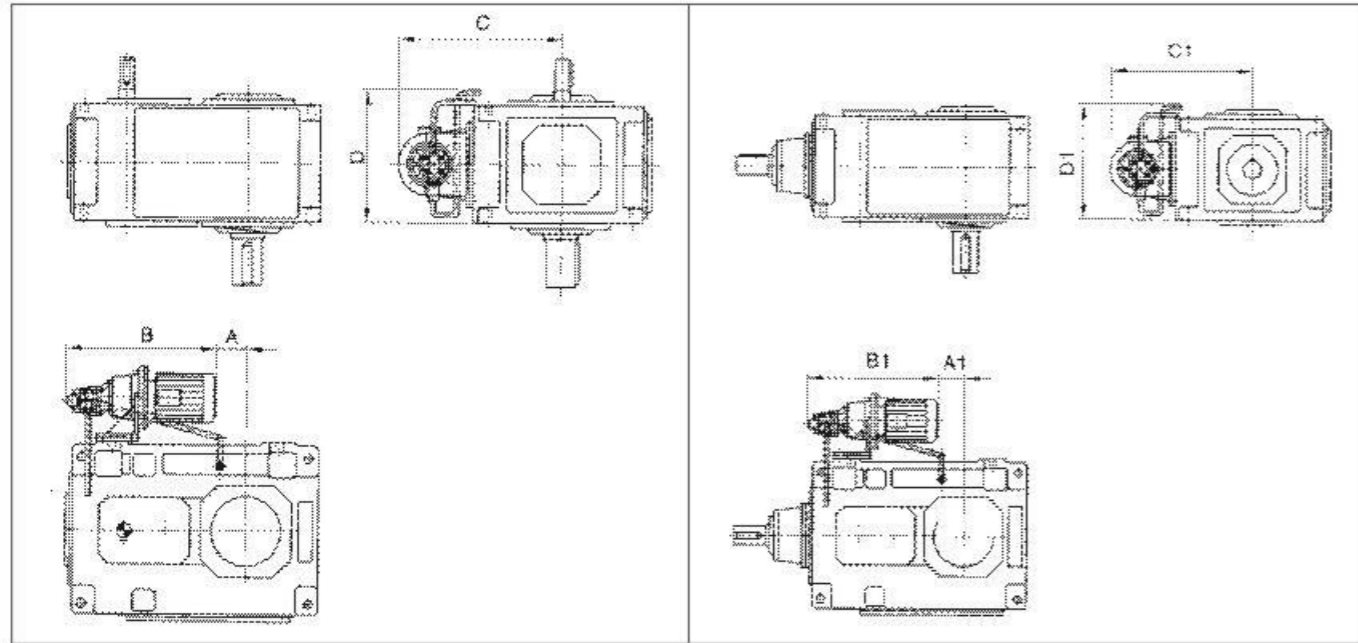


表 12 Table 12 安装尺寸 mounting dimensions on mm							表 13 Table 13 安装尺寸 mounting dimensions on mm						
类型 Tyoes	规格 Size	布置形式 Design	A	B	C	D	类型 Tyoes	规格 Size	布置形式 Design	A1	B1	C1	D1
H3.V	5/6	A/B/C/D	-30/5	560	480	385	B2.V	5/6	A/B/C/D	-160/-125	480	470	415
	7/8	A/B/C/D	55/100	585	550	430		7/8	A/B/C/D	5/50	480	525	510
	9/10	A/B/C/D	140/190	610	565	500		9/10	A/B/C/D	60/110	480	565	570
	11/12	A/B/C/D	375/445	530	625	560		11/12	A/B/C/D	150/220	480	625	660
	13/14	A/C	155/225	880	670	700		13/14	A/B/C/D	-70/0	755	670	805
	13/14	B/D	100/170	935	670	700		15/16	A/B/C/D	15/60	780	710	910
	15/16	A/C	275/320	965	710	770		17/18	A/B/C/D	-5/55	890	775	1025
	15/16	B/D	220/265	1020	710	770		5/6	A/B/C/D	-85/-50	480	480	365
	17/18	A/C	250/310	1040	770	835		7/8	A/B/C/D	-5/40	480	550	430
17/18	B/D	195/255	1095	770	835	9/10	A/B/C/D	65/115	480	565	500		
H4.V	7/8	A/C	55/100	600	550	430	B3.V	11/12	A/B/C/D	280/350	480	625	560
	7/8	B/D	0/45	680	550	430		13/14	A/B/C/D	35/105	810	670	700
	9/10	A/C	140/190	625	565	500		15/16	A/B/C/D	120/165	875	710	775
	9/10	B/D	85/135	705	565	500		17/18	A/B/C/D	165/225	970	775	835
	11/12	A/C	375/445	550	625	560	B4.V	5/6	A/B/C/D	-35/0	480	480	385
	11/12	B/D	320/390	635	625	560		7/8	A/B/C/D	55/100	480	550	430
	13/14	A/B/C/D	135/205	910	670	700		9/10	A/B/C/D	140/190	615	565	500
	15/16	A/B/C/D	255/300	1000	710	775		11/12	A/B/C/D	375/445	530	625	560
	17/18	A/B/C/D	230/290	1070	775	835		13/14	A/B/C/D	135/205	905	670	700
							15/16	A/B/C/D	255/300	990	710	775	
							17/18	A/B/C/D	230/290	1065	775	835	

齿轮箱 Gear Units
 采用实心轴、带有储油管的齿轮箱的润滑油供给方式
 Oil Supply for Gear Units With Solid Shaft and Oil Retaining
 类型 Types H2...H4, B2...B4 规格 Sizes 5...18 立式安装 Vertical


表 14 Table 14 可选润滑油供给方式 possible oil supply variants			
类型 Types	规格 Size	布置形式 Design	
		B	C
H2SV	5-6	O ¹⁾	-
	7-12	O ²⁾	-
	13-18	O ³⁾	-
H3SV	5-7	O	-
	7-12	O	-
	13-18	O	-
B2SV	5-6	-	O
	7-12	-	O
	13-18	-	O
B3SV	5-6	-	O
	7-12	-	O
	13-18	-	O
B4SV	5-6	-	O
	7-12	-	O
	13-18	-	O

- = 布置形式不允许 Design not possible

O = 可选强制润滑 Forced lubrication possible

- 1) 对于规格 5 号齿轮箱, 仅适用于速比 $i \leq 16$ For size 5 only possible up to $i \leq 16$
- 2) 对于规格 7 号齿轮箱, 仅适用于速比 $i \leq 16$ For size 7 only possible up to $i \leq 16$
 对于规格 11 号齿轮箱, 仅适用于速比 $i \leq 18$ For size 11 only possible up to $i \leq 18$
- 3) 对于规格 13 号齿轮箱, 仅适用于速比 $i \leq 18$ For size 13 only possible up to $i \leq 18$
 对于规格 17 号齿轮箱, 仅适用于速比 $i \leq 16$ For size 17 only possible up to $i \leq 16$

齿轮箱 Gear units
电机法兰联接 Motor mounting with flanges
类型 Types H2, H3, H4

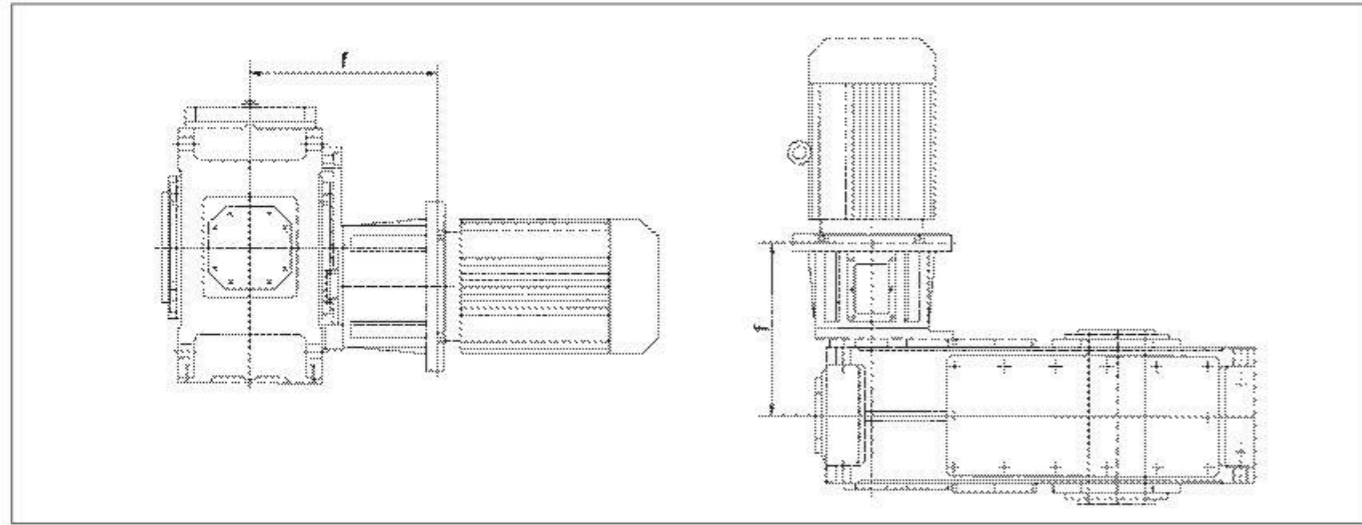


电机功率 Motor Power	H2..	
	规格 Size	
	4	5/6
	f mm	
11-15kW	403	
18.5-22kW	403	428
30kW	405	430
37-45kW	442	467
55kW		467

电机功率 Motor Power	H4..				
	规格 Size				
	7/8	9	10	11/12	
	f mm				
	齿轮轴 1 ; 传动比 iN/Ratio iN				
		≥ 3.15	≤ 2.8	≥ 3.15	≤ 2.8
2.2-4kW	318				
5.5-7.5kW	341	379		384	
11-15kW	383	421	430	426	493
18.5-22kW		421	430	426	493
30kW			432		495
37-45kW			469		532
55kW				474	532

电机功率 Motor Power	H3								
	规格 / Size								
	7/8	9			10		11/12		
	f mm								
	齿轮轴 1 ; 传动比 iN/Ratio iN								
	≥ 3.15	≤ 2.8	=3.15-4 ≥ 4.5	≤ 2.8	=3.15-4 ≥ 4.5	≤ 2.8	≥ 4.5	=3.15-4	≤ 2.8
11-15kW	388		463	508	468	513			
18.5-22kW	388	413	463	508	468	513			
30kW	390	415	465	510	470	515			
37-45kW	427	452	502	547	507	552	507	532	577
55kW	427	452	502	547	507	552	507	532	577
75-90kW			502	547	507	552	507	532	577

* 标准电机安装尺寸参见第 125 页。 Fitting dimensions for standard motors see page 125.

齿轮箱 Gear units
钟形罩法兰联接 Motor mounting with bell housing flanges
类型 Types B2, B3, B4

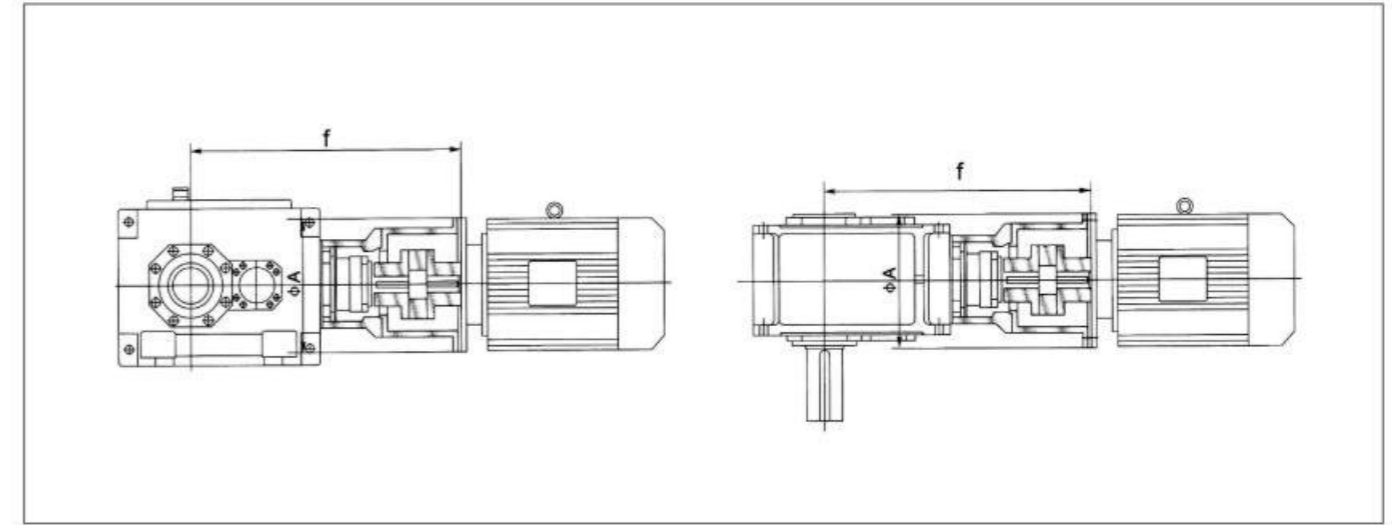







电机功率 Motor Power	B2..							
	规格 / size							
	4	5	6	7	8			
	f mm							
11-15kW	708	350						
18.5-22kW	708	350						
30kW	710	400	790	400	825			
37-45kW			827	450	862	957	450	1002
55kW						957	550	1002
75-90kW						957	550	1002

电机功率 Motor Power	B3..												
	规格 / size												
	4	5	6	7	8	9	10	11	12				
	f mm												
2.2-4kW	648	250											
5.5-7.5kW	671	300	756	350	791								
11-15kW	713	350	788	350	823	933	400	978					
18.5-22kW	713	350	788	350	823	933	400	978	1053	420	1103		
30kW	715	400	780	400	825	935	400	980	1055	420	1105	1240	400
37-45kW			827	450	862	972	450	1017	1092	450	1142	1277	450
55kW						972	550	1017	1092	550	1142	1277	550
75-90kW						972	550	1017	1092	550	1142	1277	550

电机功率 Motor Power	B4..																	
	规格 / size																	
	5	6	7		8	9	10		11	12		13	14	15	16	17		18
	f mm																	
2.2-4kW	753	250	780	873	250	918		350										
5.5-7.5kW	776	330	811	896	300	941	1021	350	1071									
11-15kW	818	350	853	938	350	983	1053	350	1003	1253	400	1323						
18.5-22kW	818	350	853	938	350	983	1053	400	1103	1253	400	1323	1423	420	1493			
30kW				940	400	985	1055	450	1105	1255	400	1325	1423	420	1493	1682	400	1728
37-45kW									1092		1142	1292	450	1362	1462	450	1532	1719
55kW											1292	550	1362	1462	550	1532	1719	550
75-90kW											1292	550	1362	1462	550	1532	1719	550


* 标准电机安装尺寸参见第 125 页。 Fitting dimensions for standard motors see page 125.

齿轮箱 Gear units 布置形式 Design
 类型 Types H2...H4..., B2...B4 规格 Sizes 1...26

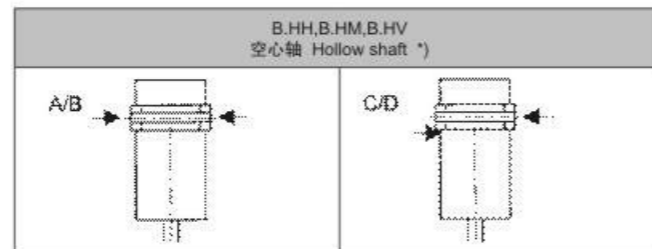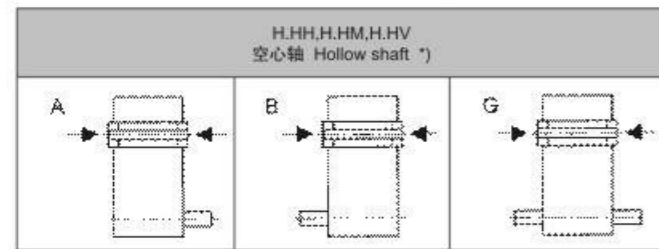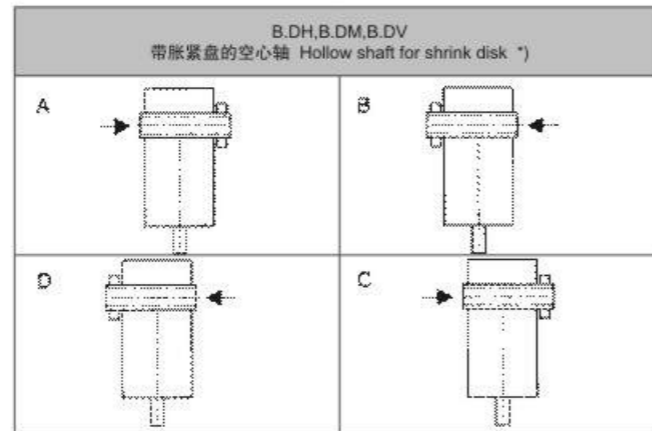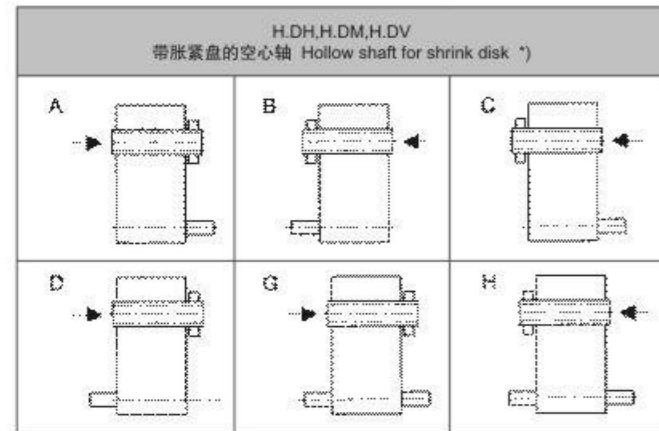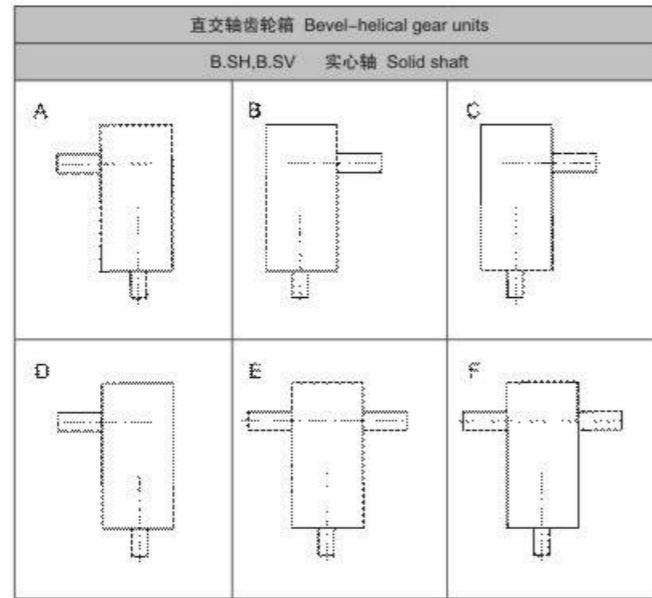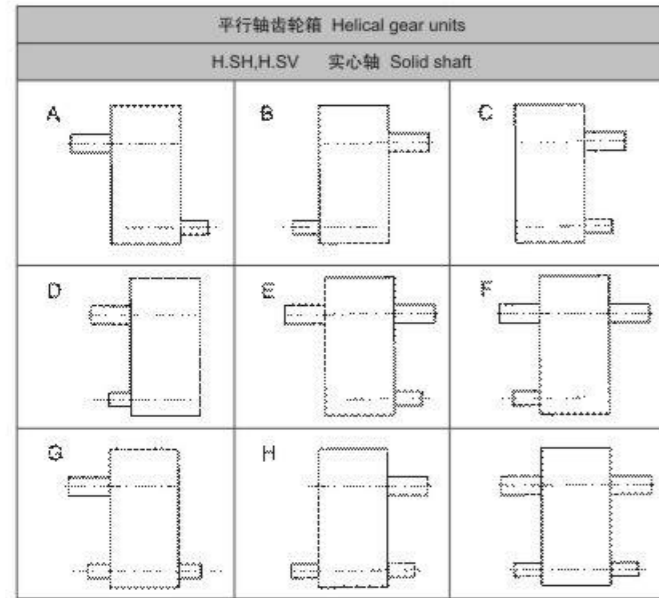

*) 箭头表示工作机驱动轴插入方向。
 The arrow indicates the direction of insertion of the driven machine shaft.

标准普通电机的参数及安装尺寸
 Standard and ordinary motor parameter and mounting dimension

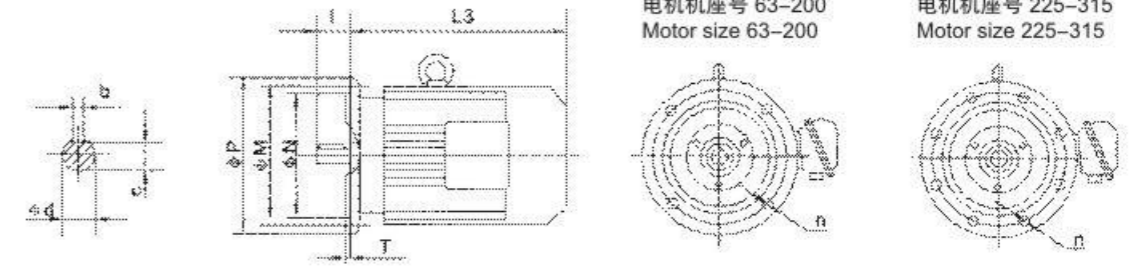

电机机座号 Motor size	4级 Class 4		6级 Class 6		8级 Class 8		L3				安装尺寸 Mounting dimensions								M(kg)						
	P1 (kW)	n1 (r/min)	P1 (kW)	n1 (r/min)	P1 (kW)	n1 (r/min)	Y2	B	E	V	M	N	P	n	T	d	l	b	c	Y (铝壳) Aluminum housing	Y2	B	E	V	
63	0.12	1390					202	270	328		115	95j6	140	4 x φ 10	3	11j6	23	4	8.5	5.5	13			11	
	0.18	1390																		6	13.5	15		12	
71	0.25	1390	0.18	850			225	285	345		130	110j6	160	4 x φ 10	3.5	14j6	30	5	11	6.5	14	16	12	14	
	0.37	1390	0.25	850																7.5	14.5	16	13	15	
80	0.55	1390	0.37	885	0.18	645	255	290	350	310	165	130j6	200	4 x φ 12	3.5	19j6	40	6	15.5	10	15	31	20	16	
	0.75	1390	0.55	885	0.25	645														11	16	32	21	17	
90S	1.1	1400	0.75	910	0.37	670	270	310	370	320	165	130j6	200	4 x φ 12	3.5	24j6	50	8	20	16	23	35	27	23	
90L	1.5	1400	1.1	910	0.55	670	295	335	395	345	165	130j6	200	4 x φ 12	3.5	24j6	50	8	20	20	25	39	31	28	
100	2.2	1420			0.75	680	325	370	420	370	215	180j6	250	4 x φ 15	4	28j6	60	8	24		33	49	41	36	
	3	1420	1.5	920	1.1	680															35	53	44	36	
112M	4	1440	2.2	940	1.5	690	340	400	450	390	215	180j6	250	4 x φ 15	4	28j6	60	8	24	41	67	60	43		
132S	5.5	1440	3	960	2.2	710	390	430	505	450	265	230j6	300	4 x φ 15	4	38k6	80	10	33	65	93	85	63		
132M	7.5	1460	4	960			3	710	430	470	545	490	265	230j6	300	4 x φ 15	4	38k6	80	10	33	76	105	98	75
			5.5	960																					
160M	11	1460	7.5	960	4	720	505	545	610	550	300	250h6	350	4 x φ 19	5	42k6	110	12	37		118	150	143	116	
					5.5	720																			
160L	15	1460			7.5	720	560	585	655	595	300	250h6	350	4 x φ 19	5	42k6	110	12	37	132	169	165	136		
180M	18.5	1470	11	960			590	620	715	740	300	250h6	350	4 x φ 19	5	48k6	110	14	42.5	164	205	203	169		
180L	22	1470	15	970	11	730	630	640	765	790	300	250h6	350	4 x φ 19	5	48k6	110	14	42.5	182	222	216	183		
200	30	1470	18.5	970			15	730	660	695	790	850	350	300h6	400	4 x φ 19	5	55k6	110	16	49	245	300	296	236
			22	970																					
225S	37	1480			18.5	730	675	705	860	910	400	350h6	450	8 x φ 19	5	60m6	140	18	53	258	360	370	291		
225M	45	1480	30	980	22	730	705	730	890	940	400	350h6	450	8 x φ 19	5	60m6	140	18	53	290	390	405	327		
250	55	1480	37	980	30	730	770	795		1060	500	450h6	550	8 x φ 19	5	65m6	140	18	58	388	530	498	393		
280S	75	1480	45	980	37	730	845	870		1160	500	450h6	500	8 x φ 19	5	75m6	140	20	67.5	510	660	633	520		
280M	90	1485	55	980	45	740	895	920		1260	500	450h6	550	8 x φ 19	5	75m6	140	20	67.5	606	785	723	610		
315S	110	1485	75	980	55	740	1100	1100		1330	600	550h6	660	8 x φ 19	6	80m6	170	22	71	910	1000	1150	950		
315M	132	1485	90	985	75	740	1180	1180		1380	600	550h6	660	8 x φ 19	6	80m6	170	22	71	1000	1100	1230	1030		
315L	160	1485	110	985	90	740															1055	1100	1320	1100	
																									200

注：由于结构需要及生产厂家不同，有时参数会有所变化，此表仅供参考，准确尺寸请来电垂询。
 Note: Sometimes the parameters may be changed with the different structures and manufacturers, this table is only for reference, please refer to us for the exact dimensions.

目录
Contents

P系列行星齿轮减速机
P series planetary gearbox

1. 产品概述 Product summary	128
2. 型号规格表示方法 Type formula	128
3. 选型及举例 Selection table and example	129
4. 选型举例 Selection example	131
5. 符号说明 Symbol description	132
6. 被驱动设备系列f1 Driven coefficient on equipment f1	133
7. 传动能力表 Selection table	135
8. 额定热容量 Thermal capacity.....	153
9. 外形尺寸图表 Out dimensions table	157
10. 组合型 Matched units	164
11. 输出法兰孔布置图 Output flange hole	165
12. 输出轴 Output shaft	166
13. 附件 Add-on piece	168
14. 带电机法兰输入 With motor flange input	173
15. 附件代号 Accessory cod	179
16. 垂直安装时润滑油补偿油箱 Vertical assembly fabrication compensating oil case	180
17. 安装方位 Installation position	181

P系列行星齿轮减速机 PLANETARY GEARBOX

产品概述/型号表示方法


Product Summary and Designation of Types

产品概述 Product summary

- 1) 采用模块化设计, 可根据客户要求的变化组合。
- 2) 箱体采用球墨铸铁, 大大提高了箱体的刚性及抗震性。
- 3) 箱体内的太阳行星轮, 内齿圈及螺旋锥齿轮均采用可控气氛渗碳火处理, 得到高硬耐磨表面, 热处理后全部磨齿, 降低了噪音, 提高了整机的效率及使用寿命。
- 4) 输入方式: 同心轴输入, 斜齿轮输入, 锥齿轮-斜齿轮输入, 锥齿轮输入。
- 5) 输出方式: 内花键式, 空心轴收缩盘式, 外花键式, 实心轴平键。
- 6) 安装形式: 水平安装, 垂直安装, 扭力臂安装。
- 7) P系列产品有9-34型规格, 行星传动级数有2级和3级, 速比为25-4000, 和CR、K、R系列组合可得到更大速比。

- 1) Adopt the module design; its match could vary from the customers' requirement.
- 2) The casting house could adopt the cast-iron QT, it could enhance the house rigidity and anti-shake.
- 3) The sun planetary gear inside the house, inner gear cycle, and screw-cone gear could adopt the controllable gas gear could gas fire treatment way to get the high Hard wear-resistant surface, after it, getting the grind gear to lower the noise, and enhance the efficiency and life expectancy of whole unit.
- 4) Input mode: the concentric shaft input, helical gear input; cone-helical gear input, cone-gear input.
- 5) Output mode: inner spline, hollow shaft shrink, outer spline, solid shaft with the even key.
- 6) Assembly mode: Horizontal, vertical, torque arm.
- 7) P series product covers 9-34 type specification, the planetary gear has 2 and 3 stage, ratio range 25-4000 gear match with CR、K、R series matched units could get the bigger ratio.

型号规格表示方法 Type formula

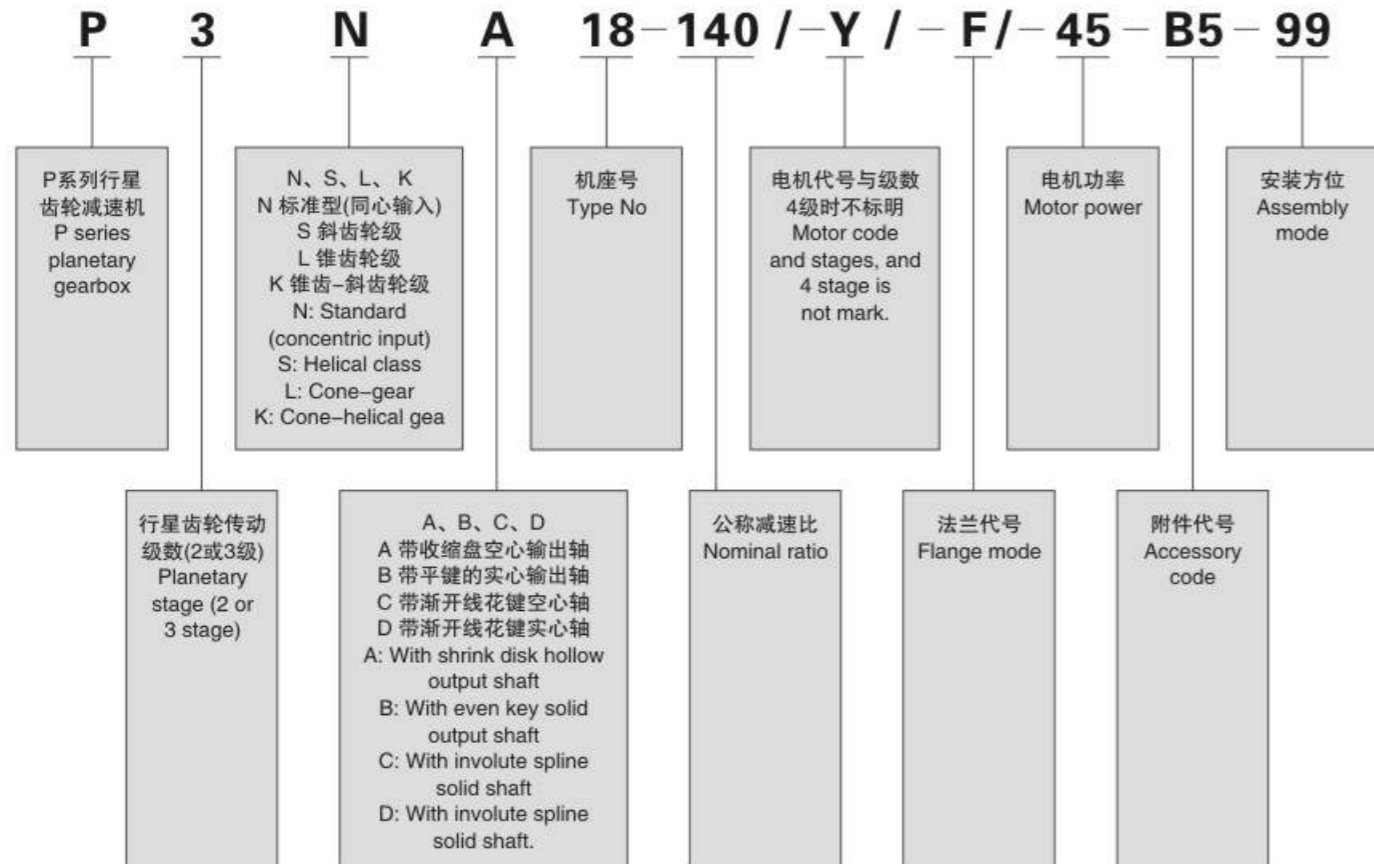

P系列行星齿轮减速机 PLANETARY GEARBOX

选型及举例

Selection Table and Example

序号	说明	代号	参数计算						
1	被驱动设备系数	f1	查10页f1表						
2	原动机系数	f2	原动机系数		f2				
			电机, 液压马达, 汽轮机		1.0				
			4-6缸活塞发动机, 周期变化1:100至1:200		1.25				
			1-3缸活塞发动机, 周期变化1:100		1.5				
3	齿轮箱许用输入转速	N1	≤1500						
4	确定减速比	i	i=n1/n2						
5	确定齿轮箱类型选择 传动效率	η	type	η	type	η			
			P2N	94%	P3N	92%			
			P2L	93%	P3S	91%			
			P2S	93%	P3K	89%			
			P2K	91%					
6	以被驱动设备所需的 扭矩或功率, 确定齿 轮箱的输入功率	P1	P1=T2·n1/(9550·i·η)或P1=P2/η						
7	根据计数, 查传动能力 表, 确定齿轮箱规格	T2N P1N	T2N≥T2·f1·f2或P1N≥P1·f1·f2 如果不满足条件: 3.33·P1≥P1N, 请向我们咨询。						
8	峰值扭矩校核*	TA	P1N≥TA·n1·f3/9550	f3		每小时峰值负荷次数			
				单向载荷	0.5	0.65	0.7	0.85	
				交变载荷	0.7	0.95	1.10	1.25	
9	输出轴的径向力轴向 力校核	Fr, Fa	查9页P系列Fr表						
10	计算功率利用率确定 其系数	f14	功率利用率 =P1/P1N·100% 确定其系数f14.	功率利用率 30% 40% 50% 60% 70% 80% 90% 100%					
11	热容量校核	PG	P1≤PG=PG1·f4·f14 若不能满足上式, 则齿 轮箱需外加补足冷却装 置(根据工况要求, 可 采用冷却水冷却油, 风 冷等形式)	环境温度系数f4					
				环境温度		每小时工作周期(ED)百分比%			
				100	80	60	40	20	
				10°C	1.14	1.20	1.32	1.54	2.04
				20°C	1.00	1.36	1.16	1.35	1.79
30°C	0.87	0.93	1.00	1.18	1.56				
40°C	0.71	0.75	0.82	0.96	1.27				
50°C	0.55	0.58	0.64	0.74	0.98				
12	确定润滑方式		V1, V3, V11, V31安装方位为浸油润滑; B51强制润滑; 其他安装方位为飞溅润滑为油泵						
13	根据输入, 输出方式, 安装方位等确定具体型号所需附件								

*峰值扭矩: 最大负载扭矩, 是指启动, 制动或最大脉动载荷所引起的最大扭矩。(一般工况条件下峰值扭矩为启动或制动时的最大扭矩)

选型及举例
Selection Table and Example

No	Statements	Code	Parameters calculation										
1	Coefficient of driven machine	f1	10 page and table f1										
2	Prime motor coefficient	f2	Prime motor coefficient										
			Motor, hydraulic motor, turbine										
			4-6 jar piston engine, cycle change 1:100 to 1:200										
			1-3 jar piston engine, cycle change 1:100										
3	Gear permissible coefficient	N1	≤1500										
4	Gear ratio	i	i=n1/n2										
5	Confirm the gear units type And select transmission efficiency	η	type	η	type	η							
			P2N	94%	P3N	92%							
			P2L	93%	P3S	91%							
			P2S	93%	P3K	89%							
			P2K	91%									
6	Select the gear units input power according To the driving machine torque	P1	P1=T2 · n1/(9550 · i · η) or P1=P2/η										
7	According to the counts, Match the transmission capacity table. Then select the type,	T _{2N} P _{1N}	T _{2N} ≥T2 · f1 · f2 or P _{1N} ≥P1 · f1 · f2 If the conditions are not satisfied: 3.33 · P1≥P _{1N} , please contact us.										
8	Peak torque calibration*	T _A	P _{1N} ≥T _A · n1 · f3/9550	Peak load times per hour									
				f3	1-5	6-30	31-100	>100					
				Single load.	0.5	0.65	0.7	0.85					
				Alternate load	0.7	0.95	1.10	1.25					
9	Output shaft radial force, and axial calibration	Fr, Fa	Check 9 page P series Fr table.										
10	Calculate the power usage rate and confirm the factor	f ₁₄	Power usage rate =P1/P _{1N} · 100% Determine the coefficient: f ₁₄	Power usage rate	30%	40%	50%	60%	70%	80%	90%	100%	
				F ₁₄	0.66	0.77	0.83	0.90	0.90	0.95	1.0	1.0	
11	Thermal capacity calibration	P _G	P ₁ ≤P _G =P _{G1} · f ₄ · f ₁₄ Gearbox need to add the oil cooling, select the water cooling, oil cooling, and wind cooling form according to service facto	F4 environment									
				Environment temperature	Work cycle percentage per hour								
					100	80	60	40	20				
				10°C	1.14	1.20	1.32	1.54	2.04				
				20°C	1.00	1.36	1.16	1.35	1.79				
				30°C	0.87	0.93	1.00	1.18	1.56				
40°C	0.71	0.75	0.82	0.96	1.27								
50°C	0.55	0.58	0.64	0.74	0.98								
12	Fabrication mode		V1, V3, V11, V31 assembly mode is oil-soaked fabrication. B51 forced fabrication, other mode is splash fabrication, oil pump.										
13	Select the matched type accessory according to the input, output mode, and assembly mode.												

* Peak torque the maximum load torque, is the maximum torque when it starts, brakes, and maximum impulses.

选型举例
Selection Example

输送设备，输入转速为1000r/min，最大起动扭矩为2000N·m，输出转速为12.5r/min，输出扭矩为68000N·m，每天工作12h，负载持续率为60%，环境温度为0~20℃，大车间安装，风速约为5m/s，海拔高度为1000m以下，水平式法兰安装，偏心平行轴输入、输出、双轴型、实心轴普通平键输出。

Output equipment, input speed is 1000r/min, the maximum start torque is 2000N.m, the output speed 12.5r/min, output torque is 68000N.m, 12h per day, load efficiency is 60%, the environment temperature is 0~20 Celsius degree, big working room, wind speed is 5m/s, the height is below 100m, horizontal assembly, concentric parallel shaft input, output double shaft, the solid shaft common even output

解答:
f1=1.5
f2=1
n1=1000
i=1000/12.5=80

根据速比及输入，输出轴要求可选P2S型
η=0.93
P1=T2 · n1/(9550 · i · η)
=68000 × 1000/(9550 × 80 × 0.93)=95.7kW
T_{2N}≥T2 × f1 × f2=68000N · m × 1.5 × 1=102kM · m
P_{1N}≥P1 × f1 × f2=96.7 × 1.5 × 1=143.55kW
初选P2SB14-80-B5-99
其P_{1N}=153KW PG₁=94KW i_{ex}=78.827

校核:
3.33 × P₂≥P_{1N}
3.33 × 95.7=318.681KW > P_{1N}满足要求。

峰值扭矩校核:
P_{1N}=153KW≥T_A · N1 · f3/9550
=2000 × 1000 × 0.5/9550=104.71kW满足要求。

热容量校核:
公称功率利用率=P1/P_{1N}=95.7/153=0.625=62.5%
查P系列选型表得f₁₄=0.9f₄=1.16
P_{G1} × f₄ × f₁₄=94 × 1.16 × 0.9=100.32KW > P1
因此无须外加辅助冷却装置就可满足设备要求。
根据设备要求，安装方位为B5

润滑方式:
飞溅润滑

选定型号为: P2SB14-80-B5-99

Answer:
f1=1.5
f2=1
n1=1000
i=1000/12.5=80

According to the ratio, input and output shaft requirement, select the P2S
η=0.93
P1=T2 · n1/(9550 · i · η)
=68000 × 1000/(9550 × 80 × 0.93)=95.7kW
T_{2N}≥T2 × f1 × f2=68000N · m × 1.5 × 1=102kM · m
P_{1N}≥P1 × f1 × f2=96.7 × 1.5 × 1=143.55kW
First select: P2SB14-80-B5-99
P_{1N}=153KW PG₁=94KW i_{ex}=78.827

Calibration: 3.33 × P₂≥P_{1N}
3.33 × 95.7=318.681KW > P_{1N} It meets the requirement.

Peak load calibration:
P_{1N}=153KW≥T_A · N1 · f3/9550
=2000 × 1000 × 0.5/9550=104.71kW. It meets the requirement.

Thermal calibration:
Nominal power usage rate=P1/P_{1N}=95.7/153=0.625=62.5%
Check P series table: f₁₄=0.9f₄=1.16
P_{G1} × f₄ × f₁₄=94 × 1.16 × 0.9=100.32KW > P1
So it is not necessary to add the oil cooling, it could meet the requirement.
Select the B5 assembly mode

Fabrication mode: Splash fabrication.

So the final type: P2SB14-80-B5-99

被驱动设备系列f1
Driven Coefficient on Equipment f1

Driven coefficient on equipment				f1			
Working machine	Day running time With load(hours)			Working machine	Day running time With load(hours)		
	0.5	>0.5-10	>10		0.5	>0.5-10	>10
Sewage treatment machinery				Transportation			
Thickener(rotation in center)	-	-	1.2	Bucket conveyor	-	1.4	1.5
Filter Press	1.0	1.3	1.5	Winch	1.4	1.6	1.6
Flocculator	0.8	1.0	1.3	conveyors Hoist	-	1.5	1.8
Aerator	-	1.8	2.0	conveyors ≥150kw	1.0	1.2	1.3
Raking equipment	1.0	1.2	1.3	Freight elevator*	1.1	1.3	1.4
Combined longitudinal and rotary rakes	1.0	1.3	1.5	Passenger elevator*	-	1.2	1.5
Thickener	-	1.1	1.3	Scraper conveyor	-	1.5	1.8
Screw pump	-	1.3	1.5	Esalator	1.0	1.2	1.4
Turbine	-	-	2.0	Track running gear	-	1.5	-
Pump				Frequency devices	-	1.8	2.0
Centrifugal pump	1.0	1.2	1.3	Reciprocating compressors	-	1.8	1.9
Dissolved integrand pump	-	-	-				
A piston	1.3	1.4	1.8				
> A piston	1.2	1.4	1.5				
Dredge				Lifting machinery**			
Bucket conveyor	-	1.6	1.6	Slewing mechanism*	1.0	1.4	1.8
dump device	-	1.3	1.5	Tilt mechanism	1.0	1.1	1.4
Cartpillar Walking structure	1.2	1.6	1.8	Walking structure	1.1	1.6	2.0
Bucket excavator				Lifting structure	1.0	1.1	1.4
For picking	-	1.7	1.7	Jib crane	1.0	1.2	1.6
For coarse material	-	2.2	2.2				
Shredder	-	2.2	2.2	Cooling tower			
Walking structure*	-	2.4	1.8	Cooling tower fan	-	-	2.0
				Fans (Axial and Centrifugal)	-	1.4	1.5
Plate bending machine	-	1.0	1.0	Food Industry			
				Sugar industry			
Chemical Industry				Sugarcane shredder	-	-	1.7
Extruder	-	-	1.6	Sugarcane grinders	-	-	1.7
paste mixer	-	1.8	1.8	Beet sugar production			
Rubber-ray machine	-	1.5	1.5	Beet pulper	-	-	1.2
Cooling cylinder	-	1.3	1.4	Squeeze Machine, Mechanical actuator			
Mixer				Cold machine, cooking machine	-	-	1.4
For Homogeneous medium	1.0	1.3	1.4	Beet washing machine	-	-	1.5
Inhomogeneous media	1.4	1.6	1.7	Beet shredder	-	-	1.5
Blender				Paper Machinery			
For Homogeneous medium density	1.0	1.3	1.5	All types***	-	1.8	2.0
Inhomogeneous medium	1.2	1.4	1.6	The pulper driver device			
Uneven gas absorption	1.4	1.6	1.8	Centrifugal Compressor	-	1.4	1.5
Ovens	1.0	1.3	1.5				
Centrifuge	1.0	1.2	1.3				
Metal processing equipment				Funicular			
A replica machine	1.0	1.0	1.2	Freight cableway	-	1.3	1.4
Pusher	1.0	1.2	1.2	Back and forth system cableway	-	1.6	1.8
Winding machine	-	1.6	1.6	T-bar lift	-	1.3	1.4
Cooling bed traverse frame	-	1.5	1.5	Continuous cableway	-	1.4	1.6
Roller leveler	-	1.6	1.6				
Roller				Cement Industry			
Continuous	-	1.5	1.5	Concrete agitator	-	1.5	1.5
Gap-type	-	2.0	2.0	Crusher*	-	1.2	1.4
Reversible pipe rolling mill	-	1.8	1.8	Rotary kiln	-	-	2.0
Shears				Tube mill	-	-	2.0
Continuous*	-	1.5	1.5	Made powder machine	-	1.6	1.6
Crank type*	1.0	1.0	1.0	Roller press	-	-	2.0
The Continuous Casting chicken drive device	-	1.4	1.4				
Mill							
Reversible open-Pei machine	-	2.5	2.5				
The reversible plate Pei mill	-	1.8	1.8				
Reversible wire rod mill	-	2.0	2.0				
Reversing plate mill	-	1.8	1.8				
Roll gap adjustment drive	0.9	1.0	-				

- The confirmation of rated power of working machine-P2:
*) According to max torque to confirm the rated power;
**) According to Cross-load to classify;
***) Inspection heat capacity is absolutely necessary.
- All the listed the various coefficients are empirical value, the prerequisite for using these coefficients is the mechanical equipment in line with the usual design specifications and load conditions, if in special circumstances, please contact us.
- Machinery is for those which not listed in this table, please contact us.

传动能力表
Selection Table

1. P2N和P2S传动能力表:(i=25 ~ 125) P2N and P2S selection table:(i=25~125)

n ₁ (r/min)	n _{2N} (r/min)	i _N	P2-9			P2-10			P2-11			P2-12			P2-13			P2-14		
			T _{2N} (kN·m)	i _{ex}	P _{1N} (kW)	T _{2N} (kN·m)	i _{ex}	P _{1N} (kW)	T _{2N} (kN·m)	i _{ex}	P _{1N} (kW)	T _{2N} (kN·m)	i _{ex}	P _{1N} (kW)	T _{2N} (kN·m)	i _{ex}	P _{1N} (kW)	T _{2N} (kN·m)	i _{ex}	P _{1N} (kW)
1500	60	25	22	25.634	137	31	25.634	129	42	25.875	174	60	24.983	249	83	24.958	344	117	24.958	485
1000	40				91			129			174			249			344			485
750	30				68			96			131			187			258			364
1500	54	28	22	28.058	123	31	28.058	116	42	28.233	235	60	27.26	336	83	27.318	310	117	27.318	437
1000	36				82			116			157			224			310			437
750	27				62			87			118			168			232			327
1500	48	31.5	22	31.142	109	31	31.142	103	42	31.207	209	60	30.13	298	83	30.321	275	117	30.321	388
1000	32				73			103			139			199			275			388
750	24				55			77			104			149			206			291
1500	42	35.5	22	35.201	96	31	35.201	90	42	35.072	183	60	33.863	261	83	34.272	241	117	34.272	340
1000	28				64			90			122			174			241			340
750	21				48			67			91			131			181			255
1500	38	40	22	40.781	87	31	40.781	80	42	40.302	165	60	38.912	236	83	39.706	215	117	39.706	303
1000	25				57			80			109			155			215			303
750	19				43			61			83			118			163			230
1500	33.3	45	22	45.601	77	31	45.601	72	42	43.209	147	60	41.719	209	83	43.797	193	117	43.797	272
1000	22.2				51			72			98			140			193			272
750	16.7				38			54			73			105			145			204
1500	30.0	50	22	51.544	69	31	51.544	65	42	48.561	132	60	46.887	188	83	49.505	174	117	49.505	245
1000	20.0				46			65			88			126			174			245
750	15.0				35			49			66			94			130			184
1500	26.8	56	22	59.715	62	31	59.715	58	42	55.802	118	60	53.878	168	83	57.353	155	117	57.353	219
1000	17.9				41			58			79			112			155			219
750	13.4				31			43			59			84			116			164
1500	23.8	63	22	61.953	55	31	61.953	52	42	63.399	105	60	61.213	150	83	59.977	138	117	59.977	194
1000	15.9				37			52			70			100			138			194
750	11.9				27			39			52			75			103			146
1500	21.1	71	22	71.775	49	31	71.775	46	42	72.853	93	60	70.34	133	83	69.485	122	117	69.485	173
1000	14.1				32			46			62			88			122			173
750	10.6				24			34			46			66			92			129
1500	18.8	80	22	78.782	43	31	78.782	41	42	81.303	82	60	78.499	118	83	78.827	109	117	78.827	153
1000	12.5				29			41			50			79			109			153
750	9.4				22			30			41			59			81			115
1500	16.7	90	22	91.272	38	31	91.272	36	42	93.426	73	60	90.205	105	83	91.324	97	117	91.324	136
1000	11.1				26			36			49			70			97			136
750	8.3				19			27			37			52			72			102
1500	15.0	100	22	99.735	35	31	99.735	32	42	99.678	66	60	96.241	94	83	95.963	87	117	95.963	123
1000	10.0				23			32			44			63			87			123
750	7.5				17			24			33			47			65			92
1500	13.4	112	22	115.55	31	31	115.55	29	42	114.54	59	60	110.59	84	83	111.18	78	117	111.18	109
1000	8.9				21			29			39			56			78			109
750	6.7				15			22			29			42			58			82
1500	12.0	125	22	124.74	28	31	124.74	26	42	123.14	53	60	118.9	75	83	119.12	70	117	119.12	147
1000	8.0				18			26			35			50			70			147
750	6.0				14			19			26			38			52			74

P系列行星齿轮减速机 PLANETARY GEARBOX

传动能力表
Selection Table

P2N和P2S传动能力表:(i=25~125)(续前页) P2N and P2S selection table:(i=25~125)

P2-16			P2-17			P2-18			P2-19			P2-20			P2-21			i _N	n _{2N} (r/min)	n ₁ (r/min)
T _{2N} (kN·m)	i _{ex}	P _{1N} (kW)	T _{2N} (kN·m)	i _{ex}	P _{1N} (kW)	T _{2N} (kN·m)	i _{ex}	P _{1N} (kW)	T _{2N} (kN·m)	i _{ex}	P _{1N} (kW)	T _{2N} (kN·m)	i _{ex}	P _{1N} (kW)	T _{2N} (kN·m)	i _{ex}	P _{1N} (kW)			
160	24.75	995	202	24.75	1256	244	24.958	1517	295	26.622	1834	354	26.622	2201	392	26.622	1625	25	60	1500
		663			837			1012			1223			1468			1101	1219	40	1000
		497			628			759			917			1101			1101	1101	30	750
160	27.09	895	202	27.09	1131	244	27.318	1366	295	29.139	1651	354	29.139	1981	392	29.139	1463	28	54	1500
		597			754			910			1101			1321			991	1097	36	1000
		448			565			683			825			991			991	991	27	750
160	20.068	796	202	20.068	1005	244	30.321	1214	295	32.342	1468	354	32.342	1761	392	32.342	1300	31.5	48	1500
		531			670			809			978			1174			881	975	32	1000
		398			502			607			734			881			881	881	24	750
160	33.987	696	202	33.987	879	244	34.272	1062	295	36.557	1284	354	36.557	1541	392	36.557	1138	35.5	42	1500
		464			586			708			856			1027			770	853	28	1000
		348			440			531			642			770			770	770	21	750
160	39.375	630	202	39.375	796	244	39.706	961	295	42.353	1162	354	42.353	1394	392	42.353	1016	40	38	1500
		415			523			632			764			917			697	772	25	1000
		315			398			480			581			697			697	697	19	750
160	42.318	558	202	42.318	705	244	42.867	852	295	45.725	1030	354	45.725	1236	392	46.357	1368	45	33.3	1500
		372			470			568			686			824			618	684	22.2	1000
		279			353			426			515			618			618	618	16.7	750
160	47.833	503	202	47.833	635	244	48.454	766	295	51.684	927	354	51.684	1112	392	52.399	1231	50	30.0	1500
		335			423			511			618			741			556	616	20.0	1000
		251			317			383			463			556			556	556	15.0	750
160	55.417	449	202	55.417	567	244	56.136	684	295	59.878	827	354	59.878	993	392	60.706	1099	56	26.8	1500
		299			378			456			552			662			496	550	17.9	1000
		224			283			342			414			496			496	496	13.4	750
160	61.438	399	202	61.438	504	244	60.32	608	295	64.341	735	354	64.341	883	392	66.084	977	63	23.8	1500
		266			336			406			490			588			441	489	15.9	1000
		199			252			304			368			441			441	441	11.9	750
160	71.178	354	202	71.178	447	244	69.882	540	295	74.541	653	354	74.541	783	392	76.561	867	71	21.1	1500
		236			298			360			435			522			392	434	14.1	1000
		177			223			270			326			392			392	392	10.6	750
160	78.788	314	202	78.788	397	244	78.976	479	295	84.841	579	354	84.841	695	392	84.746	770	80	18.8	1500
		209			264			319			386			463			347	385	12.5	1000
		157			198			240			290			347			347	347	9.4	750
160	91.278	279	202	91.278	353	244	91.496	426	295	97.596	515	354	97.596	618	392	98.182	684	90	16.7	1500
		186			235			284			343			412			309	342	11.1	1000
		140			176			213			257			309			309	309	8.3	750
160	96.594	251	202	96.594	317	244	95.963	383	295	102.36	463	354	102.36	556	392	103.9	616	100	15.0	1500
		168			212			255			309			371			308	308	10.0	1000
		126			159			192			232			278			278	278	7.5	750
160	111.91	224	202	111.91	283	244	111.18	342	295	118.59	414	354	118.59	496	392	120.37	550	112	13.4	1500
		150			189			228			276			331			248	275	8.9	1000
		112			142			171			207			248			248	248	6.7	750
160	120.59	201	202	120.59	254	244	119.12	307	295	127.06	371	354	127.06	445	392	129.41	493	125	12.0	1500
		134			169			204			247			297			222	246	8.0	1000
		101			127			153			185			222			222	222	6.0	750

P系列行星齿轮减速机 PLANETARY GEARBOX

传动能力表
Selection Table

P2N和P2S传动能力表:(i=25~125)(续前页) P2N and P2S selection table:(i=25~125)

n ₁ (r/min)	n _{2N} (r/min)	i _N	P2-22			P2-23			P2-24			P2-25			P2-26			P2-27								
			T _{2N} (kN·m)	i _{ex}	P _{1N} (kW)	T _{2N} (kN·m)	i _{ex}	P _{1N} (kW)	T _{2N} (kN·m)	i _{ex}	P _{1N} (kW)	T _{2N} (kN·m)	i _{ex}	P _{1N} (kW)	T _{2N} (kN·m)	i _{ex}	P _{1N} (kW)	T _{2N} (kN·m)	i _{ex}	P _{1N} (kW)						
1500	60	25	450	26.622	1866	513	26.872	2127	592	26.872	2454	684	26.872	2863	763	26.872	3163	852	26.622	3532						
1000	40																				1399	1595	1841	2127	2372	2649
750	30																									
1500	54	28	450	29.139	1679	513	29.321	1914	592	29.321	2209	684	29.321	2552	763	29.321	2847	852	29.139	3179						
1000	36																				1259	1436	1657	1914	2135	2384
750	27																									
1500	48	31.5	450	32.342	2239	513	32.409	2552	592	32.409	2945	684	32.409	3403	763	32.409	3796	852	32.342	4238						
1000	32																				1492	1701	1963	2268	2530	2826
750	24																				1119	1276	1473	1701	1898	2129
1500	42	35.5	450	36.557	1959	513	36.424	2233	592	36.424	2577	684	36.424	2977	763	36.424	3821	852	36.557	3709						
1000	28																				1306	1489	1718	1985	2214	2472
750	21																				979	1117	1288	1489	1661	1854
1500	38	40	450	42.353	1772	513	41.855	2020	592	41.855	2331	684	41.855	2694	763	41.855	3005	852	42.353	3855						
1000	25																				1166	1329	1534	1772	1977	2208
750	19																				886	1010	1166	1347	1502	1678
1500	33.3	45	450	46.357	1571	513	45.373	1790	592	45.373	2066	684	45.373	2387	763	45.373	2663	852	46.948	1982						
1000	22.2																				1047	1194	1377	1592	1775	1982
750	16.7																				785	895	1033	1194	1332	1487
1500	30.0	50	450	52.399	1414	513	50.993	1611	592	50.993	1860	684	50.993	2149	763	50.993	2397	852	53.067	1784						
1000	20.0																				942	1074	1240	1432	1598	1784
750	15.0																				707	806	930	1074	1198	1338
1500	26.8	56	450	60.706	1262	513	58.597	1439	592	58.597	1660	684	58.597	1918	763	58.597	2140	852	61.48	1593						
1000	17.9																				841	959	1107	1279	1427	1593
750	13.4																				631	719	830	959	1070	1195
1500	23.8	63	450	66.084	1122	513	64.442	1279	592	64.442	1476	684	64.442	1705	763	64.442	1902	852	66.345	1416						
1000	15.9																				748	853	984	1137	1268	1416
750	11.9																				561	639	738	853	951	1062
1500	21.1	71	450	76.561	995	513	74.051	1135	592	74.051	1310	684	74.051	1513	763	74.051	1688	852	76.863	1256						
1000	14.1																				664	757	873	1009	1125	1256
750	10.6																				498	567	655	757	844	942
1500	18.8	80	450	84.746	883	513	82.781	1007	592	82																

P系列行星齿轮减速机 PLANETARY GEARBOX

传动能力表
Selection Table

P2N和P2S传动能力表:(i=25~125)(续前页) P2N and P2S selection table:(i=25~125)

P2-28			P2-29			P2-30			P2-31			P2-32			P2-33			P2-34			i _N	n _{2N} (r/min)	n ₁ (r/min)
T _{2N} (kN·m)	i _{ex}	P _{1N} (kW)	T _{2N} (kN·m)	i _{ex}	P _{1N} (kW)	T _{2N} (kN·m)	i _{ex}	P _{1N} (kW)	T _{2N} (kN·m)	i _{ex}	P _{1N} (kW)	T _{2N} (kN·m)	i _{ex}	P _{1N} (kW)	T _{2N} (kN·m)	i _{ex}	P _{1N} (kW)	T _{2N} (kN·m)	i _{ex}	P _{1N} (kW)			
950	26.622	3938	1060	26.622	4394	1200	26.622	4975	1330	26.872	5514	1500	26.872	6218	1680	26.622	6965	1920	26.622	7960	25	60	1500
		2954			3296			3731			4135			4664			5223			5970		40	1000
																						30	750
950	29.139	3544	1060	29.139	3955	1200	29.139	4477	1330	29.321	4962	1500	29.321	5597	1680	29.139	6268	1920	29.139	7164	28	54	1500
		2658			2966			3358			3722			4197			4701			5373		36	1000
																						27	750
950	32.342	4726	1060	32.342	5273	1200	32.342	5970	1330	32.409	6616	1500	32.409	7462	1680	32.342	8358	1920	32.342	9551	48	48	1500
		3151			3515			3980			4411			4975			5572			6368		32	1000
		2363			2637			2985			3308			3731			4179			4776		24	750
950	36.557	4135	1060	36.557	4614	1200	36.557	5223	1330	36.424	5789	1500	36.424	6529	1680	36.557	7313	1920	36.557	8385	42	42	1500
		2757			3076			3482			3860			4353			4875			5572		28	1000
		2068			2307			2612			2895			3265			3656			4179		21	750
950	42.353	3741	1060	42.353	4175	1200	42.353	4726	1330	41.855	5238	1500	41.855	5907	1680	42.353	6616	1920	42.353	7562	38	38	1500
		2461			2746			3109			3446			3886			4353			4975		25	1000
		1871			2087			2363			2619			2954			3308			3781		19	750
950	46.948	2210	1060	46.948	2466	1200	46.948	2792	1330	45.575	3095	1500	45.575	3490	1680	45.481	3909	1920	45.481	4467	45	33.3	1500
		1658			1850			2094			2321			2618			2932			3351		22.2	1000
																						16.7	750
950	53.067	1989	1060	53.067	2220	1200	53.067	2513	1330	51.221	2785	1500	51.221	3141	1680	51.409	3518	1920	51.409	4021	50	30.0	1500
		1492			1665			1885			2089			2356			2639			3016		20.0	1000
																						15.0	750
950	61.48	1776	1060	61.48	1982	1200	61.48	2244	1330	58.858	2487	1500	58.858	2805	1680	59.559	3141	1920	59.559	3590	56	26.8	1500
		1332			1486			1683			1865			2103			2356			2692		17.9	1000
																						13.4	750
950	66.345	1579	1060	66.345	1762	1200	66.345	1994	1330	66.102	2210	1500	66.102	2493	1680	66.345	2792	1920	66.345	3191	63	23.8	1500
		1184			1321			1496			1658			1870			2094			2393		15.9	1000
																						11.9	750
950	76.863	1401	1060	76.863	1563	1200	76.863	1770	1330	75.958	1961	1500	75.958	2212	1680	76.863	2478	1920	76.863	2831	71	21.1	1500
		1051			1172			1327			1471			1659			1858			2124		14.1	1000
																						10.6	750
950	84.241	1243	1060	84.241	1387	1200	84.241	1571	1330	83.932	1741	1500	83.932	1963	1680	84.241	2199	1920	84.241	2513	80	18.8	1500
		933			1041			1178			1306			1472			1649			1885		12.5	1000
																						9.4	750
950	97.596	1105	1060	97.596	1233	1200	97.596	1396	1330	96.448	1547	1500	96.448	1745	1680	97.596	1954	1920	97.596	2234	90	16.7	1500
		829			925			1047			1160			1309			1466			1675		11.1	1000
																						8.3	750
950	102.36	995	1060	102.36	1110	1200	102.36	1256	1330	104.3	1393	1500	104.3	1571	1680	104.69	1759	1920	104.69	2010	100	15.0	1500
		746			832			942			1044			1178			1319			1508		10.0	1000
																						7.5	750
950	118.59	888	1060	118.59	991	1200	118.59	1122	1330	119.96	1243	1500	119.96	1402	1680	121.28	1571	1920	121.28	1795	112	13.4	1500
		666			743			841			933			1052			1178			1346		8.9	1000
																						6.7	750
950	127.06	796	1060	127.06	888	1200	127.06	1005	1330	127.56	1114	1500	127.56	1256	1680	129.08	1407	1920	129.08	1608	125	12.0	1500
		597			666			754			836			942			1055			1206		8.0	1000
																						6.0	750

P系列行星齿轮减速机 PLANETARY GEARBOX

传动能力表
Selection Table

2. P3N和P3S传动能力表:(i=140~900) P3N and P3S selection table: (i=140~900)

n ₁ (r/min)	n _{2N} (r/min)	i _N	P3-9			P3-10			P3-11			P3-12			P3-13			P3-14		
			T _{2N} (kN·m)	i _{ex}	P _{1N} (kW)	T _{2N} (kN·m)	i _{ex}	P _{1N} (kW)	T _{2N} (kN·m)	i _{ex}	P _{1N} (kW)	T _{2N} (kN·m)	i _{ex}	P _{1N} (kW)	T _{2N} (kN·m)	i _{ex}	P _{1N} (kW)	T _{2N} (kN·m)	i _{ex}	P _{1N} (kW)
1500	10.7	140	22	146.81	24.8	31	146.81	34.9	42	147.12	47.3	60	142.04	68	83	142.94	94	117	142.94	132
1000	7.1				16.5			23.3			31.5			45			62			88
750	5.4				12.4			17.5			23.7			34			47			66
1500	9.4	160	22	165.95	21.7	31	165.95	30.6	42	165.34	41.4	60	159.64	59	83	161.57	82	117	161.57	115
1000	6.3				14.5			20.4			27.6			39			55			77
750	4.7				10.8			15.3			20.7			30			41			58
1500	8.3	180	22	192.25	19.3	31	192.25	27.2	42	189.99	36.8	60	183.44	53	83	187.19	73	117	187.19	103
1000	5.6				12.9			18.1			24.5			35			48			68
750	4.2				9.6			13.6			18.4			26			36			51
1500	7.5	200	22	210.43	17.3	31	210.43	24.4	42	207.96	33.1	60	200.79	47	83	204.88	65	117	204.88	92
1000	5.0				11.6			16.3			22.1			32			44			62
750	3.8				8.7			12.2			16.6			24			33			46
1500	6.7	225	22	233.57	15.4	31	233.57	21.7	42	230.82	29.4	60	222.86	42	83	227.41	58	117	227.41	82
1000	4.4				10.3			14.5			19.6			28			39			55
750	3.3				7.7			10.9			14.7			21			29			41
1500	6.0	250	22	264.01	13.9	31	264.01	19.6	42	260.9	26.5	60	251.90	38	83	257.04	52	117	257.04	74
1000	4.0				9.3			13.0			17.7			25			35			49
750	3.0				6.9			9.8			13.2			19			26			37
1500	5.4	280	22	305.86	12.4	31	305.86	17.5	42	302.26	23.7	60	291.84	34	83	297.79	47	117	297.79	66
1000	3.6				8.3			11.6			15.8			23			31			44
750	2.7				6.2			8.7			11.8			17			23			33
1500	5.4	280	22	295.21	13.5	31	295.21	17.6	42	295.82	24	60	285.62	34	83	287.42	47	117	287.42	67
1000	3.6				8.3			12			16			23			31			44
750	2.7				6.3			8.8			12			17			24			33
1500	4.8	315	22	333.68	11	31	333.68	16	42	332.46	21	60	320.99	30	83	324.88	42	117	324.88	59
1000	3.2				7.4			10.5			14			20			28			39
750	2.4				5.6			7.8			11			15			21			30
1500	4.2	355	22	386.58	10	31														

P系列行星齿轮减速机 PLANETARY GEARBOX

传动能力表
Selection Table

P3N和P3S传动能力表:(i=140~900)(续前页) P3N and P3S selection table: (i=140~900)

P3-16			P3-17			P3-18			P3-19			P3-20			P3-21			i _N	n _{2N} (r/min)	n ₁ (r/min)
T _{2N} (kN·m)	i _{ex}	P _{1N} (kW)	T _{2N} (kN·m)	i _{ex}	P _{1N} (kW)	T _{2N} (kN·m)	i _{ex}	P _{1N} (kW)	T _{2N} (kN·m)	i _{ex}	P _{1N} (kW)	T _{2N} (kN·m)	i _{ex}	P _{1N} (kW)	T _{2N} (kN·m)	i _{ex}	P _{1N} (kW)			
160	143.08	180	202	143.08	228	244	142.94	275	295	152.47	332	354	152.47	399	392	152.47	442	140	10.7	1500
		120			152			183			222			266			294		7.1	1000
		90			114			137			166			199			221		5.4	750
160	161.73	158	202	161.73	199	244	161.57	241	295	172.34	291	354	172.34	349	392	172.34	386	160	9.4	1500
		105			133			160			194			233			285		6.3	1000
		79			100			120			145			174			193		4.7	750
160	187.37	140	202	187.37	177	244	187.19	214	295	199.66	258	354	199.66	310	392	199.66	343	180	8.3	1500
		93			118			143			172			207			229		5.6	1000
		70			88			107			129			155			172		4.2	750
160	204.45	126	202	204.45	159	244	204.88	192	295	218.54	233	354	218.54	279	392	218.54	309	200	7.5	1500
		84			106			128			155			186			206		5.0	1000
		63			80			96			116			140			155		3.8	750
160	225.98	112	202	225.98	142	244	227.41	171	295	242.57	207	354	242.57	284	392	242.57	275	225	6.7	1500
		75			94			114			138			165			183		4.4	1000
		56			71			86			103			124			137		3.3	750
160	253.97	101	202	253.97	127	244	257.04	154	295	274.18	186	354	274.18	223	392	274.18	247	250	6.0	1500
		67			85			103			124			149			165		4.0	1000
		50			64			77			93			112			124		3.0	750
160	291.84	90	202	291.84	114	244	297.79	137	295	317.65	166	354	317.65	199	392	317.65	221	280	5.4	1500
		60			76			92			111			133			147		3.6	1000
		45			57			69			83			100			110		2.7	750
160	268.53	91	202	268.53	115	244	283.53	139	295	302.43	168	354	302.43	202	392	302.43	223	280	5.4	1500
		61			77			93			112			134			149		3.6	1000
		46			57			69			84			101			112		2.7	750
160	303.53	81	202	303.53	102	244	320.48	123	295	341.48	149	354	341.48	179	392	341.48	198	315	4.8	1500
		54			68			82			100			119			132		3.2	1000
		40			51			62			75			90			99		2.4	750
160	351.65	72	202	351.65	91	244	371.29	110	295	396.04	132	354	396.04	159	392	396.04	176	355	4.2	1500
		48			60			73			88			106			117		2.8	1000
		36			45			55			66			79			88		2.1	750
160	396.27	64	202	396.27	80	244	388.27	97	295	414.16	118	354	414.16	141	392	414.16	156	400	3.8	1500
		43			54			65			79			94			104		2.5	1000
		32			40			49			59			71			78		1.9	750
160	459.1	57	202	459.1	72	244	449.83	86	295	479.82	104	354	479.82	125	392	479.82	139	450	3.3	1500
		38			48			58			70			84			93		2.2	1000
		28			36			43			52			63			69		1.7	750
160	508.18	51	202	508.18	64	244	510.30	78	295	544.32	94	354	544.32	113	392	544.32	125	600	3.0	1500
		34			43			52			63			75			83		2.0	1000
		26			32			39			47			56			62		1.5	750
160	588.75	46	202	588.75	57	244	591.20	69	295	630.61	84	354	630.61	101	392	630.61	112	560	2.7	1500
		30			38			46			56			67			74		1.8	1000
		23			29			35			42			50			56		1.3	750
160	623.03	40	202	623.03	51	244	621.23	62	295	662.65	75	354	662.65	90	392	662.65	99	630	2.4	1500
		27			34			41			50			60			66		1.6	1000
		20			26			31			37			45			50		1.2	750
160	721.81	36	202	721.81	45	244	719.72	55	295	767.70	66	354	767.70	79	392	767.70	88	710	2.1	1500
		24			30			37			44			53			59		1.4	1000
		18			23			27			33			40			44		1.1	750
160	776.02	32	202	776.02	40	244	771.13	49	295	822.54	59	354	822.54	71	392	822.54	78	800	1.9	1500
		21			27			32			39			47			52		1.3	1000
		16			20			24			29			35			39		0.9	750
160	891.73	28	202	891.73	36	244	893.38	49	295	952.94	63	354	952.94	77	392	952.94	86	900	1.7	1500
		19			24			29			35			42			46		1.1	1000
		14			18			22			26			31			35		0.8	750

P系列行星齿轮减速机 PLANETARY GEARBOX

传动能力表
Selection Table

P3N和P3S传动能力表:(i=140~900)(续前页) P3N and P3S selection table: (i=140~900)

n ₁ (r/min)	n _{2N} (r/min)	i _N	P3-22			P3-23			P3-24			P3-25			P3-26			P3-27		
			T _{2N} (kN·m)	i _{ex}	P _{1N} (kW)	T _{2N} (kN·m)	i _{ex}	P _{1N} (kW)	T _{2N} (kN·m)	i _{ex}	P _{1N} (kW)	T _{2N} (kN·m)	i _{ex}	P _{1N} (kW)	T _{2N} (kN·m)	i _{ex}	P _{1N} (kW)	T _{2N} (kN·m)	i _{ex}	P _{1N} (kW)
1500	10.7	140	450	152.17	507	513	152.79	578	592	152.79	667	684	152.79	711	763	152.79	860	852	152.47	640
1000	7.1				253			289			333			385			430			480
750	5.4				444			506			584			674			753			850
1500	9.4	160	450	172.34	296	513	171.71	337	592	171.71	389	684	171.71	450	763	171.71	501	852	172.34	560
1000	6.3				222			253			292			337			376			420
750	4.7				394			450			519			599			669			753
1500	8.3	180	450	199.66	263	513	187.32	300	592	187.32	346	684	197.32	400	763	197.32	446	852	199.66	498
1000	5.6				197			225			259			300			334			373
750	4.2				355			405			467			539			602			680
1500	7.5	200	450	218.54	237	513	215.97	270	592	215.97	311	684	215.97	360	763	215.97	401	852	218.54	448
1000	5.0				202			233			270			311			350			390
750	3.8				315			360			415			479			535			597
1500	6.7	225	450	242.57	210	513	239.71	240	592	239.71	277	684	239.71	320	763	239.71	357	852	242.57	398
1000	4.4				158			180			207			240			267			299
750	3.3				284			324			373			432			481			538
1500	6.0	250	450	274.18	189	513	270.95	216	592	270.95	249	684	270.95	288	763	270.95	321	852	274.18	358
1000	4.0				142			162			187			216			241			269
750	3.0				253			289			333			385			430			480
1500	5.4	280	450	317.65	269	513	313.91	193	592	313.91	222	684	313.91	257	763	313.91	287	852	317.65	320
1000	3.6				127			144			167			193			215			240
750	2.7				256			292			337			389			434			485
1500	5.4	280	450	302.43	171	513	295.28	195	592	295.28	225	684	295.28	260	763	295.28	290	852	296.01	323
1000	3.6				128			146			168			195			217			242
750	2.7				228			260			300			346			386			431
1500	4.8	315	450	341.48	152	513	331.86	173	592	331.86	200	684	331.86	231	763	331.86	257	852	334.59	287
1000	3.2				114			130			150			173			193			216
750	2.4				202			230			266			307			343			383
1500																				

P系列行星齿轮减速机 PLANETARY GEARBOX

传动能力表
Selection Table

P3N和P3S传动能力表:(i=140~900)(续前页) P3N and P3S selection table: (i=140~900)

P3-28		P3-29		P3-30		P3-31		P3-32		P3-33		P3-34		i _N	n _{2N} (r/min)	n ₁ (r/min)							
T _{2N} (kN·m)	i _{ex}	P _{1N} (kW)	T _{2N} (kN·m)	i _{ex}	P _{1N} (kW)	T _{2N} (kN·m)	i _{ex}	P _{1N} (kW)	T _{2N} (kN·m)	i _{ex}	P _{1N} (kW)	T _{2N} (kN·m)	i _{ex}				P _{1N} (kW)						
950	152.47	714 535	1060	152.47	796 597	1200	152.47	901 676	1330	152.79	999 749	1500	152.79	1127 845	1680	153.90	1262 946	1920	153.90	1442 1082	140	10.7 7.1 5.4	1500 1000 750
950	172.34	624 468	1060	172.34	697 522	1200	172.34	789 591	1330	171.71	874 656	1500	171.71	986 739	1680	173.96	1104 828	1920	173.96	1262 946	160	9.4 6.3 4.7	1500 1000 750
950	199.66	555 416	1060	199.66	619 464	1200	199.66	701 526	1330	197.32	777 583	1500	197.32	876 657	1680	201.54	981 736	1920	201.54	1122 841	180	8.3 5.6 4.2	1500 1000 750
950	218.54	499 375	1060	218.54	557 418	1200	218.54	631 473	1330	215.97	699 524	1500	215.97	789 591	1680	219.91	883 662	1920	219.91	1009 757	200	5.0 3.8 2.7	1500 1000 750
950	242.57	666 444 333	1060	242.57	743 495 372	1200	242.57	841 561 421	1330	239.71	932 622 466	1500	239.71	1051 701 526	1680	243.07	1178 897 673	1920	243.07	1346 997 757	225	6.7 4.4 3.3	1500 1000 750
950	274.18	599 400 300	1060	274.18	669 446 334	1200	274.18	757 505 379	1330	270.95	839 559 420	1500	270.95	946 631 473	1680	273.18	1060 808 606	1920	273.18	1211 908 673	250	6.0 4.0 3.0	1500 1000 750
950	317.65	535 357 268	1060	317.65	597 398 299	1200	317.65	676 451 338	1330	313.91	749 499 375	1500	313.91	845 563 422	1680	313.91	946 631 473	1920	313.91	1082 721 541	280	5.4 3.6 3.7	1500 1000 750
950	296.01	541 361 270	1060	296.01	603 402 302	1200	296.01	683 455 342	1330	300.72	757 505 379	1500	300.72	854 569 427	1680	292.05	956 638 476	1920	292.05	1093 729 546	280	5.4 3.6 2.7	1500 1000 750
950	334.59	481 320 240	1060	334.59	536 358 268	1200	334.59	607 405 304	1330	337.97	673 449 336	1500	337.97	759 506 379	1680	330.11	850 567 425	1920	330.11	971 648 486	315	4.8 3.2 2.4	1500 1000 750
950	387.63	427 284 213	1060	387.63	467 317 238	1200	387.63	539 359 269	1330	388.37	597 398 299	1500	388.37	673 449 337	1680	382.45	754 503 377	1920	382.45	862 575 431	355	4.2 2.8 2.1	1500 1000 750
950	416.52	379 252 189	1060	416.52	422 282 211	1200	416.52	478 319 239	1330	426.24	530 353 265	1500	426.24	598 398 299	1680	417.18	669 446 335	1920	417.18	765 510 383	400	3.8 2.5 1.9	1500 1000 750
950	482.56	336 224 168	1060	482.56	375 250 188	1200	482.56	425 283 213	1330	489.80	471 314 236	1500	489.80	531 354 266	1680	483.31	595 397 298	1920	483.31	680 453 340	450	3.3 2.2 1.7	1500 1000 750
950	545.35	303 202 151	1060	545.35	338 225 169	1200	545.35	383 255 191	1330	546.60	424 283 212	1500	546.60	478 319 239	1680	535.90	536 357 268	1920	535.90	612 408 306	500	3.0 2.0 1.5	1500 1000 750
950	631.81	270 180 135	1060	631.81	302 201 151	1200	631.81	342 228 171	1330	628.12	379 252 189	1500	628.12	427 285 213	1680	620.86	478 319 239	1920	620.86	546 364 273	560	2.7 1.8 1.3	1500 1000 750
950	662.65	240 160 120	1060	662.65	268 179 134	1200	662.65	304 202 152	1330	670.15	336 224 168	1500	670.15	379 253 190	1680	657.74	425 283 213	1920	657.74	483 324 243	630	2.4 1.6 1.2	1500 1000 750
950	767.70	213 142 107	1060	767.70	238 159 119	1200	767.70	269 180 135	1330	770.08	299 199 149	1500	770.08	337 224 168	1680	762.02	377 251 189	1920	762.02	431 287 215	710	2.1 1.4 1.1	1500 1000 750
950	822.54	189 126 95	1060	822.54	211 141 106	1200	822.54	239 159 120	1330	827.92	265 177 132	1500	827.92	299 199 149	1680	819.53	335 223 167	1920	819.53	383 255 191	800	1.9 1.3 0.9	1500 1000 750
950	952.94	168 112 84	1060	952.94	188 125 94	1200	952.94	213 142 106	1330	959.17	236 157 118	1500	959.17	266 177 133	1680	941.73	298 198 149	1920	941.73	340 227 170	900	1.7 1.1 0.8	1500 1000 750

P系列行星齿轮减速机 PLANETARY GEARBOX

传动能力表
Selection Table

3. P2L传动能力表:(i=31.5~100) P2L selection table: (i=31.5~100)

n ₁ (r/min)	n _{2N} (r/min)	i _N	P2-9			P2-10			P2-11			P2-12			P2-13		
			T _{2N} (kN·m)	i _{ex}	P _{1N} (kW)	T _{2N} (kN·m)	i _{ex}	P _{1N} (kW)	T _{2N} (kN·m)	i _{ex}	P _{1N} (kW)	T _{2N} (kN·m)	i _{ex}	P _{1N} (kW)	T _{2N} (kN·m)	i _{ex}	P _{1N} (kW)
1500	47.6	31.5	22	32.5353	111	31	32.5353	156	42	32.8413	212	60	31.7089	302	83	31.6775	418
1000	31.7				74			104			141			202			279
750	23.8				55			78			106			151			209
1500	42.3	35.5	22	35.6114	98	31	35.6114	139	42	35.8344	188	60	34.5987	268	83	34.6723	345
1000	28.2				66			92			125			179			247
750	21.1				49			69			94			134			173
1500	37.5	40	22	39.5264	87	31	39.5264	123	42	39.6083	167	60	38.2424	238	83	38.4842	306
1000	25.0				58			82			111			159			204
750	18.8				44			62			83			119			153
1500	33.3	45	22	43.882	78	31	43.882	109	42	43.4177	148	60	41.9206	212	83	42.1856	293
1000	22.2				52			73			99			141			195
750	16.7				39			55			74			106			146
1500	30.0	50	22	50.4204	70	31	50.4204	98	42	50.5248	133	60	48.7826	191	83	49.0910	264
1000	20.0				47			66			89			127			176
750	15.0				35			49			67			95			132
1500	26.8	56	22	55.7278	62	31	55.7278	88	42	55.8432	119	60	53.9176	170	83	54.2585	235
1000	17.9				42			59			79			113			157
750	13.4				31			44			60			85			118
1500	23.8	63	22	60.4521	55	31	60.4521	78	42	60.5773	106	60	58.4884	151	83	62.3263	209
1000	15.9				37			52			71			101			139
750	11.9				28			39			53			76			105
1500	21.1	71	22	69.6115	49	31	69.6115	69	42	69.7557	94	60	67.3503	134	83	67.7761	186
1000	14.1				33			46			63			89			124
750	10.6				25			35			47			67			93
1500	18.8	80	22	79.0528	44	31	79.0528	62	42	79.9667	83	60	77.2092	119	83	77.6973	165
1000	12.5				29			41			56			79			110
750	9.4				22			31			42			60			82
1500	16.7	90	22	86.2394	39	31	86.2394	55	42	86.418	74	60	83.438	106	83	83.9656	146
1000	11.1				26			36			49			71			98
750	8.3				19			27			37			53			73
1500	15.0	100	22	98.2171	35	31	98.2171	49	42	98.4205	67	60	95.0266	95	83	95.6575	132
1000	10.0				23			33			44			64			88
750	7.5				17			25			33			48			66

P系列行星齿轮减速机 PLANETARY GEARBOX

传动能力表
Selection Table

P2L传动能力表:(i=31.5~100)(续前页) P2L selection table: (i=31.5~100)

P2-14			P2-16			P2-17			P2-18			P2-19			i _N	n _{2N} (r/min)	n ₁ (r/min)
T _{2N} (kN·m)	i _{ex}	P _{1N} (kW)	T _{2N} (kN·m)	i _{ex}	P _{1N} (kW)	T _{2N} (kN·m)	i _{ex}	P _{1N} (kW)	T _{2N} (kN·m)	i _{ex}	P _{1N} (kW)	T _{2N} (kN·m)	i _{ex}	P _{1N} (kW)			
117	31.6775	510	160	31.4135	806	202	31.4135	865	244	31.4286	1230	295	33.5237	1487	31.5	47.6	1500
		340			538			577			820			991		31.7	1000
		255			403			433			615			743		23.8	750
117	34.6723	478	160	34.3835	716	202	34.3835	858	244	34.3999	1091	295	36.6933	1319	35.5	42.3	1500
		324			477			572			728			880		28.2	1000
		243			358			429			546			660		21.1	750
117	38.4842	432	160	38.1635	635	202	38.1635	802	244	38.1819	969	295	40.7272	1171	40	35.5	1500
		288			423			535			646			781		25.0	1000
		216			318			401			484			585		18.8	750
117	42.1856	413	160	41.834	565	202	41.834	713	244	41.149	861	295	46.0254	1041	45	33.3	1500
		275			376			475			574			694		22.2	1000
		206			282			356			430			520		16.7	750
117	49.091	372	160	48.6818	508	202	48.6818	641	244	49.091	775	295	52.3636	937	50	30.0	1500
		248			339			428			517			625		20.0	1000
		186			254			321			378			468		15.0	750
117	54.2585	332	160	53.8063	454	202	53.8063	573	244	54.8664	692	295	58.524	836	56	26.8	1500
		221			302			382			461			558		17.9	1000
		166			227			286			346			418		13.4	750
117	62.3263	295	160	61.8069	403	202	61.8069	509	244	62.3263	615	295	66.4812	743	63	23.8	1500
		197			269			339			410			496		15.9	1000
		147			202			255			307			372		11.9	750
117	67.7761	262	160	67.2113	358	202	67.2113	452	244	67.7761	546	295	72.2943	660	71	21.1	1500
		174			239			301			364			440		14.1	1000
		131			179			226			273			330		10.6	750
117	77.6973	232	160	77.0498	318	202	77.0498	401	244	77.6973	484	295	82.8769	585	80	18.8	1500
		155			212			267			323			390		12.5	1000
		116			159			200			242			293		9.4	750
117	83.9656	206	160	83.2658	282	202	83.2658	356	244	83.9656	430	295	89.563	520	90	16.7	1500
		138			188			238			287			347		11.1	1000
		103			141			178			215			260		8.3	750
117	95.6275	186	160	94.8305	254	202	94.8305	321	244	95.6275	387	295	102.0023	468	100	15.0	1500
		124			169			214			258			312		10.0	1000
		93			127			160			194			234		7.5	750

注: 必须采用强制润滑。 Note: Must use forced lubrication.

P系列行星齿轮减速机 PLANETARY GEARBOX

传动能力表
Selection Table

3. P2L传动能力表:(i=31.5~100) P2L selection table: (i=31.5~100)

n ₁ (r/min)	n _{2N} (r/min)	i _N	P2-20			P2-21			P2-22			P2-23			P2-24			P2-25		
			T _{2N} (kN·m)	i _{ex}	P _{1N} (kW)	T _{2N} (kN·m)	i _{ex}	P _{1N} (kW)	T _{2N} (kN·m)	i _{ex}	P _{1N} (kW)	T _{2N} (kN·m)	i _{ex}	P _{1N} (kW)	T _{2N} (kN·m)	i _{ex}	P _{1N} (kW)	T _{2N} (kN·m)	i _{ex}	P _{1N} (kW)
1500	47.6	31.5	354	33.5237	1517	392	33.5237	1976	450	33.5237	2268	513	33.8391	1724	592	33.8391	1989	684	33.8391	2298
1000	31.7				1011			1317			1512			1293			1492			1724
750	23.8				758			988			1134			1293			1492			1724
1500	42.3	35.5	354	36.6933	1504	392	36.6933	1753	450	36.6933	2013	513	36.9231	1530	592	36.9231	1712	684	36.9231	2040
1000	28.2				1003			1169			1342			1147			1284			1712
750	21.1				752			877			1006			1147			1284			1712
1500	37.5	40	354	40.7272	1405	392	40.7272	1556	450	40.7272	1786	513	40.8116	1358	592	40.8116	1567	684	40.8116	1810
1000	25.0				937			1037			1191			1018			1175			1567
750	18.8				703			778			883			1018			1175			1567
1500	33.3	45	354	46.0254	1249	392	46.0254	1383	450	46.0254	1588	513	46.1208	1207	592	46.1208	1393	684	46.1208	1690
1000	22.2				833			922			1059			905			1044			1393
750	16.7				625			692			794			905			1044			1393
1500	30.0	50	354	52.3636	1124	392	52.3636	1245	450	52.3636	1429	513	52.472	1086	592	52.472	1253	684	52.1365	1448
1000	20.0				749			830			953			815			940			1253
750	15.0				562			622			714			815			940			1253
1500	26.8	56	354	58.524	1004	392	58.524	1111	450	58.524	1276	513	58.6452	970	592	58.6452	1119	684	58.6452	1293
1000	17.9				669			741			851			727			839			1119
750	13.4				502			556			638			727			839			1119
1500	23.8	63	354	66.4812	892	392	66.4812	988	450	66.4812	1134	513	66.6189	862	592	66.6189	995	684	66.6189	1149
1000	15.9				595			659			756			646			746			995
750	11.9				446			494			567			646			746			995
1500	21.1	71	354	72.2943	792	392	72.2943	877	450	72.2943	1006	513	72.4441	1147	592	72.4441	1324	684	72.4441	1530
1000	14.1				528			584			671			574			662			1324
750	10.6				396			438			503			574			662			1324
1500	18.8	80	354	82.8769	703	392	82.8769	778	450	82.8769	893	513	83.0486	1018	592	83.0486	1175	684	83.0486	1358
1000	12.5				468			519			595			509			587			1175
750	9.4				351			389			447			509			587			1175
1500	16.7	90	354	89.563	625	392	89.563	692	450	89.563	794	513	89.7486	905	592	89.7486	1044	684	89.7486	1207
1000	11.1				416			461			529			453			522			1044
750	8.3				312			346			397			453			522			1044
1500	15.0	100	354	102.0023	562	392	102.0023	622	450	102.0023	714	513	102.2136	815	592	102.2136	940	684	102.2136	1086
1000	10.0				375			415			476			407			470			940
750	7.5				281			311			357			407			470			940

注: 必须采用强制润滑。 Note: Must use forced lubrication.

P系列行星齿轮减速机 PLANETARY GEARBOX

传动能力表
Selection Table

P2L传动能力表:(i=31.5 ~100)(续前页) P2L selection table: (i=31.5~100)

P2-26			P2-27			P2-28			P2-29			P2-30			P2-31-P2-34			i _N	n _{2N} (r/min)	n ₁ (r/min)										
T _{2N} (kN·m)	i _{ex}	P _{1N} (kW)	T _{2N} (kN·m)	i _{ex}	P _{1N} (kW)	T _{2N} (kN·m)	i _{ex}	P _{1N} (kW)	T _{2N} (kN·m)	i _{ex}	P _{1N} (kW)	T _{2N} (kN·m)	i _{ex}	P _{1N} (kW)	T _{2N} (kN·m)	i _{ex}	P _{1N} (kW)													
763	33.8391	2564	852	33.5237	2863	950	33.5237	2937	1060	33.5237		1200	33.5237						31.5	47.6	1500									
		1923			2147			2203													31.7	1000								
																						23.8	750							
																						42.3	1500							
763	36.9231	2275	852	36.6933	2540	950	36.6933	2833	1060	36.6933		1200	36.6933								35.5	28.2	1000							
		1706			1905			2124															21.1	750						
																							37.5	1500						
763	40.8116	2019	852	40.7272	2255	950	40.7272	2514	1060	40.7272		1200	40.7272									40	25.0	1000						
		1514			1691			1885																18.8	750					
																								33.3	1500					
763	45.1208	1795	852	46.0254	2004	950	46.0254	2235	1060	46.0254		1200	46.0254									45	22.2	1000						
		1346			1503			1676				1870		2117										16.7	750					
																								30.0	1500					
763	52.1365	1615	852	52.0288	1804	950	52.0288	2011	1060	52.0288		1200	52.0288											20.0	1000					
		1211			1353			1508				1683		1905											15.0	750				
																									26.8	1500				
763	58.6452	1442	852	58.524	1610	950	58.524	1796	1060	58.524		1200	58.524												17.9	1000				
		1082			1208			1347				1503		1701												13.4	750			
																										23.8	1500			
763	66.6189	1282	852	66.4812	1432	950	66.4812	1596	1060	66.4812		1200	66.4812													15.9	1000			
		961			1074			1197				1336		1512													11.9	750		
																											21.1	1500		
763	72.4441	1138	852	72.2943	1270	950	72.2943	1416	1060	72.2943		1200	72.2943														14.1	1000		
		853			953			1062				1185		1342														10.6	750	
																												18.8	1500	
763	83.0486	1010	852	82.8769	1127	950	82.8769	1257	1060	82.8769		1200	82.8769															12.5	1000	
		757			845			943				1052		1191															9.4	750
																													16.7	1500
763	89.7486	897	852	89.563	1002	950	89.563	1117	1060	89.563		1200	89.563															11.1	1000	
		673			752			838				935		1059															8.3	750
																													15.0	1500
763	102.2136	808	852	102.0023	902	950	102.0023	1006	1060	102.0023		1200	102.0023																10.0	1000
		606			676			754				842		953															7.5	750

注: 必须采用强制润滑。 Note: Must use forced lubrication.

P系列行星齿轮减速机 PLANETARY GEARBOX

传动能力表
Selection Table

4. P2K传动能力表:(i=112 ~560) P2K selection table:(i=112~560)

n ₁ (r/min)	n _{2N} (r/min)	i _N	P2-9			P2-10			P2-11			P2-12			P2-13			P2-14		
			T _{2N} (kN·m)	i _{ex}	P _{1N} (kW)	T _{2N} (kN·m)	i _{ex}	P _{1N} (kW)	T _{2N} (kN·m)	i _{ex}	P _{1N} (kW)	T _{2N} (kN·m)	i _{ex}	P _{1N} (kW)	T _{2N} (kN·m)	i _{ex}	P _{1N} (kW)	T _{2N} (kN·m)	i _{ex}	P _{1N} (kW)
1500	13.4	112	22	111.25	30.9	31	111.25	43.6	42	111.83	59.0	60	107.97	84	83	107.97	117	117	107.76	164
1000	8.9				20.6			29.0			39.4			56			78			110
750	6.7				15.5			21.8			29.5			42			58			82
1500	12.0	125	22	125.75	27.7	31	125.75	39.0	42	125.68	52.9	60	121.35	76	83	121.8	105	117	121.8	147
1000	8.0				18.5			26.0			35.3			50			70			98
750	6.0				13.9			19.5			26.4			38			52			74
1500	10.7	140	22	145.69	24.7	31	145.69	34.9	42	144.42	47.2	60	139.44	67	83	141.11	93	117	141.11	132
1000	7.1				16.5			23.2			31.5			45			62			88
750	5.4				12.4			17.4			23.6			34			47			66
1500	9.4	160	22	157.28	21.6	31	157.28	30.5	42	155.27	41.3	60	149.91	59	83	151.19	82	117	151.19	115
1000	6.3				14.4			20.3			27.5			39			54			77
750	4.7				10.8			15.3			20.7			30			41			58
1500	8.3	180	22	175.77	19.2	31	175.77	27.1	42	173.52	36.7	60	167.54	52	83	167.85	73	117	167.85	102
1000	5.6				12.8			18.1			24.5			35			48			68
750	4.2				9.6			13.6			18.4			26			36			51
1500	7.5	200	22	203.53	17.3	31	203.53	24.4	42	200.92	33.1	60	193.99	47	83	192.86	65	117	192.86	92
1000	5.0				11.5			16.3			22.0			31			44			61
750	3.8				8.7			12.2			16.5			24			33			46
1500	6.7	225	22	223.22	15.4	31	223.22	21.7	42	200.36	29.4	60	212.76	42	83	213.16	58	117	213.16	82
1000	4.4				10.3			14.5			19.6			28			39			55
750	3.3				7.7			10.8			14.7			21			29			41
1500	6.0	250	22	242.15	13.9	31	242.15	19.5	42	239.04	26.4	60	230.8	39	83	231.23	52	117	231.23	74
1000	4.0				9.2			13.0			17.6			25			35			49
750	3.0				6.9			9.8			13.2			19			26			37
1500	5.4	280	22	278.84	12.4	31	278.84	17.4	42	275.26	23.6	60	265.77	34	83	266.26	47	117	266.26	66
1000	3.6				8.2			11.6			15.7			22			31			44
750	2.7				6.2			8.7			11.8			17			23			33
1500	4.7	320	22	316.65	10.8	31	316.65	15.3	42	312.6	20.7	60	301.82	30	83	302.38	41	117	302.38	58
1000	3.1				7.2			10.2			13.8			20			28			38
750	2.3				5.4			7.6			10.3			15			20			29
1500	4.2	360	22	345.44	9.6	31	345.44	13.6	42	341.01	18.4	60	329.25	26	83	329.86	36	117	329.86	51
1000	2.8				6.4			9.0			12.2			17			24			34
750	2.1				4.8			6.8			9.2			13			18			26
1500	3.8	400	22	393.42	8.7	31	393.42	12.2	42	388.38	16.5	60	374.98	24	83	375.68	33	117	375.68	46
1000	2.5				5.8			8.1			11.0									

P系列行星齿轮减速机 PLANETARY GEARBOX

传动能力表
Selection Table

P2K传动能力表:(i=112~560)(续前页) P2K selection table:(i=112~560)

P2-16			P2-17			P2-18			P2-19			P2-20			i _N	n _{2N} (r/min)	n ₁ (r/min)
T _{2N} (kN·m)	i _{ex}	P _{1N} (kW)	T _{2N} (kN·m)	i _{ex}	P _{1N} (kW)	T _{2N} (kN·m)	i _{ex}	P _{1N} (kW)	T _{2N} (kN·m)	i _{ex}	P _{1N} (kW)	T _{2N} (kN·m)	i _{ex}	P _{1N} (kW)			
160	108.47	225	220	108.47	284	244	107.76	343	295	114.94	415	354	114.94	498	112	13.4	1500
		150			189			229			276			332		8.9	1000
		112			142			171			207			249		6.7	750
160	122.6	201	220	122.6	254	244	121.8	307	295	129.92	372	354	129.92	446	125	12.0	1500
		134			170			205			248			297		8.0	1000
		101			127			154			186			223		6.0	750
160	142.04	180	220	142.04	227	244	141.11	274	295	150.52	332	354	150.52	398	140	10.7	1500
		120			151			183			221			265		7.1	1000
		90			114			137			166			199		5.4	750
160	153.05	157	220	153.05	199	244	151.19	240	295	161.27	290	354	161.27	348	160	9.4	1500
		105			132			160			193			232		6.3	1000
		79			99			120			145			174		4.7	750
160	167.77	140	220	167.77	177	244	165.73	213	295	176.78	258	354	176.78	310	180	8.3	1500
		93			118			142			172			206		5.6	1000
		70			88			107			129			155		4.2	750
160	195.23	126	220	195.23	159	244	192.86	192	295	205.71	232	354	205.71	279	200	7.5	1500
		84			106			128			155			186		5.0	1000
		63			79			96			116			139		3.8	750
160	215.79	112	220	215.79	141	244	213.16	171	295	227.37	206	354	227.37	248	225	6.7	1500
		75			94			114			138			165		4.4	1000
		56			71			85			103			124		3.3	750
160	234.08	101	220	234.08	127	244	244.85	154	295	261.18	186	354	261.18	223	250	6.0	1500
		67			85			102			124			149		4.0	1000
		50			64			77			93			111		3.0	750
160	269.55	90	220	269.55	114	244	266.26	137	295	284.01	166	354	284.01	199	280	5.4	1500
		60			76			91			111			133		3.6	1000
		45			57			69			83			100		2.7	750
160	309	79	220	309	99	244	305.24	120	295	325.59	145	354	325.59	174	320	4.7	1500
		52			66			80			97			116		3.1	1000
		39			50			60			73			87		2.3	750
160	333.93	70	220	333.93	88	244	329.86	107	295	351.86	129	354	351.86	155	360	4.2	1500
		47			59			71			86			103		2.8	1000
		35			44			53			64			77		2.1	750
160	380.31	63	220	380.31	79	244	375.68	96	295	400.72	116	354	400.72	139	400	3.8	1500
		42			53			64			77			93		2.5	1000
		31			40			48			58			70		1.9	750
160	427.53	56	220	427.53	71	244	422.33	85	295	450.48	103	354	450.48	124	450	3.3	1500
		37			47			57			69			83		2.2	1000
		28			35			43			52			62		1.7	750
160	471.38	50	220	471.38	64	244	465.64	77	295	496.68	93	354	496.68	111	500	3.0	1500
		34			42			51			62			74		2.0	1000
		25			32			38			46			56		1.5	750
按客户要求供货 According to customer requirements supply commodity															560	2.7	1500
																1.8	1000
																1.3	750

P系列行星齿轮减速机 PLANETARY GEARBOX

传动能力表
Selection Table

5. P3K传动能力表:(i=560~4000) P3K selection table:(i=560~4000)

n ₁ (r/min)	n _{2N} (r/min)	i _N	P3-9			P3-10			P3-11			P3-12			P3-13		
			T _{2N} (kN·m)	i _{ex}	P _{1N} (kW)	T _{2N} (kN·m)	i _{ex}	P _{1N} (kW)	T _{2N} (kN·m)	i _{ex}	P _{1N} (kW)	T _{2N} (kN·m)	i _{ex}	P _{1N} (kW)	T _{2N} (kN·m)	i _{ex}	P _{1N} (kW)
1500	2.68	560	22	566.22	6.3	31	566.22	9	42	567.4	12	60	547.83	17	83	551.29	24
1000	1.79				4.2			6			8			11			16
750	1.34				3.1			4.4			6			9			12
1500	2.38	630	22	640.02	5.6	31	640.02	7.8	42	637.68	11	60	615.69	15	83	623.14	21
1000	1.59				3.7			5.2			7			10			14
750	1.19				2.8			3.9			5			8			11
1500	2.11	710	22	700.53	5.0	31	700.53	7	42	697.96	9	60	673.9	14	83	682.06	19
1000	1.41				3.3			4.5			6			9			12
750	1.06				2.5			3.5			5			7			9
1500	1.88	800	22	777.54	4.4	31	777.54	6	42	774.7	8	60	747.98	12	83	757.04	17
1000	1.25				2.9			4			6			8			11
750	0.94				2.2			3			4			6			8
1500	1.67	900	22	878.88	3.9	31	878.88	5.5	42	875.66	7.5	60	845.46	11	83	855.70	15
1000	1.11				2.6			3.7			5			7			10
750	0.83				2.0			2.7			3.7			5			7
1500	1.50	1000	22	982.19	3.5	31	982.19	5	42	978.6	6.7	60	944.85	10	83	956.3	13
1000	1.00				2.3			3.3			4.5			6			9
750	0.75				1.8			2.5			3.4			5			7
1500	1.34	1120	22	1137.3	3.1	31	1137.3	4.4	42	1133.1	6	60	1094	9	83	1107.3	12
1000	0.89				2.1			2.9			4			6			8
750	0.67				1.6			2.2			3			4.5			6
1500	1.20	1250	22	1247.3	2.8	31	1247.3	4.0	42	1242.8	5.4	60	1199.9	8	83	1214.4	11
1000	0.80				1.9			2.6			3.6			5			7
750	0.60				1.4			2.0			2.7			4			5
1500	1.07	1400	22	1351.1	2.5	31	1351.1	3.5	42	1348.1	4.8	60	1301.6	7	83	1317.4	9
1000	0.71				1.7			2.4			3.2			5			6
750	0.54				1.3			1.8			2.4			3.5			4.5
1500	0.94	1600	22	1558.1	2.2	31	1558.1	3.1	42	1552.4	4.2	60	1498.9	6	83	1517	8
1000	0.63				1.5			2.1			2.8			4			6
750	0.47				1.1			1.5			2.1			3			4
1500	0.83	1800	22	1769.4	2.0	31	1769.4	2.8	42	1762.9	3.7	60	1702.1	5	83	1722.8	7
1000	0.56				1.3			1.8			2.5			4			5
750	0.42				1.0			1.4			1.9			2.7			3.7
1500	0.75	2000	22	1930.3	1.8	31	1930.3	2.5	42	1923.2	3.4	60	1856.9	4.8	83	1879.4	6.6
1000	0.50				1.2			1.7			2.2			3.2			4
750	0.38				0.9			1.2			1.7			2.4			3.3
1500	0.67	2240	22	2198.4	1.6	31	2198.4	2.2	42	2190.3	3.0	60	2114.8	4.3	83	2140.4	5.9
1000	0.45				1.0			1.5			2.0			2.9			3.9
750	0.33				0.8			1.1			1.5			2.1			3.0
1500	0.60	2500	22	2471.3	1.4	31	2471.3	2.0	42	2462.3	2.7	60	2377.4	3.8	83	2406.1	5.3
1000	0.40				0.9			1.3			1.8			2.6			3.5
750	0.30				0.7			1.0			1.3			1.9			2.7
1500	0.54	2800	22	2724.8	1.3	31	2724.8	1.8	42	2714.8	2.4	60	2621.2	3.4	83	2652.9	4.7
1000	0.36				0.8			1.2			1.6			2.3			3.2
750	0.27				0.6			0.9			1.2			1.7			2.4
1500	0.48	3150	22	3105	1.1	31	3104.9	1.6	42	3093.6	2.1	60	2986.9	3.0	83	3023.1	4.2
1000	0.32				0.7			1.0			1.4			2.0			2.8
750	0.24				0.6			0.8			1.1			1.5			2.1
1500	0.42	3550	22	3597.2	1.0	31	3597.2	1.4	42	3584.1	1.9	60	3460.5	2.7	83	3502.4	3.7
1000	0.28				0.7			0.9			1.3			1.8			2.5
750	0.21				0.5			0.7			0.9			1.4			1.9
1500	0.38	4000	22	4167.5	0.9	31	4167.5	1.2	42	4118.5							

P系列行星齿轮减速机 PLANETARY GEARBOX

传动能力表
Selection Table

P3K传动能力表:(i=560~4000)(续前页) P3KSelection table: (i=560~4000)

P3-14			P3-16			P3-17			P3-18			P3-19			i _N	n _{2N} (r/min)	n ₁ (r/min)
T _{2N} (kN·m)	i _{ex}	P _{1N} (kW)	T _{2N} (kN·m)	i _{ex}	P _{1N} (kW)	T _{2N} (kN·m)	i _{ex}	P _{1N} (kW)	T _{2N} (kN·m)	i _{ex}	P _{1N} (kW)	T _{2N} (kN·m)	i _{ex}	P _{1N} (kW)			
117	551.29	33	160	551.25	46	202	551.25	58	244	544.28	70	295	580.56	84	2.68	1500	
		22			30			29			46			35	56	1.79	1000
		17			23			29			35			42	1.34	750	
117	623.14	30	160	623.09	41	202	623.09	51	244	615.21	62	295	656.22	75	2.38	1500	
		20			27			26			41			31	50	1.59	1000
		15			20			26			31			37	1.19	750	
117	682.06	26	160	679.88	36	202	679.88	45	244	673.37	55	295	718.27	66	2.11	1500	
		18			24			23			30			27	44	1.41	1000
		13			18			23			27			33	1.06	750	
117	757.04	23	160	751.48	32	202	751.48	40	244	747.4	49	295	797.23	59	1.88	1500	
		16			21			20			27			24	39	1.25	1000
		12			16			20			24			29	0.94	750	
117	855.70	21	160	844.56	28	202	844.56	36	244	844.81	43	295	901.13	52	1.67	1500	
		14			19			18			24			29	1.11	1000	
		10			14			18			22			26	0.83	750	
117	956.3	19	160	943.84	26	202	943.84	32	244	937.9	39	295	1000.4	47	1.50	1500	
		12			17			16			22			26	1.00	1000	
		9			13			16			19			24	0.75	750	
117	1107.3	17	160	1092.4	23	202	1092.9	29	244	1077.6	35	295	1149.5	42	1.34	1500	
		11			15			11			19			23	0.86	1000	
		8			11			14			17			21	0.67	750	
117	1214.4	15	160	1198.6	20	202	1198.6	26	244	1191.1	31	295	1270.5	38	1.20	1500	
		10			14			10			17			19	0.60	750	
		7			10			13			16			19	0.60	750	
117	1317.4	13	160	1300.2	18	202	1300.2	23	244	1292.1	28	295	1378.2	34	1.07	1500	
		9			12			9			15			19	0.71	1000	
		7			9			12			14			17	0.54	750	
117	1517	12	160	1497.3	16	202	1497.3	20	244	1487.8	24	295	1587	29	0.94	1500	
		8			11			8			13			16	0.63	1000	
		6			8			10			12			15	0.47	750	
117	1722.8	10	160	1700.3	14	202	1700.3	18	244	1689.6	22	295	1802.3	26	0.83	1500	
		7			9			7.1			12			14	0.56	1000	
		5.2			7.1			9			11			13	0.42	750	
117	1879.4	9.4	160	1854.9	12.8	202	1854.9	16	244	1843.2	19	295	1966.1	24	0.75	1500	
		6.2			8.5			8			11			13	0.50	1000	
		4.7			6.4			8			10			12	0.38	750	
117	2140.4	8.3	160	2112.5	11.4	202	2112.5	14	244	2099.2	17	295	2239.2	21	0.67	1500	
		5.6			7.6			7.2			10			12	0.45	1000	
		4.2			5.7			7.2			8.7			10.5	0.33	750	
117	2406.1	7.5	160	2374.8	10.2	202	2374.8	12.9	244	2359.9	16	295	2517.2	19	0.60	1500	
		5.0			6.8			5.1			8.6			10.4	0.40	1000	
		3.7			5.1			6.5			7.8			9.4	0.30	750	
117	2652.9	6.7	160	2618.4	9.1	202	2618.4	12	244	2601.9	14	295	2775.4	17	0.54	1500	
		4.5			6.1			4.6			7.7			9.3	0.36	1000	
		3.3			4.6			5.8			7.0			8.4	0.27	750	
117	3023.1	5.9	160	2983.8	8.1	202	2983.8	10.2	244	2965	12	295	3162.6	15	0.48	1500	
		4.0			5.4			4.1			6.8			8.3	0.32	1000	
		3.0			4.1			5.1			6.2			7.5	0.24	750	
117	3502.4	5.3	160	3428.7	7.2	202	3428.7	9.1	244	3435	11	295	3664	13	0.42	1500	
		3.5			4.8			3.6			6.1			7.3	0.28	1000	
		2.6			3.6			4.6			5.5			6.6	0.21	750	
117	4057.6	4.7	160	3972.2	6.4	202	3972.2	8.1	244	3979.6	9.7	295	4244.9	12	0.38	1500	
		3.1			4.3			3.2			5.4			6.5	0.25	1000	
		2.3			3.2			4.0			4.9			5.9	0.19	750	

P系列行星齿轮减速机 PLANETARY GEARBOX

传动能力表
Selection Table

P3K传动能力表:(i=560~4000)(续前页) P3KSelection table: (i=560~4000)

n ₁ (r/min)	n _{2N} (r/min)	i _N	P3-20			P3-21			P3-22			P3-23			P3-24			P3-25		
			T _{2N} (kN·m)	i _{ex}	P _{1N} (kW)	T _{2N} (kN·m)	i _{ex}	P _{1N} (kW)	T _{2N} (kN·m)	i _{ex}	P _{1N} (kW)	T _{2N} (kN·m)	i _{ex}	P _{1N} (kW)	T _{2N} (kN·m)	i _{ex}	P _{1N} (kW)	T _{2N} (kN·m)	i _{ex}	P _{1N} (kW)
1500	2.68	560	354	580.56	101	392	580.56	75	450	580.56	128	513	593.88	146	592	593.88	169	684	593.88	130
1000	1.79				67			56			64			73			84			98
750	1.34				51			45			50			57			65			75
1500	2.38	630	354	656.22	90	392	656.22	66	450	656.22	114	513	667.44	130	592	667.44	150	684	667.44	116
1000	1.59				60			50			57			65			75			87
750	1.19				45			45			50			57			65			75
1500	2.11	710	354	718.27	80	392	718.27	59	450	718.27	101	513	730.55	115	592	730.55	133	684	730.55	103
1000	1.41				53			40			44			51			58			67
750	1.06				40			40			44			51			58			67
1500	1.88	800	354	797.23	71	392	797.23	47	450	797.23	90	513	810.87	102	592	810.87	118	684	810.87	91
1000	1.25				47			35			39			45			51			59
750	0.94				35			35			39			45			51			59
1500	1.67	900	354	901.13	63	392	901.13	42	450	901.13	80	513	916.54	91	592	916.54	105	684	916.54	81
1000	1.11				42			31			35			40			46			53
750	0.83				31			31			35			40			46			53
1500	1.50	1000	354	1000.4	57	392	1000.4	42	450	1000.4	72	513	1004.7	82	592	1004.7	95	684	1004.7	73
1000	1.00				38			28			31			36			41			47
750	0.75				28			28			31			36			41			47
1500	1.34	1120	354	1149.5	51	392	1149.5	34	450	1149.5	64	513	1169.1	73	592	1169.1	84	684	1169.1	65
1000	0.89				34			25			28			32			37			42
750	0.67				25			25			28			32			37			42
1500	1.20	1250	354	1270.5	45	392	1270.5	30	450	1270.5	58	513	1292.2	66	592	1292.2	76	684	1292.2	58
1000	0.80				30			23			25			29			33			38
750	0.60				23			23			25			29			33			38
1500	1.07	1400	354	1378.2	40	392	1378.2	27	450	1378.2	51	513	1401.8	59	592	1401.8	68	684	1401.8	52
1000	0.71				27			20			22			26			29			34
750	0.54				20			20			22			26			29			34
1500	0.94	1600	354	1587	35	392	1587	24	450	1587	45	513	1614.2	51	592	1614.2	59	684	1614.2	46
1000	0.63				24			18			20			22			26			30
750	0.47				18			18			20			22			26			30
1500	0.83	1800	354	1802.3	31	392	1802.3	21	450	1802.3	40	513	1850.4	46	592	1850.4	53	684	1850.4	40
1000	0.56				21			16			17			20			23			26
750	0.42				16			16			17			20			23			26
1500	0.75	2000	354	1966.1	28	392	1966.1	19	450	1966.1	36	513	1999.7	41	592	1999.7	47	684	1999.7	36
1000	0.50				19			14			16			18			20			24
750	0.38				14			14			16			18			20			24
1500	0.67	2240	354	2239.2	25	392	2239.2	17	450	2239.2										

传动能力表
Selection Table

P3K传动能力表:(i=560~4000)(续前页) P3KSelection table: (i=560~4000)

P3-26			P3-27			P3-28			P3-29			P3-30			P3-31-P3-34			i _n	n _{2N} (r/min)	n ₁ (r/min)
T _{2N} (kN·m)	i _{ex}	P _{1N} (kW)	T _{2N} (kN·m)	i _{ex}	P _{1N} (kW)	T _{2N} (kN·m)	i _{ex}	P _{1N} (kW)	T _{2N} (kN·m)	i _{ex}	P _{1N} (kW)	T _{2N} (kN·m)	i _{ex}	P _{1N} (kW)	T _{2N} (kN·m)	i _{ex}	P _{1N} (kW)			
763	593.88	218	852	580.56	243	950	580.56	271	1060	580.56	202	1200	580.56	342				560	2.68	1500
		145		162				181		202				228					1.79	1000
		109		122				136		151				171					1.34	750
		194		216				241		269				304					2.38	1500
763	667.44	129	852	656.22	144	950	656.22	161	1060	656.22	179	1200	656.22	203				630	1.59	1000
		97		108				121		134				152					1.19	750
		175		192				214		239				270					2.11	1500
763	730.55	115	852	718.27	128	950	718.27	143	1060	718.27	159	1200	718.27	180				710	1.41	1000
		86		96				107		119				135					1.06	750
		152		170				190		212				240					1.88	1500
763	810.87	102	852	797.23	113	950	797.23	127	1060	797.23	141	1200	797.23	160				800	1.25	1000
		76		85				95		106				120					0.94	750
		136		151				169		188				213					1.67	1500
763	916.54	90	852	901.13	101	950	901.13	112	1060	901.13	125	1200	901.13	142				900	1.11	1000
		68		76				84		94				107					0.83	750
		122		136				152		169				192					1.50	1500
763	1004.7	81	852	987.8	91	950	987.8	101	1060	987.8	113	1200	987.8	128				1000	1.00	1000
		61		68				76		85				96					0.75	750
		109		122				136		151				171					1.34	1500
763	1169.1	73	852	1149.5	81	950	1149.5	90	1060	1149.5	101	1200	1149.5	114				1120	0.86	1000
		54		61				68		76				86					0.67	750
		98		109				121		136				153					1.20	1500
763	1992.2	65	852	1270.5	73	950	1270.5	81	1060	1270.5	90	1200	1270.5	102				1250	0.80	1000
		49		54				61		68				77					0.60	750
		87		97				108		121				137					1.07	1500
763	1401.8	58	852	1459.5	65	950	1459.4	72	1060	1459.5	81	1200	1459.5	91				1400	0.71	1000
		44		49				54		61				68					0.54	750
		76		85				95		106				120					0.94	1500
763	1614.2	51	852	1587	57	950	1587	63	1060	1587	71	1200	1587	80				1600	0.63	1000
		38		43				47		53				60					0.47	750
		68		76				84		94				107					0.83	1500
763	1850.4	45	852	1819.3	50	950	1819.3	56	1060	1819.3	63	1200	1819.3	71				1800	0.56	1000
		34		38				42		47				53					0.42	750
		61		68				76		85				96					0.75	1500
763	1999.7	41	852	1966.1	45	950	1966.1	51	1060	1966.1	56	1200	1966.1	64				2000	0.50	1000
		30		34				38		42				48					0.38	750
		54		61				68		76				86					0.67	1500
763	2277.5	36	852	2239.2	41	950	2239.2	45	1060	2239.2	50	1200	2239.2	57				2240	0.45	1000
		27		30				34		38				43					0.33	750
		49		54				61		68				77					0.60	1500
763	2560.2	33	852	2517.2	36	950	2517.2	40	1060	2517.2	45	1200	2517.2	51				2500	0.40	1000
		24		27				30		34				38					0.30	750
		44		49				54		61				68					0.54	1500
763	2822.8	29	852	2775.4	32	950	2775.4	36	1060	2775.4	40	1200	2775.4	45				2800	0.36	1000
		22		24				27		30				34					0.27	750
		39		43				48		54				61					0.48	1500
763	3216.7	26	852	3162.6	29	950	3162.6	32	1060	3162.6	36	1200	3162.6	41				3150	0.32	1000
		19		22				24		27				30					0.24	750
		34		38				43		48				54					0.42	1500
763	3726.7	23	852	3664	26	950	3664	29	1060	3664	32	1200	3664	36				3550	0.28	1000
		17		19				21		24				27					0.21	750
		30		34				38		42				48					0.38	1500
763	4282.4	20	852	4244.9	23	950	4244.9	25	1060	4244.9	28	1200	4244.9	32				4000	0.25	1000
		15		17				19		21				24					0.19	750

额定热容量
Thermal Capacity

1. P2N.热容量(卧式安装):

风速	机座号																
	P _{G1}																
	9	10	11	12	13	14	16	17	18	19/20	21/22	23/24	25/26	27/28	29/30	31/32	33/34
狭小空间安装 风速 ≥ 0.5m/s	21	26	32	42	49	65	75	92	100	119	142	174	201	242	278	326	366
大厅或大车间安装 风速 ≥ 1.4m/s	29	37	45	60	69	92	106	130	147	169	201	246	285	343	406	462	519
室外安装 风速 ≥ 3.7m/s	39	50	60	80	93	125	143	175	191	228	272	333	386	464	505	626	702

2. P2S.热容量(卧式安装):

风速	机座号																
	P _{G1}																
	9	10	11	12	13	14	16	17	18	19/20	21/22	23/24	25/26	27/28	29/30	31/32	33/34
狭小空间安装 风速 ≥ 0.5m/s	15	20	24	32	36	49	56	69	75	89	106	130	151	182	215	245	275
大厅或大车间安装 风速 ≥ 1.4m/s	22	28	34	45	52	69	79	97	106	127	151	185	214	257	305	347	389
室外安装 风速 ≥ 3.7m/s	29	38	45	60	70	94	107	132	143	171	204	250	289	348	412	469	527

3. P3N.热容量(卧式安装):

风速	机座号																
	P _{G1}																
	9	10	11	12	13	14	16	17	18	19/20	21/22	23/24	25/26	27/28	29/30	31/32	33/34
狭小空间安装 风速 ≥ 0.5m/s	14	18	22	29	34	46	52	64	70	83	99	121	141	169	200	228	256
大厅或大车间安装 风速 ≥ 1.4m/s	20	26	31	41	48	64	74	91	99	118	140	172	199	240	284	323	362
室外安装 风速 ≥ 3.7m/s	28	35	42	56	65	87	100	123	133	159	190	233	269	324	384	437	490

4. P3S.热容量(卧式安装):

风速	机座号																
	P _{G1}																
	9	10	11	12	13	14	16	17	18	19/20	21/22	23/24	25/26	27/28	29/30	31/32	33/34
狭小空间安装 风速 ≥ 0.5m/s	12	15	18	24	28	40	43	53	57	69	82	100	116	139	165	188	211
大厅或大车间安装 风速 ≥ 1.4m/s	17	21	26	34	40	53	61	75	81	97	116	142	164	197	234	166	298
室外安装 风速 ≥ 3.7m/s	23	29	35	46													

P系列行星齿轮减速机 PLANETARY GEARBOX

额定热容量 Thermal Capacity

5. P2L.热容量(卧式安装):

风速 P _{G1}	机座号															
	9	10	11	12	13	14	16	17	18	19/20	21/22	23/24	25/26	27/28	29/30	31-34
狭小空间安装 风速≥0.5m/s	14	18	22	29	34	46	52	64	70	83	99	121	141	169	200	按客户 要求供货
大厅或大车间安装 风速≥1.4m/s	20	26	31	41	48	64	74	91	99	118	140	172	199	240	284	
室外安装 风速≥3.7m/s	28	35	42	56	65	87	100	123	133	159	190	233	269	324	384	

6. P2K.热容量(卧式安装):

风速 P _{G1}	机座号									
	9	10	11	12	13	14	16	17	18	19/20
狭小空间安装 风速≥0.5m/s	12	15	18	24	28	38	44	53	58	69
大厅或大车间安装 风速≥1.4m/s	17	22	26	35	40	54	62	76	82	98
室外安装 风速≥3.7m/s	23	29	35	47	54	73	83	102	111	133

7. P3K.热容量(卧式安装):

风速 P _{G1}	机座号															
	9	10	11	12	13	14	16	17	18	19/20	21/22	23/24	25/26	27/28	29/30	31/34
狭小空间安装 风速≥0.5m/s	10	12	15	20	23	31	35	43	47	56	67	82	95	109	125	按客户 要求供货
大厅或大车间安装 风速≥1.4m/s	14	17	21	28	33	44	50	61	66	79	95	116	106	125	144	
室外安装 风速≥3.7m/s	19	24	28	38	44	59	67	82	90	107	128	157	166	195	225	

注: 以上表格数据均为卧式热容量, 其他安装型式请来电咨询。

P系列行星齿轮减速机 PLANETARY GEARBOX

额定热容量 Thermal Capacity

1. P2N. thermal capacity (horizontal assembly):

Wind speed P _{G1}	Type no																
	9	10	11	12	13	14	16	17	18	19/20	21/22	23/24	25/26	27/28	29/30	31/32	33/34
Small room to installation Wind speed≥0.5m/s	21	26	32	42	49	65	75	92	100	119	142	174	201	242	278	326	366
Big working room installation Wind speed≥1.4m/s	29	37	45	60	69	92	106	130	147	169	201	246	285	343	406	462	519
Outdoor installation Wind speed≥3.7m/s	39	50	60	80	93	125	143	175	191	228	272	333	386	464	505	626	702

2. P2S. thermal capacity (horizontal assembly):

Wind speed P _{G1}	Type no																
	9	10	11	12	13	14	16	17	18	19/20	21/22	23/24	25/26	27/28	29/30	31/32	33/34
Small room to installation Wind speed≥0.5m/s	15	20	24	32	36	49	56	69	75	89	106	130	151	182	215	245	275
Big working room installation Wind speed≥1.4m/s	22	28	34	45	52	69	79	97	106	127	151	185	214	257	305	347	389
Outdoor installation Wind speed≥3.7m/s	29	38	45	60	70	94	107	132	143	171	204	250	289	348	412	469	527

3. P3N. thermal capacity (horizontal assembly):

Wind speed P _{G1}	Type no																
	9	10	11	12	13	14	16	17	18	19/20	21/22	23/24	25/26	27/28	29/30	31/32	33/34
Small room to installation Wind speed≥0.5m/s	14	18	22	29	34	46	52	64	70	83	99	121	241	169	200	228	256
Big working room installation Wind speed≥1.4m/s	20	26	31	41	48	64	74	91	99	118	140	172	199	240	284	323	362
Outdoor installation Wind speed≥3.7m/s	28	35	42	56	65	87	100	123	133	159	190	233	269	324	384	437	490

4. P3S. thermal capacity (horizontal assembly):

Wind speed P _{G1}	Type no																
	9	10	11	12	13	14	16	17	18	19/20	21/22	23/24	25/26	27/28	29/30	31/32	33/34
Small room to installation Wind speed≥0.5m/s	12	15	18	24	28	40	43	53	57	69	82	100	116	139	165	188	211
Big working room installation Wind speed≥1.4m/s	17	21	26	34	40	53	61	75	81	97	116	142	164	197	234	166	298
Outdoor installation Wind speed≥3.7m/s	23	29	35	46	54	72	82	101	110	131	156	192	222	267	316	360	404

P系列行星齿轮减速机 PLANETARY GEARBOX

额定热容量 Thermal Capacity

5. P2L. thermal capacity (horizontal assembly):

Wind speed	Type no		P _{G1}															
	9	10	11	12	13	14	16	17	18	19/20	21/22	23/24	25/26	27/28	29/30	31-34		
Small room to installation Wind speed ≥ 0.5m/s	14	18	22	29	34	46	52	64	70	83	99	121	141	169	200	According to customer requirements supply commodity		
Big working room installation Wind speed ≥ 1.4m/s	20	26	31	41	48	64	74	91	99	118	140	172	199	240	284			
Outdoor installation Wind speed ≥ 3.7m/s	28	35	42	56	65	87	100	123	133	159	190	233	269	324	384			

6. P2K. thermal capacity (horizontal assembly):

Wind speed	Type no		P _{G1}							
	9	10	11	12	13	14	16	17	18	19/20
Small room to installation Wind speed ≥ 0.5m/s	12	15	18	24	28	38	44	53	58	69
Big working room installation Wind speed ≥ 1.4m/s	17	22	26	35	40	54	62	76	82	98
Outdoor installation Wind speed ≥ 3.7m/s	23	29	35	47	54	73	83	102	111	133

6. P3K. thermal capacity (horizontal assembly):


Wind speed	Type no		P _{G1}															
	9	10	11	12	13	14	16	17	18	19/20	21/22	23/24	25/26	27/28	29/30	31/34		
Small room to installation Wind speed ≥ 0.5m/s	10	12	15	20	23	31	35	43	47	56	67	82	95	109	125	According to customer requirements supply commodity		
Big working room installation Wind speed ≥ 1.4m/s	14	17	21	28	33	44	50	61	66	79	95	116	106	125	144			
Outdoor installation Wind speed ≥ 3.7m/s	19	24	28	38	44	59	67	82	90	107	128	157	166	195	225			

Note: the above table data are horizontal heat capacity, the other mounting type call advisory

P系列行星齿轮减速机 PLANETARY GEARBOX

外形尺寸图表 Out Dimensions Table

P2NA i_N = 25...40

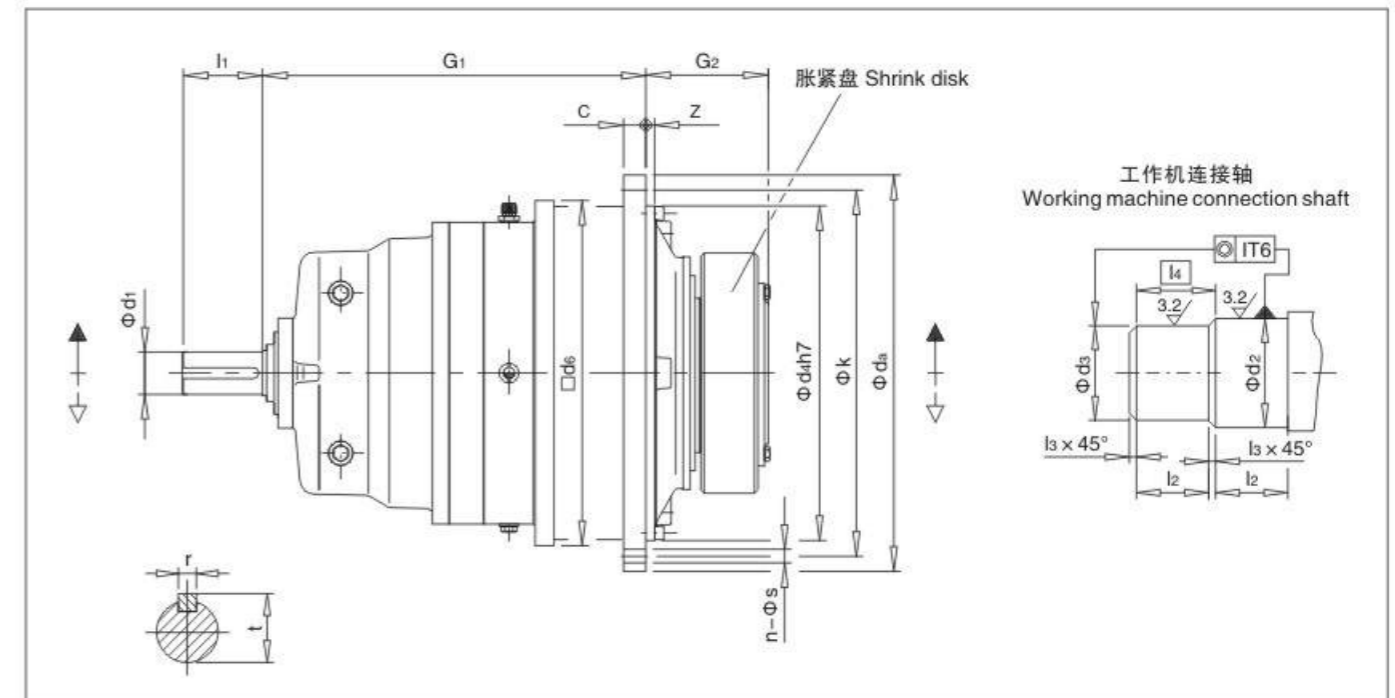


P2NA 机座号 Type No	额定输出 扭矩 Nominal output torque T2N (N·M)	输入轴尺寸 Input shaft size				d2	d3	l2	l3	l4	c	da	d4	d6	G1	G2	k	z	法兰孔 尺寸 Flange hole n	重量 Weight (kg)	油量 Oil liter (l)	
		d1	l1	r	t																	
9	22000	55	90	16	59	120	115	65	2.5	67.5	24	428	350	356	469	165	388	6 ± 1.5	18	24	145	6
10	31000	55	90	16	59	130	125	70	2.5	72.5	28	472	394	400	489	174	436	6 ± 1.5	18	28	195	8
11	42000	70	120	20	74.5	140	135	82.5	2.5	85	32	525	425	436	579	204	485	6 ± 1.5	22	20	280	12
12	60000	70	120	20	74.5	160	155	90	2.5	92.5	34	605	495	510	593	224	555	9 ± 1.5	26	20	425	16
13	83000	80	140	25	85	180	175	95	2.5	97.5	39	645	535	554	714	241	595	11 ± 1.5	26	24	540	20
14	117000	80	140	25	85	210	205	105	2.5	107.5	42	720	610	629	737	278	665	9	26	32	805	32
16	160000	95	160	25	100	230	225	110	2.5	112.5	44	770	660	680	851	285	715	10	26	36	1030	40
17	202000	95	160	25	100	250	245	120	2.5	122.5	50	895	750	775	877	294	830	10	33	24	1500	56
18	244000	110	180	28	116	260	255	120	2.5	122.5	50	930	785	815	1006	303	865	10	33	32	1900	66
19	295000	110	180	28	116	280	275	135	2.5	137.5	56	980	840	870	1029.5	327.5	915	12	33	36	2000	82
20	354000	110	180	28	116	300	295	135	2.5	137.5	56	980	840	870	1029.5	327.5	915	12	33	36	2100	75
21	392000	120	210	32	127	310	305	152	2.5	154.5	62	1115	935	960	1046	354	1025	24	39	32	2650	110
22	450000	120	210	32	137	330	325	152	2.5	154.5	62	1115	935	930	1046	354	1025	24	39	32	2800	95
23	513000	130	210	32	137	350	345	164	2.5	166.5	68	1210	1025	1056	1150	380	1120	28	39	36	3450	150
24	592000	130	210	32	137	360	355	164	2.5	166.5	68	1210	1025	1056	1150	380	1120	28	39	36	3900	125
25	684000	140	240	36	148	380	375	180	2.5	182.5	74	1320	1115	1150	1241	407	1220	29	45	36	4750	190
26	763000	140	240	36	148	400	395	180	2.5	182.5	74	1320	1115	1150	1241	407	1220	29	45	36	5150	160
27	852000	150	240	36	158	430	425	191	2.5	193.5	81	1460	1215	1248	1379	453	1345	31	52	32	61000	245
28	950000	150	240	36	158	450	445	191	2.5	193.5	81	1460	1215	1248	1379	453	1345	31	52	32	6550	205
29	1060000	160	270	40	169	460	450	197.5	5	202.5	87	1565	1320	1355	1457	483	1450	34	52	36	7800	305
30	1200000	160	270	40	169	480	470	197.5	5	202.5	87	1565	1320	1355	1457	483	1450	34	52	36	8300	255
31	1330000	170	270	40	179	480	470	232	5	237.0	94	1665	1400	1443	1607	538	1545	36	62	32	10200	380
32	1500000	170	270	40	179	510	500	232	5	237.0	94	1665	1400	1443	1607	538	1545	36	62	32	10700	315
33	1680000	180	310	40	179	530	520	242	5	247.0	100	1755	1495	1536	1683	573	1635	36	62	36	12350	460
34	1920000	180	310	45	190	570	560	242	5	247.0	100	1755	1495	1536	1683	573	1635	36	62	36	13150	380

- 注: 1 当d1 ≤ 100时公差为m6, 当d1 > 100时公差为n6;
 2 当尺寸d2或d3 ≤ 160时, 公差为h6;
 当尺寸d2或d3 > 160时, 公差为g6;
 3 重量不包括胀紧盘和润滑油。
 1. When d1 ≤ 100, tolerance is m6, d1 > 100, tolerance is n6;
 2. When d2 or d3 ≤ 160, tolerance is h6;
 When d2 or d3 > 16, tolerance is g6;
 3. Weight is not including shrink disk and fabrication oil.

P系列行星齿轮减速机 PLANETARY GEARBOX

外形尺寸图表
Out Dimensions Table

P2LA $i_N = 31.5 \dots 100$

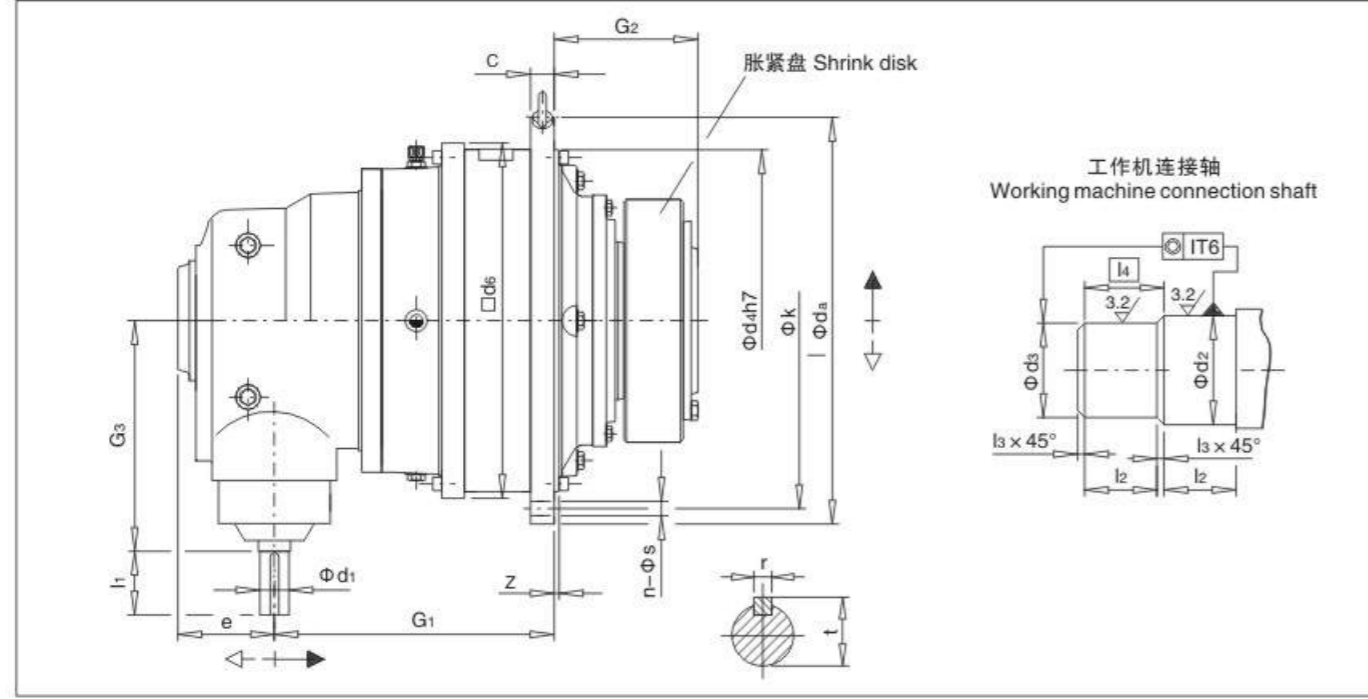


P2LA 机座号 Type No	额定输出 扭矩 Nominal output torque T2N (N·M)	输入轴尺寸 Input shaft size								d2	d3	l2	l3	l4	c	da	d4	d6	e	G1	G2	G3	k	z	法兰孔 尺寸 Flange hole		重量 Weight (kg)	油量 Oil liter (l)
		$i_N \leq 90$				$i_N \geq 100$																			s	n		
		d1	l1	r	t	d1	l1	r	t																			
9	22000	50	100	14	53.5	40	80	12	43	130	125	70	2.5	72.5	28	472	394	400	185	445	174	305	436	6 ± 1.5	18	24	159	6
10	31000	50	100	14	53.5	40	80	12	43	130	125	70	2.5	72.5	28	472	394	400	185	445	174	305	436	6 ± 1.5	18	28	215	8
11	42000	60	110	18	64	50	100	14	53.5	140	135	82.5	2.5	85	32	525	425	436	210	501	204	350	485	6 ± 1.5	22	20	310	12
12	60000	60	110	18	64	50	100	14	53.5	160	155	90	2.5	92.5	34	605	495	510	210	515	224	350	555	9 ± 1.5	26	20	470	16
13	83000	75	135	20	79.5	60	110	18	64	180	175	95	2.5	97.5	39	645	535	554	250	619	241	415	595	11 ± 1.5	26	24	595	20
14	117000	75	135	20	79.5	60	110	18	64	210	205	105	2.5	107.5	42	720	610	629	250	642	278	415	665	9	26	32	890	32
16	160000	85	165	22	90	70	140	20	74.5	230	225	110	2.5	112.5	44	770	660	680	295	705	285	490	715	10	26	36	1137	40
17	202000	85	165	22	90	70	140	20	74.5	250	245	120	2.5	122.5	50	895	750	775	295	731	294	490	830	10	33	24	1660	56
18	244000	95	165	25	100	75	140	20	79.5	260	255	120	2.5	122.5	50	930	785	815	350	882	303	605	865	10	33	32	2100	66
19	295000	95	165	25	100	75	140	20	79.5	280	275	135	2.5	137.5	56	980	840	870	350	905.5	327.5	605	915	12	33	36	2200	82
20	354000	95	165	25	100	75	140	20	79.5	300	295	135	2.5	137.5	56	980	840	870	350	905.5	327.5	605	915	12	33	36	2300	75
21	392000	115	205	32	122	90	170	25	95	310	305	152	2.5	154.5	62	1115	935	960	400	996	354	700	1025	24	39	32	2930	110
22	450000	115	205	32	122	90	170	25	95	330	325	152	2.5	154.5	62	1115	935	930	400	996	354	700	1025	24	39	32	3100	95
23	513000	115	205	32	122	90	170	25	95	350	345	164	2.5	166.5	68	1210	1025	1056	400	1055	380	700	1120	28	39	36	3800	150
24	592000	115	205	32	122	90	170	25	95	360	355	164	2.5	166.5	68	1210	1025	1056	400	1055	380	700	1120	28	39	36	4300	125
25	684000	140	245	36	148	110	210	28	116	380	375	180	2.5	182.5	74	1320	1115	1150	475	1138	407	835	1220	29	45	36	52500	190
26	763000	140	245	36	148	110	210	28	116	400	395	180	2.5	182.5	74	1320	1115	1150	475	1138	407	835	1220	29	45	36	5660	160
27	852000	140	245	36	148	110	210	28	116	430	425	191	2.5	193.5	81	1460	1215	1248	475	1272	453	835	1345	31	52	32	6680	245
28	950000	140	245	36	148	110	210	28	116	450	445	191	2.5	193.5	81	1460	1215	1248	475	1272	453	835	1345	31	52	32	7180	205
29	1060000	150	245	40	169	115	210	32	122	460	450	197.5	5	202.5	87	1565	1320	1355	530	1367	483	945	1450	34	52	36	8500	305
30	1200000	150	245	40	169	115	210	32	122	480	470	197.5	5	202.5	87	1565	1320	1355	530	1367	483	945	1450	34	52	36	9070	255
31-34	按客户要求供货 According to customer requirements supply commodity																											

- 注： 1 当 $d1 \leq 100$ 时公差为 $m6$ ，当 $d1 > 100$ 时公差为 $n6$ ；
 2 当尺寸 $d2$ 或 $d3 \leq 160$ 时，公差为 $h6$ ；
 当尺寸 $d2$ 或 $d3 > 160$ 时，公差为 $g6$ ；
 3 重量不包括胀紧盘和润滑油。

P系列行星齿轮减速机 PLANETARY GEARBOX

外形尺寸图表
Out Dimensions Table

P2SA $i_N = 45 \dots 125$

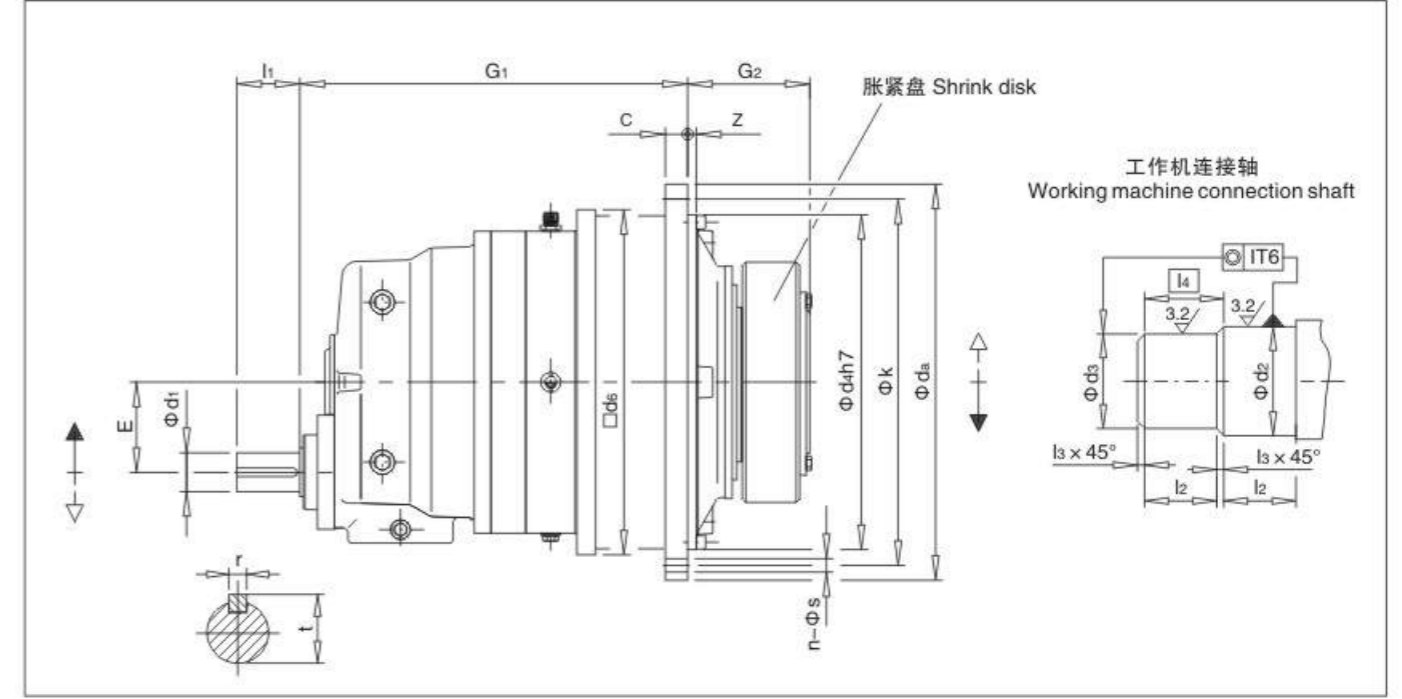


P2SA 机座号 Type No	额定输出 扭矩 Nominal output torque T2N (N·M)	输入轴尺寸 Input shaft size								d2	d3	l2	l3	l4	c	da	d4	d6	E	G1	G2	k	z	法兰孔 尺寸 Flange hole		重量 Weight (kg)	油量 Oil liter (l)
		$i_N \leq 90$				$i_N \geq 100$																		s	n		
		d1	l1	r	t	d1	l1	r	t																		
9	22000	38	60	10	41	120	115	65	2.5	67.5	24	428	350	356	90	469	165	388	6 ± 1.5	18	24	160	6				
10	31000	38	60	10	41	130	125	70	2.5	72.5	28	472	394	400	90	489	174	436	6 ± 1.5	18	28	220	8				
11	42000	55	90	16	59	140	135	82.5	2.5	85	32	525	425	436	115	579	204	485	6 ± 1.5	22	20	310	12				
12	60000	55	90	16	59	160	155	90	2.5	92.5	34	605	495	510	115	593	224	555	9 ± 1.5	26	20	470	16				
13	83000	70	120	20	74.5	180	175	95	2.5	97.5	39	645	535	554	140	714	241	595	11 ± 1.5	26	24	600	20				
14	117000	70	120	20	74.5	210	205	105	2.5	107.5	42	720	610	629	140	737	278	665	9	26	32	900	32				
16	160000	80	140	25	85	230	225	110	2.5	112.5	44	770	660	680	170	851	285	715	10	26	36	1150	40				
17	202000	80	140	25	85	250	245	120	2.5	122.5	50	895	750	775	170	877	294	830	10	33	24	1650	56				
18	244000	90	160	25	95	260	255	120	2.5	122.5	50	930	785	815	200	1006	303	865	10	33	32	1950	66				
19	295000	90	160	25	95	280	275	135	2.5	137.5	56	980	840	870	200	1029.5	327.5	915	12	33	36	2400	82				
20	354000	90	160	25	95	300	295	135	2.5	137.5	56	980	840	870	200	1029.5	327.5	915	12	33	36	2500	75				
21	392000	100	180	28	106	310	305	152	2.5	154.5	62	1115	935	960	230	1076	354	1025	24	39	32	2900	110				
22	450000	100	180	28	106	330	325	152	2.5	154.5	62	1115	935	930	230	1076	354	1025	24	39	32	3100	95				
23	513000	120	210	32	127	350	345	164	2.5	166.5	68	1210	1025	1056	265	1175	380	1120	28	39	36	3800	150				
24	592000	120	210	32	127	360	355	164	2.5	166.5	68	1210	1025	1056	265	1175	380	1120	28	39	36	4100	125				
25	684000	130	210	32	137	380	375	180	2.5	182.5	74	1320	1115	1150	300	1291	407	1220	29	45	36	4950	190				
26	763000	130	210	32	137	400	395	180	2.5	182.5	74	1320	1115	1150	300	1291	407	1220	29	45	36	5350	160				
27	852000	140	240	36	148	430	425	191	2.5	193.5	81	1460	1215	1248	320	1429	453	1345	31	52	32	6800	245				
28	950000	140	240	36	148	450	445	191	2.5	193.5	81	1460	1215	1248	320	1429	453	1345	31	52	32	7200	205				
29	1060000	150	240	36	158	460	450	197.5	5	202.5	87	1565	1320	1355	360	1507	483	1450	34	52	36	8500	305				
30	1200000	150	240	36	158	480	470	197.5	5	202.5	87	1565	1320	1355	360	1507	483	1450	34	52	36	9000	255				
31	1330000	160	270	40	169	480	470	232	5	237.0	94	1665	1400	1443	400	1662	538	1545	36	62	32	10500	380				
32	1500000	160	270	40	169	510	500	232	5	237.0	94	1665	1400	1443	400	1662	538	1545	36	62	32	11200	315				
33	1680000	170	270	40	179	530	520	242	5	247.0	100	1755	1495	1536	400	1743	573	1635	36	62	36	12700	460				
34	1920000	170	270	40	179	570	560	242	5	247.0	100	1755	1495	1536	400	1743	573	1635	36	62	36	13500	380				

- 注： 1 当 $d1 \leq 100$ 时公差为 $m6$ ，当 $d1 > 100$ 时公差为 $n6$ ；
 2 当尺寸 $d2$ 或 $d3 \leq 160$ 时，公差为 $h6$ ；
 当尺寸 $d2$ 或 $d3 > 160$ 时，公差为 $g6$ ；
 3 重量不包括胀紧盘和润滑油。

P系列行星齿轮减速机 PLANETARY GEARBOX

外形尺寸图表
Out Dimensions Table

P2KA $i_N = 112...500$

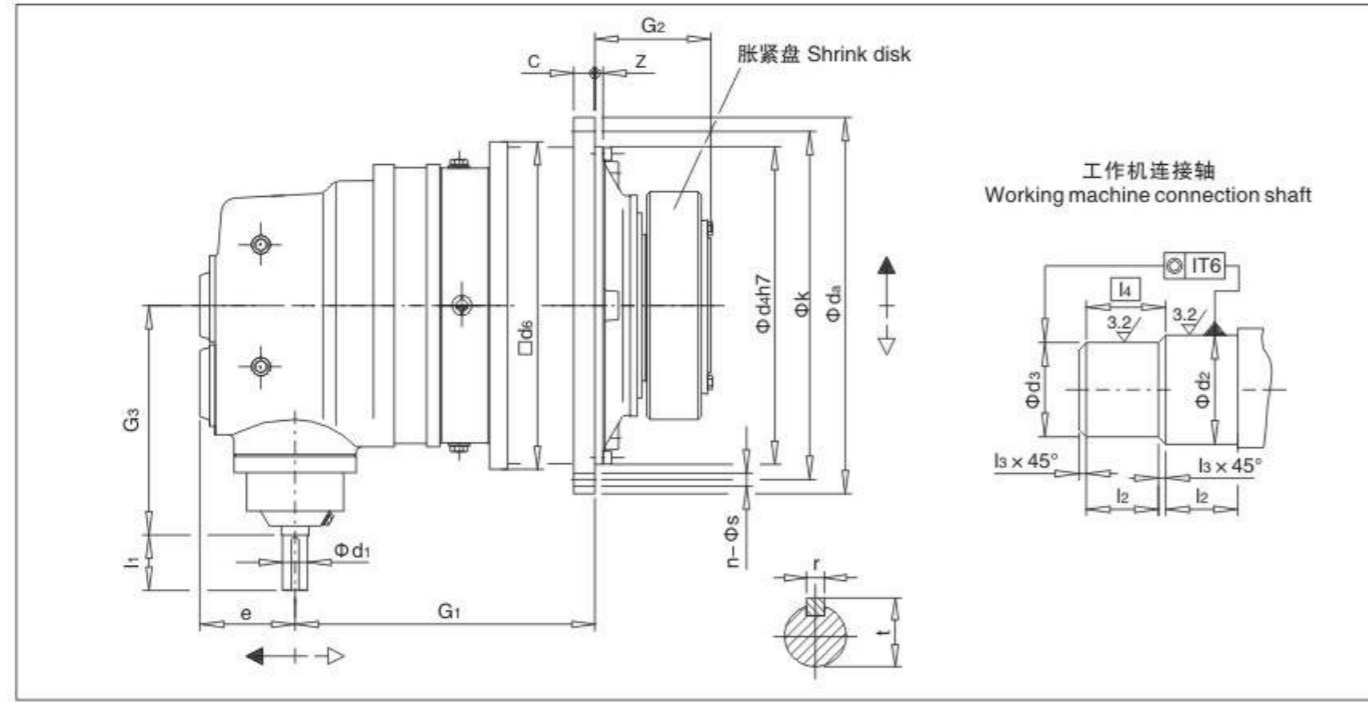

P2KA 机座号 Type No	额定输出 扭矩 Nominal output torque T2N (N·M)	输入轴尺寸 Input shaft size								d2	d3	l2	l3	l4	c	d _a	d ₄	d ₆	e	G ₁	G ₂	G ₃	k	z	法兰孔 尺寸 Flange hole		重量 Weight (kg)	油量 Oil liter (l)	
		$i_N \leq 2000$				$i_N \geq 2240$																			s	n			
		d ₁	l ₁	r	t	d ₁	l ₁	r	t																				
9	22000	35	70	10	38	30	60	8	33	120	115	65	2.5	67.5	24	428	350	356	119	339	165	320	388	6 ± 1.5	18	24	165	6	
10	31000	35	70	10	38	30	60	8	33	130	125	70	2.5	72.5	28	472	394	400	119	359	174	320	436	8 ± 1.5	18	28	227	8	
11	42000	45	80	14	48.5	35	60	10	38	140	135	82.5	2.5	85	32	525	425	436	137	419	204	375	485	8 ± 1.5	22	20	320	12	
12	60000	45	80	14	48.5	35	60	10	38	160	155	90	2.5	92.5	34	605	495	510	137	433	224	375	555	9 ± 1.5	26	20	464	16	
13	83000	50	100	14	53.5	40	80	12	43	180	175	95	2.5	97.5	39	645	535	554	172	518.5	241	445	595	11 ± 1.5	26	24	618	20	
14	117000	50	100	14	53.5	40	80	12	43	210	205	105	2.5	107.5	42	720	610	629	172	541.5	278	445	665	9	26	32	927	32	
16	160000	60	110	18	64	50	100	14	53.5	230	225	110	2.5	112.5	44	770	660	680	194	632	285	520	715	10	26	36	1184	40	
17	202000	60	110	18	64	50	100	14	53.5	250	245	120	2.5	122.5	50	895	750	775	194	658	294	520	830	10	33	24	1700	56	
18	244000	75	135	20	79.5	60	110	18	64	260	255	120	2.5	122.5	50	930	785	815	240	741.5	303	615	865	10	33	32	2010	73	
19	295000	75	135	20	79.5	60	110	18	64	280	275	135	2.5	137.5	56	980	840	870	240	764.5	327.5	615	915	12	33	36	2470	82	
20	354000	75	135	20	79.5	60	110	18	64	300	295	135	2.5	137.5	56	980	840	870	240	764.5	327.5	615	915	12	33	36	2550	75	
21-26																													


按客户要求供货 According to customer requirements supply commodity

- 注: 1 当 $d_1 \leq 100$ 时公差为 m6, 当 $d_1 > 100$ 时公差为 n6;
2 当尺寸 d_2 或 $d_3 \leq 160$ 时, 公差为 h6;
当尺寸 d_2 或 $d_3 > 160$ 时, 公差为 g6;
3 重量不包括胀紧盘和润滑油。
1. When $d_1 \leq 100$, tolerance is m6, $d_1 > 100$, tolerance is n6;
2. When d_2 or $d_3 \leq 160$, tolerance is h6;
When d_2 or $d_3 > 160$, tolerance is g6;
3. Weight is not including shrink disk and fabrication oil.

P系列行星齿轮减速机 PLANETARY GEARBOX

外形尺寸图表
Out Dimensions Table

P3NA $i_N = 140...280$

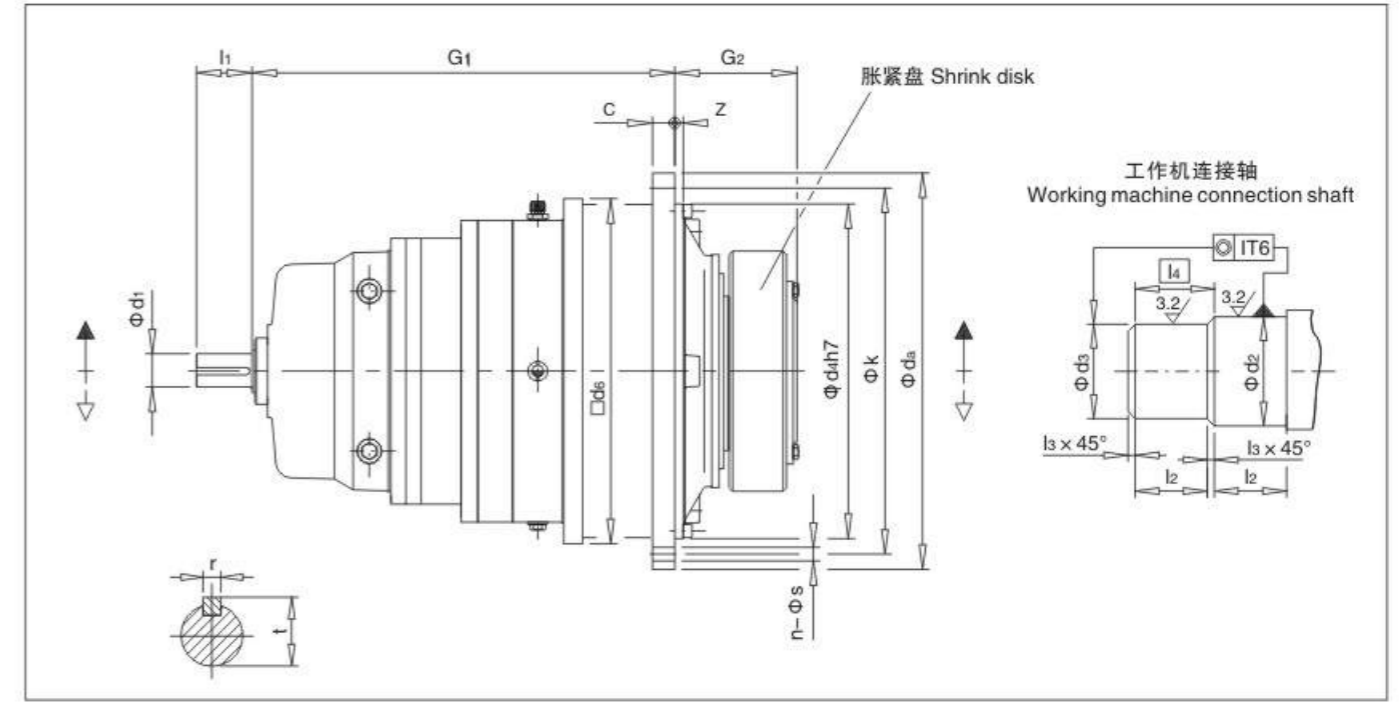


P3NA 机座号 Type No	额定输出 扭矩 Nominal output torque T2N (N·M)	输入轴尺寸 Input shaft size								d2	d3	l2	l3	l4	c	d _a	d ₄	d ₆	E	G ₁	G ₂	k	z	法兰孔 尺寸 Flange hole		重量 Weight (kg)	油量 Oil liter (l)
		d ₁	l ₁	r	t	s	n																				
		9	22000	55	90			16	59															120	115		
10	31000	55	90	16	59	130	125	70	2.5	72.5	28	472	394	400	90	585	174	436	6 ± 1.5	18	28	205	9				
11	42000	55	90	16	59	140	135	82.5	2.5	85	32	525	425	436	90	616	204	485	6 ± 1.5	22	20	295	13				
12	60000	55	90	16	59	160	155	90	2.5	92.5	34	605	495	510	90	630	224	555	9 ± 1.5	26	20	447	17				
13	83000	55	90	16	59	180	175	95	2.5	97.5	39	645	535	554	90	688	241	595	11 ± 1.5	26	24	567	21				
14	117000	55	90	16	59	210	205	105	2.5	107.5	42	720	610	629	90	711	278	665	9	26	32	850	33				
16	160000	70	120	20	74.5	230	225	110	2.5	112.5	44	770	660	680	115	853	285	715	10	26	36	1085	42				
17	202000	70	120	20	74.5	250	245	120	2.5	122.5	50	895	750	775	115	879	294	830	10	33	24	1580	60				
18	244000	80	140	25	85	260	255	120	2.5	122.5	50	930	785	815	140	1013.5	303	865	10	33	32	2000	70				
19	295000	80	140	25	85	280	275	135	2.5	137.5	56	980	840	870	140	1036.5	327.5	915	12	33	36	2100	85				
20	354000	80	140	25	85	300	295	135	2.5	137.5	56	980	840	870	140	1036.5	327.5	915	12	33	36	2200	75				
21	392000	80	140	25	85	310	305	152	2.5	154.5	62	1115	935	960	140	1093	354	1025	24	39	32	2785	115				
22	450000	80	140	25	85	330	325	152	2.5	154.5	62	1115	935	930	140	1093	354	1025	24	39	32	2950	105				
23	513000	95	160	25	100	350	345	164	2.5	166.5	68	1210	1025	1056	170	1222	380	1120	28	39	36	3625	155				
24	592000	95	160	25	100	360	355	164	2.5	166.5	68	1210	1025	1056	170	1222	380	1120	28	39	36	4100	135				
25	684000	95	160	25	100	380	375	180	2.5	182.5	74	1320	1115	1150	170	1284	407	1220	29	45	36	5000	195				
26	763000	95	160	25	100	400	395	180	2.5	182.5	74	1320	1115	1150	170	1284	407	1220	29	45	36	5400	170				
27	852000	110	180	28	116	430	425	191	2.5	193.5	81	1460	1215	1248	200	1470	453	1345	31	52	32	6400	250				
28	950000	110	180	28	116	450	445	191	2.5	193.5	81	1460	1215	1248	200	1470	453	1345	31	52	32	6875	220				
29	1060000	110	180	28	116	460	450	197.5	5	202.5	87	1565	1320	1355	200	1517	483	1450	34	52	36	8190	310				
30	1200000	110	180	28	116	480	480	197.5	5	202.5	87	1565	1320	1355	200	1517	483	1450	34	52	36	8715	280				
31	1330000	120	210	32	127	480	480	232	5	237.0	94	1665	1400	1443	230	1585	540	1545	36	62	32	10700	390				
32	1500000	120	210	32	127	510	510	232	5	237.0	94	1665	1400	1443	230	1585	540	1545	36	62	32	11200	360				
33	1680000	130	210	32	137	530	530	242	5	247.0	100	1755	1495	1536	265	1710	573	1635	36	62	36	12950	470				
34	1920000	130	210	32	137	570	570	242	5	247.0	100	1755	1495	1536	265	1710	573	1635	36	62	36	13800	430				

- 注: 1 当 $d_1 \leq 100$ 时公差为 m6, 当 $d_1 > 100$ 时公差为 n6;
2 当尺寸 d_2 或 $d_3 \leq 160$ 时, 公差为 h6;
当尺寸 d_2 或 $d_3 > 160$ 时, 公差为 g6;
3 重量不包括胀紧盘和润滑油。
1. When $d_1 \leq 100$, tolerance is m6, $d_1 > 100$, tolerance is n6;
2. When d_2 or $d_3 \leq 160$, tolerance is h6;
When d_2 or $d_3 > 160$, tolerance is g6;
3. Weight is not including shrink disk and fabrication oil.

P系列行星齿轮减速机 PLANETARY GEARBOX

外形尺寸图表
Out Dimensions Table

P3SA $i_N = 280 \dots 900$

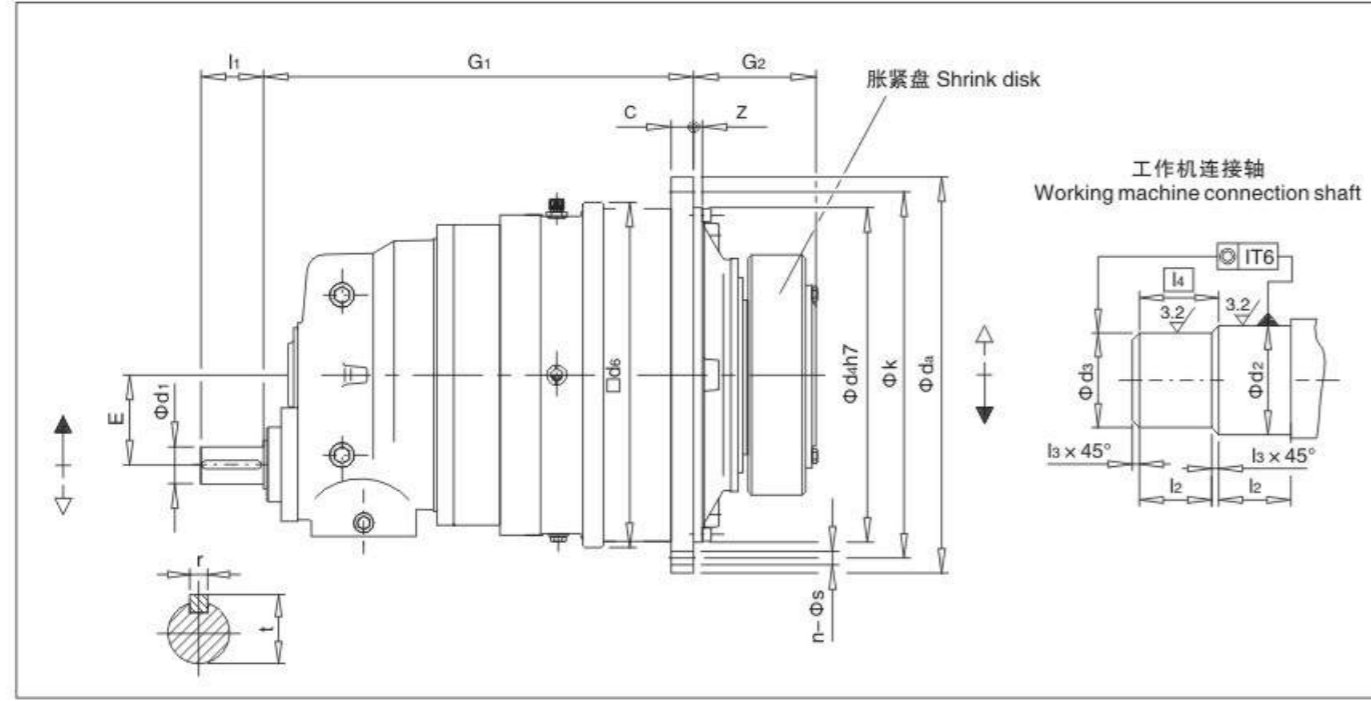


P3SA 机座号 Type No	额定输出 扭矩 Nominal output torque T2N (N·M)	输入轴尺寸 Input shaft size				d2	d3	l2	l3	l4	c	da	d4	d6	E	G1	G2	k	z	法兰孔 尺寸 Flange hole		重量 Weight (kg)	油量 Oil liter (l)
		d1	l1	r	t															s	n		
9	22000	38	60	10	41	120	115	65	2.5	67.5	24	428	350	356	90	565	165	388	6 ± 1.5	18	24	170	7
10	31000	38	60	10	41	130	125	70	2.5	72.5	28	472	394	400	90	585	174	436	8 ± 1.5	18	28	230	9
11	42000	38	60	10	41	140	135	82.5	2.5	85	32	525	425	436	90	616	204	485	8 ± 1.5	22	20	310	13
12	60000	38	60	10	41	160	155	90	2.5	92.5	34	605	495	510	90	500	224	555	9 ± 1.5	26	20	160	17
13	83000	38	60	10	41	180	175	95	2.5	97.5	39	645	535	554	90	568	241	595	11 ± 1.5	26	24	584	21
14	117000	38	60	10	41	210	205	105	2.5	107.5	42	720	610	629	90	711	278	665	9	26	32	875	33
16	160000	55	90	16	59	230	225	110	2.5	112.5	44	770	660	680	115	853	285	715	10	26	36	1115	42
17	202000	55	90	16	59	250	245	120	2.5	122.5	50	895	750	775	115	879	294	830	10	33	24	1625	60
18	244000	70	120	20	74.5	260	255	120	2.5	122.5	50	930	785	815	140	1013.5	303	865	10	33	32	2060	70
19	295000	70	120	20	74.5	280	275	135	2.5	137.5	56	980	840	870	140	1036.5	327.5	915	12	33	36	2160	85
20	354000	70	120	20	74.5	300	295	135	2.5	137.5	56	980	840	870	140	1036.5	327.5	915	12	33	36	2260	75
21	392000	70	120	20	74.5	310	305	152	2.5	154.5	62	1115	935	960	140	1093	354	1025	24	39	32	2870	115
22	450000	70	120	20	74.5	330	325	152	2.5	154.5	62	1115	935	960	140	1093	354	1025	24	39	32	3040	105
23	513000	80	140	25	85	350	345	164	2.5	166.5	68	1210	1025	1056	170	1222	380	1120	28	39	36	3730	155
24	592000	80	140	25	85	360	355	164	2.5	166.5	68	1210	1025	1056	170	1222	380	1120	28	39	36	4220	135
25	684000	80	140	25	85	380	375	180	2.5	182.5	74	1320	1115	1150	170	1284	407	1220	29	45	36	5150	195
26	763000	80	140	25	85	400	395	180	2.5	182.5	74	1320	1115	1150	170	1284	407	1220	29	45	36	5560	170
27	852000	90	160	25	95	430	425	191	2.5	193.5	81	1460	1215	1248	200	1470	453	1345	31	52	32	6580	250
28	950000	90	160	25	95	450	445	191	2.5	193.5	81	1460	1215	1248	200	1470	453	1345	31	52	32	7080	220
29	1060000	90	160	25	95	460	450	197.5	5	202.5	87	1565	1320	1355	200	1517	483	1450	34	52	36	8400	310
30	1200000	90	160	25	95	480	470	197.5	5	202.5	87	1565	1320	1355	200	1517	483	1450	34	52	36	8970	280
31	1330000	100	180	28	100	480	470	232	5	237.0	94	1665	1400	1443	230	1617	538	1545	36	62	32	11000	390
32	1500000	100	180	28	106	510	500	232	5	237.0	94	1665	1400	1443	230	1617	538	1545	36	62	32	11500	360
33	1680000	120	210	32	127	530	520	242	5	247.0	100	1755	1495	1536	265	1735	573	1635	36	62	36	13300	470
34	1920000	120	210	32	127	570	560	242	5	247.0	100	1755	1495	1536	265	1735	573	1635	36	62	36	14200	430

注: 1 当 $d1 \leq 100$ 时公差为 m6, 当 $d1 > 100$ 时公差为 n6;
2 当尺寸 $d2$ 或 $d3 \leq 160$ 时, 公差为 h6;
当尺寸 $d2$ 或 $d3 > 160$ 时, 公差为 g6;
3 重量不包括胀紧盘和润滑油。
1. When $d1 \leq 100$, tolerance is m6, $d1 > 100$, tolerance is n6;
2. When $d2$ or $d3 \leq 160$, tolerance is h6;
When $d2$ or $d3 > 160$, tolerance is g6;
3. Weight is not including shrink disk and fabrication oil.

P系列行星齿轮减速机 PLANETARY GEARBOX

外形尺寸图表
Out Dimensions Table





P3KA $i_N = 560 \dots 4000$

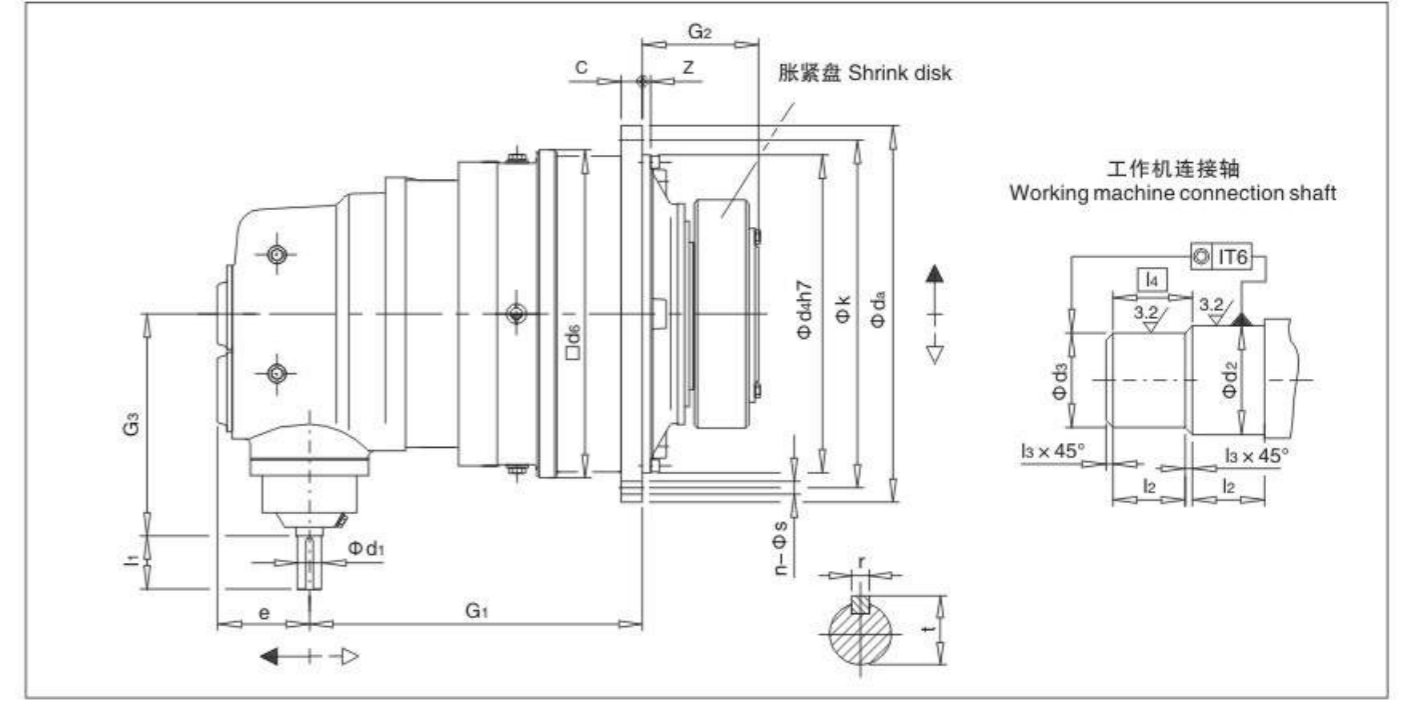


P3KA 机座号 Type No	额定输出 扭矩 Nominal output torque T2N (N·M)	输入轴尺寸 Input shaft size				d2	d3	l2	l3	l4	c	da	d4	d6	e	G1	G2	G3	k	z	法兰孔 尺寸 Flange hole		重量 Weight (kg)	油量 Oil liter (l)				
		d1	l1	r	t																s	n						
																									s	n		
9	22000	35	70	10	38	30	60	8	33	120	115	65	2.5	67.5	24	428	350	356	119	435	165	320	388	6 ± 1.5	18	24	180	7
10	31000	35	70	10	38	30	60	8	33	130	125	70	2.5	72.5	28	472	394	400	119	455	174	320	436	8 ± 1.5	18	28	240	9
11	42000	35	70	10	38	30	60	8	33	140	135	82.5	2.5	85	32	525	425	436	119	486	204	320	485	8 ± 1.5	22	20	315	15
12	60000	35	70	10	38	30	60	8	33	160	155	90	2.5	92.5	34	605	495	510	119	500	224	320	555	9 ± 1.5	26	20	470	20
13	83000	35	70	10	38	30	60	8	33	180	175	95	2.5	97.5	39	645	535	554	119	568	241	320	595	11 ± 1.5	26	24	595	21
14	117000	35	70	10	38	30	60	8	33	210	205	105	2.5	107.5	42	720	610	629	119	581	278	320	665	9	26	32	890	33
16	160000	45	80	14	48.5	35	60	10	38	230	225	110	2.5	112.5	44	770	660	680	137	693	285	375	715	10	26	36	1137	42
17	202000	45	80	14	48.5	35	60	10	38	250	245	120	2.5	122.5	50	895	750	775	137	719	294	375	830	10	33	24	1660	60
18	244000	50	100	14	53.5	40	80	12	43	260	255	120	2.5	122.5	50	930	785	815	172	818	303	445	865	10	33	32	2100	70
19	295000	50	100	14	53.5	40	80	12	43	280	275	135	2.5	137.5	56	980	840	870	172	841	327.5	445	915	12	33	36	2200	85
20	354000	50	100	14	53.5	40	80	12	43	300	295	135	2.5	137.5	56	980	840	870	172	841	327.5	445	915	12	33	36	2300	75
21	392000	50	100	14	53.5	40	80	12	43	310	305	152	2.5	154.5	62	1115	935	960	172	897.5	354	445	1025	24	39	32	2930	115
22	450000	50	100	14	53.5	40	80	12	43	330	325	152	2.5	154.5	62	1115	935	960	172	897.5	354	445	1025	24	39	32	3100	105
23	513000	60	110	18	64	50	100	14	53.5	350	345	164	2.5	166.5	68	1210	1025	1056	194	1003	380	520	1120	28	39	36	3800	155
24	592000	60	110	18	64	50	100	14	53.5	360	355	164	2.5	166.5	68	1210	1025	1056	194	1003	380	520	1120	28	39	36	4300	135
25	684000	60	110	18	64	50	100	14	53.5	380	375	180	2.5	182.5	74	1320	1115	1150	194	1065	407	520	1220	29	45	36	5250	195
26	763000	60	110	18	64	50	100	14	53.5	400	395	180	2.5	182.5	74	1320	1115	1150	194	1065	407	520	1220	29	45	36	5660	170
27	852000	75	135	20	79.5	60	110	18	64	430	425	191	2.5	193.5	81	1460	1215	1248	240	1205.5	453	615	1345	31	52	32	6680	250
28	950000	75	135	20	79.5	60	110	18	64	450	445	191	2.5	193.5	81	1460	1215	1248	240	1205.5	453	615	1345	31	52	32	7180	220
29	1060000	75	135	20	79.5	60	110	18	64	460	450	197.5	5	202.5	87	1565	1320	1355	240	1252.5	483	615	1450	34	52	36	8500	310
30	1200000	75	135	20	79.5	60	110	18	64	480	470	197.5	5	202.5	87	1565	1320	1355	240	1252.5	483	615	1450	34	52	36	9170	280

注: 1 当 $d1 \leq 100$ 时公差为 m6, 当 $d1 > 100$ 时公差为 n6;
2 当尺寸 $d2$ 或 $d3 \leq 160$ 时, 公差为 h6;
当尺寸 $d2$ 或 $d3 > 160$ 时, 公差为 g6;
3 重量不包括胀紧盘和润滑油。
1. When $d1 \leq 100$, tolerance is m6, $d1 > 100$, tolerance is n6;
2. When $d2$ or $d3 \leq 160$, tolerance is h6;
When $d2$ or $d3 > 160$, tolerance is g6;
3. Weight is not including shrink disk and fabrication oil.

组合型
Matched Units

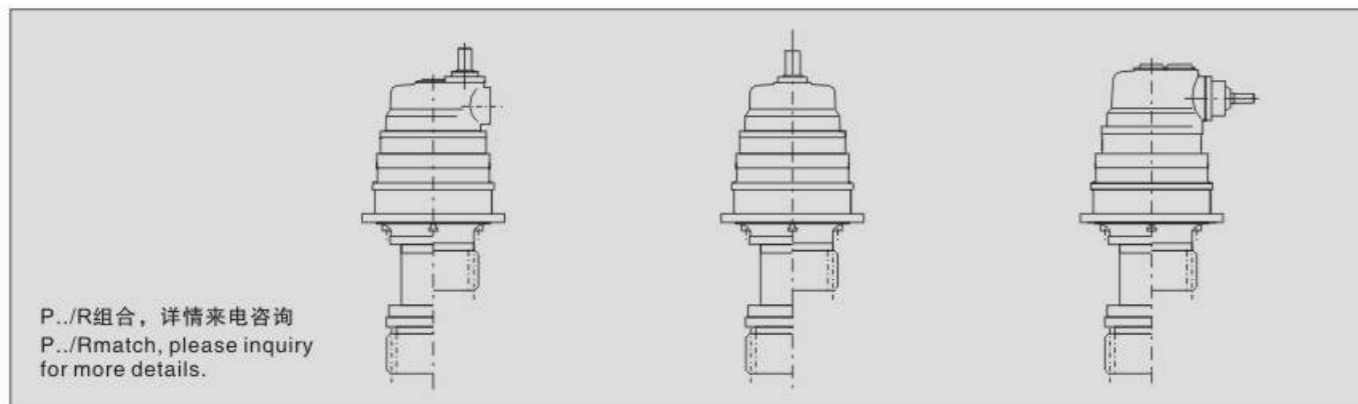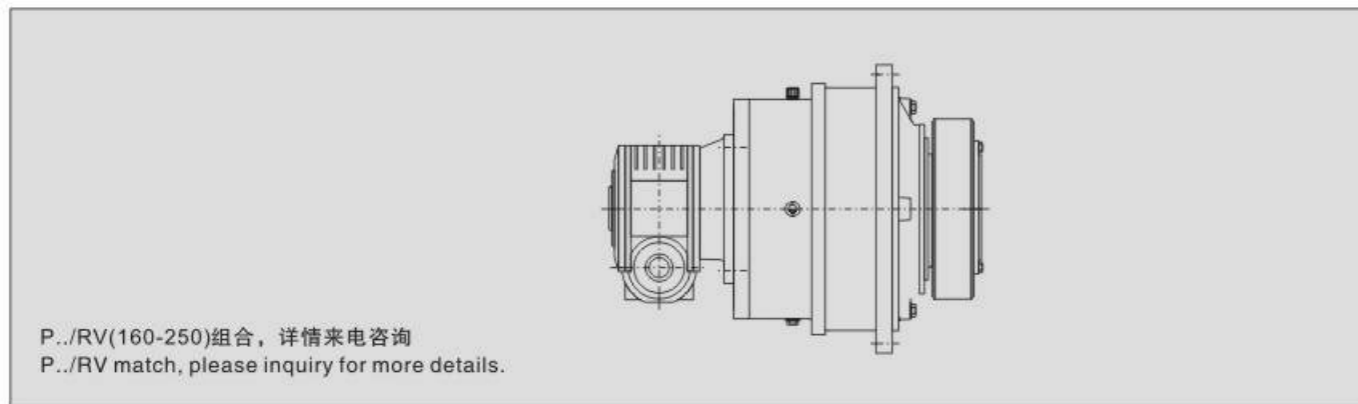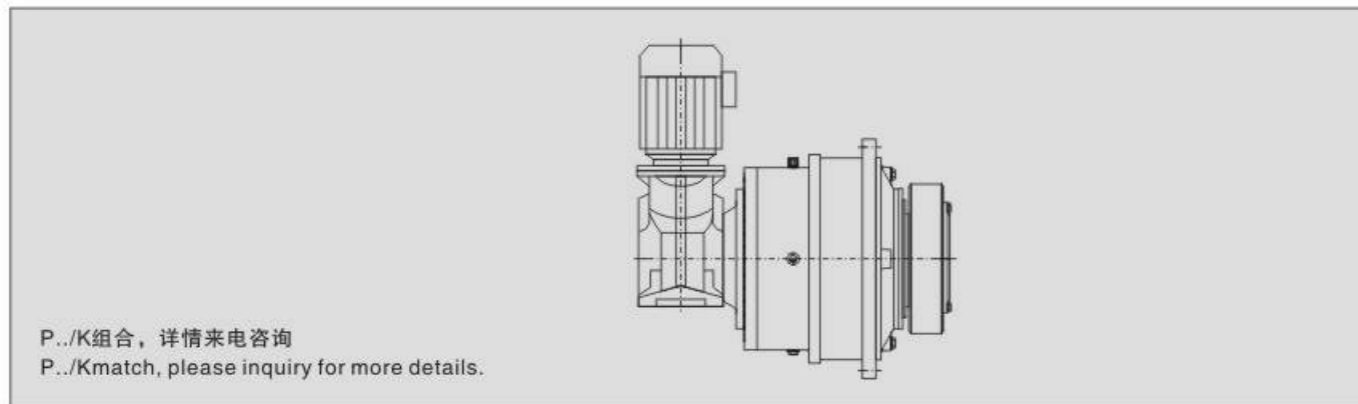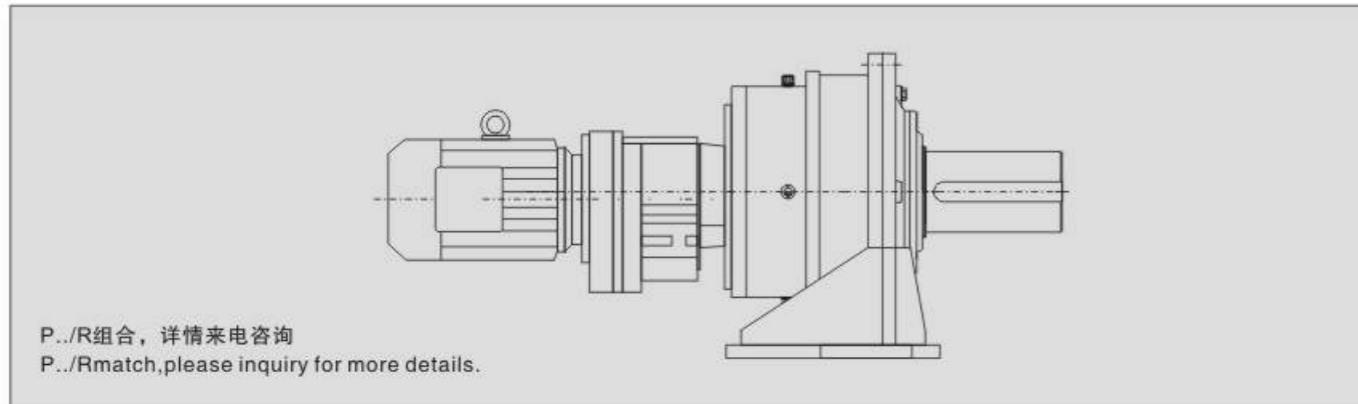


输出法兰孔布置图
Output Flange Hole

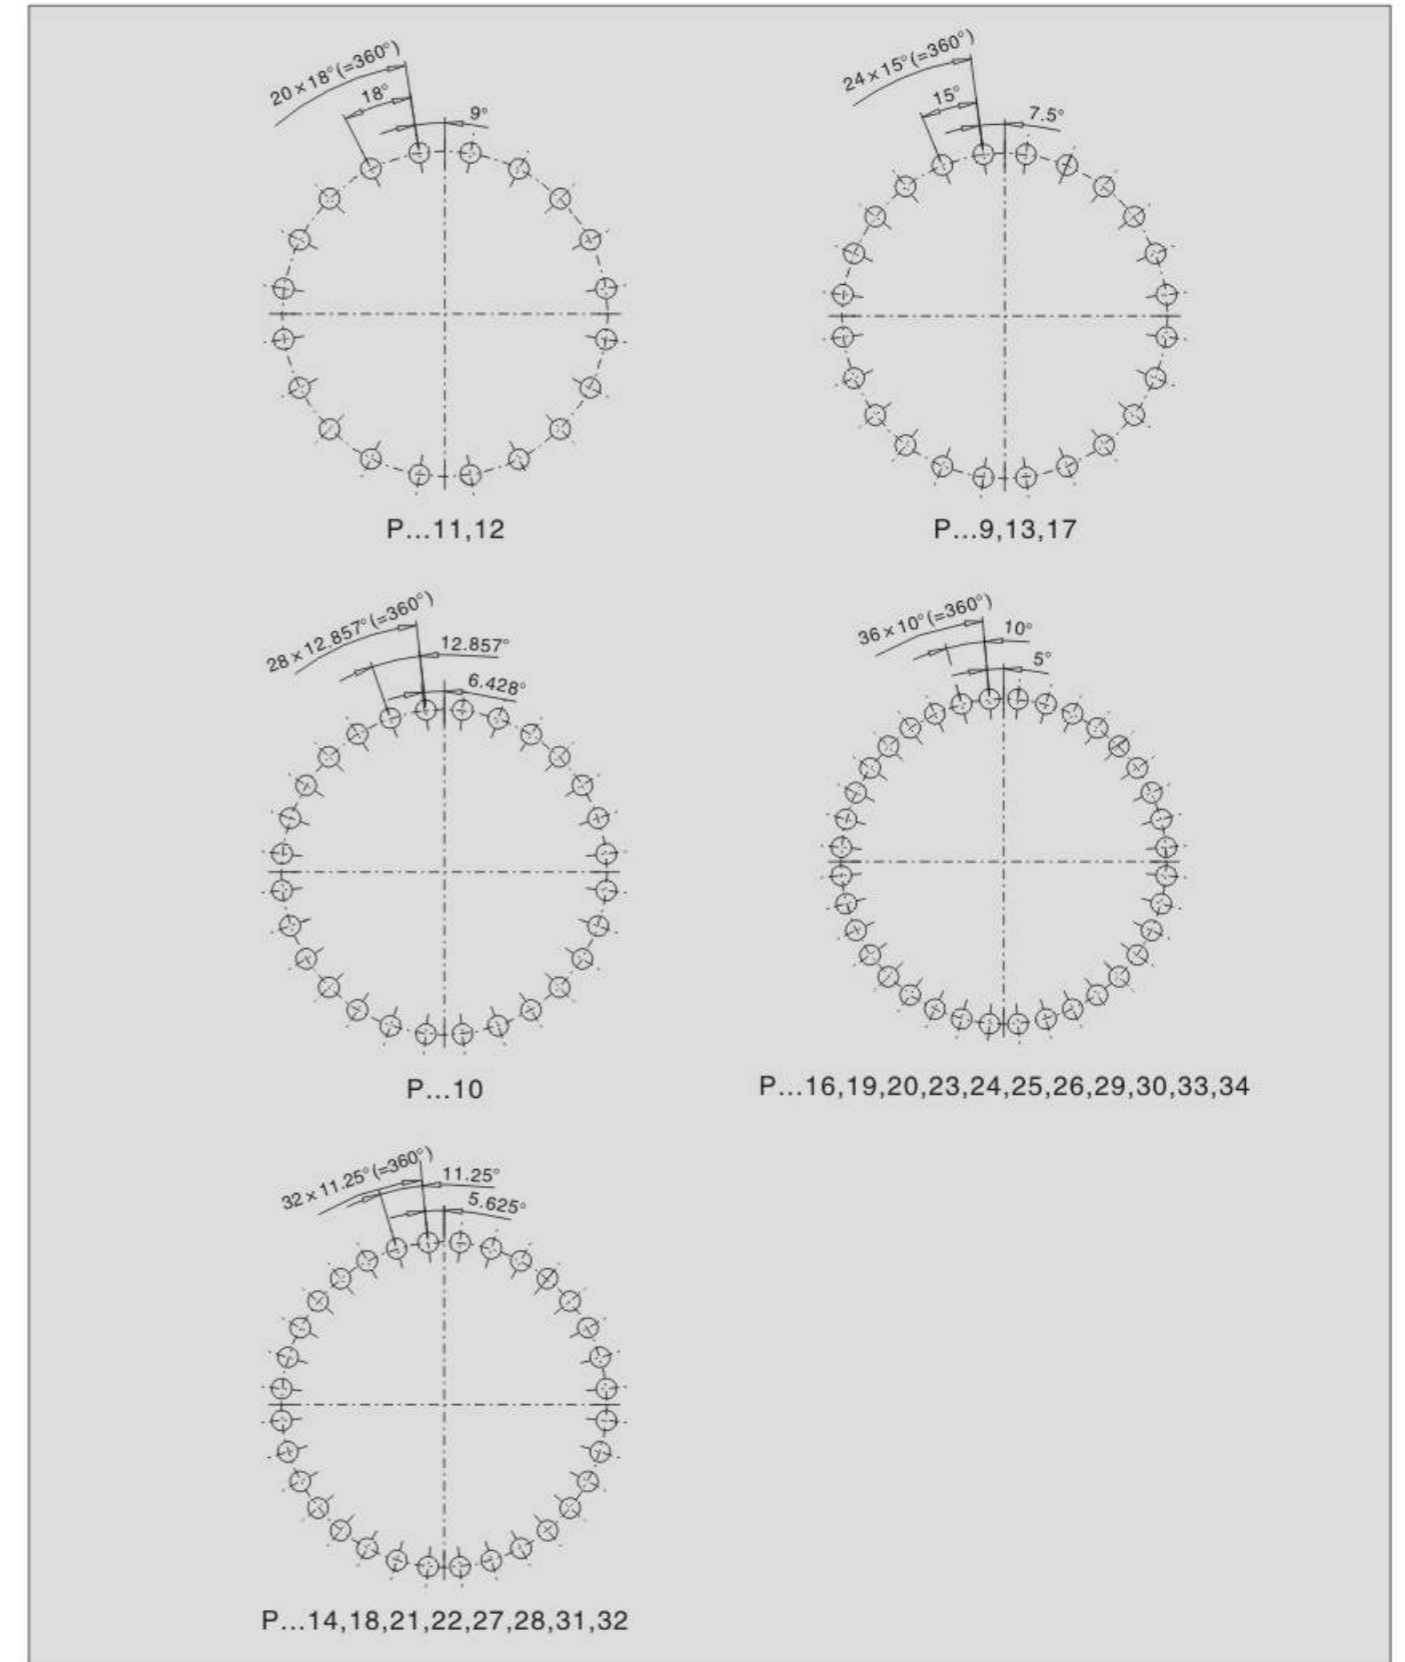

输出轴
Output Shaft


1. 空心轴 Hollow shaft

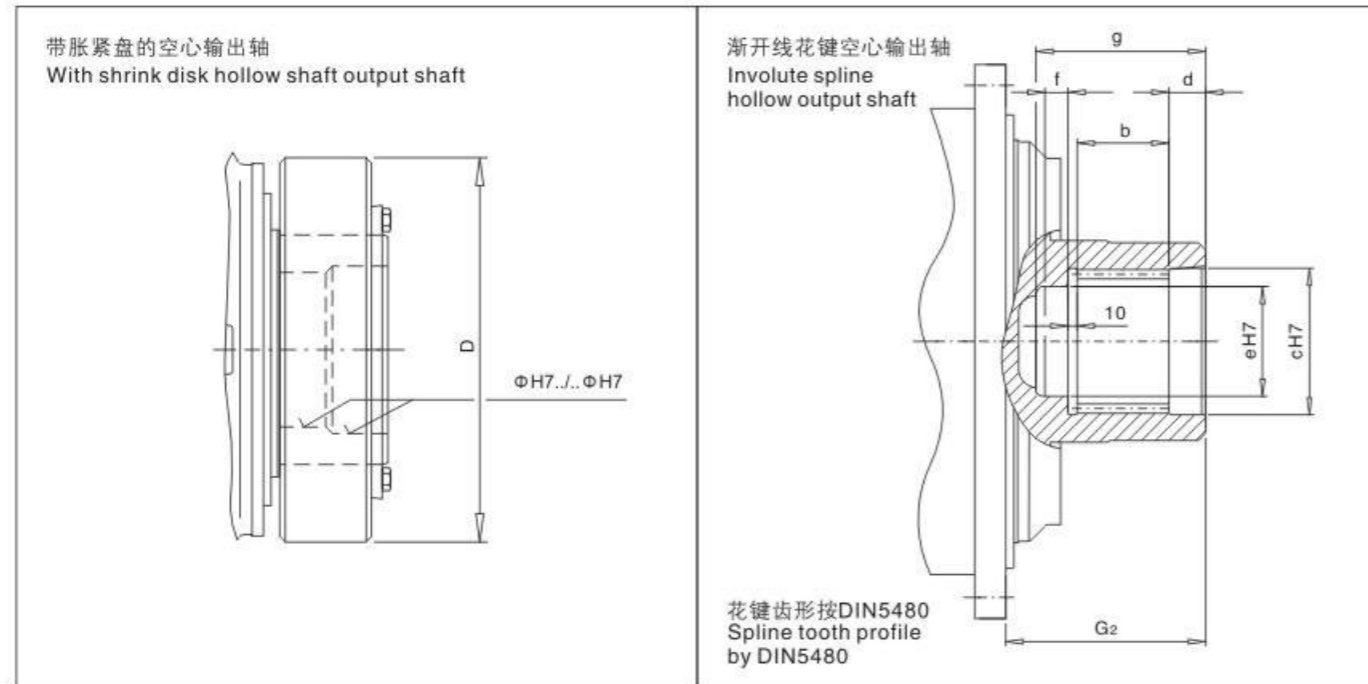

机座号 Type no	许用扭矩 Permissible torque T_{2N} (N·M)	胀紧盘 Shrink disk				空心花键输出轴 Hollow spline output shaft							
		型号 Type	D	螺栓 Bolt	重量 Weight	内花键规格 Inner spline specification		b	c	d	e	f	G_2
9	22000	155	263	M14	15.2	120×5×30×22×9H	70	122	40	107	20	165	150
10	31000	165	290	M16	21.5	130×5×30×24×9H	80	132	40	117	20	174	160
11	42000	185	320	M16	32.7	140×5×30×26×9H	90	142	45	125	25	204	180
12	60000	220	370	M20	53	160×5×30×30×9H	100	162	45	145	25	223	190
13	83000	240	405	M20	66	180×5×30×34×9H	110	182	45	165	25	237	200
14	117000	280	460	M20	103	210×5×30×40×9H	125	212	45	195	25	264	215
16	160000	300	485	M24	120	240×8×30×28×9H	140	242	50	220	25	285	235
17	202000	320	520	M24	138	250×8×30×30×9H	150	252	50	230	30	290	250
18	244000	340	570	M24	189	260×8×30×31×9H	160	262	50	240	30	303	260
19	295000	360	590	M24	207	280×8×30×34×9H	170	282	50	260	30	327.5	270
20	354000	380	640	M27	244	300×8×30×36×9H	180	302	50	280	30	327.5	280
21	392000	390	650	M27	249	310×8×30×37×9H	190	312	60	290	40	354	310
22	450000	420	670	M27	285	330×8×30×40×9H	200	332	60	310	40	354	320
23	513000	440	720	M27	357	340×8×30×41×9H	200	342	60	320	40	348	320
24	592000	460	770	M27	419	360×8×30×44×9H	220	362	60	340	40	368	340
25	684000	480	800	M30	492	380×8×30×46×9H	230	382	60	360	40	372	350
26	763000	500	850	M30	567	400×8×30×48×9H	240	402	60	380	40	382	360
27	852000	530	910	M30	744	440×8×30×54×9H	250	442	60	420	40	423	370
28	950000	560	940	M30	776	450×8×30×55×9H	260	452	65	430	40	428	385
29	1060000	560	940	M30	736	460×8×30×56×9H	270	462	65	440	45	433	400
30	1200000	590	960	M30	845	480×8×30×58×9H	285	482	65	460	45	448	415
31	1330000	590	960	M30	835								
32	1500000	620	1020	M30	1064								
33	1690000	660	1070	M33	1178								
34	1920000	700	1140	M33	1345								

输出轴
Output Shaft

2. 实心轴 Solid shaft

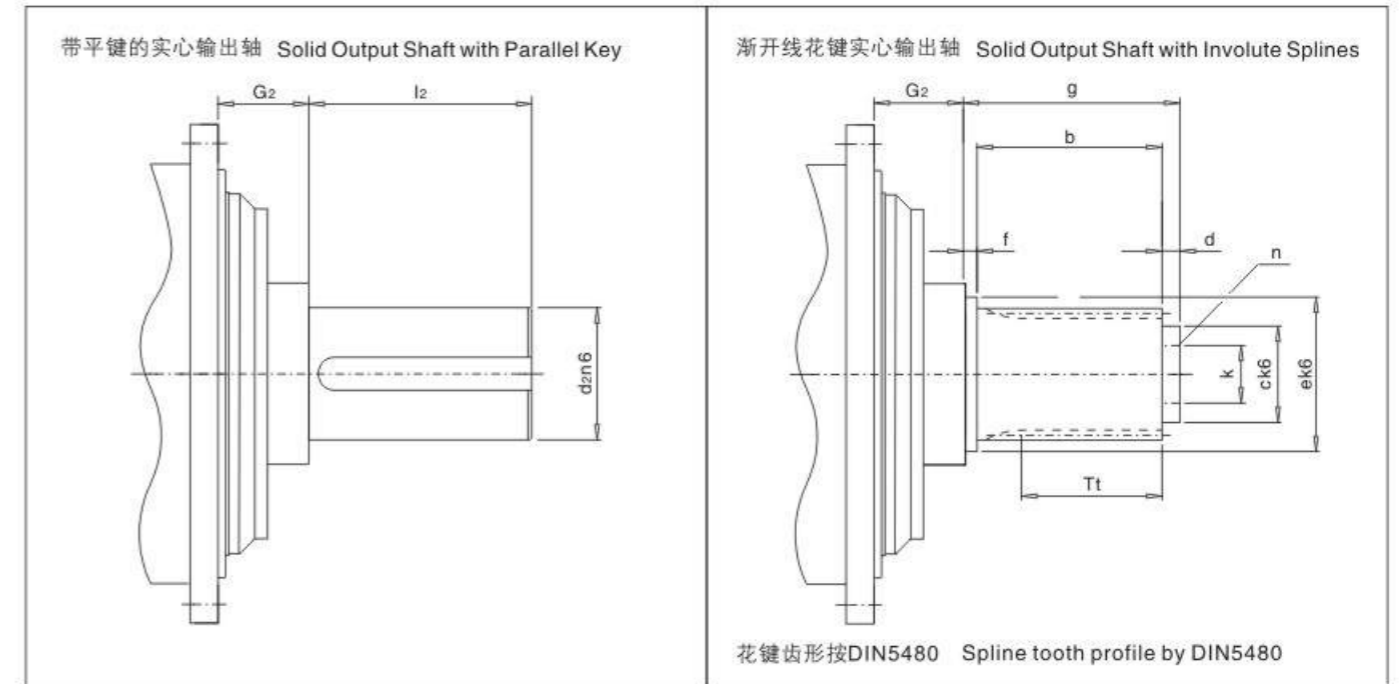


机座号 Type no	许用扭矩 Permissible torque T_{2N} (N·M)	带平键实心轴 With even key solid shaft			实心花键输出轴 Solid spline output													
		d_2	l_2	G_2	外花键规格 Outer spline specification		Tt	b	c	d	e	f	g	k	n	G_2		
9	22000	120	210	95	130×5×30×24×8m	70	80	110	20	132	20	120	80	3×M16×24	95			
10	31000	130	210	95	140×5×30×26×8m	80	90	120	20	142	20	130	90	3×M16×24	95			
11	42000	150	240	109	160×5×30×30×8m	90	100	140	25	162	25	150	110	3×M16×24	109			
12	60000	160	270	106	180×5×30×34×8m	100	110	90	25	182	25	160	130	3×M16×24	106			
13	83000	180	310	118	200×5×30×38×8m	110	120	100	30	202	25	175	140	3×M16×24	118			
14	117000	210	350	139	220×5×30×42×8m	125	135	120	30	222	30	195	160	3×M16×24	139			
16	160000	230	350	142	250×8×30×30×8m	140	155	140	35	252	30	220	185	3×M20×30	142			
17	202000	250	400	139	260×8×30×31×8m	150	165	155	40	262	35	240	200	3×M20×30	139			
18	244000	260	400	134	280×8×30×34×8m	160	175	170	40	282	35	250	215	3×M20×30	134			
19	295000	280	450	148.5	300×8×30×36×8m	170	185	180	40	302	35	260	225	3×M20×30	148.5			
20	354000	300	500	148.5	310×8×30×37×8m	180	195	190	40	312	35	270	235	6×M20×30	148.5			
21	392000	310	500	158	320×8×30×38×8m	190	205	200	40	322	35	280	250	6×M20×30	158			
22	450000	330	500	158	340×8×30×41×8m	200	215	210	40	342	35	290	265	6×M20×30	158			
23	513000	350	550	175	360×8×30×44×8m	200	215	230	40	362	35	290	275	6×M20×30	175			
24	592000	360	590	175	380×8×30×46×8m	220	235	245	40	382	35	310	290	6×M20×30	175			
25	684000	380	590	182	400×8×30×48×8m	230	245	260	40	402	35	320	310	6×M24×30	182			
26	763000	400	650	182	420×8×30×51×8m	240	255	280	40	422	35	330	330	6×M24×30	182			
27	852000	430	690	196.5	440×8×30×54×8m	250	265	310	40	442	35	340	370	6×M24×30	196.5			
28	950000	450	750	196.5	450×8×30×55×8m	260	275	330	45	452	40	360	380	6×M24×36	196.5			
29	1060000	460	750	209	460×8×30×56×8m	270	285	340	45	462	40	370	390	6×M24×36	209			
30	1200000	480	790	209	480×8×30×58×8m	285	300	360	45	482	40	385	410	6×M24×36	209			
31	1330000	500	790	232														
32	1500000	510	850	232														
33	1690000	530	900	251														
34	1920000	570	950	251														

P系列行星齿轮减速机 PLANETARY GEARBOX

附件
Add-on Piece

1. 齿轮箱机座 (附件代号-96) Gear units type (accessory code-96):

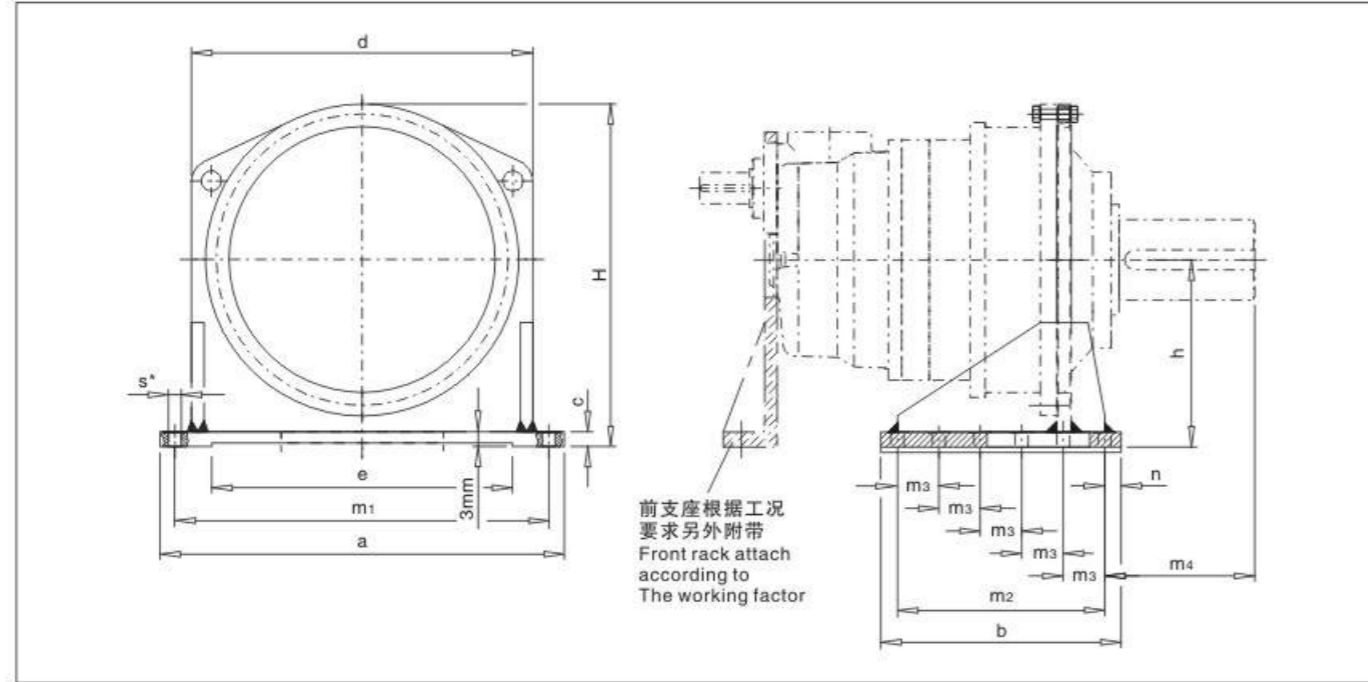


尺寸 Size	a	b	c	d	e	h	H	m ₁	m ₂	m ₃	m ₄	n	螺栓孔 Bolt hole		重量 Weight (kg)
													s*	数量 Size	
9	580	330	20	450	380	260	480	520	260	130	240	35	26	2×3	56
10	630	360	25	500	430	280	525	570	290	145	240	35	26	2×3	82
11	680	400	30	550	480	315	585	620	330	110	274	35	26	2×4	122
12	760	450	30	630	560	360	670	700	380	95	292	35	26	2×5	157
13	820	490	35	680	610	390	720	750	420	105	334	35	26	2×5	213
14	920	560	35	760	680	430	800	840	480	120	380	40	33	2×5	270
16	980	580	40	820	700	470	865	900	500	125	374	40	33	2×5	350
17	1130	670	45	940	810	540	998	1040	580	145	405	45	39	2×5	520
18	1180	720	45	980	830	560	1035	1080	620	155	385	50	39	2×5	580
19	1260	760	50	1050	880	590	1090	1160	640	160	450	60	45	2×5	720
20	1260	760	50	1050	880	590	1090	1160	640	160	500	60	45	2×5	720
21	1440	840	55	1170	1020	660	1228	1320	700	175	513	70	52	2×5	940
22	1440	840	55	1170	1020	660	1228	1320	700	175	513	70	52	2×5	940
23	1540	910	60	1270	1100	730	1345	1420	750	150	567	80	52	2×6	1275
24	1540	910	60	1270	1100	730	1345	1420	750	150	607	80	52	2×6	1275
25	1700	1000	65	1400	1240	795	1465	1550	860	215	574	70	62	2×5	1670
26	1700	1000	65	1400	1240	795	1465	1550	860	215	634	70	62	2×5	1670
27	1850	1100	70	1550	1370	870	1610	1700	950	190	664	75	62	2×6	2170
28	1850	1100	70	1550	1370	870	1610	1700	950	190	724	75	62	2×6	2170
29	1980	1180	75	1640	1460	925	1715	1820	1000	250	731	90	70	2×5	2650
30	1980	1180	75	1640	1460	925	1715	1820	1000	250	771	90	70	2×5	2650
31	2150	1300	75	1750	1570	1000	1845	1950	1100	220	773	100	70	2×6	3100
32	2150	1300	75	1750	1570	1000	1845	1950	1100	220	833	100	70	2×6	3100
33	2230	1350	85	1850	1630	1050	1940	2050	1150	230	883	100	78	2×6	3850
34	2230	1350	85	1850	1630	1050	1940	2050	1150	230	933	100	78	2×6	3850

P系列行星齿轮减速机 PLANETARY GEARBOX

附件
Add-on Piece

2. 齿轮箱机座 (附件代号-96) Gear units type (accessory code-96):

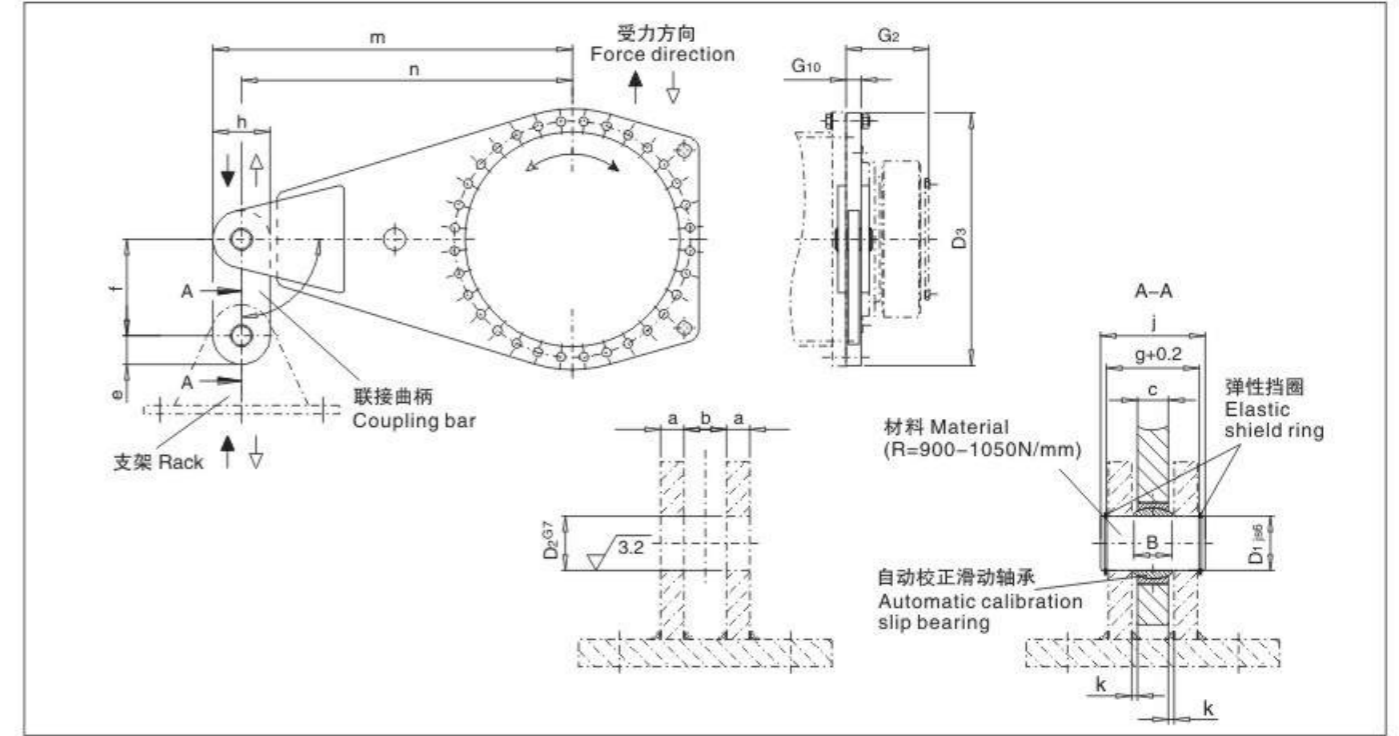


尺寸 Size	T2N (N·M)	D ₁	D ₂	D ₃	G ₂	G ₁₀	a min.	b	B*	c	e	f	0 +0.2	h	j	k	m	n	滚动 轴承 Rolling bearing	重量 Weight (kg)
9	22000	30	440	165	25	15	25	22	18	50	140	59.5	100	70	3.5	605	555	30	38	
10	31000	35	485	174	30	15	30	25	20	52.5	140	64.5	105	75	5	667.5	615	35	51	
11	42000	40	540	204	30	18	30	28	22	65	160	70.5	130	85	4	750	685	40	82	
12	60000	40	620	224	30	18	30	28	22	65	160	70.5	130	85	4	850	785	40	85	
13	83000	45	665	241	35	20	35	32	25	72.5	180	79.5	145	95	5	912.5	840	45	113	
14	117000	50	740	278	40	20	40	35	30	72.5	200	85	145	100	5	1012.5	940	50	145	
16	160000	60	790	285	50	25	50	44	35	77.5	240	105	155	120	7.5	1077.5	1000	60	206	
17	202000	60	915	294	50	25	50	44	35	85	240	105	170	120	7.5	1250	1165	60	274	
18	244000	70	955	303	55	30	55	49	40	105	280	120	210	135	7.5	1315	1210	70	365	
19	295000	80	1005	327.5	60	30	60	55	45	105	320	125	210	145	7.5	1405	1300	80	423	
20	354000	80	1005	327.5	60	30	60	55	45	105	320	125	210	145	7.5	1405	1300	80	423	
21	392000	80	1140	354	60	30	60	55	45	113	320	125	225	145	7.5	1562.5	1450	80	530	
22	450000	80	1140	354	60	30	60	55	45	113	320	125	225	145	7.5	1562.5	1450	80	530	
23	513000	90	1235	380	65	30	65	60	50	125	360	130	250	150	7.5	1700	1575	90	665	
24	592000	90	1235	380	65	30	65	60	50	125	360	130	250	150	7.5	1700	1575	90	665	
25	684000	100	1350	407	75	35	75	70	55	138	400	150	275	170	10	1857.5	1720	100	940	
26	763000	100	1350	407	75	35	75	70	55	138	400	150	275	170	10	1857.5	1720	100	940	
27	852000	110	1490	453	75	35	75	70	55	150	440	150	300	175	10	2050	1900	110	1120	
28	950000	110	1490	453	75	35	75	70	55	150	440	150	300	175	10	2050	1900	110	1120	
29	1060000	110	1600	483	75	35	75	70	55	158	440	150	315	175	10	2192.5	2035	110	1260	
30	1200000	110	1600	483	75	35	75	70	55	158	400	150	315	170	10	2192.5	2035	110	1260	

*) B=22-35, 公差为-0.12; B=44-55, 公差为-0.15; B=60-70, 公差为-0.20
B=22-35, Reference -0.12; B=44-55, Reference -0.15; B=60-70, Reference -0.20

P系列行星齿轮减速机 PLANETARY GEARBOX

附件
Add-on Piece

3. 带橡胶衬套的双向扭力臂 (附件代号-76) Double-sides torque arm with rubber bushing. (accessory code-76):

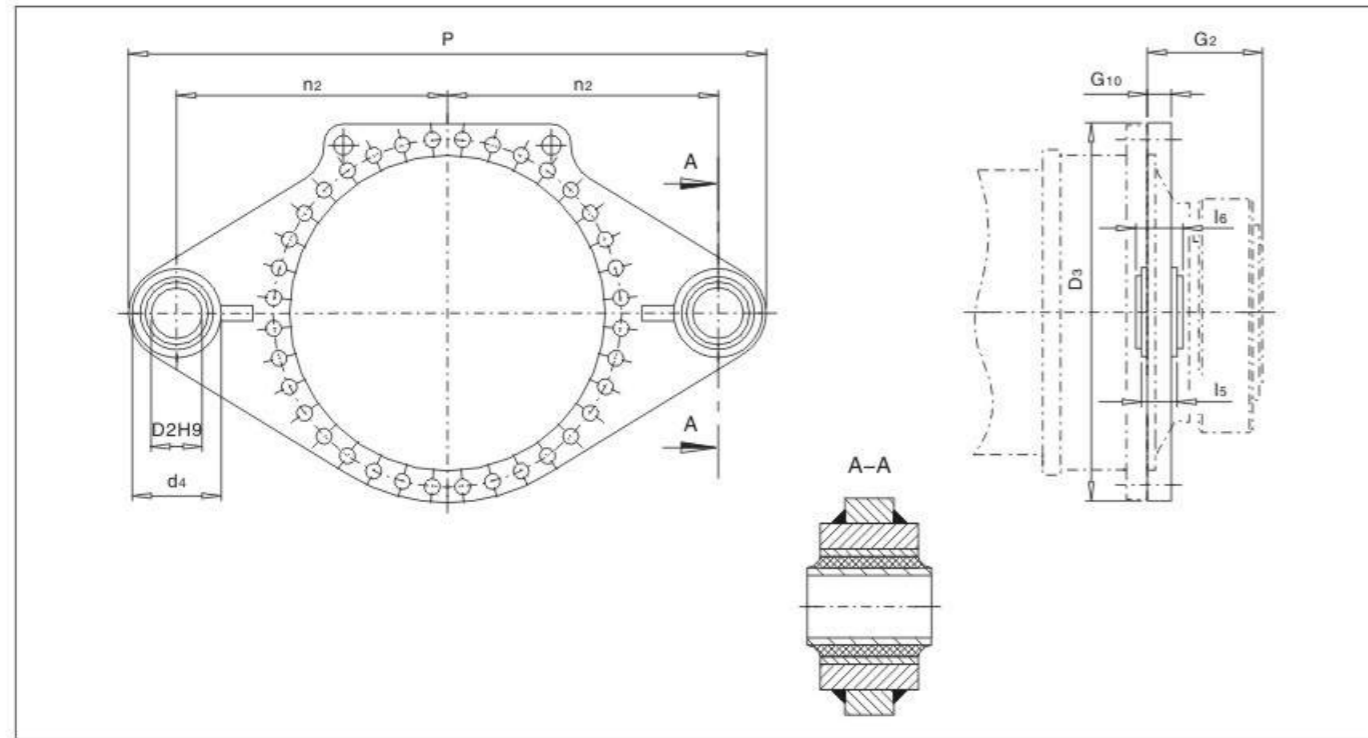


尺寸 Size	T2N (N · M)	D2*	D3	d4	G3	G10	l5	l6	n5	P	衬套 Bush	重量 Weight (kg)
9	22000	50	440	115	165	30	100	110	500	1140	0118095	58
10	31000	50	485	115	174	30	100	110	550	1240	0118095	72
11	42000	100	540	180	204	30	110	120	575	1355	0118772	95
12	60000	100	620	180	224	35	110	120	625	1455	0118772	120
13	83000	110	665	210	241	35	170	180	600	1435	0118802	145
14	117000	110	740	210	278	40	170	180	650	1535	0118802	170
16	160000	124	790	240	285	40	220	230	700	1670	0118805	230
17	202000	124	915	240	288	40	220	230	750	1770	0118805	300
18	244000	124	955	240	303	50	220	230	900	2072	0118805	400

* 销轴pin: ϕ h8

P系列行星齿轮减速机 PLANETARY GEARBOX

附件
Add-on Piece


4. 扭转轴支架 (附件代号-77) Rotation rack (accessory code-77):

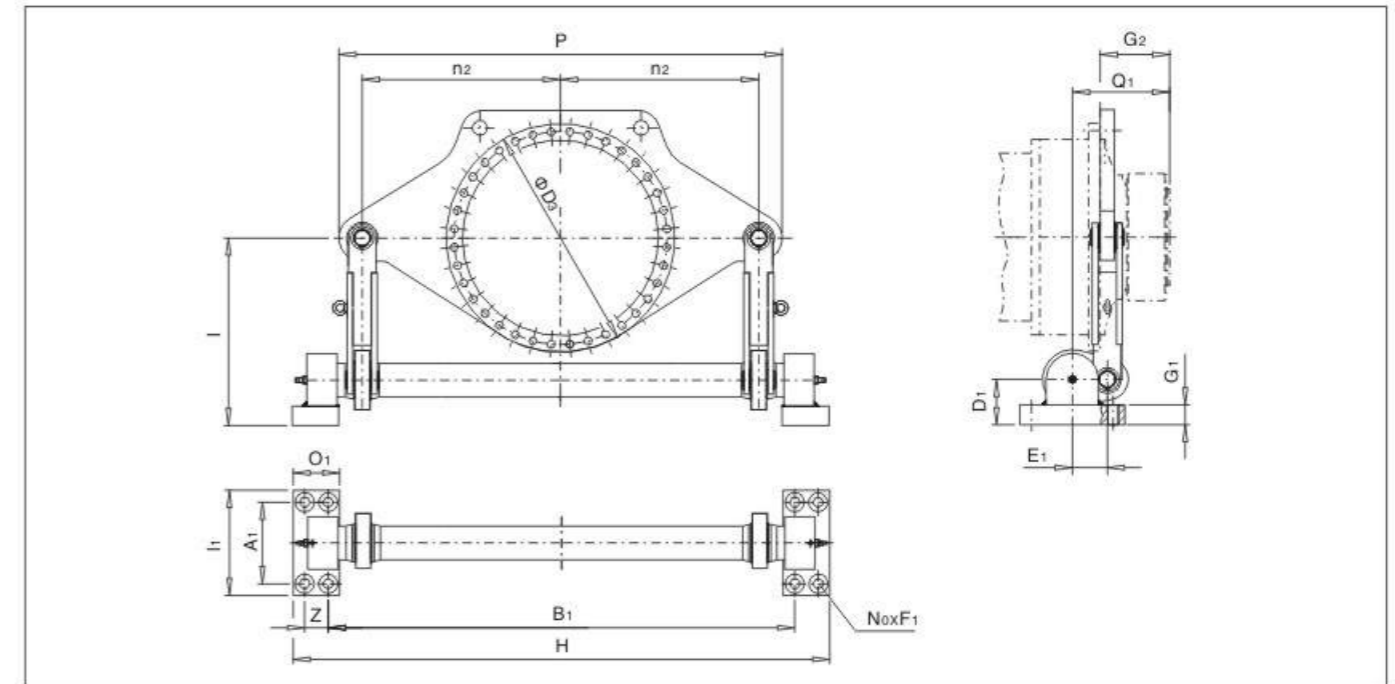

尺寸 Size	T2N (N · M)	A1	B1	D3	D1	E1	F1	G1	G2	H	I	l1	n2	N0	O1	P	Q1	Z	重量 Weight (kg)
9	22000	250	1414	610	120	105	33	48.5	165	1619	560	330	550	8	140	1230	247.5	65	300
10	31000	250	1414	610	120	105	33	48.5	174	1619	560	330	550	8	140	1230	256.5	65	300
11	42000	250	1414	610	120	105	33	48.5	204	1619	560	330	550	8	140	1230	286.5	65	300
12	60000	250	1414	610	120	105	33	48.5	224	1619	560	330	550	8	140	1230	306.5	65	300
13	83000	280	1604	775	155	145	39	68.5	241	1837	620	380	650	8	158	1450	358.5	75	600
14	117000	280	1604	775	155	145	39	68.5	278	1837	620	380	650	8	158	1450	395.5	75	600
16	160000	280	1604	775	155	145	39	68.5	285	1837	620	380	650	8	158	1450	402.5	75	600
17	202000	315	1777	955	170	165	39	73.5	294	2041	700	400	750	8	180	1680	431.5	84	900
18	244000	315	1777	955	170	165	39	73.5	303	2041	700	400	750	8	180	1680	440.5	84	900
19	295000	350	2000	985	195	175	45	83.5	328	2300	860	450	850	8	200	1900	470.5	100	1400
20	354000	350	2000	985	195	175	45	83.5	328	2300	860	450	850	8	200	1900	470.5	100	1400
21	392000	400	2254	1120	210	190	45	88.5	354	2591	900	530	950	8	225	2110	506.5	113	1700
22	450000	400	2254	1120	210	190	45	88.5	354	2591	900	530	950	8	225	2110	506.5	113	1700
23	513000	450	2496	1215	235	220	45	98.5	380	2871	1060	590	1063	8	250	2385	562.5	125	2150
24	592000	450	2496	1215	235	220	45	98.5	380	2871	1060	590	1063	8	250	2385	562.5	125	2150
25	684000	500	2816	1350	275	245	52	118.5	407	3236	1200	650	1150	8	280	2600	614.5	140	2700
26	763000	500	2816	1350	275	245	52	118.5	407	3236	1200	650	1150	8	280	2600	614.5	140	2700
27	852000	530	2887	1490	300	255	52	128.5	453	3327	1250	700	1250	8	290	2820	670.5	150	3400
28	950000	530	2887	1490	300	255	52	128.5	453	3327	1250	700	1250	8	290	2820	670.5	150	3400
29	1060000	560	3200	1565	300	280	62	128.5	483	3673	1350	750	1360	8	315	3080	718	158	4350
30	1200000	560	3200	1565	300	280	62	128.5	483	3673	1350	750	1360	8	315	3080	718	158	4350
31	1330000	590	3408	1695	340	300	70	148.5	538	3906	1400	790	1450	8	330	3260	788	168	5500
32	1500000	590	3408	1695	340	300	70	148.5	538	3906	1400	790	1450	8	330	3260	788	168	5500
33	1680000	620	3588	1785	375	300	70	158.5	573	4116	1500	840	1550	8	350	3520	840.5	178	7000
34	1920000	620	3588	1785	375	300	70	158.5	573	4116	1500	840	1550	8	350	3520	840.5	178	7000

附件
Add-on Piece

5. 电机安装支架 Motor assembly rack

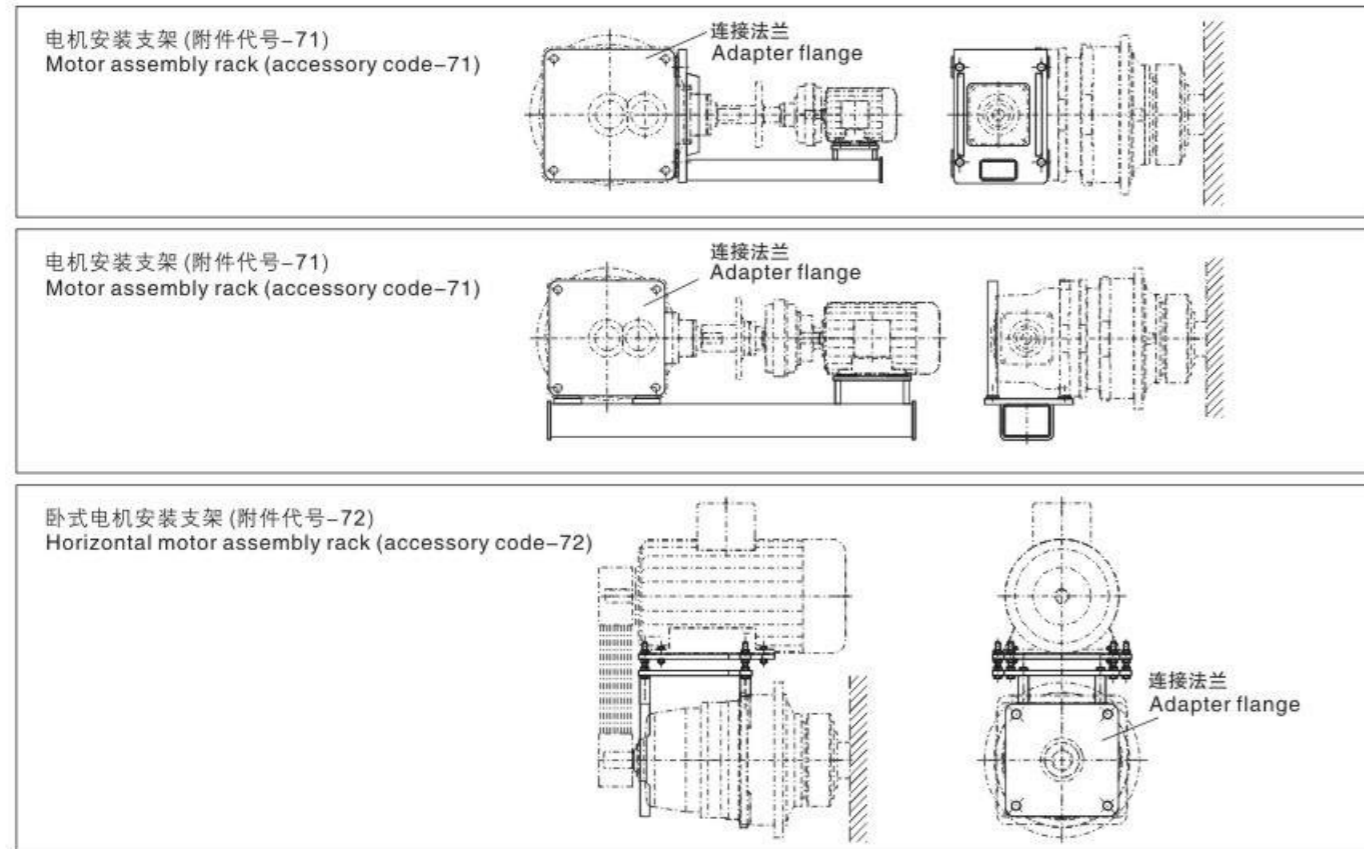


6. 法兰联接及底座安装时螺母的预紧扭矩 Flange connecting and base assembly needed bolt torque available

尺寸 Size	螺栓 Bolt (10.9)	预紧扭矩 Tightening torque (N·M)	螺栓 Bolt (8.8)	预紧扭矩 Tightening torque (N·M)
9	M16	295	M24	710
10	M16	295	M24	710
11	M20	580	M24	710
12	M24	1000	M24	710
13	M24	1000	M24	710
14	M24	1000	M30	1450
16	M24	1000	M30	1450
17	M30	2000	M36	2530
18	M30	2000	M36	2530
19/20	M30	2000	M42	4070
21/22	M36	3560	M48	6140
23/24	M36	3560	M48	6140
25/26	M42	5720	M56	9840
27/28	M48	8640	M56	9840
29/30	M48	8640	M64	14300
31/32	M56	13850	M64	14300
33/34	M56	13850	M64	14300

带电机法兰输入
With Motor Flange Input

1. P2S. 带电机、输入法兰及联轴器尺寸 P3S. motor input flange and coupling size:

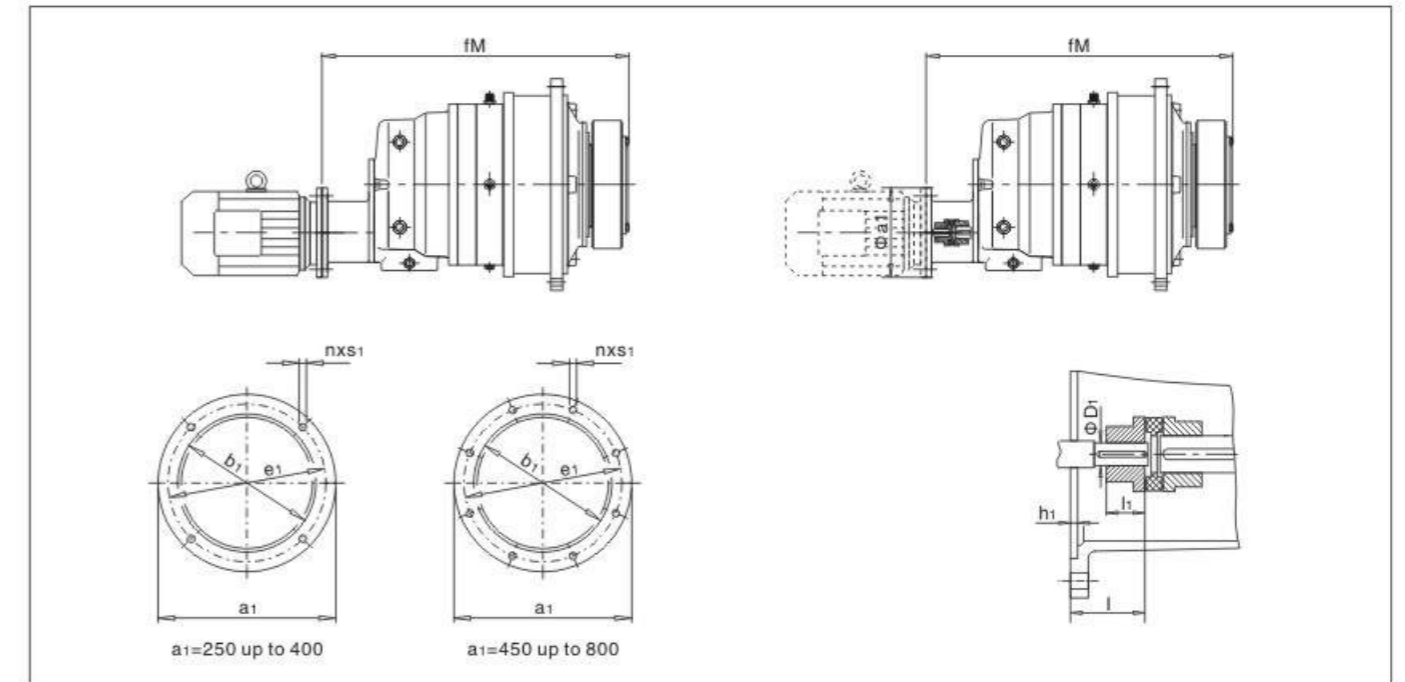

P2S.	电机 Motor (Y)*	法兰 Flange (F)**	a ₁	b ₁ (h ₇)	D ₁	e ₁	f _M	h ₁	l ₁	l	n	s ₁
9	160		350	250	42	300	832	6	75	110	4	M16
	180		350	250	48	300	832	6	75	110	4	M16
10	160		350	250	42	300	861	6	75	110	4	M16
	180		350	250	48	300	861	6	75	110	4	M16
11	160		350	250	42	300	1010	6	75	110	4	M16
	180		350	250	48	300	1010	6	75	110	4	M16
	200		400	300	55	350	1010	7	75	110	4	M16
12	160		350	250	42	300	1044	6	75	110	4	M16
	180		350	250	48	300	1044	6	75	110	4	M16
	200		400	300	55	350	1044	7	75	110	4	M16
13	225		450	350	60	400	1247	7	90	140	8	M16
	250		550	450	65	500	1247	8	90	140	8	M16
14	225		450	350	60	400	1307	7	90	140	8	M16
	250		550	450	65	500	1307	8	90	140	8	M16
16	250		550	450	65	500	1452	7	100	140	8	M16
	280		550	450	75	500	1452	8	100	140	8	M16
17	250		550	450	65	500	1487	7	100	140	8	M16
	280		550	450	75	500	1487	8	100	140	8	M16
18	315		660	550	80	600	1680	11	110	140	8	M20
19/20	315		660	550	80	600	1728	11	110	140	8	M20


注：(1)：“*”所选直联电机机座号所对应的功率应满足传动能力表；
“(F)”表格中所示的法兰为标准型号的法兰，如有异同请另咨询。
(2)侧面扭力臂组合，请咨询。

(1)* Power to match transmission force table for direct-connect motor;
** Table flange is standard flange.
(2) Side torque arm matched units, please inquiry.

P系列行星齿轮减速机 PLANETARY GEARBOX

带电机法兰输入
With Motor Flange Input

2. P3N. 带电机法兰及联轴器尺寸 P3N. motor flange and coupling size:

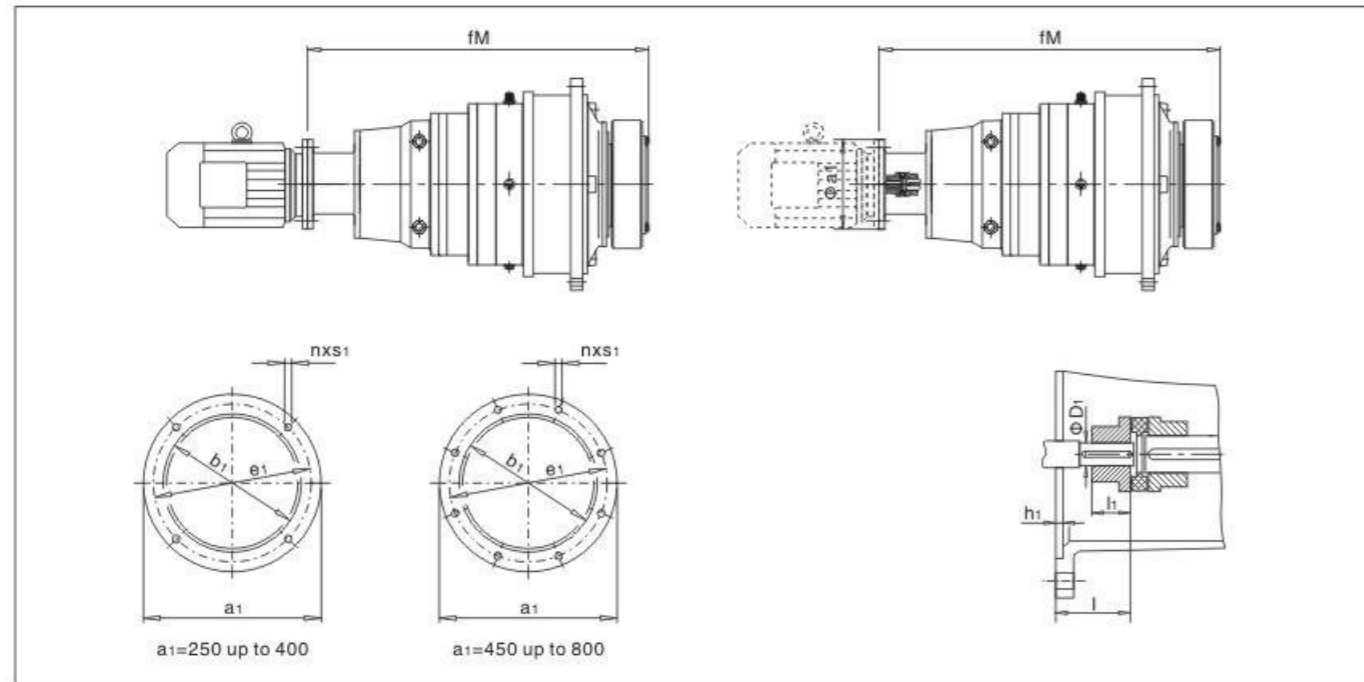

P3N.	电机 Motor (Y)*	法兰 Flange (F)**	a ₁	b ₁ (h ₇)	D ₁	e ₁	f _M	h ₁	l ₁	l	n	s ₁
9	132		300	230	38	265	912	5	56	80	4	M12
	160		350	250	42	300	960	6	80	110	4	M16
	180		350	250	48	300	960	6	80	110	4	M16
10	132		300	230	38	265	941	5	56	80	4	M12
	160		350	250	42	300	989	6	80	110	4	M16
	180		350	250	48	300	989	6	80	110	4	M16
11	132		300	230	38	265	1002	5	56	80	4	M12
	160		350	250	42	300	1050	6	80	110	4	M16
	180		350	250	48	300	1050	6	80	110	4	M16
12	132		300	230	38	265	1036	5	56	80	4	M12
	160		350	250	42	300	1084	6	80	110	4	M16
	180		350	250	48	300	1084	6	80	110	4	M16
13	160		350	250	42	300	1159	6	80	110	4	M16
	180		350	250	48	300	1159	6	80	110	4	M16
	200		400	300	55	350	1159	7	80	110	4	M16
14	160		350	250	42	300	1219	6	80	110	4	M16
	180		350	250	48	300	1219	6	80	110	4	M16
16	200		400	300	55	350	1400	7	90	110	4	M16
	225		450	350	60	400	1430	7	90	140	8	M16
17	200		400	300	55	350	1435	7	90	110	4	M16
	225		450	350	60	400	1465	7	90	140	8	M16
18	250		550	450	65	500	1636.5	7	100	140	8	M16
	280		550	450	75	500	1636.5	8	100	140	8	M16
19/20	250		550	450	65	500	1685	7	100	140	8	M16
	280		550	450	75	500	1685	8	100	140	8	M16


注：(1)：“*” 所选直联电机机座号所对应的功率应满足传动能力表；
“**” 表格中所示的法兰为标准型号的法兰，如有异同请另咨询。
(2) 侧面扭力臂组合，请咨询。

(1)* Power to match transmission force table for direct-connect motor;
** Table flange is standard flange.
(2) Side torque arm matched units, please inquiry.

P系列行星齿轮减速机 PLANETARY GEARBOX

带电机法兰输入
With Motor Flange Input

3. P3S. 带电机法兰及联轴器尺寸 P3S. motor flange and coupling size:

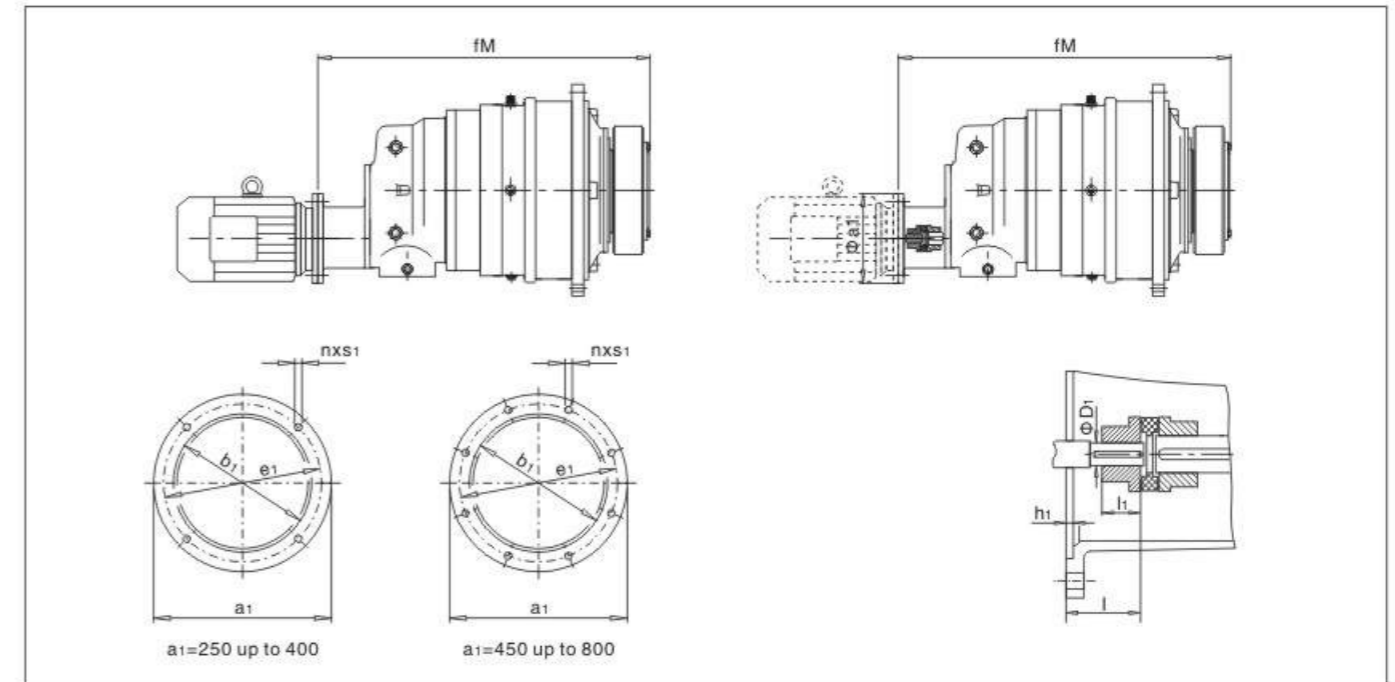

P3S.	电机 Motor (Y)*	法兰 Flange (F)**	a ₁	b ₁ (h ₇)	D ₁	e ₁	f _M	h ₁	l ₁	l	n	s ₁
9	100		250	180	28	215	865	5	45	60	4	M12
	112		250	180	28	215	865	5	45	60	4	M12
	132		300	230	38	265	896	5	70	80	4	M12
10	160		350	250	42	300	931	6	75	110	4	M16
	100		250	180	28	215	894	5	45	60	4	M12
	112		250	180	28	215	894	5	45	60	4	M12
11	132		300	230	38	265	925	5	70	80	4	M12
	160		350	250	42	300	957	6	75	110	4	M16
	112		250	180	28	215	955	5	45	60	4	M12
12	132		300	230	38	265	986	5	70	80	4	M12
	160		350	250	42	300	1018	6	75	110	4	M16
	180		350	250	48	300	1018	6	75	110	4	M16
13	112		250	180	28	215	989	5	45	60	4	M12
	132		300	230	38	265	1020	5	70	80	4	M12
	160		350	250	42	300	1052	6	75	110	4	M16
14	180		350	250	48	300	1052	6	75	110	4	M16
	132		300	230	38	265	1095	5	70	80	4	M12
	160		350	250	42	300	1127	6	75	110	4	M16
16	180		350	250	48	300	1127	6	75	110	4	M16
	132		300	230	38	265	1155	5	70	80	4	M12
	160		350	250	42	300	1187	6	75	110	4	M16
17	180		350	250	48	300	1187	6	75	110	4	M16
	200		400	300	55	350	1365	6	75	110	4	M16
	200		400	300	55	350	1365	7	75	110	4	M16
18	160		350	250	42	300	1365	6	75	110	4	M16
	180		350	250	48	300	1365	6	75	110	4	M16
	200		400	300	55	350	1365	7	75	110	4	M16
19/20	160		350	250	42	300	1390	6	75	110	4	M16
	180		350	250	48	300	1390	6	75	110	4	M16
	200		400	300	55	350	1400	7	75	110	4	M16
18	180		350	250	48	300	1558.5	6	90	110	4	M16
	200		400	300	55	350	1570.5	6	90	110	4	M16
	225		450	350	60	400	1608.5	7	90	110	8	M16
19/20	250		550	450	65	500	1608.5	7	90	110	8	M16
	180		350	250	48	300	1606	6	90	110	4	M16
	200		400	300	55	350	1618	6	90	110	4	M16
19/20	225		450	350	60	400	1656	7	90	110	8	M16
	250		550	450	65	500	1656	7	90	110	8	M16


注：(1)：“*” 所选直联电机机座号所对应的功率应满足传动能力表；
“**” 表格中所示的法兰为标准型号的法兰，如有异同请另咨询。
(2) 侧面扭力臂组合，请咨询。

(1)* Power to match transmission force table for direct-connect motor;
** Table flange is standard flange.
(2) Side torque arm matched units, please inquiry.

P系列行星齿轮减速机 PLANETARY GEARBOX

带电机法兰输入
With Motor Flange Input

4. P2K. 带电机法兰及联轴器尺寸 P2K. motor flange and coupling size:

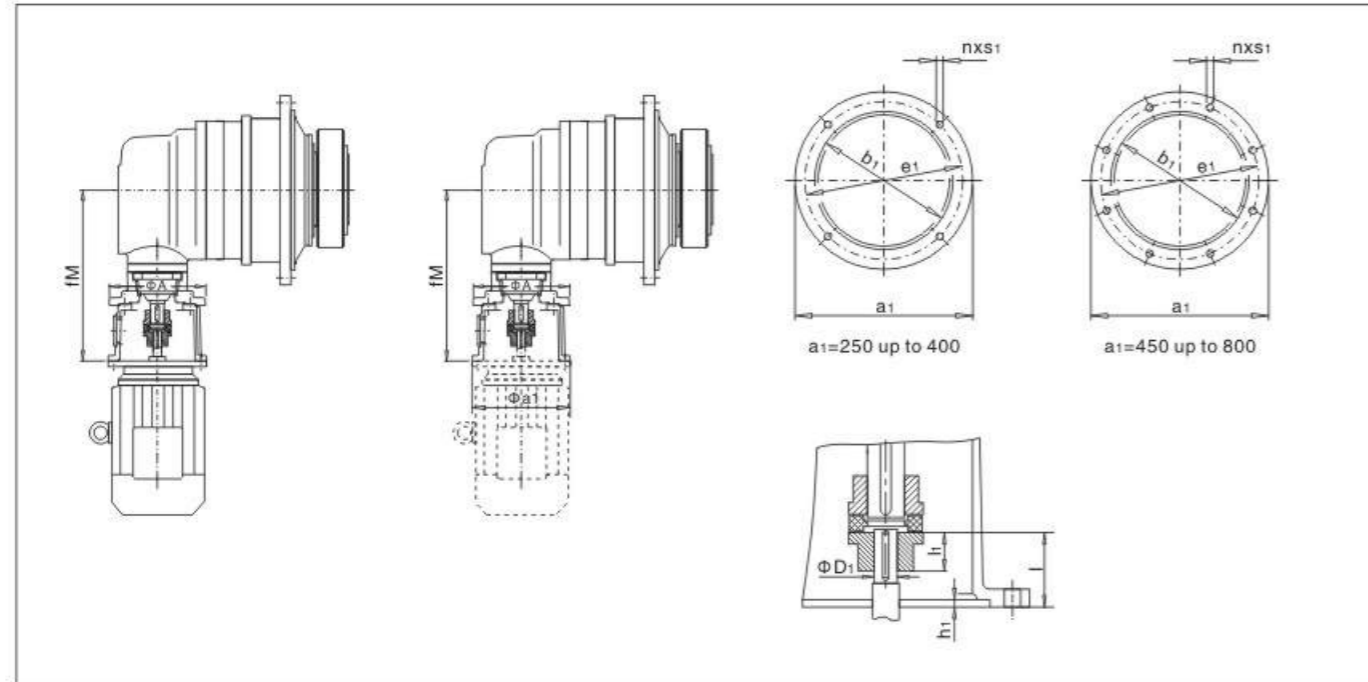


P2K.	电机 Motor (Y)*	法兰 Flange (F)**	a ₁	A	b ₁	D ₁	e ₁	f _M	h ₁	l	l ₁	n	s ₁
9/10	132		300	250	230	38	265	486	5	80	70	4	M12
	160		350	250	250	42	300	528	6	110	75	4	M16
11/12	160		350	300	250	42	300	593	6	110	75	4	M16
	180		350	350	250	48	300	593	6	110	75	4	M16
13/14	200		400	350	300	55	350	593	7	110	75	4	M16
	160		350	440	250	42	300	663	6	110	75	4	M16
16/17	180		350	440	250	48	300	663	6	110	75	4	M16
	200		400	440	300	55	350	663	7	110	75	4	M16
18/19/20	225		450	440	350	60	400	695	7	140	80	8	M16
	250		550	440	450	65	500	707	8	140	85	8	M16
21/22	200		400	440	300	55	350	770	7	110	80	4	M16
	225		425	440	350	60	400	800	7	140	80	8	M16
23/24	250		550	440	450	65	500	812	8	140	85	8	M16
	280		550	440	450	75	500	812	8	140	85	8	M16
25/26	225		450	440	350	60	400	932	7	140	85	8	M16
	250		550	440	450	65	500	932	8	140	85	8	M16
27/28	280		550	440	450	75	500	932	8	140	85	8	M16
	315*		600	440	550	80	600	967	11	170	100	8	M20

注：(1)：“*”所选直联电机机座号所对应的功率应满足传动能力表；
“(1)” Power to match transmission force table for direct-connect motor;
“(2)” 表格中所示的法兰为标准型号的法兰，如有异同请另咨询。
“(2)” Side torque arm matched units, please inquiry.

P系列行星齿轮减速机 PLANETARY GEARBOX

带电机法兰输入
With Motor Flange Input

5. P2L. 带电机法兰及联轴器尺寸 P2L. motor flange and coupling size:

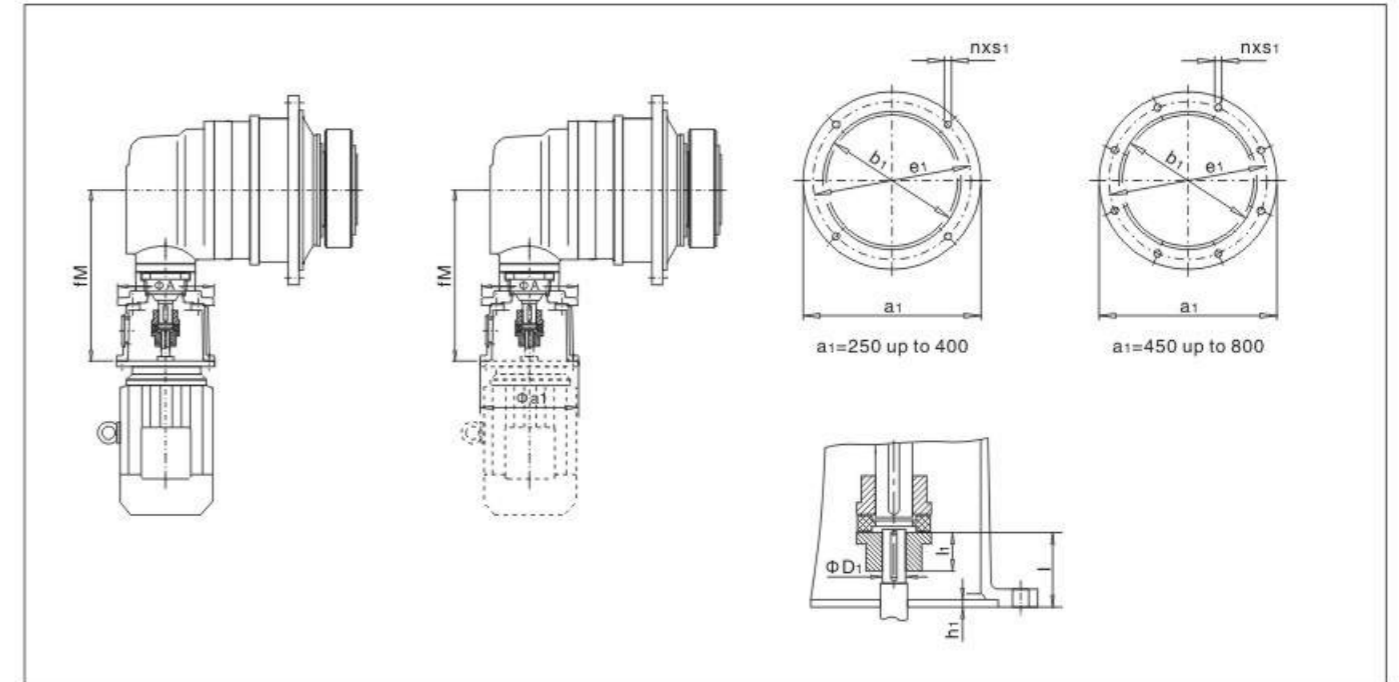


P2K.	电机 Motor (Y)*	法兰 Flange (F)**	a ₁	A	b ₁	D ₁	e ₁	f _M	h ₁	l	l ₁	n	s ₁
9/10	160		350	440	250	42	300	543	6	110	75	4	M16
	180		350	440	250	48	300	543	6	110	75	4	M16
	200		400	440	300	55	350	543	7	110	75	4	M16
	225		450	440	350	60	400	575	7	140	80	8	M16
11/12	200		400	440	300	55	350	600	7	110	75	4	M16
	225		450	440	350	60	400	630	7	140	80	8	M16
13/14	250		550	440	450	65	500	642	8	140	85	8	M16
	225		450	440	350	60	400	732	7	140	85	8	M16
16/17	250		550	440	450	65	500	732	8	140	85	8	M16
	280		550	440	450	75	500	732	8	140	85	8	M16
18/19/20	280		550	600	450	75	500	842	8	140	100	8	M16
	315*		660	650	550	80	600	872	11	170	100	8	M20
	315MC		660	650	550	80	600	872	11	170	100	8	M20
	315MD		660	650	550	80	600	872	11	170	100	8	M20
21/22	315LB		660	650	550	80	600	987	11	170	100	8	M20
	315*		660	650	550	80	600	987	11	170	100	8	M20
	315MC		660	650	550	80	600	987	11	170	100	8	M20
	315MD		660	650	550	80	600	987	11	170	100	8	M20
23/24	315LB		660	650	550	80	600	1122	11	170	125	8	M20
	315MC		660	650	550	80	600	1122	11	170	125	8	M20
25/26	315MD		660	650	550	80	600	1122	11	170	125	8	M20
	315LB		660	650	550	80	600	1122	11	170	125	8	M20
27/28	315MB		800	650	680	95	740	1122	11	170	125	8	M20
	315LB		800	650	680	95	740	1122	11	170	125	8	M20

注：(1)：“*”所选直联电机机座号所对应的功率应满足传动能力表；
“(1)” Power to match transmission force table for direct-connect motor;
“(2)” 表格中所示的法兰为标准型号的法兰，如有异同请另咨询。
“(2)” Side torque arm matched units, please inquiry.

P系列行星齿轮减速机 PLANETARY GEARBOX

带电机法兰输入
With Motor Flange Input

6. P3K. 带电机法兰及联轴器尺寸 P3K. motor flange and coupling size:

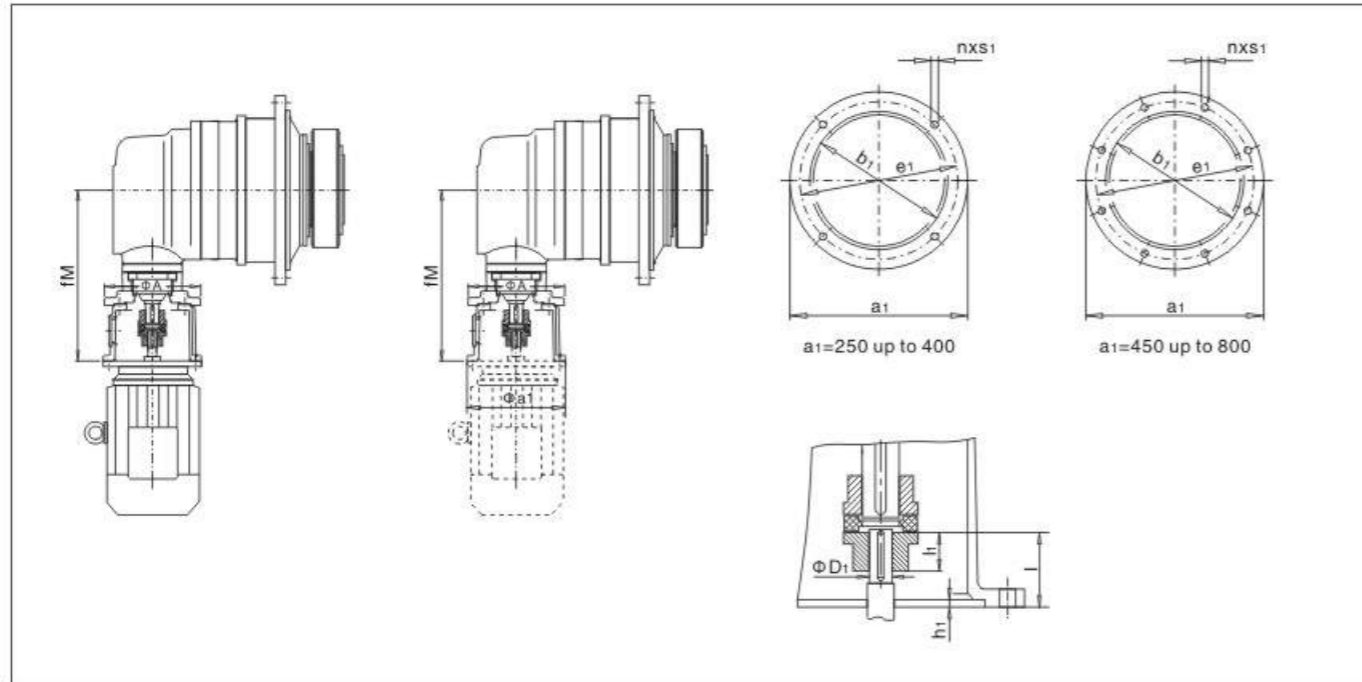

P2K.	电机 Motor (Y)*	法兰 Flange (F)**	a ₁	A	b ₁	D ₁	e ₁	f _M	h ₁	l	l ₁	n	s ₁
9/10/11 12/13/14	132		300	250	230	38	265	486	5	80	70	4	M12
	160		350	250	250	42	300	528	6	110	75	4	M16
	180		350	250	250	48	300	528	6	110	75	4	M16
16/17	160		350	350	250	42	300	593	6	110	75	4	M16
	180		350	350	250	40	300	593	6	110	75	4	M16
	200		400	350	300	55	350	593	7	110	75	4	M16
18/19/20 21/22	160		350	440	250	42	300	663	6	110	75	4	M16
	180		350	440	250	48	300	663	6	110	75	4	M16
	200		400	440	300	35	350	663	7	110	75	4	M16
	225		450	440	350	60	400	695	7	140	80	8	M16
23/24 25/26	200		400	440	300	55	350	770	6	110	80	4	M16
	225		450	440	350	60	400	800	7	140	80	8	M16
	250		550	440	450	62	500	812	7	140	85	8	M16
27/28 29/30	280		550	440	450	75	500	812	8	140	85	8	M16
	225		450	440	350	60	400	932	7	140	85	8	M16
	250		550	440	450	65	500	932	7	140	85	8	M16
	280		550	440	450	75	500	932	8	140	85	8	M16
	315*		600	440	550	80	600	967	11	170	100	8	M20

注：(1)：“*”所选直联电机机座号所对应的功率应满足传动能力表；
“**”表格中所示的法兰为标准型号的法兰，如有异同请另咨询。
(2) 侧面扭力臂组合，请咨询。

(1)* Power to match transmission force table for direct-connect motor;
** Table flange is standard flange.
(2) Side torque arm matched units, please inquiry.

P系列行星齿轮减速机 PLANETARY GEARBOX

附件代号
Accessory Cod


代号Code	附件 Add-on piece		附图 Representation
99	不带附件 Without accessory		
96	带附件 With base	7.12.1	
71	电机机架 (电机、连轴号) Motor rack (motor, concentric shaft)	7.12.5	
72	电机机架 Motor rack		
73	电机移动机座 (电机、联轴器、齿轮箱) Motor mobile rack (motor, coupling, gear units)		
74	钟型罩式法兰 (输出) Bell liner flange		
75	扭力臂 (单向) Torque arm (single direction)	7.12.2	
76	扭力臂 (双向) Torque arm (double direction)	7.12.3	
77	扭转轴支架 Torsion shaft rack	7.12.4	
80	支架1 Rack 1		
81	支架2 Rack 2		
	特殊设计按客户要求 Special design according to customer requirements		

* 非刚性联接 Non rigid connection

P系列行星齿轮减速机 PLANETARY GEARBOX

垂直安装时润滑油补偿油箱 Vertical Assembly Fabrication Compensating Oil Case


安装方位为V1, V3, V11, V31时采用润滑油补偿油箱
Assembly mode V1, V3, V11, V31 fabrication compensating oil case.

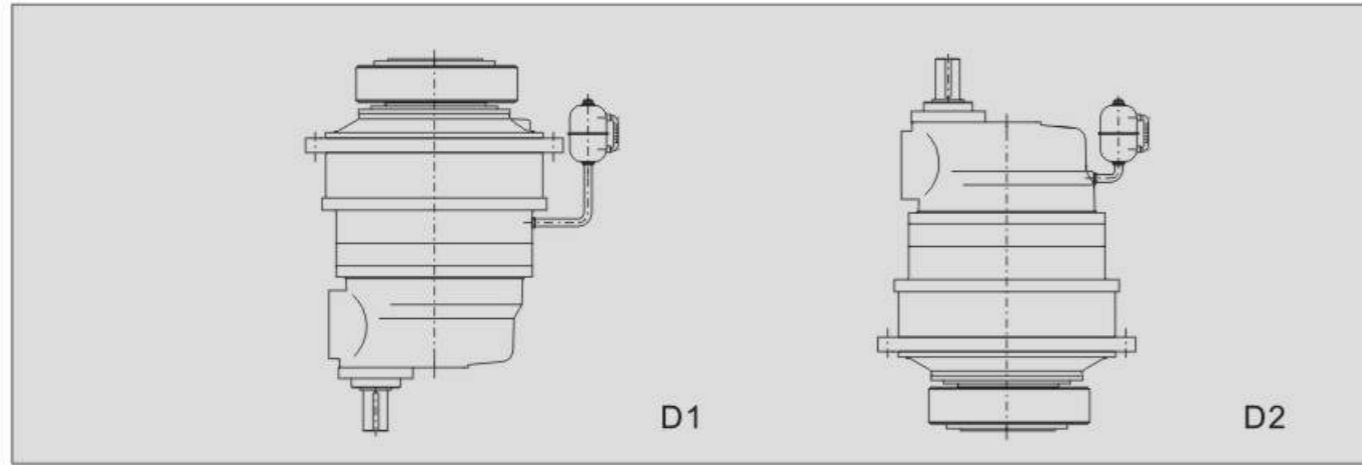

在垂直安装条件下,正常的润滑方法很难给予顶端轴承提供润滑油,为了确保润滑油的供应,齿轮箱内油量必须加高,如上图(D1,D2)所示,通过补偿油箱加高油位,补偿油箱上装有通气帽通气.油箱可被安装在齿轮箱上,也可以安装在客户的机架上,实际尺寸和最终位置在订货时商定.

The formal fabrication ways is hard to fill the fabrication oil in the vertical assembly conditions, in order to make the supply of the fabrication oil, the oil volume in the gear units need to heighten. Just like the picture (D1, D2) shows, to enhance the oil level by compensating oil case with air vent and cap.. the oil case could be installed on the gear units as well as the customer's machine rack. The factual size and final position can be negotiated when placing an order.

水平安装时,油泵供油如下 Horizontal installation, oil pump supply oil as follow

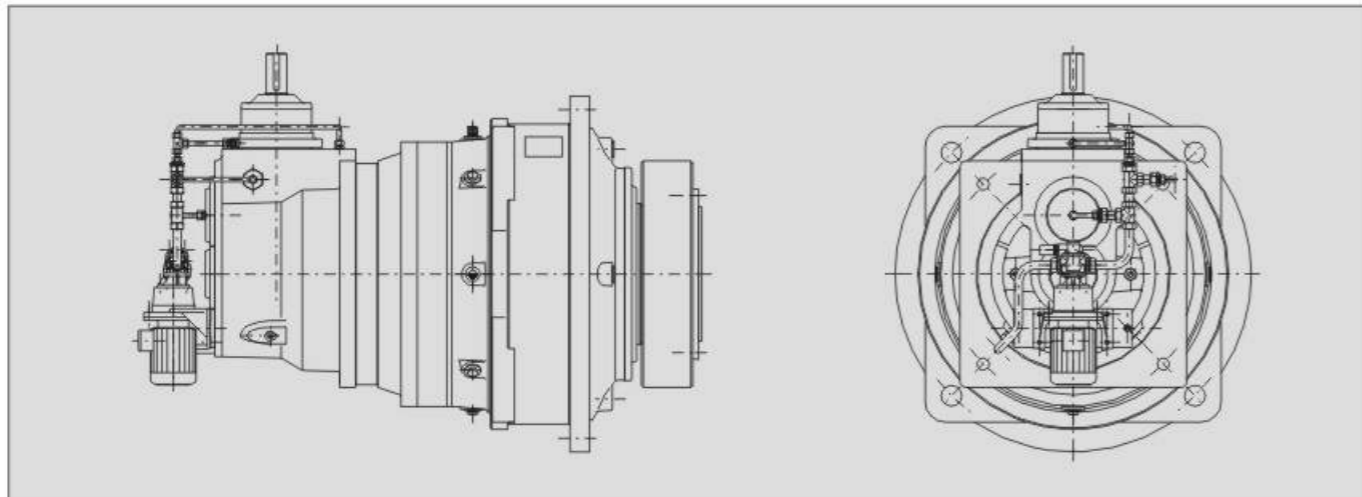

B51安装方位时,需配备电动泵强制循环润滑
[PK, PL为B51安装方位时所有规格(即9-34型), PS的20型以上所有规格(即21-34型)]
B51 assembly position, need the match the electric motor pump to force the cycle fabrication.
(PK, PL is B51 assembly position is suitable to type 9-34. above PS 20 type(21-34))

注:轴布置形式,请参阅13.17.

P系列行星齿轮减速机 PLANETARY GEARBOX

安装方位 Installation Position

		水平安装 Horizontal type		垂直安装 Vertical type	
同轴式齿轮箱 Concentric gearbox	0				
斜齿-行星 齿轮箱 Helical- planetary gearbox	1	P.S.			
伞齿-斜齿- 行星齿轮箱 Bevel-helical planetary gearbox	2	P.K.			
伞齿-行星 齿轮箱 Bevel- planetary gearbox	3	P.L.			
扭力臂安装 Torque arm assembly	5			*) 对于B51, V1, V3, V11, V31安装方位时, 需保证齿轮箱的润滑,请与我们联系。 *) For B51, V1, V3, V11, V31 installation orientation, boundary for gear lubrication, please contact us	