




# 45E RoHS Compliant

## 贴片保险丝(抗浪涌型)

SMD Fuse (High Inrush Current Withstand) 600V/500V/250V/72V/63V

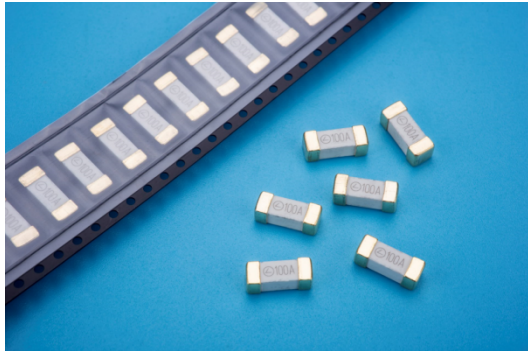

### 测试标准:

Testing Standard:  
UL248-1 UL248-14

### 额定分断能力:

Interrupting Rating:  
100 Amperes at 600V/500VAC/DC(40mA~5A)  
300 Amperes at 250V/125VAC/DC (6.3A~100A)  
1500 Amperes at 72V/63VDC(40mA~100A)

### 工作温度:

Operating Temperature:  
-55°C ~ +125°C

### 材料:


Materials:  
End cap: gold plated brass  
Ceramic tube: Ceramic

### 焊接方法:

Soldering Method:  
Reflow soldering: 260°C, 10s max.  
Manual soldering: 380°C, 3s max.

### 包装:


Packaging:  
Automaton taped 1000pcs per reel,  
10000pcs per carton.

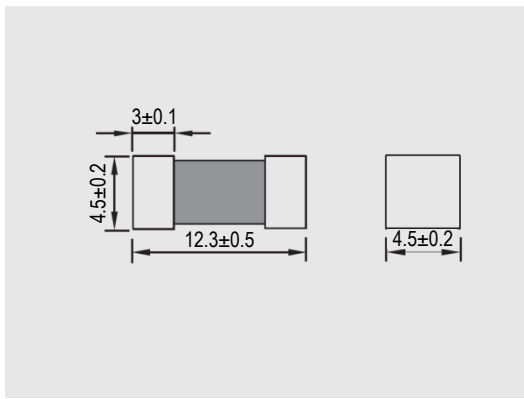

### 电气特性: Electrical Characteristics

额定电流的% of Ampere Rating	熔断时间 Opening Time
100%	4 hours Min.(大于 4 小时)
200%	60 s Max.(小于 60 秒)

目录编号: Catalog No. K:600V J:500V A:250V F:72V C:63V

目录编号 Catalog No.	额定电流 Ampere Rating	额定电压 Voltage Rating	熔化热能 I <sup>2</sup> T Melting Integral (A <sup>2</sup> ·s)	认证 Approvals
				●表示已获认证 ●表示认证中 
45E2100K/J/A/F/C	10A	600V/500V/250V/72V/63V	50.2	●
45E2150K/J/A/F/C	15A	600V/500V/250V/72V/63V	73.0	●
45E2200K/J/A/F/C	20A	600V/500V/250V/72V/63V	202.0	●
45E2250K/J/A/F/C	25A	600V/500V/250V/72V/63V	390.2	●
45E2300K/J/A/F/C	30A	600V/500V/250V/72V/63V	1800	●
45E2350K/J/A/F/C	35A	600V/500V/250V/72V/63V	3500	●
45E2400K/J/A/F/C	40A	600V/500V/250V/72V/63V	5120	●
45E2450K/J/A/F/C	45A	600V/500V/250V/72V/63V	5620	●
45E2500K/J/A/F/C	50A	600V/500V/250V/72V/63V	6000	●
45E2550K/J/A/F/C	55A	600V/500V/250V/72V/63V	8215	●
45E2600K/J/A/F/C	60A	600V/500V/250V/72V/63V	10800	●
45E2800K/J/A/F/C	80A	600V/500V/250V/72V/63V	18500	●
45E3100K/J/A/F/C	100A	600V/500V/250V/72V/63V	34000	●