



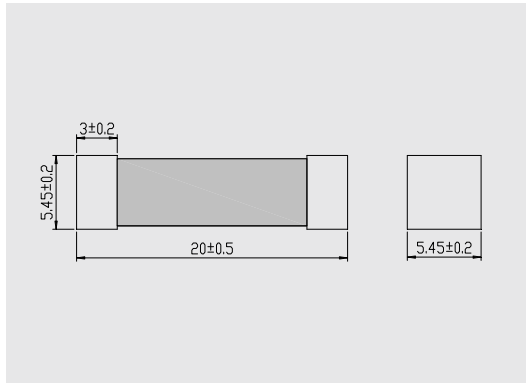

52T RoHS Compliant

贴片保险丝(抗浪涌型)

SMD Fuse (High Inrush Current Withstand) 500V/400V/300V/250V/72V

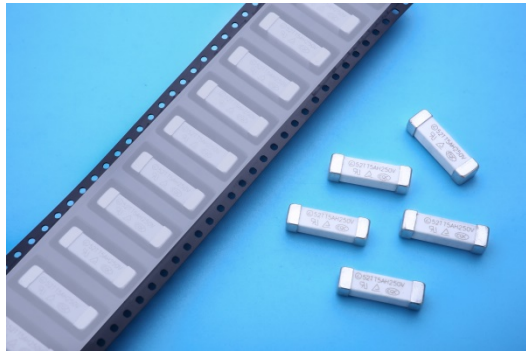

测试标准:

Testing Standard:

IEC60127-1,IEC60127-7,GB/T9364.1,GB/T9364.7

额定分断能力:

Interrupting Rating:

300 Amperes at 500V/400V/300V/250V/72V DC (40mA~30A)

1500 Amperes at 300V/250V AC(40mA~30A)

工作温度:

Operating Temperature:

-55℃~+125℃

材料:

Materials:

End cap: Sn plated brass

Ceramic tube: Ceramic

焊接方法:

Soldering Method:


Reflow soldering: 260℃,10s max.

Manual soldering: 380℃,3s max.

包装:

Packaging:
Automaton taped 1000pcs per reel,
10000pcs per carton.

Time-Current Characteristics
电流-时间曲线图

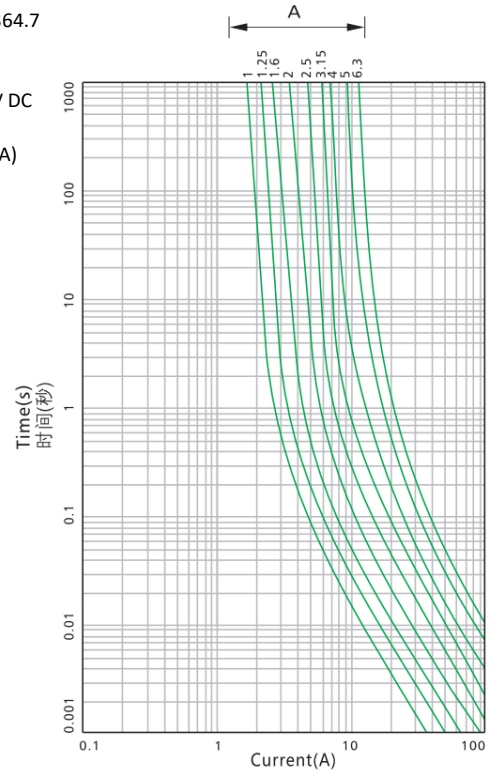

电气特性: Electrical Characteristics

额定电流的% of Ampere Rating	熔断时间 Opening Time
210%	30min Max.(小于 30 分钟)
275%	750ms-80s
400%	150ms-5s
1000%	10ms-150ms

目录编号: Catalog No. J:500V T:400V G:300V A:250V F:72V

目录编号 Catalog No.	额定电流 Ampere Rating	额定电压 Voltage Rating	熔化热能 I ² T Melting Integral (A ² ·s)	认证 Approvals				
52T1100J/T/G/A/F	1A	500V/400V/300V/250V/72V	1.2	●	●	●	○	○
52T1125J/T/G/A/F	1.25A	500V/400V/300V/250V/72V	2.3	●	○	○	○	○
52T1160J/T/G/A/F	1.6A	500V/400V/300V/250V/72V	3.5	●	●	●	○	○
52T1200J/T/G/A/F	2A	500V/400V/300V/250V/72V	7.4	●	●	●	○	○
52T1250J/T/G/A/F	2.5A	500V/400V/300V/250V/72V	12	●	●	●	○	○
52T1315J/T/G/A/F	3.15A	500V/400V/300V/250V/72V	25	●	●	●	○	○
52T1400J/T/G/A/F	4A	500V/400V/300V/250V/72V	40	●	●	●	○	○
52T1500J/T/G/A/F	5A	500V/400V/300V/250V/72V	65	●	●	●	○	○
52T1630J/T/G/A/F	6.3A	500V/400V/300V/250V/72V	110	●	●	●	○	○
52T1800J/T/G/A/F	8A	500V/400V/300V/250V/72V	210	●	○	○	○	○
52T2100J/T/G/A/F	10A	500V/400V/300V/250V/72V	390	●	●	●	○	○
52T2125J/T/G/A/F	12.5A	500V/400V/300V/250V/72V	880	●	○	○	○	○
52T2160J/T/G/A/F	16A	500V/400V/300V/250V/72V	1606	●	○	○		
52T2200J/T/G/A/F	20A	500V/400V/300V/250V/72V	1850	●				
52T2250J/T/G/A/F	25A	500V/400V/300V/250V/72V	2130	●				