



5P $\Phi 5.2 \times 20$ RoHS Compliant



玻璃保险丝管(快断型)



Glass Tube Fuse (Fast-Acting) 250V/125V

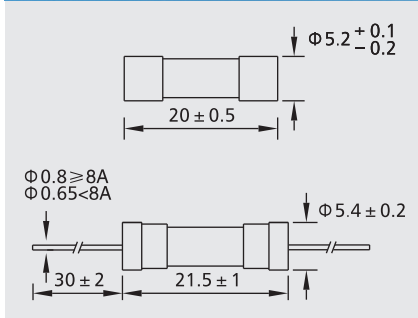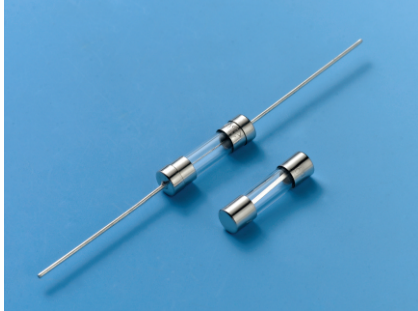

测试标准:
Testing Standard:
METI Ordinance Article 1

额定分断能力:
Interrupting Rating:
500 Amperes at 125V AC
100 Amperes at 250V AC

工作温度:
Operating Temperature:
-55°C ~ +125°C

材料:
Materials:
End cap: nickel plated brass
Glass tube: glass
Lead wire: tinned copper wire
Inner cap: nickel plated brass

焊接方法:
Soldering Method:
Wave soldering: 260°C, 10s max
Manual soldering: 350°C, 5s max

电气特性: Electrical Characteristics

额定电流的% % of Ampere Rating	熔断时间 Opening Time
130%	1 hours Min(大于1小时)
160%	1 hour Max(小于1小时)
200%	120 s Max(小于120秒)

目录编号: Catalog No.A:250V B:125V 带引线产品目录编号后加"P":Suffix"P"for Lead Type After Catalog No.

目录编号 Catalog No.	额定电流 Ampere Rating	额定电压 Voltage Rating	熔化热能 ² T Melting Integral (A ² .S)	认证 Approvals
				● 表示已获认证 ● 表示认证中
5P1100A/B	1A	250/125V	1.2	●
5P1125A/B	1.25A	250/125V	2.1	●
5P1150A/B	1.5A	250/125V	3.3	●
5P1160A/B	1.6A	250/125V	7.2	●
5P1200A/B	2A	250/125V	14	●
5P1250A/B	2.5A	250/125V	23	●
5P1300A/B	3A	250/125V	35	●
5P1315A/B	3.15A	250/125V	39	●
5P1350A/B	3.5A	250/125V	45	●
5P1400A/B	4A	250/125V	53	●
5P1500A/B	5A	250/125V	68	●
5P1600A/B	6A	250/125V	97	●
5P1630A/B	6.3A	250/125V	134	●
5P1800A/B	8A	250/125V	206	●
5P2100A/B	10A	250/125V	305	●
5P2120A/B	12A	250/125V	365	●
5P2150A/B	15A	250/125V	598	●

Time-Current Characteristics
电流-时间曲线图

