



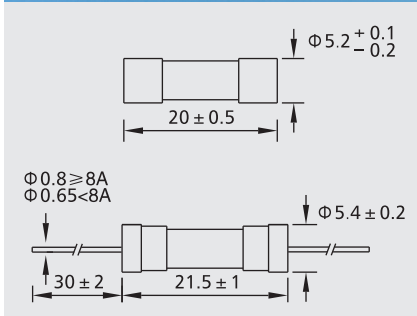

# 5E $\Phi 5.2 \times 20$ RoHS Compliant

## 玻璃保险丝管(延时型)

### Glass Tube Fuse (Time-Lag) 250V/125V

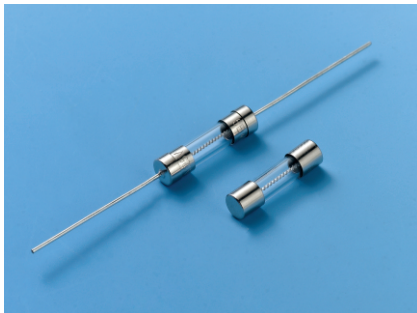

**测试标准:**  
Testing Standard:  
UL248-1 UL248-14


**额定分断能力:**  
Interrupting Rating:  
10000 Amperes at 125V AC  
35 Amperes at 250V AC(100mA~1A)  
100 Amperes at 250V AC(1.5A~3.5A)  
200 Amperes at 250V AC(4A~6.3A)

**工作温度:**  
Operating Temperature:  
-55°C ~ +125°C

**材料:**  
Materials:  
End cap:nickel plated brass  
Glass tube:glass  
Lead wire:tinned copper wire  
Inner cap:nickel plated brass

**焊接方法:**  
Soldering Method:  
Wave soldering: 260°C, 10s max  
Manual soldering: 350°C, 5s max

Time-Current Characteristics  
电流-时间曲线图

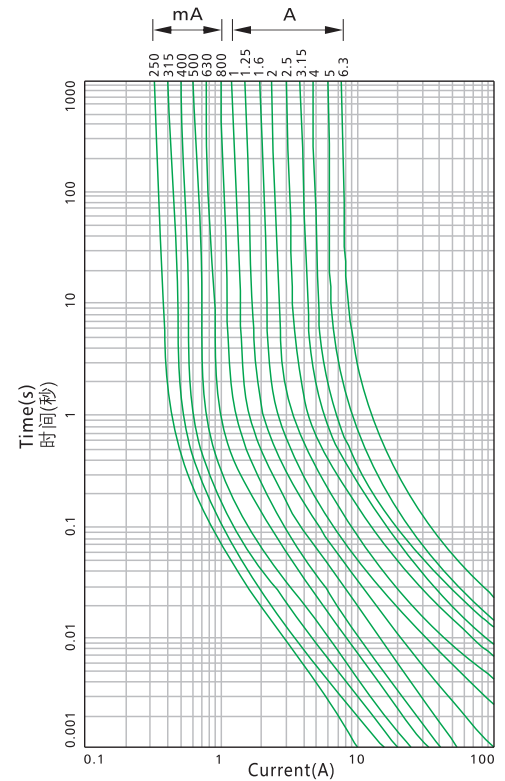

#### 电气特性: Electrical Characteristics

额定电流的% % of Ampere Rating	熔断时间 Opening Time
100%	4 hours Min(大于4小时)
135%	1 hour Max(小于1小时)
200%	120 s Max (小于120秒)
1000%	10 ms Min (大于10毫秒)

目录编号: Catalog No.A:250V B:125V 带引线产品目录编号后加"P":Suffix"P"for Lead Type After Catalog No.

目录编号 Catalog No.	额定电流 Ampere Rating	额定电压 Voltage Rating	熔化热能 <sup>2</sup> T Melting Integral (A <sup>2</sup> .S)	认证 Approvals	
5E0100A/B	100mA	250/125V	0.005	●	●
5E0125A/B	125mA	250/125V	0.01	●	●
5E0160A/B	160mA	250/125V	0.02	●	●
5E0200A/B	200mA	250/125V	0.04	●	●
5E0250A/B	250mA	250/125V	0.06	●	●
5E0300A/B	300mA	250/125V	0.08	●	●
5E0315A/B	315mA	250/125V	0.10	●	●
5E0350A/B	350mA	250/125V	0.13	●	●
5E0400A/B	400mA	250/125V	0.19	●	●
5E0500A/B	500mA	250/125V	0.32	●	●
5E0630A/B	630mA	250/125V	0.54	●	●
5E0750A/B	750mA	250/125V	0.93	●	●
5E0800A/B	800mA	250/125V	1.16	●	●
5E1100A/B	1A	250/125V	2.5	●	●
5E1150A/B	1.5A	250/125V	6.2	●	●
5E1160A/B	1.6A	250/125V	11	●	●
5E1200A/B	2A	250/125V	20	●	●
5E1250A/B	2.5A	250/125V	39	●	●
5E1300A/B	3A	250/125V	64	●	●
5E1315A/B	3.15A	250/125V	69	●	●
5E1350A/B	3.5A	250/125V	70	●	●
5E1400A/B	4A	250/125V	83	●	●
5E1500A/B	5A	250/125V	90	●	●
5E1600A/B	6A	250/125V	102	●	●
5E1630A/B	6.3A	250/125V	126	●	●

● 表示已获认证  
● 表示认证中