




5N Φ5.2x20 RoHS Compliant

陶瓷保险丝管(延时型) Ceramic Tube Fuse (Time-Lag) 250V

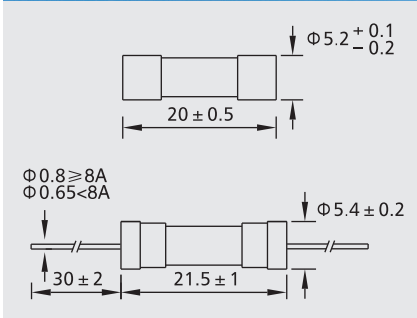

测试标准:
Testing Standard:
IEC60127-1 IEC60127-2 GB/T9364.1 GB/T9364.2


额定分断能力:
Interrupting Rating:
1500 Amperes at 250V AC

工作温度:
Operating Temperature:
-55°C ~ +125°C

材料:
Materials:
End cap: nickel plated brass
Ceramic tube: ceramic
Lead wire: tinned copper wire
Inner cap: nickel plated brass

焊接方法:
Soldering Method:
Wave soldering: 260°C, 10s max
Manual soldering: 350°C, 5s max

Time-Current Characteristics
电流-时间曲线图

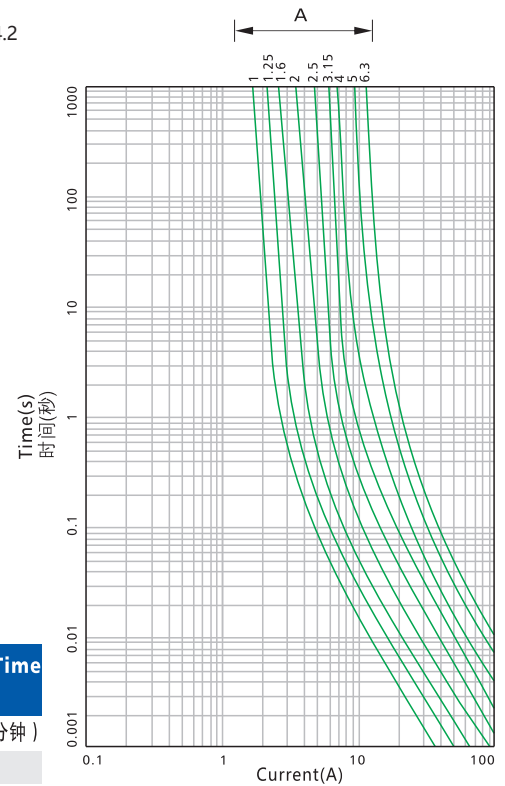

电气特性: Electrical Characteristics

额定电流的% of Ampere Rating	熔断时间 Opening Time (100mA~800mA)	熔断时间 Opening Time (1A~3.15A)	熔断时间 Opening Time (4A~10A)
210%	30 min Max (小于30分钟)	30 min Max (小于30分钟)	30 min Max (小于30分钟)
275%	250 ms~80 s	750ms~80s	750 ms~80 s
400%	50 ms~5 s	95ms~5s	150 ms~5 s
1000%	5ms~150 ms	10ms~150ms	20 ms~150 ms

目录编号: Catalog No. A:250V

带引线产品目录编号后加"P": Suffix "P" for Lead Type After Catalog No.

目录编号 Catalog No.	额定电流 Ampere Rating	额定电压 Voltage Rating	最大电压降(mv) Max Voltage Drop	熔化热能 ² T Melting Integral (A ² .S)	认证 Approvals			
								
5N0100A	100mA	250V	2800	0.07	●			
5N0125A	125mA	250V	2600	0.08	●			
5N0160A	160mA	250V	2400	0.09	●			
5N0200A	200mA	250V	2100	0.2	●			
5N0250A	250mA	250V	1500	0.3	●			
5N0315A	315mA	250V	1100	0.4	●			
5N0400A	400mA	250V	1000	0.5	●			
5N0500A	500mA	250V	850	0.6	●			
5N0630A	630mA	250V	650	0.8	●			
5N0800A	800mA	250V	500	1.0	●			
5N1100A	1A	250V	350	1.2	●	●	●	●
5N1125A	1.25A	250V	300	2.5	●	●	●	●
5N1160A	1.6A	250V	200	3.6	●	●	●	●
5N1200A	2A	250V	190	7.6	●	●	●	●
5N1250A	2.5A	250V	180	13	●	●	●	●
5N1315A	3.15A	250V	140	25	●	●	●	●
5N1400A	4A	250V	100	40	●	●	●	●
5N1500A	5A	250V	100	67	●	●	●	●
5N1630A	6.3A	250V	100	110	●	●	●	●
5N1800A	8A	250V	100	210	●	○	○	●
5N2100A	10A	250V	100	390	●	○	○	
5N2120A	12A	250V	-	580	●			
5N2150A	15A	250V	-	890	●			

● 表示已获得认证
○ 表示认证中