



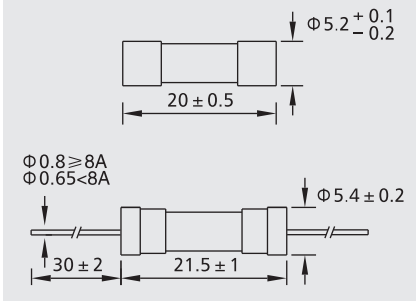

5K $\Phi 5.2 \times 20$ RoHS Compliant

玻璃保险丝管(延时型)

Glass Tube Fuse (Time-Lag) 250V

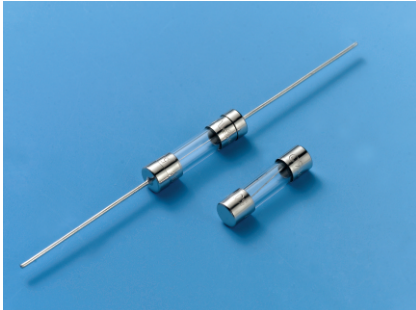

测试标准:

Testing Standard:

IEC60127-1 IEC60127-2 GB/T9364.1 GB/T9364.2 GB/T9364.7

额定分断能力:

Interrupting Rating:

35A or 10In Whichever is greater

工作温度:

Operating Temperature:

-55°C ~ +125°C

材料:

Materials:

End cap: nickel plated brass

Glass tube: glass

Lead wire: tinned copper wire

Inner cap: nickel plated brass


焊接方法:

Soldering Method:

Wave soldering: 260°C, 10s max

Manual soldering: 350°C, 5s max

Time-Current Characteristics
电流-时间曲线图

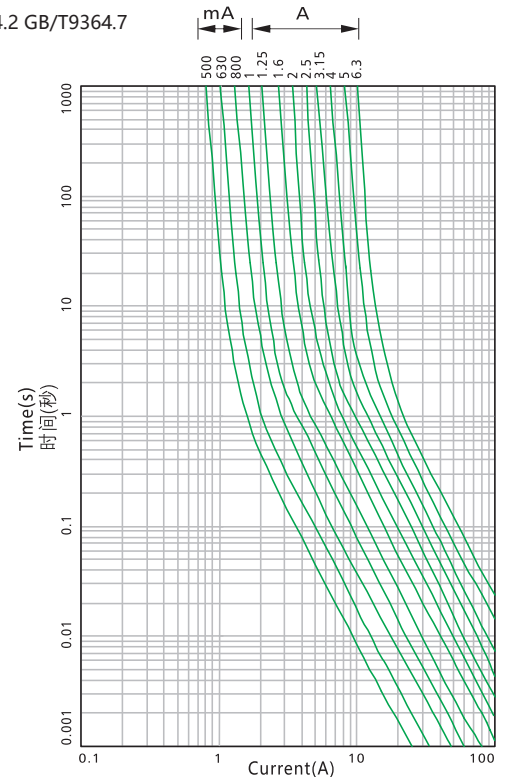

电气特性: Electrical Characteristics

额定电流的% % of Ampere Rating	熔断时间 Opening Time (200mA~10A)	熔断时间 Opening Time (12.5A~16A)
210%	2 min Max(小于2分钟)	5 min Max(小于5分钟)
275%	600 ms~10 s	600 ms~15 s
400%	150 ms~3 s	150 ms~5 s
1000%	20 ms~300 ms	20 ms~400 ms

目录编号: Catalog No.A:250V

带引线产品目录编号后加"P":Suffix"P"for Lead Type After Catalog No.

目录编号 Catalog No.	额定电流 Ampere Rating	额定电压 Voltage Rating	最大电压降(mv) Max Voltage Drop	熔化热能 ¹ T Melting Integral (A ² .S)	认证 Approvals					
					UL	D'E	CCC	CQC	JET	其他
5K0200A	200mA	250V	1500	0.10	●					
5K0250A	250mA	250V	1300	0.18	●					
5K0315A	315mA	250V	1100	0.30	●	●	●			●
5K0400A	400mA	250V	1000	0.65	●					
5K0500A	500mA	250V	900	0.96	●	●	●			●
5K0630A	630mA	250V	300	1.7	●	●	●			●
5K0800A	800mA	250V	250	3.2	●	●	●			●
5K1100A	1A	250V	150	3.8	●	●	●		●	●
5K1125A	1.25A	250V	150	4.3	●	●	●		●	●
5K1160A	1.6A	250V	150	5.0	●	●	●		●	●
5K1200A	2A	250V	150	12.8	●	●	●		●	●
5K1250A	2.5A	250V	100	20.7	●	●	●		●	●
5K1315A	3.15A	250V	100	45	●	●	●		●	●
5K1400A	4A	250V	100	61.4	●	●	●		●	●
5K1500A	5A	250V	100	135	●	●	●		●	●
5K1630A	6.3A	250V	100	205	●	●	●		●	●
5K1800A	8A	250V	100	320	●	●		●	●	
5K2100A	10A	250V	100	510	●	●		●	●	
5K2125A	12.5A	250V	80	800	●			●	●	
5K2160A	16A	250V	80	1105	●			●		

● 表示已获认证
○ 表示认证中