





SNT RoHS Compliant



微型保险丝(延时型)

Micro Fuse (Time-Lag) 350V/300V/250V

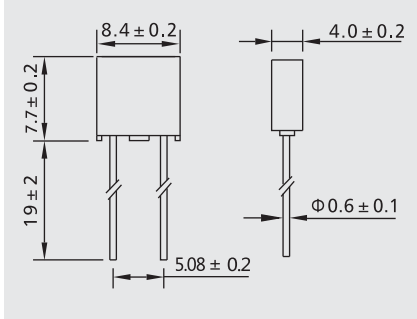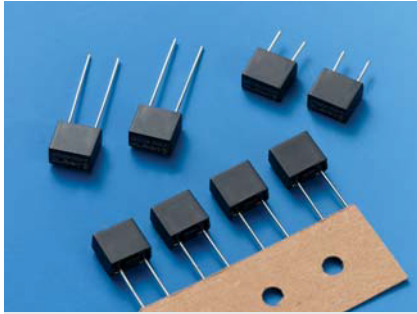

测试标准:
Testing Standard:
IEC60127-1 IEC60127-3 GB9364.1 GB9364.3


额定分断能力:
Interrupting Rating:
100 Amperes at 250V/300V/350V AC

工作温度:
Operating Temperature:
-55°C ~ +125°C

材料:
Materials:
Case: thermoplastic nylon
Base: thermoplastic nylon
Lead wire: tinned copper wire

焊接方法:
Soldering Method:
Wave soldering: 260°C, 10s max
Manual soldering: 370°C, 5s max

Time-Current Characteristics
电流-时间曲线图

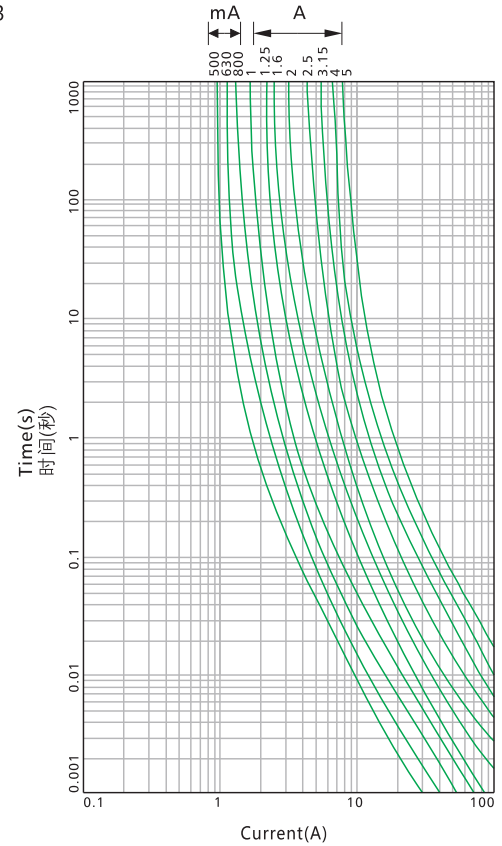

电气特性: Electrical Characteristics

额定电流的% % of Ampere Rating	熔断时间 Opening Time
210%	2 min Max(小于2分钟)
275%	400 ms~10 s
400%	150 ms~3 s
1000%	20 ms~150 ms

目录编号: Catalog No.H:350V G:300V A:250V

目录编号 Catalog No.	额定电流 Ampere Rating	额定电压 Voltage Rating	最大电压降(mv) Max Voltage Drop	熔化热能 ² T Melting Integral (A ² .S)	认证 Approvals	
					● 表示已获认证	○ 表示认证中
SNT0100H/G/A	100mA	350V/300V/250V	350	0.06	●	
SNT0125H/G/A	125mA	350V/300V/250V	300	0.08	●	
SNT0160H/G/A	160mA	350V/300V/250V	280	0.10	●	
SNT0200H/G/A	200mA	350V/300V/250V	260	0.20	●	
SNT0250H/G/A	250mA	350V/300V/250V	240	0.40	●	
SNT3150H/G/A	315mA	350V/300V/250V	220	0.49	●	
SNT0400H/G/A	400mA	350V/300V/250V	200	0.58	●	
SNT0500H/G/A	500mA	350V/300V/250V	190	0.65	●	●
SNT0630H/G/A	630mA	350V/300V/250V	180	0.80	●	●
SNT0800H/G/A	800mA	350V/300V/250V	160	2.8	●	●
SNT1100H/G/A	1A	350V/300V/250V	140	5.2	●	●
SNT1125H/G/A	1.25A	350V/300V/250V	130	7.2	●	●
SNT1160H/G/A	1.6A	350V/300V/250V	120	10	●	●
SNT1200H/G/A	2A	350V/300V/250V	100	15	●	●
SNT1250H/G/A	2.5A	350V/300V/250V	100	34	●	●
SNT1350H/G/A	3.15A	350V/300V/250V	100	51	●	●
SNT1400H/G/A	4A	350V/300V/250V	100	80	●	○
SNT1500H/G/A	5A	350V/300V/250V	100	110	●	○
SNT1630H/G/A	6.3A	350V/300V/250V	100	170	●	○