PRODUCT DISPLAY

产品展示

船用防浪阀 —— 船用铸钢直通防浪阀


MARINE STORM VALVES——MARINE CAST STEEL STORM GLOBE VALVES



船用铸钢直通防浪阀5K/10K

MARINE CAST STEEL 5K/10K STORM GLOBE VALVES
JIS F 3060A



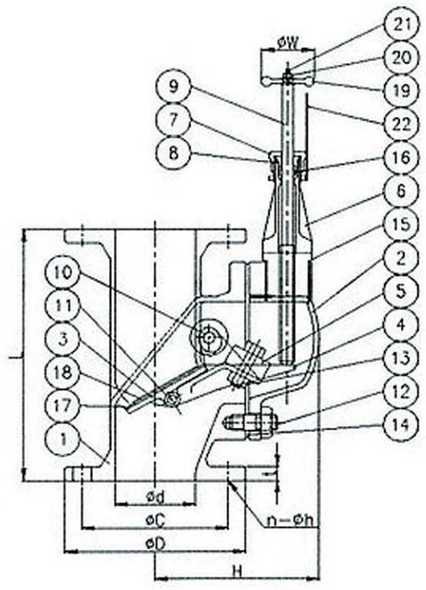

Dimensions unit : mm

Rating	SIZE	Φd	L	H	FF Flange				ΦW
					ΦD	ΦC	t	n-Φh	
5K JIS F 3060 GLOBE	50A	50	210	135	130	105	14	4-15	100
	65A	65	240	145	155	130	14	4-15	100
	80A	80	260	155	180	145	14	4-19	125
	100A	100	280	175	200	165	16	8-19	125
	125A	125	330	195	235	200	16	8-19	125
	150A	150	360	215	265	230	18	8-19	125
5K JIS F 3060R ANGLE	50A	50	170	135	130	105	14	4-15	100
	65A	65	200	145	155	130	14	4-15	100
	80A	80	220	155	180	145	14	4-19	125
	100A	100	250	175	200	165	16	8-19	125
	125A	125	270	195	235	200	16	8-19	125
	150A	150	310	215	265	230	18	8-19	125

Max. working pressure unit:kgf/cm²

Fluid condition	Maximum working pressure
Non-shock water	5

Max. working pressure unit:kgf/cm²

Shell hydraulic test	5.1
Seat hydraulic test	1.0

Material List

NO.	Parts	Material
1	Body	SC480
2	Bonnet	SC480
3	Dise	SC480
4	Arm	SC480
5	Blance weight	Pb
6	Spindle box	CAC406(BC6)
7	Packing gland nut	C3604
8	Packing gland	C3604
9	Stem	SUS304
10	Plug	SUS304
11	Bolt & Nut	SUS304
12	Bolt & Nut	SUS304
13	Bolt & Nut	SUS304
14	Gasket	NON ASBESTOS
15	Gasket	PTFE
16	Packing	GRAPHITE
17	Gasket	RUBBER
18	Gasket gland	C3604
19	Handle	FC200
20	Handle nut	C3604
21	Split pin	C2600
22	Indicator	C2801

PRODUCT DISPLAY

产品展示

船用防浪阀 —— 船用铸钢直角防浪阀

MARINE STORM VALVES——MARINE CAST STEEL STORM ANGLE VALVES




船用铸钢直角防浪阀5K/10K

MARINE CAST STEEL 5K/10K STORM ANGLE VALVES

JIS F 3060B



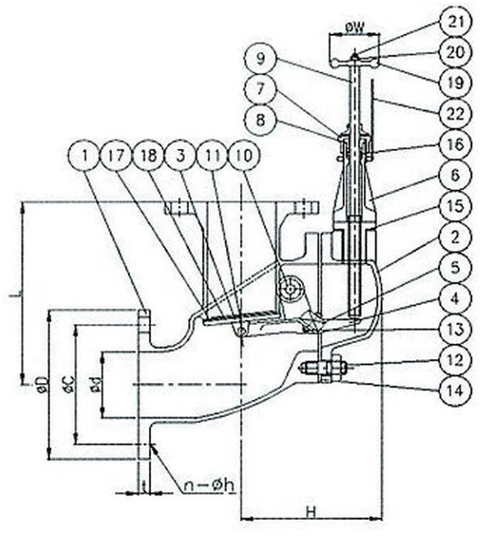

Dimensions unit : mm

Rating	SIZE	Φd	L	H	FF Flange				ΦW
					ΦD	ΦC	t	n-Φh	
5K JIS F 3060 GLOBE	50A	50	210	135	130	105	14	4-15	100
	65A	65	240	145	155	130	14	4-15	100
	80A	80	260	155	180	145	14	4-19	125
	100A	100	280	175	200	165	16	8-19	125
	125A	125	330	195	235	200	16	8-19	125
	150A	150	360	215	265	230	18	8-19	125
5K JIS F 3060R ANGLE	50A	50	170	135	130	105	14	4-15	100
	65A	65	200	145	155	130	14	4-15	100
	80A	80	220	155	180	145	14	4-19	125
	100A	100	250	175	200	165	16	8-19	125
	125A	125	270	195	235	200	16	8-19	125
	150A	150	310	215	265	230	18	8-19	125

Max. working pressure unit:kgf/cm²

Fluid condition	Maximum working pressure
Non-shock water	5

Max. working pressure unit:kgf/cm²

Shell hydraulic test	5.1
Seat hydraulic test	1.0

Material List

NO.	Parts	Material
1	Body	SC480
2	Bonnet	SC480
3	Dise	SC480
4	Arm	SC480
5	Blance weight	Pb
6	Spindle box	CAC406(BC6)
7	Packing gland nut	C3604
8	Packing gland	C3604
9	Stem	SUS304
10	Plug	SUS304
11	Bolt & Nut	SUS304
12	Bolt & Nut	SUS304
13	Bolt & Nut	SUS304
14	Gasket	NON ASBESTOS
15	Gasket	PTFE
16	Packing	GRAPHITE
17	Gasket	RUBBER
18	Gasket gland	C3604
19	Handle	FC200
20	Handle nut	C3604
21	Split pin	C2600
22	Indicator	C2801

PRODUCT DISPLAY

产品展示

船用瞭望孔

MARINE FLAT TYPE SIGH GLASS




瞭望孔


MARINE FLAT TYPE 5K SIGHT GLASS

MEETS SOLAS REQUIREMENTS
SPECIFICATIONS

MATERIAL:CASTIRON.TEMPERED FLATGLASS
WORKINGPRESSURE:2kg/cm²
WORKINGTEMPERATURE:200℃
STANDARD CONNECTION FLANGE:JIS 5K



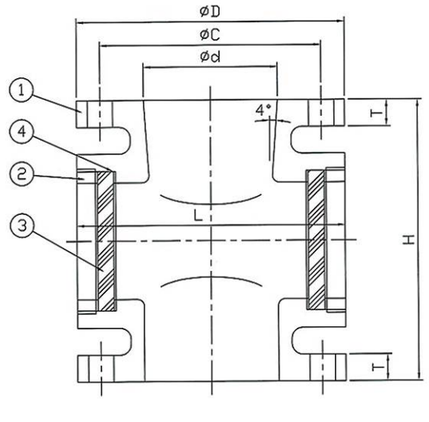

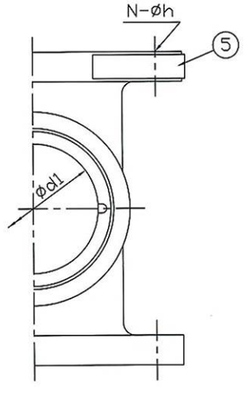

Dimensions

N/D	ΦD	ΦC	ΦD	N-Φh	T	H	L	Φd1
15A	15	60	80	4-12	12	80	75	15
20A	20	65	85	4-12	14	85	80	20
25A	25	75	95	4-12	14	90	86	25
32A	32	90	115	4-15	16	100	94	32
40A	40	95	120	4-15	16	100	102	40
50A	50	105	130	4-15	16	115	115	50
65A	65	130	155	4-15	18	160	140	65
80A	80	145	180	4-19	18	180	158	80
100A	100	165	200	8-19	20	210	178	85
125A	125	200	235	8-19	20	245	208	115
150A	150	230	265	8-19	22	310	232	150
200A	200	280	320	8-23	24	380	294	200
250A	250	345	385	12-23	26	400	344	250
300A	300	390	430	12-23	28	450	406	300
350A	350	435	480	12-23	30	510	460	350

Material List

NO.	DESCRIPTION	MATERIAL	Q'TY	REMARK
1	BODY	FC200	1	
2	GLAND NUT	SS400	2	
3	GLASS	HEAT-RESISTANT	2	
4	GASKET	ASBESTOS FREE	4	
5	NAME PLATE	BsP1	1	

PRODUCT DISPLAY

产品展示

船用球铁阀 —— 船用球铁直通阀

MARINE FCD VALVES——MARINE FCD GLOBE VALVES




船用球铁直通阀5K/16K

MARINE FCD 5K/16K GLOBE VALVES

JIS F 7321/7323



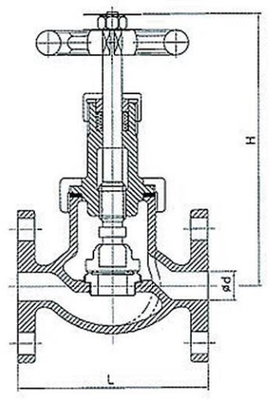

SPECIFICATIONS

Applicable fluid	Water, Steam Air
Working pressure	Max16kgf/cm2g
Applicable Temp	Max.220℃
Hydro. test pressure	Working pr x1.5times
End.connection	JIS 5K-FF,JJS16K-FF

MATERIAL

Parts	Material
Body/Bonnet	FCD400
Handwheel	FC200
Disc	SUS304 orSCS2
Seat	SUS304
Stem	SUS304 or SCS2
Bush	C3604
Seat Ring	C3604
Packing	GRAPHITE
Gasket	NON ASBESTOS

DIMENSIONS

GLOBE VALVE unit : mm

SIZE	d	L	H
5K 15A	15	100	145
5K 20A	20	110	160
5K 25A	25	120	185
5K 32A	32	140	195
5K 40A	40	160	215
16K 15A	15	110	145
16K 20A	20	120	160
16K 25A	25	130	185
16K 32A	32	160	195
16K 40A	40	180	215

ANGLE VALVE unit : mm

SIZE	d	L	H
5K 15A	15	55	135
5K 20A	20	60	150
5K 25A	25	65	175
5K 32A	32	80	180
5K 40A	40	85	200
16K 15A	15	70	135
16K 20A	20	75	150
16K 25A	25	85	175
16K 32A	32	95	180
16K 40A	40	100	200

PRODUCT DISPLAY

产品展示

船用球铁阀 —— 船用球铁直角阀

MARINE FCD VALVES——MARINE FCD ANGLE VALVES




船用球铁直角阀5K/16K

MARINE FCD 5K/16K ANGLE VALVES

JIS F 7322/7324



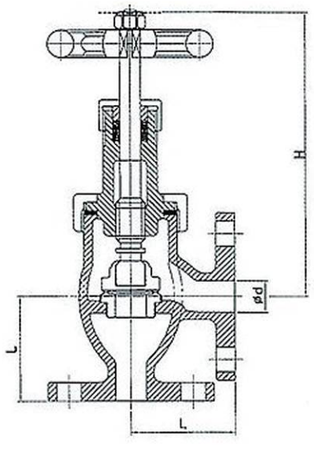

SPECIFICATIONS

Applicable fluid	Water, Steam Air
Working pressure	Max16kgf/cm2g
Applicable Temp	Max.220℃
Hydro. test pressure	Working pr x1.5times
End.connection	JIS 5K-FF,JJS16K-FF

MATERIAL

Parts	Material
Body/Bonnet	FCD400
Handwheel	FC200
Disc	SUS304 orSCS2
Seat	SUS304
Stem	SUS304 or SCS2
Bush	C3604
Seat Ring	C3604
Packing	GRAPHITE
Gasket	NON ASBESTOS

DIMENSIONS

GLOBE VALVE unit : mm

SIZE	d	L	H
5K 15A	15	100	145
5K 20A	20	110	160
5K 25A	25	120	185
5K 32A	32	140	195
5K 40A	40	160	215
16K 15A	15	110	145
16K 20A	20	120	160
16K 25A	25	130	185
16K 32A	32	160	195
16K 40A	40	180	215

ANGLE VALVE unit : mm

SIZE	d	L	H
5K 15A	15	55	135
5K 20A	20	60	150
5K 25A	25	65	175
5K 32A	32	80	180
5K 40A	40	85	200
16K 15A	15	70	135
16K 20A	20	75	150
16K 25A	25	85	175
16K 32A	32	95	180
16K 40A	40	100	200

TO BE TRUE FOREVER.

诚信 · 永恒 · 共赢美好未来

KEYSMILE

