PRODUCT DISPLAY

产品展示

船用直通阀——船用不锈钢直通阀

MARINE GLOBE VALVES——MARINE STAINLESS GLOBE VALVES




船用不锈钢直通截止阀 5K 10K 16K

MARINE STAINLESS 5K/10K/16K GLOBE VALVES

JIS F 7305R/7319R/7309R



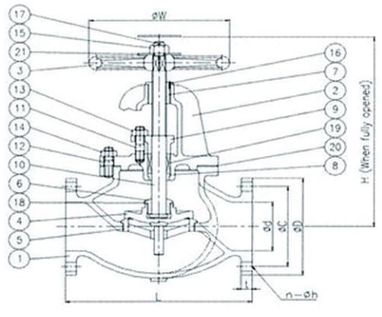

GLOBE VALVE

Hydro. test pressure unit:kgf/c㎡

Rating	5	10		16
Nominal dia	50-300A	50-200A	250, 300A	50-200A
Sheel hydraulic test	10.5	21	20	33
Seat hydraulic test	7.7	15.4	11	24.2
Seat hydraulic(check)	4	4	–	4

Max. working pressure unit:kgf/c㎡

Rating	5			10				16	
Nominal dia.	50-200A		250A 300A	50-200A		250, 300A		50-200A	
Trim	B	S	B	B	S	B	S	B	S
Steam of 230℃ or less	–	5	–		10	–	–	–	16
Steam of 205℃ or less	5	5	–	10	10	–	–	16	16
Saturated steam	–	–	–	10	10	5	5	–	–
Air and gas	5	5	5	10	10	–	–	16	16
Oil and pulsation water	5	5	5	10	10	10	10	16	16
Non-shock water of120℃ or less	7	7	7	14	14	10	10	22	22

Material List

NO.	Parts	Material
1	Body	SCS13, 14, 16
2	Bonnet	SCS13, 14, 16
3	Handwheel	FC200
4	Disc	SCS13, 14, 16
5	Valve seat	SCS13, 14, 16
6	Disc nut	SCS13, 14, 16
7	Screwed bonnet bush	C3604
8	Seat ring	C3604
9	Packing gland	CAC406(BC6)
10	Stem	SUS304, 316, 316L
11	Stud bolt	SUS304
12	Stud bolt	SUS304
13	Hex. nut	SUS304
14	Hex. nut	SUS304
15	Hex. nut	SUS304
16	Lock pin	SS400
17	Split pin	C2600
18	Disc lock washer	SUS304
19	Packing	GRAPHITE
20	Gasket	PTFE
21	Name plate	C2600 or SUS304

Dimensions unit : mm

Rating	SIZE	Φd	L	L1	H	H'	FF Flange				ΦW
							ΦD	ΦC	t	n-Φh	
5K JIS F 7305R	50A	50	210	100	270	240	130	105	16	4-15	160
	65A	65	250	115	300	255	155	130	18	4-15	180
	80A	80	280	130	310	265	180	145	18	4-19	180
	100A	100	340	150	360	310	200	165	20	8-19	224
	125A	125	410	170	390	330	235	200	20	8-19	250
	150A	150	480	190	415	380	265	230	22	8-19	280
	200A	200	570	220	530	450	320	280	24	8-23	315
	250A	250	740	275	650	540	385	345	26	12-23	355
	300A	300	840	310	740	610	430	390	28	12-23	400
10K JIS F 7319R	50A	50	220	120	285	255	155	120	20	4-19	160
	65A	65	270	130	310	270	175	140	22	4-19	200
	80A	80	300	140	320	275	185	150	22	8-19	200
	100A	100	350	160	370	315	210	175	24	8-19	250
	125A	125	420	180	420	360	250	210	24	8-23	280
	150A	150	490	205	470	405	280	240	26	8-23	315
	200A	200	570	230	555	475	330	290	26	12-23	355
	250A	250	740	290	630	570	400	355	30	12-25	450
	300A	300	840	320	770	645	445	400	32	16-25	500
16K JIS F 7309R	50A	50	220	120	285	255	155	120	22	8-19	160
	65A	65	270	130	310	270	175	140	22	8-19	200
	80A	80	300	150	340	295	200	160	24	8-23	224
	100A	100	350	170	385	330	225	185	26	8-23	250
	125A	125	430	200	455	390	270	225	26	8-25	315
	150A	150	500	225	510	435	305	260	28	12-25	355
	200A	200	570	250	630	540	350	305	30	12-25	450

PRODUCT DISPLAY

产品展示

船用直通阀——船用不锈钢直通阀

MARINE GLOBE VALVES——MARINE STAINLESS GLOBE VALVES




船用不锈钢直通截止止回阀 5K 10K 16K

MARINE STAINLESS 5K/10K GLOBE CHECK VALVES

JIS F 7353R/7471R/7377R



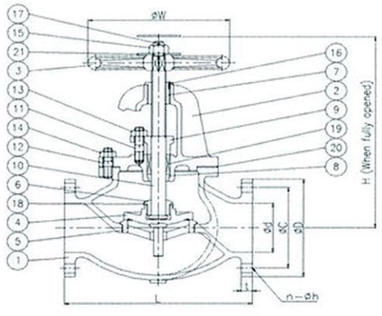

Hydro. test pressure unit:kgf/c㎡

Rating	5	10		16
Nominal dia	50-300A	50-200A	250, 300A	50-200A
Sheel hydraulic test	10.5	21	20	33
Seat hydraulic test	7.7	15.4	11	24.2
Seat hydraulic(check)	4	4	–	4

Max. working pressure unit:kgf/c㎡

Rating	5			10				16	
Nominal dia.	50-200A		250A 300A	50-200A		250, 300A		50-200A	
Trim	B	S	B	B	S	B	S	B	S
Steam of 230℃ or less	–	5	–		10	–	–	–	16
Steam of 205℃ or less	5	5	–	10	10	–	–	16	16
Saturated steam	–	–	–	10	10	5	5	–	–
Air and gas	5	5	5	10	10	–	–	16	16
Oil and pulsation water	5	5	5	10	10	10	10	16	16
Non-shock water of120℃ or less	7	7	7	14	14	10	10	22	22

Material List

NO.	Parts	Material
1	Body	SCS13, 14, 16
2	Bonnet	SCS13, 14, 16
3	Handwheel	FC200
4	Disc	SCS13, 14, 16
5	Valve seat	SCS13, 14, 16
6	Disc nut	SCS13, 14, 16
7	Screwed bonnet bush	C3604
8	Seat ring	C3604
9	Packing gland	CAC406(BC6)
10	Stem	SUS304, 316, 316L
11	Stud bolt	SUS304
12	Stud bolt	SUS304
13	Hex. nut	SUS304
14	Hex. nut	SUS304
15	Hex. nut	SUS304
16	Lock pin	SS400
17	Split pin	C2600
18	Disc lock washer	SUS304
19	Packing	GRAPHITE
20	Gasket	PTFE
21	Name plate	C2600 or SUS304

Dimensions unit : mm

Rating	SIZE	Φd	L	L1	H	H'	FF Flange				ΦW
							ΦD	ΦC	t	n-Φh	
5K JIS F 7353R	50A	50	210	100	270	240	130	105	16	4-15	160
	65A	65	250	115	300	255	155	130	18	4-15	180
	80A	80	280	130	310	265	180	145	18	4-19	180
	100A	100	340	150	360	310	200	165	20	8-19	224
	125A	125	410	170	390	330	235	200	20	8-19	250
	150A	150	480	190	415	380	265	230	22	8-19	280
	200A	200	570	220	530	450	320	280	24	8-23	315
	250A	250	740	275	650	540	385	345	26	12-23	355
	300A	300	840	310	740	610	430	390	28	12-23	400
10K JIS F 7471R	50A	50	220	120	285	255	155	120	20	4-19	160
	65A	65	270	130	310	270	175	140	22	4-19	200
	80A	80	300	140	320	275	185	150	22	8-19	200
	100A	100	350	160	370	315	210	175	24	8-19	250
	125A	125	420	180	420	360	250	210	24	8-23	280
	150A	150	490	205	470	405	280	240	26	8-23	315
	200A	200	570	230	555	475	330	290	26	12-23	355
	250A	250	740	290	630	570	400	355	30	12-25	450
	300A	300	840	320	770	645	445	400	32	16-25	500
16K JIS F 7377R	50A	50	220	120	285	255	155	120	22	8-19	160
	65A	65	270	130	310	270	175	140	22	8-19	200
	80A	80	300	150	340	295	200	160	24	8-23	224
	100A	100	350	170	385	330	225	185	26	8-23	250
	125A	125	430	200	455	390	270	225	26	8-25	315
	150A	150	500	225	510	435	305	260	28	12-25	355
	200A	200	570	250	630	540	350	305	30	12-25	450

PRODUCT DISPLAY

产品展示

船用直角阀——船用铸铁角体阀门

MARINE ANGLE VALVES——MARINE CAST IRON ANGLE VALVES




船用铸铁直角截止阀 5K 10K 16K

MARINE CAST IRON 5K/10K/16K ANGLE VALVES

JIS F 7306/7308/7310



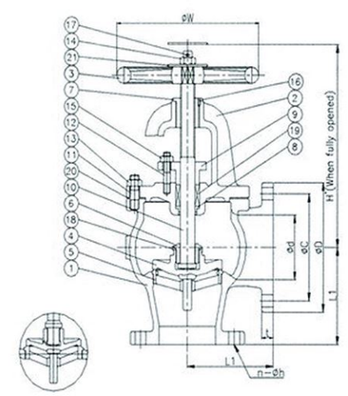

Screw-down check valve ANGLE VALVE

Hydro. test pressure unit:kgf/c㎡

Rating	5		10		16
Nominal dia.	50-300A	350-400A	50-200A	250-400A	50-200A
Sheel hydraulic test	10.5	9	21	20	33
Sheel hydraulic test	7.7	6.6	15.4	11	24.2
Seat hydraulic(check)	4	3	4	-	4

Max. working pressure unit:kgf/c㎡

Rating	5				10				16	
Nominal dia.	50-200A		250A 300A	350A 400A	50-200A		250-400A		50-200A	
Trim	B	S	B	B	B	S	B	S	B	S
Steam of 230℃ or less	-	5	-	-	-	10	-	-	-	16
Steam of 205℃ or less	5	5	-	-	10	10	-	-	16	16
Saturated steam	-	-	-	-	10	10	5	5	-	-
Air and gas	5	5	5	-	10	10	-	-	16	16
Oil and pulsation water	5	5	5	5	10	10	10	10	16	16
Non-shock water of120℃ or less	7	7	7	6	14	14	10	10	22	22

Material List

NO.	Parts	Material
1	Body	FC200
2	Bonnet	FC200
3	Handwheel	FC200
4	Disc	CAC406(BC6)orSCS2
5	Valve seat	CAC406(BC6)orSCS2
6	Stud nut	SCS2
7	Hex.nutScrewed bonnet bush	C3604
8	Seat ring	C3604
9	Packing gland	CAC406(BC6)
10	Stem	SUS403
11	Stud bolt	SS400
12	Stud bolt	SS400
13	Hex. nut	SS400
14	Hex. nut	SS400
15	Hex. nut	SS400
16	Lock pin	SS400
17	Split pin	C2600
18	Disc lock washer	C2600
19	Packing	GRAPHITE
20	Gasket	NON ASBESTOS
21	Name plate	C2801

Dimensions unit : mm

Rating	Size	Φd	L	L1	H	H'	FF Flange				ΦW
							ΦD	ΦC	t	n-Φh	
5K JIS F 7306	50A	50	210	100	270	240	130	105	16	4-15	160
	65A	65	250	115	300	255	155	130	18	4-15	180
	80A	80	280	130	310	265	180	145	18	4-19	180
	100A	100	340	150	360	310	200	165	20	8-19	224
	125A	125	410	170	390	330	235	200	20	8-19	250
	150A	150	480	190	415	380	265	230	22	8-19	280
	200A	200	570	220	530	450	320	280	24	8-23	315
	250A	250	740	275	650	540	385	345	26	12-23	355
	300A	300	840	310	740	610	430	390	28	12-23	400
	350A	335	940	360	840	690	480	435	30	12-25	500
	400A	380	1050	395	940	770	540	495	30	16-25	560
10K JIS F 7308	50A	50	220	120	285	255	155	120	20	4-19	160
	65A	65	270	130	310	270	175	140	22	4-19	200
	80A	80	300	140	320	275	185	150	22	8-19	200
	100A	100	350	160	370	315	210	175	24	8-19	250
	125A	125	420	180	420	360	250	210	24	8-23	280
	150A	150	490	205	470	405	280	240	26	8-23	315
	200A	200	570	230	555	475	330	290	26	12-23	355
	250A	250	740	290	630	570	400	355	30	12-25	450
	300A	300	840	320	770	645	445	400	32	16-25	500
	350A	335	-	360	-	710	490	445	34	16-25	560
	400A	380	-	420	-	790	560	510	36	16-27	630
16K JIS F 7310	50A	50	220	120	285	255	155	120	22	8-19	160
	65A	65	270	130	310	270	175	140	22	8-19	200
	80A	80	300	140	340	295	200	160	24	8-23	224
	100A	100	350	170	385	330	225	185	26	8-23	250
	125A	125	430	200	455	390	270	225	26	8-25	315
	150A	150	500	225	510	435	305	260	28	12-25	355
	200A	200	570	250	630	540	350	305	30	12-25	450

PRODUCT DISPLAY

产品展示

船用直角阀——船用铸铁角体阀门

MARINE ANGLE VALVES——MARINE CAST IRON ANGLE VALVES




船用铸铁直角截止止回阀 5K 10K 16K

MARINE CAST IRON 5K/10K/16K ANGLE CHECK VALVES

JIS F 7354/7376/7378



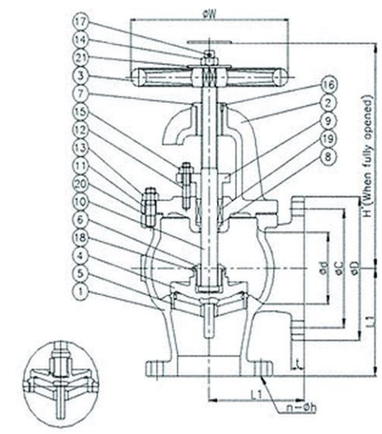

Screw-down check valve ANGLE VALVE

Hydro. test pressure unit:kgf/c㎡

Rating	5		10		16
Nominal dia.	50-300A	350-400A	50-200A	250-400A	50-200A
Sheel hydraulic test	10.5	9	21	20	33
Sheel hydraulic test	7.7	6.6	15.4	11	24.2
Seat hydraulic(check)	4	3	4	-	4

Max. working pressure unit:kgf/c㎡

Rating	5				10				16	
Nominal dia.	50-200A		250A 300A	350A 400A	50-200A		250-400A		50-200A	
Trim	B	S	B	B	B	S	B	S	B	S
Steam of 230℃ or less	-	5	-	-	-	10	-	-	-	16
Steam of 205℃ or less	5	5	-	-	10	10	-	-	16	16
Saturated steam	-	-	-	-	10	10	5	5	-	-
Air and gas	5	5	5	-	10	10	-	-	16	16
Oil and pulsation water	5	5	5	5	10	10	10	10	16	16
Non-shock water of120℃ or less	7	7	7	6	14	14	10	10	22	22

Material List

NO.	Parts	Material
1	Body	FC200
2	Bonnet	FC200
3	Handwheel	FC200
4	Disc	CAC406(BC6)orSCS2
5	Valve seat	CAC406(BC6)orSCS2
6	Stud nut	SCS2
7	Hex.nutScrewed bonnet bush	C3604
8	Seat ring	C3604
9	Packing gland	CAC406(BC6)
10	Stem	SUS403
11	Stud bolt	SS400
12	Stud bolt	SS400
13	Hex. nut	SS400
14	Hex. nut	SS400
15	Hex. nut	SS400
16	Lock pin	SS400
17	Split pin	C2600
18	Disc lock washer	C2600
19	Packing	GRAPHITE
20	Gasket	NON ASBESTOS
21	Name plate	C2801

Dimensions unit : mm

Rating	Size	Φd	L	L1	H	H'	FF Flange				ΦW
							ΦD	ΦC	t	n-Φh	
5K JIS F 7354	50A	50	210	100	270	240	130	105	16	4-15	160
	65A	65	250	115	300	255	155	130	18	4-15	180
	80A	80	280	130	310	265	180	145	18	4-19	180
	100A	100	340	150	360	310	200	165	20	8-19	224
	125A	125	410	170	390	330	235	200	20	8-19	250
	150A	150	480	190	415	380	265	230	22	8-19	280
	200A	200	570	220	530	450	320	280	24	8-23	315
	250A	250	740	275	650	540	385	345	26	12-23	355
	300A	300	840	310	740	610	430	390	28	12-23	400
	350A	335	940	360	840	690	480	435	30	12-25	500
	400A	380	1050	395	940	770	540	495	30	16-25	560
10K JIS F 7376	50A	50	220	120	285	255	155	120	20	4-19	160
	65A	65	270	130	310	270	175	140	22	4-19	200
	80A	80	300	140	320	275	185	150	22	8-19	200
	100A	100	350	160	370	315	210	175	24	8-19	250
	125A	125	420	180	420	360	250	210	24	8-23	280
	150A	150	490	205	470	405	280	240	26	8-23	315
	200A	200	570	230	555	475	330	290	26	12-23	355
	250A	250	740	290	630	570	400	355	30	12-25	450
	300A	300	840	320	770	645	445	400	32	16-25	500
	350A	335	-	360	-	710	490	445	34	16-25	560
	400A	380	-	420	-	790	560	510	36	16-27	630
16K JIS F 7378	50A	50	220	120	285	255	155	120	22	8-19	160
	65A	65	270	130	310	270	175	140	22	8-19	200
	80A	80	300	140	340	295	200	160	24	8-23	224
	100A	100	350	170	385	330	225	185	26	8-23	250
	125A	125	430	200	455	390	270	225	26	8-25	315
	150A	150	500	225	510	435	305	260	28	12-25	355
	200A	200	570	250	630	540	350	305	30	12-25	450

PRODUCT DISPLAY

产品展示

船用直角阀——船用铸钢角体阀门

MARINE ANGLE VALVES——MARINE CAST STEEL ANGLE VALVES




船用铸钢直角截止阀 5K 10K 16K

MARINE CAST STEEL 5K/10K/16K ANGLE VALVES

JIS F 7312R/7320/7310R



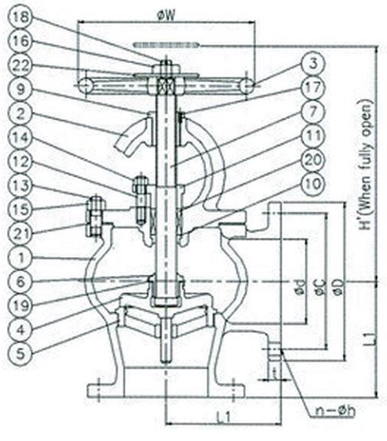

Hydro. test pressure unit:kgf/c㎡

Rating	5	10	16
Sheel hydraulic test	10.5	21	33
Seat hydraulic test	7.7	15.4	24.2
Seat hydraulic(check)	4	4	4

Max. working pressure unit:kgf/c㎡

Rating	5	10	16
Steam of 300℃	-	10	-
Steam of 220℃ or less	-	10	16
Air,gas,oil and pulsation water	5	12	16
Non-shock water of 120℃ or less	7	14	22

Material List

NO.	Parts	Material
1	Body	SC480
2	Bonnet	SC480
3	Handwheel	FC200
4	Disc	CAC406(BC6)or SCS2
5	Valve seat	CAC406(BC6) or SCS2
6	Disc nut	SCS2
7	Stem	SUS403
8	Screwed bonnet bush	C3604
9	Seat ring	C3604
10	Packing gland	CAC406(BC6)
11	Stud bolt	SS400
12	Stud bolt	SS400
13	Hex. nut	SS400
14	Hex. nut	SS400
15	Hex. nut	SS400
16	Lock pin	SS400
17	Split pin	C2600
18	Disc lock washer	C2801
19	Packing	GRAPHITE
20	Gasket	NON ASBESTOS
21	Name plate	C2801

Rating	SIZE	Φd	L	L1	H	H'	FF Flange				ΦW
							ΦD	ΦC	t	n-Φh	
5K JIS F 7312	50A	50	210	100	270	240	130	105	14	4-15	160
	65A	65	250	115	300	255	155	130	14	4-15	180
	80A	80	280	130	310	265	180	145	14	4-19	180
	100A	100	340	150	360	310	200	165	16	8-19	224
	125A	125	410	170	390	330	235	200	16	8-19	250
	150A	150	480	190	415	380	265	230	18	8-19	280
	200A	200	570	220	530	450	320	280	20	8-23	315
	250A	250	740	275	650	540	385	345	22	12-23	355
	300A	300	840	310	740	610	430	390	22	12-23	400
10K JIS F 7320	50A	50	220	120	270	240	155	120	20	4-19	160
	65A	65	270	130	300	260	175	140	22	4-19	200
	80A	80	300	140	310	265	185	150	22	8-19	200
	100A	100	350	160	355	300	210	175	24	8-19	250
	125A	125	420	180	415	350	250	210	24	8-23	280
	150A	150	490	205	470	400	280	240	26	8-23	315
	200A	200	570	230	565	480	330	290	26	12-23	355
	250A	250	740	290	645	535	400	355	30	12-25	400
	300A	300	840	320	735	610	445	400	32	16-25	450
16K JIS F 7310R	50A	50	220	120	285	255	155	120	16	8-19	160
	65A	65	270	130	310	270	175	140	18	8-19	200
	80A	80	300	140	340	295	200	160	20	8-23	224
	100A	100	350	160	385	330	225	185	22	8-23	250
	125A	125	430	200	455	390	270	225	26	8-25	315
	150A	150	500	225	510	435	305	260	28	12-25	355
	200A	200	570	250	630	540	350	305	30	12-25	450

PRODUCT DISPLAY

产品展示

船用直角阀——船用铸钢角体阀门

MARINE ANGLE VALVES——MARINE CAST STEEL ANGLE VALVES




船用铸钢直角截止止回阀 5K 10K 16K

MARINE CAST STEEL 5K/10K/16K ANGLE CHECK VALVES

JIS F 7312R/7472/7378R



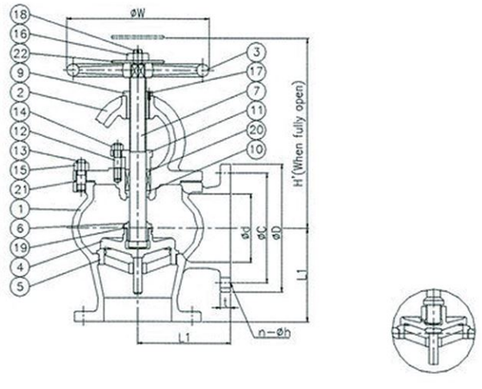

Screw-down check valve

Hydro. test pressure unit:kgf/c㎡

Rating	5	10	16
Sheel hydraulic test	10.5	21	33
Seat hydraulic test	7.7	15.4	24.2
Seat hydraulic(check)	4	4	4

Max. working pressure unit:kgf/c㎡

Rating	5	10	16
Steam of 300℃	-	10	-
Steam of 220℃ or less	-	10	16
Air,gas,oil and pulsation water	5	12	16
Non-shock water of 120℃ or less	7	14	22

Material List

NO.	Parts	Material
1	Body	SC480
2	Bonnet	SC480
3	Handwheel	FC200
4	Disc	CAC406(BC6)or SCS2
5	Valve seat	CAC406(BC6) or SCS2
6	Disc nut	SCS2
7	Stem	SUS403
8	Screwed bonnet bush	C3604
9	Seat ring	C3604
10	Packing gland	CAC406(BC6)
11	Stud bolt	SS400
12	Stud bolt	SS400
13	Hex. nut	SS400
14	Hex. nut	SS400
15	Hex. nut	SS400
16	Lock pin	SS400
17	Split pin	C2600
18	Disc lock washer	C2801
19	Packing	GRAPHITE
20	Gasket	NON ASBESTOS
21	Name plate	C2801

Rating	SIZE	Φd	L	L1	H	H'	FF Flange				ΦW
							ΦD	ΦC	t	n-Φh	
5K JIS F 7312R	50A	50	210	100	270	240	130	105	14	4-15	160
	65A	65	250	115	300	255	155	130	14	4-15	180
	80A	80	280	130	310	265	180	145	14	4-19	180
	100A	100	340	150	360	310	200	165	16	8-19	224
	125A	125	410	170	390	330	235	200	16	8-19	250
	150A	150	480	190	415	380	265	230	18	8-19	280
	200A	200	570	220	530	450	320	280	20	8-23	315
	250A	250	740	275	650	540	385	345	22	12-23	355
	300A	300	840	310	740	610	430	390	22	12-23	400
10K JIS F 7472	50A	50	220	120	270	240	155	120	20	4-19	160
	65A	65	270	130	300	260	175	140	22	4-19	200
	80A	80	300	140	310	265	185	150	22	8-19	200
	100A	100	350	160	355	300	210	175	24	8-19	250
	125A	125	420	180	415	350	250	210	24	8-23	280
	150A	150	490	205	470	400	280	240	26	8-23	315
	200A	200	570	230	565	480	330	290	26	12-23	355
	250A	250	740	290	645	535	400	355	30	12-25	400
	300A	300	840	320	735	610	445	400	32	16-25	450
16K JIS F 7378R	50A	50	220	120	285	255	155	120	16	8-19	160
	65A	65	270	130	310	270	175	140	18	8-19	200
	80A	80	300	140	340	295	200	160	20	8-23	224
	100A	100	350	160	385	330	225	185	22	8-23	250
	125A	125	430	200	455	390	270	225	26	8-25	315
	150A	150	500	225	510	435	305	260	28	12-25	355
	200A	200	570	250	630	540	350	305	30	12-25	450

PRODUCT DISPLAY

产品展示

船用直角阀——船用铸钢角体阀门


MARINE ANGLE VALVES——MARINE CAST STEEL ANGLE VALVES



船用铸钢直角截止阀 20K

MARINE CAST STEEL 20K ANGLE VALVES
JIS F 7314



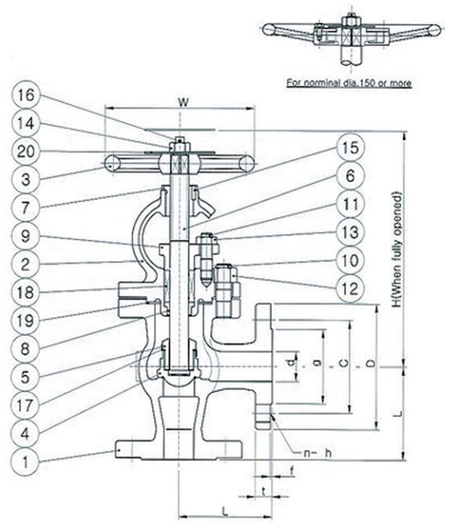

Hydro. test pressure

Rating	20
Sheel hydraulic test	51
Seat hydraulic test	37.4
Seat hydraulic(check)	10

Dimensions unit : mm

Rating	SIZE	Φd	L	L1	H	H'	RF Flange				ΦW
							ΦD	ΦC	t	n-Φh	
20K JIS F 7314	32A	32	190	100	270	250	135	100	18	4-19	160
	40A	40	200	110	290	265	140	105	18	4-19	160
	50A	50	230	125	305	275	155	120	18	8-19	200
	65A	65	270	135	345	305	175	140	20	8-19	224
	85A	80	300	150	385	340	200	160	22	8-23	250
	100A	100	350	170	440	385	225	185	24	8-23	280
	125A	125	430	200	500	440	270	225	26	8-25	315
	150A	150	500	225	550	485	305	260	28	12-25	355

Max. working pressure

Rating	20
Steam of 400℃	23
Steam of 350℃	26
Steam of 300℃	29
Steam of 220℃ or less	31
Air, Gas, Oil and pulsation water	31
Norr-shock water of 120C or less	34

Material List

NO.	Parts	Material
1	Body	SC480
2	Bonnet	SC480
3	Handwheel	FC200
4	Disc	SCS2
5	Valve seat	SCS2
6	Disc nut	SCS2
7	Stem	SUS410
8	Screwed bonnet bush	C3604
9	Seat ring	C3604
10	Packing gland	S25C
11	Stud bolt	SS400
12	Stud bolt	SS400
13	Hex. nut	SS400
14	Hex. nut	SS400
15	Hex. nut	SS400
16	Lock pin	SS400
17	Split pin	C2600
18	Disc lock washer	C2801
19	Packing	GRAPHITE
20	Gasket	NON ASBESTOS
21	Name plate	C2801

PRODUCT DISPLAY

产品展示

船用直角阀——船用铸钢角体阀门

MARINE ANGLE VALVES——MARINE CAST STEEL ANGLE VALVES




船用铸钢直角截止止回阀 20K

MARINE CAST STEEL 20K ANGLE CHECK VALVES

JIS F 7474



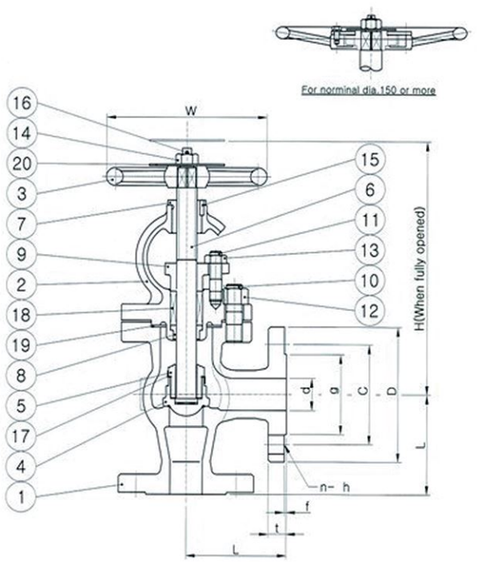

Hydro. test pressure

Rating	20
Sheel hydraulic test	51
Seat hydraulic test	37.4
Seat hydraulic(check)	10

Dimensions unit : mm

Rating	SIZE	Φd	L	L1	H	H'	RF Flange				ΦW
							ΦD	ΦC	t	n-Φh	
20K JIS F 7474	32A	32	190	100	270	250	135	100	18	4-19	160
	40A	40	200	110	290	265	140	105	18	4-19	160
	50A	50	230	125	305	275	155	120	18	8-19	200
	65A	65	270	135	345	305	175	140	20	8-19	224
	85A	80	300	150	385	340	200	160	22	8-23	250
	100A	100	350	170	440	385	225	185	24	8-23	280
	125A	125	430	200	500	440	270	225	26	8-25	315
	150A	150	500	225	550	485	305	260	28	12-25	355

Max. working pressure

Rating	20
Steam of 400℃	23
Steam of 350℃	26
Steam of 300℃	29
Steam of 220℃ or less	31
Air, Gas, Oil and pulsation water	31
Norr-shock water of 120C or less	34

Material List

NO.	Parts	Material
1	Body	SC480
2	Bonnet	SC480
3	Handwheel	FC200
4	Disc	SCS2
5	Valve seat	SCS2
6	Disc nut	SCS2
7	Stem	SUS410
8	Screwed bonnet bush	C3604
9	Seat ring	C3604
10	Packing gland	S25C
11	Stud bolt	SS400
12	Stud bolt	SS400
13	Hex. nut	SS400
14	Hex. nut	SS400
15	Hex. nut	SS400
16	Lock pin	SS400
17	Split pin	C2600
18	Disc lock washer	C2801
19	Packing	GRAPHITE
20	Gasket	NON ASBESTOS
21	Name plate	C2801