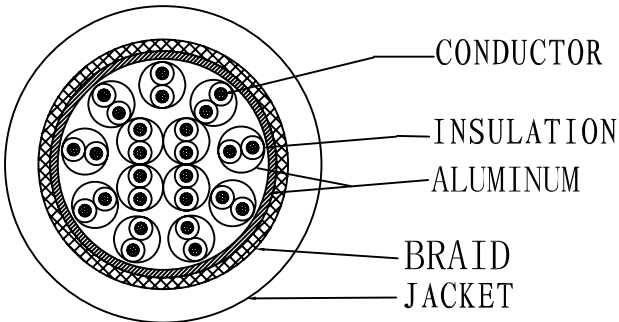


# SPECIFICATION

UL Model:	UL2464	Document Number	Made Date	Rev:
Specification:	(26AWGx1PR+AL)*13C+AL+B	WCH19080605	2019-08-06	1.0V
Cross Section	 <p style="text-align: right; margin-right: 50px;"> CONDUCTOR  INSULATION  ALUMINUM  BRAID  JACKET </p>			
<b>Technical Parameters</b>				
Conductor	Specification	(AWG)	26	
	Material		Tinned Stranded Copper	
	Configuration	(mm)	TS7/0.16±0.007	
Insulation	Average Thickness	(mm)	0.23	
	Minimum Thickness	(mm)	0.20	
	Over Diameter	(mm)	1.00±0.10	
	Material		SR-PVC (RoHS)	
	Colour		TBD	
Assembly	Foil Shield		One Side Aluminum Foil	
	Braided Shield	(mm)	TS16/9/12 (6P)	
Jacket	Average Thickness	(mm)	1.06	
	Minimum Thickness	(mm)	0.90	
	Over Diameter	(mm)	10.20±0.30	
	Material		PVC (RoHS)	
	Colour		Half-Matte Black	
Electrical Capability	Rated Temperature	(°C)	80	
	Rated Voltage	(V)	300	
	Conductor Resistance	(Ω/KM 20°C)	150	
	Insulation Resistance	(MΩ/KM 20°C)	10	
Marking	As per standard of UL2464			