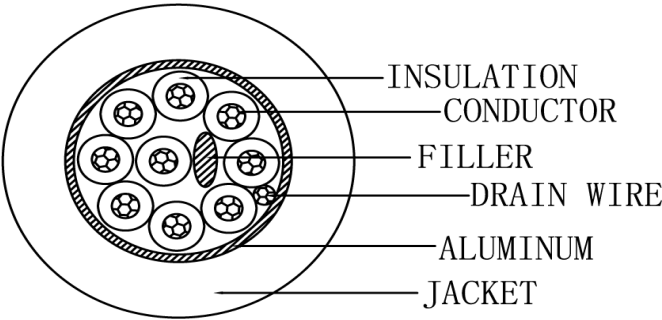


SPECIFICATION

UL Model:	UL2464	Document Number	Made Date	Rev:
Specification:	26AWGx9C+F+D+AL	WCH19080610	2019-08-06	1.0V
Cross Section				
Technical Parameters				
Conductor	Specification	(AWG)	26	
	Material		Tinned Stranded Copper	
	Configuration	(mm)	TS7/0.16±0.007	
Insulation	Average Thickness	(mm)	0.24	
	Minimum Thickness	(mm)	0.20	
	Over Diameter	(mm)	1.00±0.10	
	Material		SR-PVC (RoHS)	
	Colour		TBD	
Assembly	Filler	(mm)	10S/5SOL*1PCS Cotton Rope	
	Drain Wire	(mm)	TS7/0.16±0.007	
	Screened Shield		One Side Aluminum Foil	
Jacket	Average Thickness	(mm)	0.70	
	Minimum Thickness	(mm)	0.56	
	Over Diameter	(mm)	5.20±0.20	
	Material		PVC (RoHS)	
	Colour		Black	
Electrical Capability	Rated Temperature	(°C)	80	
	Rated Voltage	(V)	300	
	Conductor Resistance	(Ω/KM 20°C)	140	
	Insulation Resistance	(MΩ/KM 20°C)	10	
Marking	As per standard of UL2464			