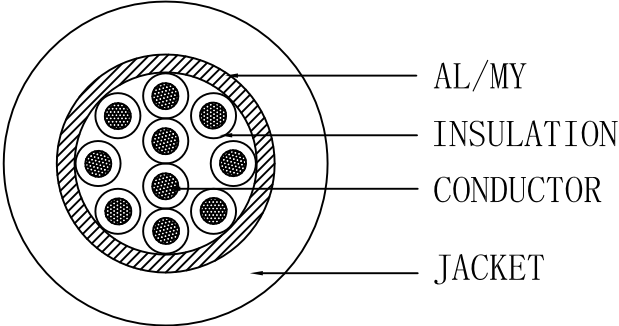


SPECIFICATION

UL Model:	UL2464	Document Number	Made Date	Rev:
Specification:	22AWGx10C+AL	WCH19080615	2019-08-06	1.0V
Cross Section				
Technical Parameters				
Conductor	Specification	(AWG)	22	
	Material		Tinned Stranded Copper	
	Configuration	(mm)	TS17/0.16±0.007	
Insulation	Average Thickness	(mm)	0.25	
	Minimum Thickness	(mm)	0.21	
	Over Diameter	(mm)	1.30±0.10	
	Material		SR-PVC (RoHS)	
	Colour		Black, Brown, Red, Orange, Yellow Green, Blue, Purple, Grey, White	
Assembly	Screened Shield		One Side Aluminum Foil	
	Cotton Paper	(mm)	No Paper	
Jacket	Average Thickness	(mm)	0.75	
	Minimum Thickness	(mm)	0.60	
	Over Diameter	(mm)	6.80±0.20	
	Material		PVC (RoHS)	
	Colour		Black	
Electrical Capability	Rated Temperature	(°C)	80	
	Rated Voltage	(V)	300	
	Conductor Resistance	(Ω/KM 20°C)	59.4	
	Insulation Resistance	(MΩ/KM 20°C)	10	
Marking	As per standard of UL2464			