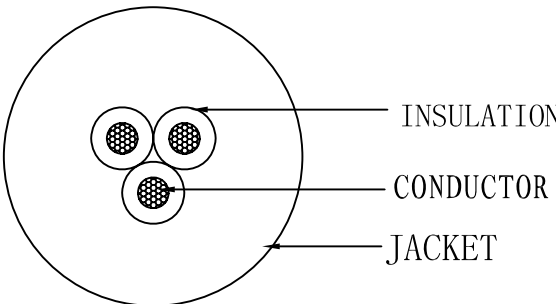


SPECIFICATION

Part number:	UL2464	Document Number	Made Date	Rev:
Specification:	24AWGx3C	WCH19080612	2019-08-06	1.0V
Cross Section				
Technical Parameters				
Conductor	Specification	(AWG)	24	
	Material		Tinned Stranded Copper	
	Configuration	(mm)	TS7/0.20±0.007	
Insulation	Average Thickness	(mm)	0.23	
	Minimum Thickness	(mm)	0.19	
	Over Diameter	(mm)	1.10±0.10	
	Material		32P PVC (RoHS)	
	Colour		Black, Red, Brown	
Assembly	Filler		--	
	Drain	(mm)	--	
	Aluminum Foil		--	
Jacket	Average Thickness	(mm)	0.92	
	Minimum Thickness	(mm)	0.73	
	Over Diameter	(mm)	4.20±0.20	
	Material		PVC (RoHS)	
	Colour		RAL7040 Grey	
Electrical Capability	Rated Temperature	(°C)	80	
	Rated Voltage	(V)	300	
	Conductor Resistance	(Ω/KM 20°C)	94.2	
	Insulation Resistance	(MΩ/KM 20°C)	10	
Remark	As per standard of UL2464			