THREADED SOCKET-PLATED

产品图片/Product picture



产品数据图/ Product data graph

Art. No.	System Load Rating Tons	Treaded Type
ZHTS001	0.5	M/Rd12
ZHTS002	0.8	M/Rd14
ZHTS003	1.2	M/Rd16
ZHTS004	1.6	M/Rd18
ZHTS005	2.0	M/Rd20
ZHTS006	2.5	M/Rd24
ZHTS007	4.0	M/Rd30
ZHTS008	6.3	M/Rd36
ZHTS009	8.0	M/Rd42
ZHTS010	12.5	M/Rd52

LIFTING SOCKET WITH FOOT

产品图片/Product picture



产品数据图/ Product data graph

Art. No.	Load Capacity(Ton)	M*H
ZHLF001	0.15	6*40
ZHLF002	0.20	8*40
ZHLF003	0.25	8*50
ZHLF004	0.35	10*50
ZHLF005	0.35	10*50
ZHLF006	0.50	12*60
ZHLF007	0.50	12*60
ZHLF008	0.60	12*70
ZHLF009	0.70	16*70
ZHLF010	0.80	16*80
ZHLF011	0.80	16*80
ZHLF012	1.00	16*100
ZHLF013	1.20	16*120
ZHLF014	1.25	20*100
ZHLF015	1.25	20*100
ZHLF016	1.40	20*120
ZHLF017	1.80	24*120
ZHLF018	2.75	30*150

FLAT LIFTING SOCKET WITH CROSS PIN

产品图片/Product picture



产品数据图/ Product data graph

Art. No.	Specification	Safe Working Load(kg)	Length(mm)
ZHFCP001	M8*50	250	50
ZHFCP002	M10*60	450	60
ZHFCP003	M12*60	500	60
ZHFCP004	M14*80	700	80
ZHFCP005	M16*100	1000	100
ZHFCP006	M20*100	1250	100
ZHFCP007	M24*120	1700	120

QINGDAO ZHANHUA METAL PRODUCTS CO., LTD TEL: 0086-532-8752-8787 FAX: 0086-532-8752-8786
E-mail: qdzhanhua@163.com Http://www.zhanhuametal.cn

LIFTING SOCKET WITH CROSS BAR

产品图片/Product picture




产品数据图/ Product data graph

Art. No.	Specification	Safe Working Load(kg)	Thread d	Dimensions(mm)			
				L	e	g	F
ZHLC001	M10*42	600	M10	42	22	6/8	50
ZHLC002	M12*50	900	M12	50	20	10	75
ZHLC003	M12*75	900	M12	75	40	10	75
ZHLC004	M16*75	1700	M16	75	40	10/12	75
ZHLC005	M20*75	2300	M20	75	35	12/14	90
ZHLC006	M24*100	3000	M24	100	55	16	100

QINGDAO ZHANHUA METAL PRODUCTS CO., LTD TEL: 0086-532-8752-8787 FAX: 0086-532-8752-8786
E-mail: qdzhanhua@163.com Http://www.zhanhuametal.cn

LIFTING SOCKETS WITH PLATE AND BOLTS

剖面图/ Profile

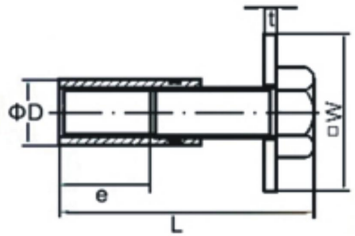

产品数据图/ Product data graph

Art. No.	Dimensions						Safe Working Load
	MD(mm)	ΦD(mm)	e(mm)	L(mm)	W(mm)	Square Plate Thickness(mm)	
ZHLPB001	M12*1.75	16	28	55	40*40	4	500
ZHLPB002	M16*1.75	22	29	75	50*50	5	1200
ZHLPB003	M20*2.5	26	35	90	60*60	5	2000
ZHLPB004	M24*3.0	32	46	110	80*80	6	2500
ZHLPB005	M30*3.5	40	60	140	95*95	6	4000

QINGDAO ZHANHUA METAL PRODUCTS CO., LTD TEL: 0086-532-8752-8787 FAX: 0086-532-8752-8786
E-mail: qdzhanhua@163.com Http://www.zhanhuametal.cn

FIXING SOCKET WITH BENDED END

产品图片/Product picture



产品数据图/ Product data graph

Art. No.	System Load Rating Tons	Threaded Type	Height	Thickness
ZHFSBE01	0.5	M/Rd12	60	ϕ17*2
ZHFSBE02	1.2	M/Rd16	60	ϕ22*2.5
ZHFSBE03	2.0	M/Rd20	70	ϕ27*3

QINGDAO ZHANHUA METAL PRODUCTS CO., LTD TEL: 0086-532-8752-8787 FAX: 0086-532-8752-8786
E-mail: qdzhanhua@163.com Http://www.zhanhuametal.cn

FIXING SOCKET DOWEL WITH HOLE

产品图片/Product picture




产品数据图/ Product data graph

Art. No.	System Load Rating Tons	Threaded Type	Length
ZHFSDH01	0.5	M12	60
ZHFSDH02	1.2	M16	80
ZHFSDH03	1.6	M18	90
ZHFSDH04	2.0	M20	95
ZHFSDH05	2.5	M24	100
ZHFSDH06	4.0	M30	135

QINGDAO ZHANHUA METAL PRODUCTS CO., LTD TEL: 0086-532-8752-8787 FAX: 0086-532-8752-8786
E-mail: qdzhanhua@163.com Http://www.zhanhuametal.cn

FIXING SOCKETS WITH CROSS HOLE

剖面图/ Profile

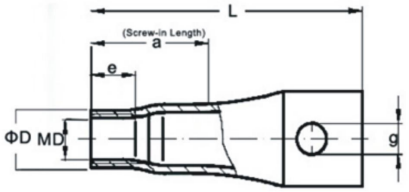

产品图片/Product picture



产品数据图/ Product data graph

Art. No.	Dimensions						Safe Working Load Class
	MD	ϕd	a	g	e	L	
	mm	mm	mm	mm	mm	mm	kgs
ZHFSCH001	M6	8.5	25	6.2	6	35	150
ZHFSCH002	M8	10.5	25	6.2	8	40	200
ZHFSCH003	M10	13.5	25	6.2	10	45/60	350
ZHFSCH004	M12	17.0	25/30	10.2	12	55/65	500/600
ZHFSCH005	M16	21.3	25/30	12.2	16	70/80	700/800
ZHFSCH006	M16	21.3	25/30	12.2	16	100/120	1000/1200
ZHFSCH007	M20	26.9	40	13.2	20	100/120	1250/1400
ZHFSCH008	M24	33.7	50	17.2	24	120	1800
ZHFSCH009	M32	42.0	70	22.0	30	150	2750

FIXING SOCKET WITH HOLE AND NAILING PLATE

产品图片/Product picture




产品数据图/ Product data graph

Art. No.	Description	Thread	L(mm)	Safe Weight Load(kg)
ZHFSHN001	M10*60	M10	60	450
ZHFSHN002	M12*70	M12	70	600
ZHFSHN003	M16*100	M16	100	1000
ZHFSHN004	M20*100	M20	100	1300
ZHFSHN005	M24*105	M24	105	1600

QINGDAO ZHANHUA METAL PRODUCTS CO., LTD TEL: 0086-532-8752-8787 FAX: 0086-532-8752-8786
E-mail: qdzhanhua@163.com Http://www.zhanhuametal.cn

WAVED ROD BAR SOCKET


（1） 产品图片/Product picture



产品数据图/ Product data graph

Art. No.	Approximate dimension(mm)				Load. stages	Metric thread		Round thread(Rd)		Appox.weight per 100 pieces
	d	p	g		kg	d*l (mm)	Reference No.	d*l (mm)	Reference No.	kg
ZHWRBS101	M+Rd 12	8	25		500	M12*150	k 3112km	Rd12*150	k 3112kr	9.00
ZHWRBS102	M+Rd 14	10	25		800	M14*180	k 3114km	Rd14*180	k 3114 kr	16.61
ZHWRBS103	M+Rd 16	12	27		1200	M16*230	k 3116km	Rd16*230	k 3116kr	28.48
ZHWRBS104	M+Rd 18	14	34		1600			Rd18*260	k 3118kr	40.27
ZHWRBS105	M+Rd 20	14	35		2000	M20*260	k 3120km	Rd20*260	k 3120kr	47.38
ZHWRBS106	M+Rd 24	16	43		2500	M24*300	k 3124km	Rd24*300	k 3124kr	74.27
ZHWRBS107	M+Rd 30	20	56		4000	M30*420	k 3130km	Rd30*420	k 3130kr	156.80
ZHWRBS108	M+Rd 36	25	69		6300	M36*460	k 3136km	Rd36*460	k 3136kr	292.29
ZHWRBS109	M+Rd 42	28	80		8000	M42*500	k 3142km	Rd42*500	k 3142kr	416.00

（2） 产品图片/Product picture



产品数据图/ Product data graph

Art. No.	Approximate dimension(mm)				Load. stages	Metric thread		Round thread(Rd)		Appox.weight per 100 pieces
	d	p	g		kg	d*l (mm)	Reference No.	d*l (mm)	Reference No.	kg
ZHWRBS201	M+Rd 12	8	25		500	M12*300	k 3112lm	Rd12*300	k 3112lr	14.92
ZHWRBS202	M+Rd 14	10	25		800	M14*310	k 3114lm	Rd14*310	k 3114lr	25.00
ZHWRBS203	M+Rd 16	12	27		1200	M16*320	k 3116lm	Rd16*320	k 3116lr	37.30
ZHWRBS204	M+Rd 18	14	34		1600			Rd18*360	k 3118lr	50.94
ZHWRBS205	M+Rd 20	14	35		2000	M20*400	k 3120lm	Rd20*400	k 3120lr	63.90
ZHWRBS206	M+Rd 24	16	43		2500	M24*450	k 3124lm	Rd24*450	k 3124lr	98.17
ZHWRBS207	M+Rd 30	20	56		4000	M30*600	k 3130lm	Rd30*600	k 3130lr	202.45
ZHWRBS208	M+Rd 36	25	69		6300	M36*750	k 3136lm	Rd36*750	k 3136lr	428.77
ZHWRBS209	M+Rd 42	28	80		8000	M42*850	k 3142lm	Rd42*850	k 3142lr	510.00
ZHWRBS210	M+Rd 52	32	97		12500	M52*920	k 3152lm	Rd52*920	k 3152lr	780.00


QINGDAO ZHANHUA METAL PRODUCTS CO., LTD TEL: 0086-532-8752-8787 FAX: 0086-532-8752-8786
E-mail: qdzhanhua@163.com Http://www.zhanhuametal.cn

RING LIFT RECESS FORMER

产品图片/Product picture



剖面图/ Profile



产品数据图/ Product data graph


Art. No.	Ring Clutch System(tons)	Clutch ID #	Length(L) inch	Height(H) inch	Width(W) inch	Slot Width(A) inch	Hole Distance(C) inch	Hole Diameter(C)	Weight Each(lb)
ZHRRF001	1T	1.3T	3-3/4	1-15/16	1-11/16	3/16	1-1/16	0.406	0.20
ZHRRF002	2T-2.5T	2.5T	3-3/4	1-15/16	1-11/16	3/8	1-1/16	0.406	0.20
ZHRRF003	4T-5T	5T	4-7/8	2-1/4	2-3/16	5/8	1-3/8	0.406	0.44
ZHRRF004	8T-10T	10T	6-1/2	3-1/4	3-1/2	3/4	1-15/16	0.406	1.25

UTILITY ANCHOR RUBBER RECESS FORMER

产品图片/Product picture



剖面图/ Profile

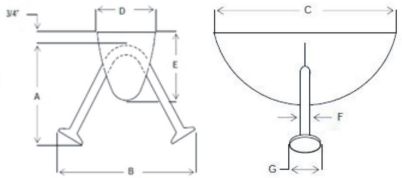

产品数据图/ Product data graph

Art. No.	Specification inch	Slab inch	Thickness inch	A	B
ZHURF001	4	3.125	5.281	0.450	1.375
ZHURF002	4-1/2	3.750	6.000	0.450	1.375
ZHURF003	5-1/2	4.750	7.122	0.450	1.375
ZHURF004	8	6.750	9.375	0.450	1.375
ZHURF005	4	3.125	5.300	0.670	1.340
ZHURF006	4-1/2	3.750	6.800	0.670	1.340
ZHURF007	5-1/2	4.750	7.400	0.670	1.340
ZHURF008	8	6.750	10.000	0.670	1.340

QINGDAO ZHANHUA METAL PRODUCTS CO., LTD TEL: 0086-532-8752-8787 FAX: 0086-532-8752-8786
E-mail: qdzhanhua@163.com Http://www.zhanhuametal.cn

LIFTING CLUTCH A

产品数据图/ Product data graph

Art. No.	System Capacity Tons
ZHLCA001	2.5
ZHLCA002	5
ZHLCA003	7.5
ZHLCA004	10
ZHLCA005	26
ZHLCA006	32

产品图片/Product picture



QINGDAO ZHANHUA METAL PRODUCTS CO., LTD TEL: 0086-532-8752-8787 FAX: 0086-532-8752-8786
E-mail: qdzhanhua@163.com Http://www.zhanhuametal.cn

LIFTING CLUTCH B

产品图片/Product picture

Component A: cast super alloy
Component B: Forged alloy steel
100% magnaflux crack detectiion
Breakage test
Surface Treatment:
Electrogalvanizing
Safety Factor: 5:1



产品数据图/ Product data graph


Art.No	Weight/kg	WLL/T	B.L/T	A±1	B±0.5	C±1	M±2	Q°
ZH1-1.3T	0.865	1.3	6.5	148	75	33	118	6
ZH1.5-2.5T	1.5	2.5	12.5	198	91.5	41	145	7
ZH3.0-5T	3.1	5	25	238	118	57	170	5
ZH6-10T	8.77	10	50	338.5	160	73	245.5	

Ultimate load is 5 times the Working Load Limit

QINGDAO ZHANHUA METAL PRODUCTS CO., LTD TEL: 0086-532-8752-8787 FAX: 0086-532-8752-8786
E-mail: qdzhanhua@163.com Http://www.zhanhuametal.cn

FLAT PLATE SOCKET

产品图片/Product picture



产品数据图/ Product data graph

(1) ELECTRO GALVANIZED YELLOW (RD) SILVER (M)

Art. No.	Load(T)	M/Rd	D	c	H	h	L	B	s	w	k	t
ZHFPSE001	0.5	12	16	1.5	30	27	35	35	3	4	10	22
ZHFPSE002	0.5	12	16	1.5	43	40	35	35	3	4	10	22
ZHFPSE003	0.8	14	18	1.5	33	30	35	35	3	4	10	25
ZHFPSE004	1.2	16	21	1.5	35	32	35	35	3	4	10	27
ZHFPSE005	1.2	16	21	1.5	45	40	60	60	5	4	10	27
ZHFPSE006	1.2	16	21	1.5	55	50	60	60	5	5	10	27
ZHFPSE007	1.2	16	21	1.5	60	55	50	50	5	5	10	27
ZHFPSE008	1.6	18	24	1.5	44	39	60	45	5	5	10	34
ZHFPSE009	2.0	20	26.9	1.5	47	42	60	60	5	5	10	35
ZHFPSE010	2.5	24	31	2.5	54	49	80	60	5	5	10	43
ZHFPSE011	2.5	24	31	2.5	70	65	190	70	5	5	10	43
ZHFPSE012	2.5	24	31	2.5	75	67	130	130	8	5	10	43
ZHFPSE013	4.0	30	38	2.5	72	66	100	80	6	5	10	56
ZHFPSE014	6.3	36	47	3.5	80	74	130	100	6	6	10	69
ZHFPSE015	8.0	42	54	3.5	98	90	130	130	8	6	10	80
ZHFPSE016	12.5	52	63.5	3.5	120	112	130	150	8	6	10	97

(2) STAINLESS STEEL

Art. No.	Load(T)	M/Rd	D	c	H	h	L	B	s	w	k
ZHFPSS001	0.5	12	16	1.5	30	27	35	35	3	4	5
ZHFPSS002	0.8	14	18	1.5	33	30	35	35	3	4	5
ZHFPSS003	1.2	16	21	1.5	35	32	35	35	3	4	10
ZHFPSS004	1.6	18	24	1.5	44	39	60	60	5	7	10
ZHFPSS005	2.0	20	26.9	1.5	47	42	60	60	5	7	10
ZHFPSS006	2.5	24	31	2.5	54	49	60	60	5	7	10
ZHFPSS007	4.0	30	38	2.5	72	64	130	130	8	8	10
ZHFPSS008	6.3	36	47	3.5	80	72	130	130	8	8	10

QINGDAO ZHANHUA METAL PRODUCTS CO., LTD TEL: 0086-532-8752-8787 FAX: 0086-532-8752-8786
E-mail: qdzhanhua@163.com Http://www.zhanhuametal.cn

CROWN FOOT ANCHOR

产品图片/Product picture



产品数据图/ Product data graph

Art. No.	System Load Rating Tons	Thread Type
ZHCA001	0.5	Rd12
ZHCA002	0.8	Rd14
ZHCA003	1.2	Rd16
ZHCA004	1.6	Rd18
ZHCA005	2.0	Rd20
ZHCA006	2.5	Rd24
ZHCA007	4.0	Rd30
ZHCA008	6.3	Rd36
ZHCA009	8.0	Rd42
ZHCA010	12.5	Rd52

RUBBER RECESSES

产品数据图/ Product data graph

Art. No.	System Capacity Tons
ZHRR001	1
ZHRR002	2
ZHRR003	4
ZHRR004	6&8
ZHRR005	12&16

产品图片/Product picture



QINGDAO ZHANHUA METAL PRODUCTS CO., LTD TEL: 0086-532-8752-8787 FAX: 0086-532-8752-8786
E-mail: qdzhanhua@163.com Http://www.zhanhuametal.cn

SWIFT LIFT FOOT ANCHOR

产品图片/Product picture



产品数据图/ Product data graph

Art. No.	Work Load	Specification	Material	Surface Treatment
ZHSLFA01	1.3T	1.3T *55mm	20Mn2, Q345D	Plain, Zinc Plating, H.D.G
		1.3T *65mm		
		1.3T *85mm		
		1.3T *119mm		
		1.3T *203mm		
ZHSLFA02	2.5T	2.5T* 55mm		
		2.5T*70mm		
		2.5T*80mm		
		2.5T*119mm		
		2.5T*140mm		
		2.5T*170mm		
		2.5T*279mm		
ZHSLFA03	5T	5T *76mm		
		5T *95mm		
		5T *110mm		
		5T *119mm		
		5T *140mm		
		5T *160mm		
		5T *179mm		
		5T *240mm		
		5T *340mm		
ZHSLFA04	7.5T	7.5T *120mm		
		7.5T *165mm		
		7.5T *300mm		
		7.5T *540mm		
		7.5T *600mm		
		7.5T *680mm		
ZHSLFA05	10T	10T *119mm		
		10T *135mm		
		10T *150mm		
		10T *170mm		
		10T *225mm		
		10T *250mm		
		10T *340mm		
ZHSLFA06	15T	15T *200mm		
		15T *400mm		
ZHSLFA07	20T	20T *250mm		
		20T *500mm		
ZHSLFA08	32T	30T *500mm		
		30T *700mm		
		30T *1200mm		

DOUBLE HEAD LIFTING FOOT ANCHOR

产品图片/Product picture



产品数据图/ Product data graph

Art. No.	Work Load	Specification	Material	Surface Treatment
ZHSLFA01	1.3T	1.3T *55mm	20Mn2, Q345D	Plain, Zinc Plating, H.D.G
		1.3T *65mm		
		1.3T *85mm		
		1.3T *119mm		
		1.3T *203mm		
ZHSLFA02	2.5T	2.5T* 55mm		
		2.5T*70mm		
		2.5T*80mm		
		2.5T*119mm		
		2.5T*140mm		
		2.5T*170mm		
		2.5T*279mm		
ZHSLFA03	5T	5T *76mm		
		5T *95mm		
		5T *110mm		
		5T *119mm		
		5T *140mm		
		5T *160mm		
		5T *179mm		
		5T *240mm		
		5T *340mm		
ZHSLFA04	7.5T	7.5T *120mm		
		7.5T *165mm		
		7.5T *300mm		
		7.5T *540mm		
		7.5T *600mm		
		7.5T *680mm		
ZHSLFA05	10T	10T *119mm		
		10T *135mm		
		10T *150mm		
		10T *170mm		
		10T *225mm		
		10T *250mm		
		10T *340mm		
ZHSLFA06	15T	15T *200mm		
		15T *400mm		
ZHSLFA07	20T	20T *250mm		
		20T *500mm		
ZHSLFA08	32T			

QINGDAO ZHANHUA METAL PRODUCTS CO., LTD TEL: 0086-532-8752-8787 FAX: 0086-532-8752-8786
E-mail: qdzhanhua@163.com Http://www.zhanhuametal.cn

EYE ANCHOR

产品图片/Product picture



产品数据图/ Product data graph

Art. No.	Work Load	Specification	Material	Surface Treatment
ZHEA01	1.3T	1.3T *50mm	Carbon Steel/ Alloy Steel	Plain, E.G., H.D.G.
		1.3T *65mm		
		1.3T *85mm		
ZHEA02	2.5T	2.5T* 65mm		
		2.5T*80mm		
		2.5T*90mm		
		2.5T*120mm		
ZHEA03	5T	5T *90mm		
		5T *120mm		
		5T *180mm		
ZHEA04	10T	10T *115mm		
		10T *118mm		
ZHEA05	20T	20T *250mm		

UTILITY ANCHOR

产品图片/Product picture




产品数据图/ Product data graph

Art. No.	WD	Slab Thickness	W(mm)(±6.35)	H(mm)(±6.35)
ZHUA001	0.444	4''	133.35	79.38
ZHUA002		5''	152.4	95.25
ZHUA003		6''	182.58	120.65
ZHUA004	0.671	4''	137.16	79.38
ZHUA005		5''	163.53	95.25
ZHUA006		6''	192.1	120.65
ZHUA007		7''	222.25	146.05
ZHUA008		8''	250.83	171.45
ZHUA009		9''	281.51	196.85
ZHUA010		10''	311.15	222.25

EASY LIFT FOOT ANCHOR

产品图片/Product picture






产品数据图/ Product data graph

Art. No.	Length(L)	Width(W)	Panel Thickness(T)			
	Inch	inch	4''	5''	6''	8''
ZHELFA001	4.50	3.00	4100	4600	5000	5800
ZHELFA002	5.50	3.00	5600	6300	7100	7800
ZHELFA003	7.125	3.00	7800	8800	9800	10000

QINGDAO ZHANHUA METAL PRODUCTS CO., LTD TEL: 0086-532-8752-8787 FAX: 0086-532-8752-8786
E-mail: qdzhanhua@163.com Http://www.zhanhuametal.cn

ERECTION ANCHOR A

产品图片/Product picture



产品数据图/ Product data graph

Art. No.	Ton	Body Length(L)	Body Width(W)	Body Thick(T)	Notch Locat.(J)	Neck Width(K)	Hole Dia. (H)	Hole Center (G)	Hole Locat. (F)	System Code
ZHEAA001	2.5	203	50	10	46	35	14	29	57	2.5
ZHEAA002	5	267	64	16	64	46	20	32	81	5
ZHEAA003	7.5	325	95	16	62	62	25	44	102	10
ZHEAA004	10	325	95	20	81	65	25	44	102	10

ERECTION ANCHOR B

产品图片/Product picture




产品数据图/ Product data graph

Art. No.	Load Class	Width(w)	Thickness(T)	Length(L)	Safe Working Load Tension
		mm	mm	mm	kn
ZHEAB001	2.5T	60	10	156	22.5
ZHEAB002	5T	90	16	240	44.6
ZHEAB003	10T	115	20	305	89.2

SANDWICH PANEL ERECTION ANCHOR

剖面图/ Profile



产品图片/Product picture




产品数据图/ Product data graph

Art. No.	Specification(Tons)	Clutch ID	L(inch)	A(inch)	B(inch)	C(inch)	D(inch)	Unit Weight(lb)
ZHSPEA001	4T	4-5T	6	3-1/2	1-3/8	5/8	3-3/4	3.10
ZHSPEA002	5T	4-5T	6	3-1/2	1-3/8	5/8	3-3/4	3.20
ZHSPEA003	8T	8-10T	6	4-3/4	2-29/32	3/4	4	5.25
ZHSPEA004	10T	8-10T	6	4-3/4	2-29/32	3/4	4	2.25

TWO HOLE ERECTION ANCHOR

产品图片/Product picture




产品数据图/ Product data graph

Art. No.	Specification (Tons)	Clutch ID	Anchor Length (L)	Anchor Width(W)	Thickness(T)	Safe Working Load Tension
			inch	inch	inch	lb
ZHTHEA001	2T	2-2.5T	4	2	3/8	4000
ZHTHEA002	2.5T	2-2.5T	4	2	3/8	5000
ZHTHEA003	4T	4-5T	7	2-1/2	5/8	8000
ZHTHEA004	5T	4-5T	7	2-1/2	5/8	10000
ZHTHEA005	8T	8-10T	7	3-1/2	3/4	16000
ZHTHEA006	8T	8-10T	13-1/2	3-1/2	3/4	16000
ZHTHEA007	10T	8-10T	7	3-1/2	3/4	20000
ZHTHEA008	10T	8-10T	13-1/2	3-1/2	3/4	20000

FOOT ERECTION ANCHOR

产品图片/Product picture

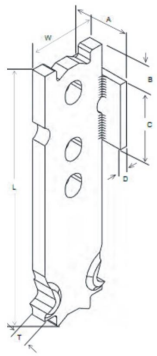


产品数据图/ Product data graph

Art. No.	Specification (Tons)	Clutch ID	Anchor Length (L)	Anchor Width(W)	Thickness(T)	Safe Working Load Tension
			inch	inch	inch	lb
ZHTHEA001	2T	2-2.5T	2	2	3/8	4000
ZHTHEA002	4T	4-5T	2-1/2	9-1/2	5/8	8000
ZHTHEA003	8T	8-10T	3-1/2	13-1/2	3/4	16000

QINGDAO ZHANHUA METAL PRODUCTS CO., LTD TEL: 0086-532-8752-8787 FAX: 0086-532-8752-8786
E-mail: qdzhanhua@163.com Http://www.zhanhuametal.cn

TWO HOLE ANCHOR

剖面图/ Profile



产品图片/Product picture



产品数据图/ Product data graph

Art. No.	Specification (Tons)	Clutch ID	Anchor Length (L)	Anchor Width(W)	Thickness(T)	Safe Working Load Tension	Weight Each
			inch	inch	inch	lb	lb
ZHTHA001	2T	2-2.5T	4	1-1/4	3/8	4000	0.42
ZHTHA002	2.5T	2-2.5T	4	1-1/4	3/8	5000	0.42
ZHTHA003	4T	4-5T	4	1-1/2	5/8	8000	0.87
ZHTHA004	5T	4-5T	4	1-1/2	5/8	10000	0.87
ZHTHA005	8T	8-10T	7	2-1/2	3/4	16000	3.08
ZHTHA006	10T	8-10T	7	2-1/2	3/4	20000	3.08

REINFORCED PLATE ANCHOR

产品图片/Product picture



产品数据图/ Product data graph

Art. No.	Specification(Tons)	Anchor Depth(L)	Body Width(W)	Body Thick.(T)	Base Width(A)	Base Length(C)	Safe Working Load
		mm	mm	mm	mm	mm	kg
ZHRPA001	2.5T	57	32	10	95	32	1814
ZHRPA002	5T	76	38	13	76	38	3628
ZHRPA003	5T	89	38	13	76	38	3628
ZHRPA004	5T	111	38	16	98	38	3628
ZHRPA005	10T	181	60	20	32	64	4535

QINGDAO ZHANHUA METAL PRODUCTS CO., LTD TEL: 0086-532-8752-8787 FAX: 0086-532-8752-8786
E-mail: qdzhanhua@163.com Http://www.zhanhuametal.cn